



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Tri-Ply, Inc.
P.O. Box 2685
Port Arthur, TX 77643

Your application for Notice of Acceptance (NOA) of:

Tri-Ply Modified Bitumen Roof Systems for Concrete Deck

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0129.17
EXPIRES: 05/10/2006

Raul Rodriguez
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 05/10/2001


ROOFING SYSTEM APPROVAL

Category: Roofing
Sub-Category: SBS/APP, Modified Bitumen
Deck Type: Concrete
Maximum Design Pressure -457.5 psf
Fire Classification: See General Limitation #1

Approval Date: May 10, 2001
 Expiration Date: May 10, 2006

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
TriPly Asphalt Concrete Primer	5, 55 gallons	ASTM D 41	Asphalt concrete primer used to promote adhesion of asphalt in built-up roofing.
TriPly #75 Base Sheet	3 sq. roll 75 lb. roll	ASTM D 4601	Asphalt impregnated and coated glass mat base sheet.
TriPly Ply 4	5 sq. roll	ASTM D 2178	Type IV asphalt impregnated glass felt with asphalt coating.
Tri-Ply Ply 6	5 sq. roll 45 lb. roll	ASTM D 2178	Type VI asphalt impregnated glass felt with asphalt coating.
TriPly Mineral Surfaced Cap Sheet	76 lb. roll	ASTM D 3909	Asphalt coated, glass fiber mat cap sheet surfaced with mineral granules.
Tri-Ply Modified Bitumen Adhesive	5 gallons	ASTM D 3019 Type III	Fiber reinforced, rubberized Adhesive
TriPly SBS Modified Bitumen	1 sq. roll 103 lbs.	ASTM D 5147	Non-woven polyester mat coated with polymer modified asphalt and surfaced with mineral granules.
TP 4 Smooth APP Modified Bitumen	1 sq. roll 87 lbs.	ASTM D 5147	Heavy duty, polyester reinforced, asphalt modified bitumen membrane, smooth surface.
TP 4 Granule APP Modified Bitumen	1 sq. roll 102 lbs.	ASTM D 5147	Heavy duty, polyester reinforced, asphalt modified bitumen membrane, granule surface.
TriPly Aluminum Roof Coating	5 gallons	ASTM D2824, Type I	Non-fibered. aluminum pigmented, asphalt roof coating
TriPly Modified Bitumen Flashing Cement	5 gallons	ASTM D 3019 Type III	Fiber reinforced, rubberized Adhesive

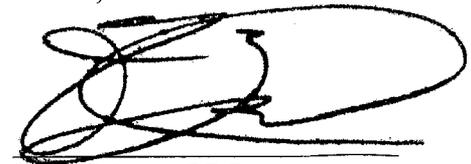

Frank Zuloaga, RRC
 Roofing Product Control Examiner

APPROVED INSULATIONS:

TABLE 2

Product Name	Product Description	Manufacturer (With Current NOA)
GAFTEMP Isotherm RA, RN & Composite	Polyisocyanurate foam insulation	GAF Materials Corp.
GAFTEMP® Composite A & N	Polyisocyanurate foam insulation with high density fiberboard or Permalite perlite insulation.	GAF Materials Corp.
GAFTEMP® Fiberboard	Fiberboard insulation.	GAF Materials Corp.
GAFTEMP® Permalite	Perlite insulation board.	GAF Materials Corp.
GAFTEMP Recover Board	Perlite recover board	GAF Materials Corp.
GAFTEMP® High Density Fiberboard	High density wood fiberboard insulation.	GAF Materials Corp.
PYROX	Polyisocyanurate foam insulation	Apache Products Co.
Nail-Line	Polyisocyanurate foam insulation	Apache Products Co.
White Line	Polyisocyanurate foam insulation	Apache Products Co.
ACFoam I, II & Composite	Polyisocyanurate foam insulation	Atlas Energy Products
Hy-Therm AP	Polyisocyanurate foam insulation	Celotex Corp.
Hy-Therm Nail-Line	Polyisocyanurate foam insulation	Celotex Corp.
ISO 95+	Polyisocyanurate foam insulation	Firestone Building Products, Inc.
Wood Fiber	Wood fiber insulation board	generic
High Density Wood Fiberboard	Wood fiber insulation board	generic
Perlite Insulation	Perlite insulation board	generic
E'NRG'Y-2 & E'NRG'Y-2 PLUS	Polyisocyanurate foam insulation	Johns Manville
FiberGlass Roof Insulation	Glass fiber/Mineral fiber insulation	Johns Manville
Multi-Max	Polyisocyanurate roof insulation	RMax, Inc.



APPROVED FASTENERS:

TABLE 3

Fastener Number	Product Name	Product Description	Dimensions	Manufacturer (With Current NOA)
1.	GAFTITE® #12 Standard & #14 Heavy Duty Roofing Fastener	Insulation fastener for steel, wood & concrete decks.		GAF Materials Corp.
2.	GAFTITE® ASAP	Pre-assembled GAFTITE Fasteners and metal and plastic plates.		GAF Materials Corp.
3.	GAFTITE® Base Sheet Fastener and Plate	Base sheet fastening assembly.		GAF Materials Corp.
4.	Galvalume Plates	Round galvalume stress plates.	3" and 3 1/2"	GAF Materials Corp.
5.	Polypropylene Plates	Round polypropylene stress plates.	3" and 3 1/2"	GAF Materials Corp.
6.	Anchorbond Fastener	Insulation fastener for concrete decks.		Celotex Corp.
7.	Anchorbond Steel Plate	Hexagonal steel stress plates.	3-1/4" x 2-7/8"	Celotex Corp.
8.	Anchorbond Plastic Plate	Hexagonal polypropylene stress plates.	3-1/4" x 3"	Celotex Corp.
9.	Dekfast Fasteners #14 & #15	Insulation fastener for wood, steel and concrete decks		Construction Fasteners Inc.
10.	Dekfast Hex Plate	Galvalume hex stress plate.	2 7/8" x 3 1/4"	Construction Fasteners Inc.
11.	Dekfast Lock Plate	Polypropylene locking plate.	3" x 3 1/4"	Construction Fasteners Inc.
12.	Hextra	Insulation fastener steel or wood decks		ITW Buildex
13.	#15 Roofgrip	Insulation fastener steel, wood or concrete decks		ITW Buildex
14.	Gearlok Plastic Plate	Polypropylene plastic plate	3.2" round	ITW Buildex



Frank Zuloaga, RRC
Roofing Product Control Examiner

APPROVED FASTENERS:

TABLE 3

Fastener Number	Product Name	Product Description	Dimensions	Manufacturer (With Current NOA)
15.	Metal Plate	Galvalume plate for use with Roofgrip	3" square	ITW Buildex
16.	Olympic Fastener #12 & #14	Insulation fastener		Olympic Manufacturing Group, Inc.
17.	Olympic Fastener ASAP	Pre-assembled Insulation fastener and plate		Olympic Manufacturing Group, Inc.
18.	Fluted Nail	Spiral fluted fastener for concrete decks.		Olympic Manufacturing Group, Inc.
19.	Olympic Polypropylene	Polypropylene plastic plate	3.25" round	Olympic Manufacturing Group, Inc.
20.	Olympic Standard	3" round galvalume AZ50 steel plate	3" round	Olympic Manufacturing Group, Inc.
21.	Johns Manville CD-10	Wafer head nail with split shank for concrete decks		Johns Manville
22.	Standard Metal Plate	3" square galvalume AZ50 steel plate	3" square	Johns Manville
23.	Johns Manville	3" round polyethylene stress plate	3.25" round	Johns Manville
24.	Rawl Drive	Insulation fastener for concrete decks		Powers Fasteners, Inc.
25.	Rawl Plate	3" round galvalume AZ55 steel plate	3" round	Powers Fasteners, Inc.
26.	Insul-Fixx Fastener #14	Insulation fastener for concrete, steel and wood decks		SFS/Stadler
27.	Insul-Fixx S Plate	3" round galvalume AZ50 steel plate	3" round	SFS/Stadler
28.	Insul-Fixx P Plate	3" round polyethylene stress plate	3" round	SFS/Stadler
29.	Tru-Fast	Insulation fastener for steel, wood, concrete.		Tru-Fast



APPROVED FASTENERS:

TABLE 3

Fastener Number	Product Name	Product Description	Dimensions	Manufacturer (With Current NOA)
30.	Tru-Fast Plastic Plate	3.04" round polyethylene plastic plate	3.04" round	Tru-Fast
31.	Tru-Fast MP-3	3.23" round galvalume AZ50 steel plate	3.23" round	Tru-Fast

EVIDENCE SUBMITTED:

TABLE 4

<u>Test Agency</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Factory Mutual Research Corporation	Current Insulation Attachment Requirements	FMRC 1996	01.01.96
Factory Mutual Research Corporation	Wind Uplift FMRC 4470 - PA 114	J.I. 1V8A4.AM	06.28.93
		J.I. 3X3A2.AM	08.02.94
		J.I. 0Y9Q5.AM	07.29.94
		J.I. 1B9A8.AM	09.04.97
		J.I. 3D4Q2.AM	04.30.97
Trinity Engineering	Wind Uplift PA 114	4483.04 97-1	06.06.97
Underwriters Laboratories, Inc.	Fire Resistance Classification UL 790 - PA 114	R1306, 87NK11819	01.01.93
Dynatech Engineering Corporation	Wind Uplift PA 114	#3600.02.95-1	02.02.95
		#4482.02.95-1	



Frank Zuloaga, RRC
Roofing Product Control Examiner

APPROVED ASSEMBLIES:

- Membrane Type:** APP
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type A:** All insulation layers are adhered, to a mechanically attached or adhered anchor/base-sheet. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

One or more layers of any of the following insulations.

Insulation Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft ²
Apache Pyrox, White Line, Nail Line, Hy-Therm AP, E'NRG'Y 2, GAFTEMP Isotherm RA, GAFTEMP Isotherm RN, E'NRG'Y 2 Plus, GAFTEMP Composite, GAFTEMP Composite A, GAFTEMP Composite N, ISO 95+, Wood Fiber, GAFTEMP® Fiberboard (Min. 1" thick)	N/A	N/A
High Density Wood Fiber, GAFTEMP® High Density Fiberboard (Min. ½" thick)	N/A	N/A
Perlite, GAFTEMP® Permalite (Min. ¾" thick)	N/A	N/A
Fiberglass (Min. 15/16" thick)	N/A	N/A

Note: All insulation shall be adhered to the anchor sheet in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard RAS 117 for insulation attachment. Insulation listed as base layer only shall be used only as base layers with a second layer of approved top layer insulation installed as the final membrane substrate. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of anchor sheet.

Anchor Sheet:	(Optional) Install one ply of TriPly Ply 4, Ply 6 or #75 Base Sheet	Applied directly to primed deck adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Base Sheet:	One or more plies TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the insulated substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. see General Limitation #4.



TRI-PLY, A DIVISION OF BUILDING MATERIALS CORPORATION OF AMERICA

Acceptance No: 01-0129.17

Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One ply of TP 4 Smooth, TP 4 Granule APP Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-90 psf (See General Limitation #9)	



Frank Zuloaga, RRC
Roofing Product Control Examiner

Membrane Type: SBS
Deck Type 3: Concrete Decks, Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type A: All insulation layers are adhered, to a mechanically attached or adhered anchor/base-sheet. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

One or more layers of any of the following insulations.

Insulation Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft ²
Apache Pyrox, White Line , Nail Line, Hy-Therm AP, E'NRG'Y 2, GAFTEMP Isotherm RA, GAFTEMP Isotherm RN, E'NRG'Y 2 Plus, GAFTEMP Composite, GAFTEMP Composite A, GAFTEMP Composite N, ISO 95+, Wood Fiber, GAFTEMP® Fiberboard (Min. 1" thick)	N/A	N/A
High Density Wood Fiber, GAFTEMP® High Density Fiberboard (Min. ½" thick)	N/A	N/A
Perlite, GAFTEMP® Permalite (Min. ¾" thick)	N/A	N/A
Fiberglass (Min. 1 ⁵ / ₁₆ " thick)	N/A	N/A

Note: All insulation shall be adhered to the anchor sheet in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard RAS 117 for insulation attachment. Insulation listed as base layer only shall be used only as base layers with a second layer of approved top layer insulation installed as the final membrane substrate. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of anchor sheet.

Anchor Sheet:	(Optional) Install one ply of TriPly Ply 4, Ply 6 or #75 Base Sheet	Applied directly to primed deck adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Base Sheet:	One or more plies TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the insulated substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. see General Limitation #4.
Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.

TRI-PLY, A DIVISION OF BUILDING MATERIALS CORPORATION OF AMERICA

Acceptance No: 01-0129.17

- Membrane:** One or more plies ply of TriPly SBS Modified Bitumen Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
- Surfacing:** (Optional) Install one of the following:
1. Gravel or slag Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
 2. TriPly Mineral Surfaced Cap Sheet Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
- Maximum Design Pressure:** -90 psf (See General Limitation #9)



Frank Zuloaga, RRC
Roofing Product Control Examiner

Membrane Type: APP

Deck Type 3: Concrete Decks, Insulated, New Construction

Deck Description: 2500 psi structural concrete or concrete plank

System Type B: Base layer of insulation is mechanically attached to roof deck. Any subsequent layers are then adhered to base layer of insulation. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

One or more layers of any of the following insulations.

Insulation for Base Layer (Table 2) (When applicable: Steel plate only =S, plastic plate only =P)	Insulation Fasteners (Table 3)	Fastener Density/ft²
E'NRG'Y 2, GAFTEMP® Isotherm RN (Min. 1.4" thick)	9 or 21 1, 2, 16, 17, 18 or 24	1:3 1:4
E'NRG'Y 2 Plus, GAFTEMP Composite A, GAFTEMP Composite N (Min. 1.5" thick)	1, 2, 9, 16, 17, 18, 21, 24, 26 or 29	1:4
ISO 95 + (Min. 1.4" thick)	21, 26 or 29S	1:3
Perlite, GAFTEMP® PERMALITE (Min. ¾" thick)	1 (3.5" Plates), 9S, 16S, 21 or 29	1:2
Fiberglass (Min. 15/16" thick)	1, 9, 16, 18, 21, 26 or 29	1:2.67
High Density Wood Fiber, GAFTEMP High Density Fiberboard (Min. ¾" thick)	1S, 2, 9S, 16S, 17, 18, 21 or 29S	1:4
Wood Fiber, GAFTEMP Fiberboard (Min. 1" thick)	1, 2, 6, 9, 13, 16, 17, 26 or 29S	1:3

Note: Base layer shall be mechanically attached with fasteners and density described. Insulation panels listed are minimum sizes and dimensions; if larger panels are used the number of fasteners per board shall be increased maintaining the same fastener density (See Roofing Application Standard RAS 117 for fastening details).

Insulation for Top Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
Any of the insulations listed for Base Layer, above.	N/A	N/A
GAFTEMP® Recover Board (Min. ½" thick)	N/A	N/A

Note: Apply top layer of insulation in a full mopping of any approved mopping asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard RAS 117 for insulation attachment. Insulation listed as Base Layer only shall be used only as base layers with a second layer of approved top layer insulation installed as the final membrane substrate. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.



Base Sheet:	Install one ply of TriPly #75, Ply 4, or Ply 6 base sheet	Applied directly over the top layer of insulation. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. (See General Limitation #4).
Ply Sheet:	(Optional) One or more plies TriPly Ply 4 or Ply 6 sheet	Fully adhered in type III or IV of an approved asphalt at an application rate of 20-40 lbs./sq.
Membrane:	One or more plies of TP 4 Smooth or TP 4 Granule APP Modified Bitumen	applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-45 psf (See General Limitation #9)	



- Membrane Type:** SBS
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type B:** Base layer of insulation is mechanically attached to roof deck. Any subsequent layers are then adhered to base layer of insulation. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

One or more layers of any of the following insulations.

Insulation for Base Layer (Table 2) (When applicable: Steel plate only =S, plastic plate only =P)	Insulation Fasteners (Table 3)	Fastener Density/ft²
Apache Pyrox, White Line (Min. 1.3" thick)	1, 2, 9, 16, 17, 18, 21, 26 or 29	1:2.67
Apache/Hy-Therm Nail-Line (Min. 1.5" thick)	1, 9, 16, 18, 26S or 29	1:4
E'NRG'Y 2, GAFTEMP® Isotherm RN (Min. 1.4" thick)	1, 2, 9S, 16, 17, 18, 21 or 24	1:3
E'NRG'Y 2 Plus, GAFTEMP Composite A, GAFTEMP Composite N (Min. 1.5" thick)	1, 2, 9, 16, 17, 18, 21, 24, 26 or 29	1:4
ISO 95 + (Min. 1.4" thick)	21, 26 or 29S	1:3
Perlite, GAFTEMP® PERMALITE (Min. ¾" thick)	1 (3.5" Plates), 9S, 16S, 21 or 29	1:2
Fiberglass (Min. 15/16" thick)	1, 9, 16, 18, 21, 26 or 29	1:2.67
High Density Wood Fiber, GAFTEMP High Density Fiberboard (Min. ¾" thick)	1S, 2, 9S, 16S, 17, 18, 21 or 29S	1:4
Wood Fiber, GAFTEMP Fiberboard (Min. 1" thick)	1, 2, 6, 9, 13, 16, 17, 26 or 29S	1:3

Note: Base layer shall be mechanically attached with fasteners and density described. Insulation panels listed are minimum sizes and dimensions; if larger panels are used the number of fasteners per board shall be increased maintaining the same fastener density (See Roofing Application Standard RAS 117 for fastening details).

Insulation for Top Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
Any of the insulations listed for Base Layer, above.	N/A	N/A
GAFTEMP® Recover Board (Min. ½" thick)	N/A	N/A



Note: Apply top layer of insulation in a full mopping of any approved mopping asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard RAS 117 for insulation attachment. Insulation listed as Base Layer only shall be used only as base layers with a second layer of approved top layer insulation installed as the final membrane substrate. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Base Sheet:	Install one ply of TriPly #75, Ply 4, or Ply 6 base sheet	Applied directly over the top layer of insulation. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. (See General Limitation #4).
Ply Sheet:	(Optional) One or more plies TriPly Ply 4 or Ply 6 sheet	Fully adhered in type III or IV of an approved asphalt at an application rate of 20-40 lbs./sq.
Membrane:	One or more plies of TriPly SBS Modified Bitumen	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. TriPly Mineral Surfaced Cap Sheet	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure:	-45 psf (See General Limitation #9)	



Membrane Type: APP
Deck Type 3: Concrete Decks, Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type C: All layers of insulation are mechanically attached to roof deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

One or more layers of any of the following insulations.

Insulation for Base Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP Isotherm RA, GAFTEMP Isotherm RN (Min. 1.3" thick)	N/A	N/A
E'NRG'Y 2 , ISO 95+ (Min. 1.4" thick)	N/A	N/A
Apache Pyrox, White Line , Hy-Therm AP (Min. 1.3" thick)	N/A	N/A
Apache/Hy-Therm Nail-Line, E'NRG'Y 2 Plus (Min. 1.5" thick)	N/A	N/A
Perlite, GAFTEMP® Permalite (Min. ½" thick)	N/A	N/A
Fiberglass (Min. 1 ⁵ / ₁₆ " thick)	N/A	N/A
High Density Wood Fiber, GAFTEMP® High Density Fiberboard (Min. ¾" thick)	N/A	N/A
Wood Fiber, GAFTEMP® Fiberboard (Min. 1" thick)	N/A	N/A

Note: All layers shall be simultaneously fastened; see top layer below for fasteners and density. Insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. Please refer to Roofing Application Standard RAS 117 for insulation attachment.

Insulation for Top Layer (Table 2) (When applicable: Steel plate only =S, plastic plate only =P)	Insulation Fasteners (Table 3)	Fastener Density/ft²
Apache Pyrox, White Line (Min. 1.3" thick)	1, 2, 9, 16, 17, 18, 21, 26 or 29	1:2.67
Apache/Hy-Therm Nail-Line (Min. 1.5" thick)	1, 9, 16, 18, 26S or 29	1:2.67
E'NRG'Y 2, GAFTEMP® Isotherm RN (Min. 1.4" thick)	9S or 21 1, 2, 16, 17, 18 or 24	1:3 1:4
E'NRG'Y 2 Plus, GAFTEMP Composite N (Min. 1.5" thick)	1, 2, 9, 16, 17, 18, 21, 24, 26 or 29	1:4

ISO 95 + (Min. 1.4" thick)	21, 26 or 29S	1:3
Perlite, GAFTEMP® PERMALITE (Min. ¾" thick)	1S, 2, 9S, 16S, 21 or 29	1:2
Fiberglass (Min. 15/16" thick)	1, 2, 9, 16, 17, 18, 21, 26 or 29	1:2.67
High Density Wood Fiber, GAFTEMP High Density Fiberboard (Min. ¾" thick)	1S, 2, 9S, 16S, 17, 18, 21 or 29S	1:4
Wood Fiber, GAFTEMP Fiberboard (Min. 1.3" thick)	1, 2, 6, 13, 16, 17, 21 or 29S	1:3

Note: Insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. Please refer to Roofing Application Standard RAS 117 for insulation attachment.

Base Sheet:	Install one ply of TriPly Ply 4, Ply 6 or #75 Base Sheet	Applied directly over the top layer of insulation. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. (See General Limitation #4).
Ply Sheet:	(Optional) One or more plies TriPly Ply 4 or Ply 6 sheet.	Adhered in full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One ply of TP 4 Smooth, TP 4 Granule APP Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-45 psf (See General Limitation #9)	



Membrane Type: SBS
Deck Type 3: Concrete Decks, Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type C: All layers of insulation are mechanically attached to roof deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

One or more layers of any of the following insulations.

Insulation for Base Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP Isotherm RA, GAFTEMP Isotherm RN (Min. 1.3" thick)	N/A	N/A
E'NRG'Y 2 , ISO 95+ (Min. 1.4" thick)	N/A	N/A
Apache Pyrox, White Line , Hy-Therm AP (Min. 1.3" thick)	N/A	N/A
Apache/Hy-Therm Nail-Line, E'NRG'Y 2 Plus (Min. 1.5" thick)	N/A	N/A
Perlite, GAFTEMP® Permalite (Min. ½" thick)	N/A	N/A
Fiberglass (Min. 15/16" thick)	N/A	N/A
High Density Wood Fiber, GAFTEMP® High Density Fiberboard (Min. ¾" thick)	N/A	N/A
Wood Fiber, GAFTEMP® Fiberboard (Min. 1" thick)	N/A	N/A

Note: All layers shall be simultaneously fastened; see top layer below for fasteners and density. Insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. Please refer to Roofing Application Standard RAS 117 for insulation attachment.

Insulation for Top Layer (Table 2) (When applicable: Steel plate only =S, plastic plate only =P)	Insulation Fasteners (Table 3)	Fastener Density/ft²
Apache Pyrox, White Line (Min. 1.3" thick)	1, 2, 9, 16, 17, 18, 21, 26 or 29	1:2.67
Apache/Hy-Therm Nail-Line (Min. 1.5" thick)	1, 9, 16, 18, 26S or 29	1:2.67
E'NRG'Y 2, GAFTEMP® Isotherm RN (Min. 1.4" thick)	9S or 21 1, 2, 16, 17, 18 or 24	1:3 1:4
E'NRG'Y 2 Plus, GAFTEMP Composite N (Min. 1.5" thick)	1, 2, 9, 16, 17, 18, 21, 24, 26 or 29	1:4

Perlite, GAFTEMP® PERMALITE (Min. ¾" thick)	1S, 2, 9S, 16S, 21 or 29	1:2
Fiberglass (Min. 15/16" thick)	1, 2, 9, 16, 17, 18, 21, 26 or 29	1:2.67
High Density Wood Fiber, GAFTEMP High Density Fiberboard (Min. ¾" thick)	1S, 2, 9S, 16S, 17, 18, 21 or 29S	1:4
Wood Fiber, GAFTEMP Fiberboard (Min. 1.3" thick)	1, 2, 6, 13, 16, 17, 21 or 29S	1:3

Note: Insulation panels listed are minimum sizes and dimensions; if larger panels are used, the number of fasteners shall be increased maintaining the same fastener density. Please refer to Roofing Application Standard RAS 117 for insulation attachment.

Base Sheet:	Install one ply of TriPly Ply 4, Ply 6 or #75 Base Sheet	Applied directly over the top layer of insulation. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. (See General Limitation #4).
Ply Sheet:	(Optional) One or more plies TriPly Ply 4 or Ply 6 sheet.	Adhered in full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One or more plies ply of TriPly SBS Modified Bitumen	Adhered in full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. TriPly Mineral Surfaced Cap Sheet	Adhered in full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure:	-45 psf (See General Limitation #9)	



Membrane Type: APP
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F: Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet:	One or more plies TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the primed deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One ply of TP 4 Smooth, TP 4 Granule APP Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-90 psf (See General Limitation #9)	



Membrane Type: SBS
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F: Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet:	One or more plies TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the primed deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One or more plies ply of TriPly SBS Modified Bitumen	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. or in TriPly Modified Bitumen Adhesive at an application rate of 1-2 gal./sq.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. TriPly Mineral Surfaced Cap Sheet	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure:	-90 psf (See General Limitation #9)	



Frank Zuloaga, RRC
Roofing Product Control Examiner

Membrane Type: SBS
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F(2): Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet:	One or more plies TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the primed deck. Adhere with TriPly Modified Bitumen Adhesive at an application rate of 1-2 gal./sq.
Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered with TriPly Modified Bitumen Adhesive at an application rate of 1-2 gal./sq.
Membrane:	One or more plies ply of TriPly SBS Modified Bitumen	Adhered in TriPly Modified Bitumen Adhesive at an application rate of 1-2 gal./sq.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. TriPly Mineral Surfaced Cap Sheet	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure:	-90 psf (See General Limitation #9)	



Membrane Type: APP
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F(3): Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet:	(Optional) One or more plies TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the primed deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One ply of TP 4 Smooth, TP 4 Granule APP Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following: <ol style="list-style-type: none">1. Gravel or slag2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq. Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-236 psf (See General Limitation #9)	



Membrane Type: APP
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F(4): Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet:	One ply TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the primed deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One ply of TP 4 Smooth, TP 4 Granule APP Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-457.5 psf (See General Limitation #9)	



Membrane Type: SBS
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F(4): Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet:	One ply TriPly Ply 4, Ply 6 or #75 Base Sheet	Adhered directly to the primed deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One or more plies ply of TriPly SBS Modified Bitumen	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. TriPly Mineral Surfaced Cap Sheet	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure:	-457.5 psf (See General Limitation #9)	



Membrane Type: SBS
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F(5): Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet: One ply TriPly Ply 4, Ply 6 or #75 Base Sheet Adhered directly to the primed deck. Adhered with TriPly Modified Bitumen Adhesive at an application rate of 1-2 gal./sq.

Membrane: One or more plies ply of TriPly SBS Modified Bitumen Adhered with TriPly Modified Bitumen Adhesive at an application rate of 1-2 gal./sq.

Surfacing: (Optional) Install one of the following:

1. Gravel or slag Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
2. TriPly Mineral Surfaced Cap Sheet Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.

Maximum Design Pressure: -230 psf (See General Limitation #9)



Membrane Type: APP
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F(5): Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet:	GAFGLAS® STRATAVENT® Perforated	lose laid dry
Ply Sheet:	One or more plies of TriPly Ply 4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One ply of TP 4 Smooth, TP 4 Granule APP Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following: 1. Gravel or slag 2. GAF Premium Fibred Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq. Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-90 psf (See General Limitation #9)	



Membrane Type: SBS
Deck Type 3: Concrete Decks, Non-Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type F(5): Membrane and /or base sheet is adhered to roof deck.

All General and System Limitations shall apply.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of base sheet.

Base Sheet: None

Ply Sheet: (Optional), One or more plies of TriPly Ply 4 or Ply 6 sheets Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.

Membrane: One or more plies ply of TriPly SBS Modified Bitumen Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. or in TriPly Modified Bitumen Adhesive at an application rate of 1-2 gal./sq.

Surfacing: (Optional) Install one of the following:

1. Gravel or slag Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
2. TriPly Mineral Surfaced Cap Sheet Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.

Maximum Design Pressure: -90 psf (See General Limitation #9)



- Membrane Type:** APP & SBS
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type A:** Optional insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

(Optional) Insulation Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft ²
ACFoam Composite, GAFTEMP® Composite, GAFTEMP Composite A, GAFTEMP Composite N or E'NRG'Y-2 (Min. 1.75" thick)	N/A	N/A

Optional insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation or base sheet.

- | | | |
|--------------------------|--|--|
| Base Sheet: | Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet | Adhered directly to the substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Ply Sheet: | (Optional) One or more plies of TriPly Ply 4 sheets | Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Membrane: | One or more plies of TP 4 Smooth, TP 4 Granule APP Modified Bitumen or TriPly SBS Modified Bitumen | Applied according to manufacturer's application instructions. |
| Surfacing: | (Optional) Install one of the following: | |
| | 1. Gravel or slag | Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq. |
| | 2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion | Applied at a rate of 1.5 gal./sq.

Applied at a rate of 3 gal./sq. (Torch Smooth applications only) |
| | 3. TriPly Mineral Surfaced Cap Sheet | Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Maximum Design Pressure: | -270 psf (See General Limitation #9) | |



- Membrane Type:** APP & SBS
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type A(2):** All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

Insulation Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft ²
High Density Wood Fiber, GAFTEMP® High Density Fiberboard (Min. ½" thick)	N/A	N/A
GAFTEMP® PERMALITE® (Min. 1" thick)	N/A	N/A

All insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation or base sheet.

- Base Sheet:** Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet


Adhered directly to the insulated substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
- Ply Sheet:** (Optional) One or more plies of TriPly Ply4 or Ply 6 sheets

Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
- Membrane:** One or more plies of TP 4 Smooth, TP 4 Granule APP Modified Bitumen or TriPly SBS Modified Bitumen

Applied according to manufacturer's application instructions.
- Surfacing:** (Optional) Install one of the following:

 1. Gravel or slag Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
 2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion Applied at a rate of 1.5 gal./sq.
 3. TriPly Mineral Surfaced Cap Sheet Applied at a rate of 3 gal./sq. (Torch Smooth applications only)

Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
- Maximum Design Pressure:** -140 psf (See General Limitation #9)

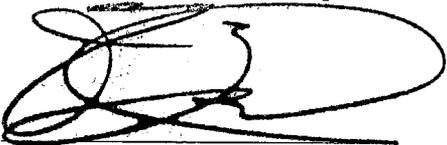

Membrane Type: APP & SBS
Deck Type 3: Concrete Decks, Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type A(3): All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.


All General and System Limitations shall apply.

Insulation for Base Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® Isotherm RN (Min. 2" thick)	N/A	N/A
Insulation for Top Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® PERMALITE® (Min. ½" thick)	N/A	N/A

All insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation or base sheet.

Base Sheet:	Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet	Adhered directly to the deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional) One or more plies of TriPly Ply4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One or more plies of TP 4 Smooth, TP 4 Granule APP Modified Bitumen or TriPly SBS Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
	3. TriPly Mineral Surfaced Cap Sheet	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure:	-322.5 psf (See General Limitation #9)	

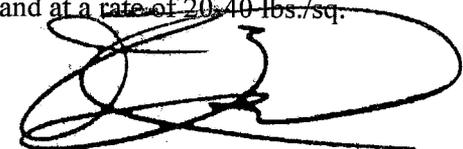

Membrane Type: APP & SBS
Deck Type 3: Concrete Decks, Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type A(4): All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

Insulation for Base Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® Composite N (Min. 1.5" thick)	N/A	N/A
Insulation for Top Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® Composite (Min. 1.5" thick)	N/A	N/A

All insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation or base sheet.

Base Sheet:	Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet	Adhered directly to the deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional) One or more plies of TriPly Ply4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One or more plies of TP 4 Smooth, TP 4 Granule APP Modified Bitumen or TriPly SBS Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq.
	3. TriPly Mineral Surfaced Cap Sheet	Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
Maximum Design Pressure:	-270 psf (See General Limitation #9)	



Membrane Type: SBS
Deck Type 3: Concrete Decks, Insulated, New Construction
Deck Description: 2500 psi structural concrete or concrete plank
System Type A(5): All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

Insulation Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® Permalite (Min. 3/4" thick)	N/A	N/A

Insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation or base sheet.

Base Sheet:	Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet	Adhered directly to the deck. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional) One or more plies of TriPly Ply4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One or more plies of TriPly SBS Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion	Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only)
	3. TriPly Mineral Surfaced Cap Sheet	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure:	-137 psf (See General Limitation #9)	



- Membrane Type:** SBS
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type A(6):** All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

Insulation for Base Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
E'NRG'Y 2 Plus, AC Foam I, II, Apache Pyrox, AP, White Line, Hy-Therm AP, Multi-Max or , GAFTEMP Isotherm RA, GAFTEMP Isotherm RN, GAFTEMP Composite, GAFTEMP Composite A, GAFTEMP Composite N (Min. 1¼" thick)	N/A	N/A

Insulation for Top Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® Permalite (Min. ½" thick)	N/A	N/A

All insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation or base sheet.

- | | | |
|--------------------|---|--|
| Base Sheet: | Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet | Adhered directly to the insulated substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Ply Sheet: | (Optional) One or more plies of TriPly Ply4 or Ply 6 sheets | Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Membrane: | One or more plies of TriPly SBS Modified Bitumen | Applied according to manufacturer's application instructions. |
| Surfacing: | (Optional) Install one of the following: | |
| | 1. Gravel or slag | Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq. |
| | 2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat® Emulsion | Applied at a rate of 1.5 gal./sq.
Applied at a rate of 3 gal./sq. (Torch Smooth applications only) |



3. TriPly Mineral Surfaced Cap Sheet Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Maximum Design Pressure: -126 psf (See General Limitation #9)



Frank Zuloaga, RRC
Roofing Product Control Examiner

- Membrane Type:** APP
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type A(7):** All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

Insulation Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft ²
GAFTEMP Permalite (Min. ¾" thick)	N/A	N/A

Insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation.

- | | | |
|--------------------------|---|--|
| Base Sheet: | Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet | Adhered directly to the insulated substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Ply Sheet: | (Optional) One or more plies of TriPly Ply4 or Ply 6 sheets | Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Membrane: | One or more plies of TP 4 Smooth or TP 4 Granule APP Modified Bitumen | Applied according to manufacturer's application instructions. |
| Surfacing: | (Optional) Install one of the following: | |
| | 1. Gravel or slag | Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq. |
| | 2. GAF Premium Fibered Aluminum Roof Coating or GAF WeatherCoat [®] Emulsion | Applied at a rate of 1.5 gal./sq. Applied at a rate of 3 gal./sq. (Torch Smooth applications only) |
| | 3. TriPly Mineral Surfaced Cap Sheet | Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Maximum Design Pressure: | -128 psf (See General Limitation #9) | |



- Membrane Type:** SBS
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type A(8):** All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

Insulation for Base Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
E'NRG'Y 2 Plus, AC Foam I, II, Apache Pyrox, AP, White Line, Hy-Therm AP, Multi-Max or , GAFTEMP Isotherm RA, GAFTEMP Isotherm RN, GAFTEMP Composite, GAFTEMP Composite A, GAFTEMP Composite N (Min. 1/4" thick)	N/A	N/A

Insulation for Top Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® Fiberboard or Wood Fiber (Min. 1/2" thick)	N/A	N/A

All insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation.

- | | | |
|--------------------|---|--|
| Base Sheet: | Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet | Adhered directly to the insulated substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Ply Sheet: | (Optional) One or more plies of TriPly Ply4 or Ply 6 sheets | Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq. |
| Membrane: | One or more plies of TriPly SBS Modified Bitumen | Applied according to manufacturer's application instructions. |
| Surfacing: | (Optional) Install one of the following: | |
| | 1. Gravel or slag | Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq. |
| | 2. GAF Premium Fibered Aluminum Roof Coating or | Applied at a rate of 1.5 gal./sq. |



GAF WeatherCoat® Emulsion Applied at a rate of 3 gal./sq. (Torch Smooth applications only)

- 3. TriPly Mineral Surfaced Cap Sheet Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.

Maximum Design Pressure: -162 psf (See General Limitation #9)



- Membrane Type:** APP & SBS
- Deck Type 3:** Concrete Decks, Insulated, New Construction
- Deck Description:** 2500 psi structural concrete or concrete plank
- System Type A(9):** All insulation layers are adhered to deck. Membrane is subsequently fully or partially adhered to insulation.

All General and System Limitations shall apply.

Insulation for Base Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
E'NRG'Y 2 Plus, AC Foam I, II, Apache Pyrox, AP, White Line, Hy-Therm AP, Multi-Max or , GAFTEMP Isotherm RA, GAFTEMP Isotherm RN, GAFTEMP Composite, GAFTEMP Composite A, GAFTEMP Composite N (Min. 1¼" thick)	N/A	N/A

Insulation for Top Layer (Table 2)	Insulation Fasteners (Table 3)	Fastener Density/ft²
GAFTEMP® PERMALITE Fiberboard or Perlite (Min. ¾" thick)	N/A	N/A

All insulation shall be adhered to the deck in full mopping of approved hot asphalt within the EVT range and at a rate of 20-40 lbs/100 ft². Please refer to Roofing Application Standard PA 117 for insulation attachment. Composite insulation panels may be used as a top layer placed with the polyisocyanurate side facing down.

Note: Concrete deck shall be primed with ASTM D 41 asphalt primer and allowed to dry prior to application of insulation.

Base Sheet:	Install one ply of TriPly Ply4, Ply 6 or #75 Base Sheet	Adhered directly to the insulated substrate. Adhere with any approved mopping asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Ply Sheet:	(Optional) One or more plies of TriPly Ply4 or Ply 6 sheets	Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.
Membrane:	One or more plies of TP 4 Smooth, TP 4 Granule APP Modified Bitumen or TriPly SBS Modified Bitumen	Applied according to manufacturer's application instructions.
Surfacing:	(Optional) Install one of the following:	
	1. Gravel or slag	Applied at 400 lb./sq. and 300 lb./sq. respectively in a flood coat of approved asphalt at 60 lb./sq.
	2. GAF Premium Fibered Aluminum Roof Coating or	Applied at a rate of 1.5 gal /sq



GAF WeatherCoat® Emulsion Applied at a rate of 3 gal./sq. (Torch Smooth applications only)

3. TriPly Mineral Surfaced Cap Sheet Adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq.

Maximum Design Pressure: -157 psf (See General Limitation #9)



Frank Zuloaga, RRC
Roofing Product Control Examiner

CONCRETE DECK SYSTEM LIMITATIONS:

1. If mechanical attachment to the structural deck through the lightweight insulating concrete is proposed, a field withdrawal resistance testing shall be performed to determine fastener patterns and density. All testing and fastening design shall be in compliance with Testing Application Standard TAS 105 and Roofing Application Standard RAS 117, calculations shall be signed and sealed by a Florida registered Professional Engineer, Registered Architect, or Registered Roof Consultant.

GENERAL LIMITATIONS:

- 1 Fire classification is not part of this acceptance, refer to a current Approved Roofing Materials Directory for fire ratings of this product.
- 2 Insulation may be applied in multiple layers. The first layer shall be attached in compliance with Product Control Approval guidelines. All other layers shall be adhered in a full mopping of approved asphalt applied within the EVT range and at a rate of 20-40 lbs./sq., or mechanically attached using the fastening pattern of the top layer.
- 3 All standard panel sizes are acceptable for mechanical attachment. When applied in approved asphalt, panel size shall be 4' x 4' maximum.
- 4 An overlay and/or recovery board insulation panel is required on all applications over closed cell foam insulations when the base sheet is fully mopped. If no recovery board is used the base sheet may be applied using spot mopping with approved asphalt, 12" diameter circles, 24" o.c.; or strip mopped 8" ribbons in three rows, one at each sidelap and one down the center of the sheet allowing a continuous area of ventilation. Encircling of the strips is not acceptable. A 6" break shall be placed every 12' in each ribbon to allow cross ventilation. Asphalt application of either system shall be at a minimum rate of 12 lbs./sq. **Note: Spot attached systems shall be limited to a maximum design pressure of -45 psf.**
- 5 Fastener spacing for insulation attachment is based on a Minimum Characteristic Force (F') value of 275 lbf., as tested in compliance with TAS 105. If the fastener value, as field-tested, is below 275 lbf., insulation attachment shall not be acceptable.
- 6 Fastener spacing for mechanical attachment of anchor/base sheet or membrane attachment is based on a minimum fastener resistance value in conjunction with the maximum design value listed within the specific system. Should the fastener resistance be less than that required, as determined by the Building Official, a revised fastener spacing, prepared, signed and sealed by a Florida Registered Engineer or Architect may be submitted. Said revised fastener spacing utilize the withdrawal resistance value taken from Miami-Dade Protocol TAS 105 and calculations in compliance with Miami-Dade Roofing Application Standard RAS 117.
- 7 Perimeter and corner areas shall comply with the enhanced uplift pressure of these areas, as calculated in compliance with Chapter 23 of the South Florida Building Code. Fastener densities shall be increase for both insulation and base sheet as needed calculated in compliance with Miami-Dade Roofing Application Standard TAS 117. **(When this limitation is specifically referred within this NOA, General Limitation #9 will not be applicable.)**
- 8 All attachment and sizing of perimeter nailers, metal profile, and/or flashing termination designs shall conform with Miami-Dade County Roofing Application Standard TAS 111 and the wind load requirements of Chapter 23 of the South Florida Building Code.
- 9 The maximum designed pressure limitation listed shall be applicable to all roof pressure zones (i.e. field, perimeters, corners). No rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners, and corners). **(When this limitation is specifically referred within this NOA, General Limitation #9 will not be applicable.)**

NOTICE OF ACCEPTANCE STANDARD CONDITIONS

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
 - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
 - b) The product is no longer the same product (identical) as the one originally approved;
 - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
 - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
 - a) Unsatisfactory performance of this product or process;
 - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 1 through 41.

END OF THIS ACCEPTANCE



Frank Zuloaga, RRC
Roofing Product Control Examiner