



MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING

BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Dor-O-Matic Inc., Division of Ingersoll-Rand Company
7350 W. Wilson Avenue
Harwood Heights ,IL 60706

Your application for Notice of Acceptance (NOA) of:
Series "96000 " Automatic Aluminum Sliding Glass Door-Impact
under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0612.10
EXPIRES: 03/13/2003

Raul Rodriguez
Chief Product Control Division

THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL CONDITIONS BUILDING CODE & PRODUCT REVIEW COMMITTEE

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 09/13/2001

Dor-O-Matic, Inc.

ACCEPTANCE No.: 01-0612.10

APPROVED : September 13, 2001

EXPIRES : March 13, 2003

NOTICE OF ACCEPTANCE: SPECIFIC CONDITIONS

1. SCOPE

- 1.1** This revises and replaces the Notice of Acceptance No. 00-0128.06 which was issued on May 5, 2000. It approves an automatic aluminum sliding glass door, as described in Section 2 of this Notice of Acceptance, designed to comply with the South Florida Building Code (SFBC), 1994 Edition for Miami-Dade County, for the locations where the pressure requirements, as determined by SFBC Chapter 23, do not exceed the Design Pressure Rating values indicated in the approved drawings.

2. PRODUCT DESCRIPTION

- 2.1** The Series "96000" Automatic Aluminum Sliding Glass Door – Large Missile Impact Resistant and its components shall be constructed in strict compliance with the following documents: Drawing No B 8211000051, titled "96000 Hurricane Door Unit", Sheets 1 through 2 of 2 dated 2/14/96 and last revised on 8/23/2001, bearing the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division. These documents shall hereinafter be referred to as the approved drawings.

3. LIMITATIONS

- 3.1** This approval applies to single unit applications only, as shown in approved drawings.
3.2 Unit shall be installed only at locations protected by a canopy or overhang such that the angle between the edge of canopy or overhang to sill is less than 45 degrees. Unless unit is installed in non-habitable areas where the unit and the area are designed to accept water infiltration.

4. INSTALLATION

- 4.1** The automatic door and its components shall be installed in strict compliance with the approved drawings.
4.2 Hurricane protection system (shutters): the installation of this unit **will not require** a hurricane protection system.

5. LABELING

- 5.1** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved".

6. BUILDING PERMIT REQUIREMENTS

- 6.1** Application for building permit shall be accompanied by copies of the following:
6.1.1 This Notice of Acceptance
6.1.2 Duplicate copies of the approved drawings, as identified in Section 2 of this Notice of Acceptance, clearly marked to show the components selected for the proposed installation.
6.1.3 Any other documents required by the Building Official or the South Florida Building Code (SFBC) in order to properly evaluate the installation of this system.

Ishaq I. Chanda

Ishaq I. Chanda, P.E., Product Control Examiner
Product Control Division

Dor-O-Matic, Inc.

ACCEPTANCE No.: 01-0612.10

APPROVED : September 13, 2001

EXPIRES : March 13, 2003

NOTICE OF ACCEPTANCE: STANDARD CONDITIONS

1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
 - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
 - b) The product is no longer the same product (identical) as the one originally approved;
 - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
 - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
 - a) Unsatisfactory performance of this product or process.
 - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purpose.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer need not reseal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1, 2 and this last page 3.

Ishaq I. Chanda


Ishaq I. Chanda, P.E., Product Control Examiner
Product Control Division

END OF THIS ACCEPTANCE

GLASS STOP REF. 1/4" SUPPLY GLASS STOP ON EXTERIOR SIDE ONLY

DOOR PANEL


1. TYPICAL ALUMINUM ALLOY 6063-T6 STRUCTURAL SILICONE ADHESIVE IS APPLIED AT TOP OF HEADER, JAMBS, AND BELOW SPACER, AND THRESHOLDS.

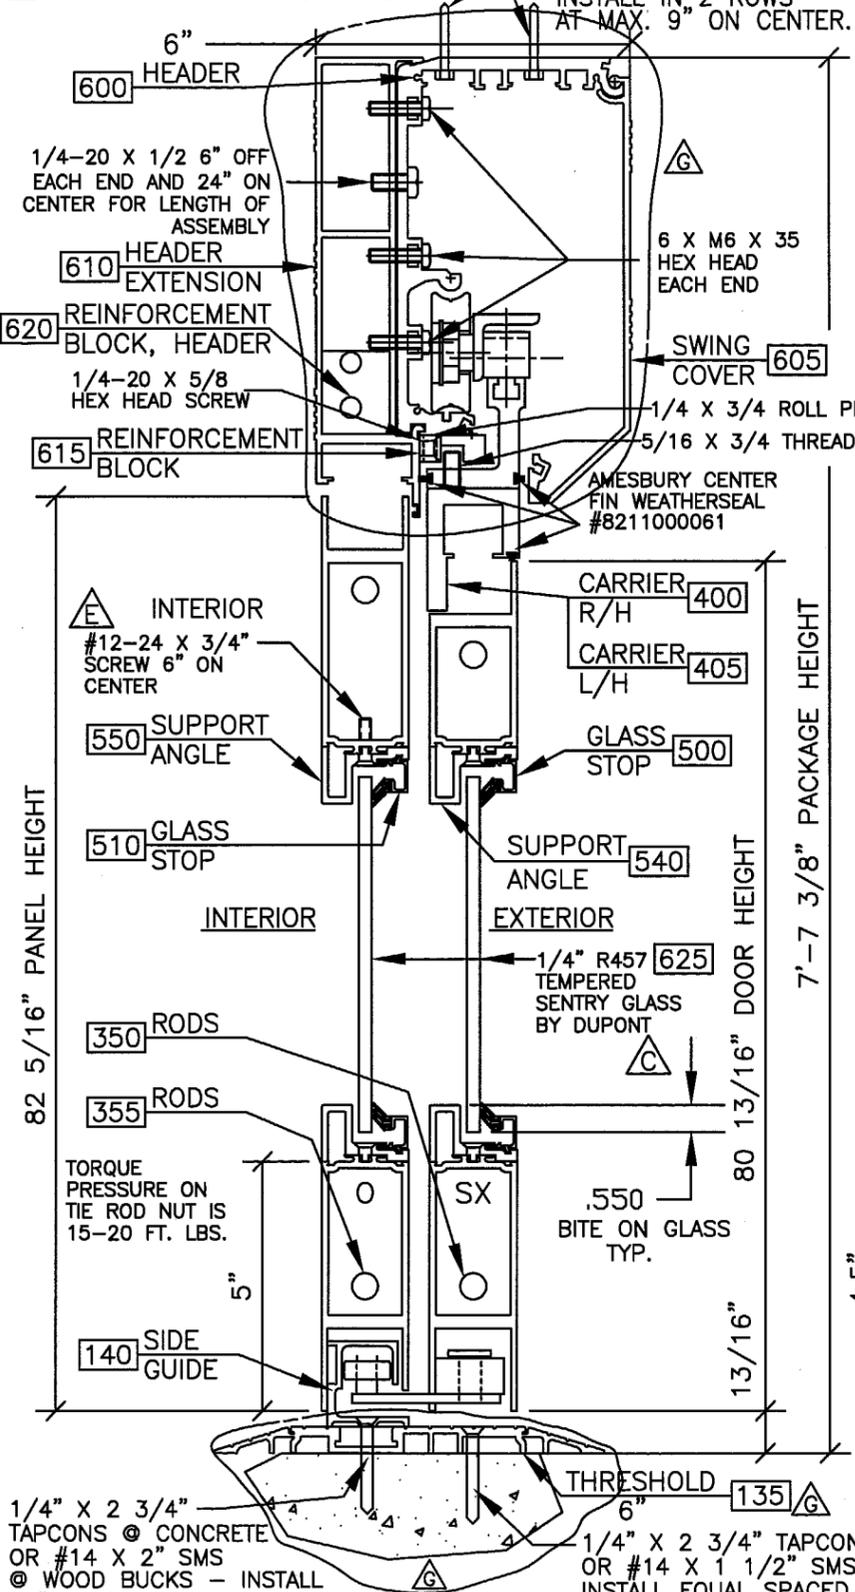



SECTION "A"- "A"
SHOWN IN OPEN POSITION

1/4" X 2 3/4" TAPCONS @ CONCRETE OR #14 X 2" SMS @ WOOD BUCKS - INSTALL 12" ON CENTER, 4 EA. SIDE. CONNECTORS TO BE INSTALLED THROUGH SIDE GUIDE & SPACER INTO FRAME.

1/4" X 2 3/4" TAPCONS @ CONCRETE OR #14 X 1 1/2" SMS @ WOOD BUCKS - INSTALL EQUAL SPACED, 4 EACH SIDE.

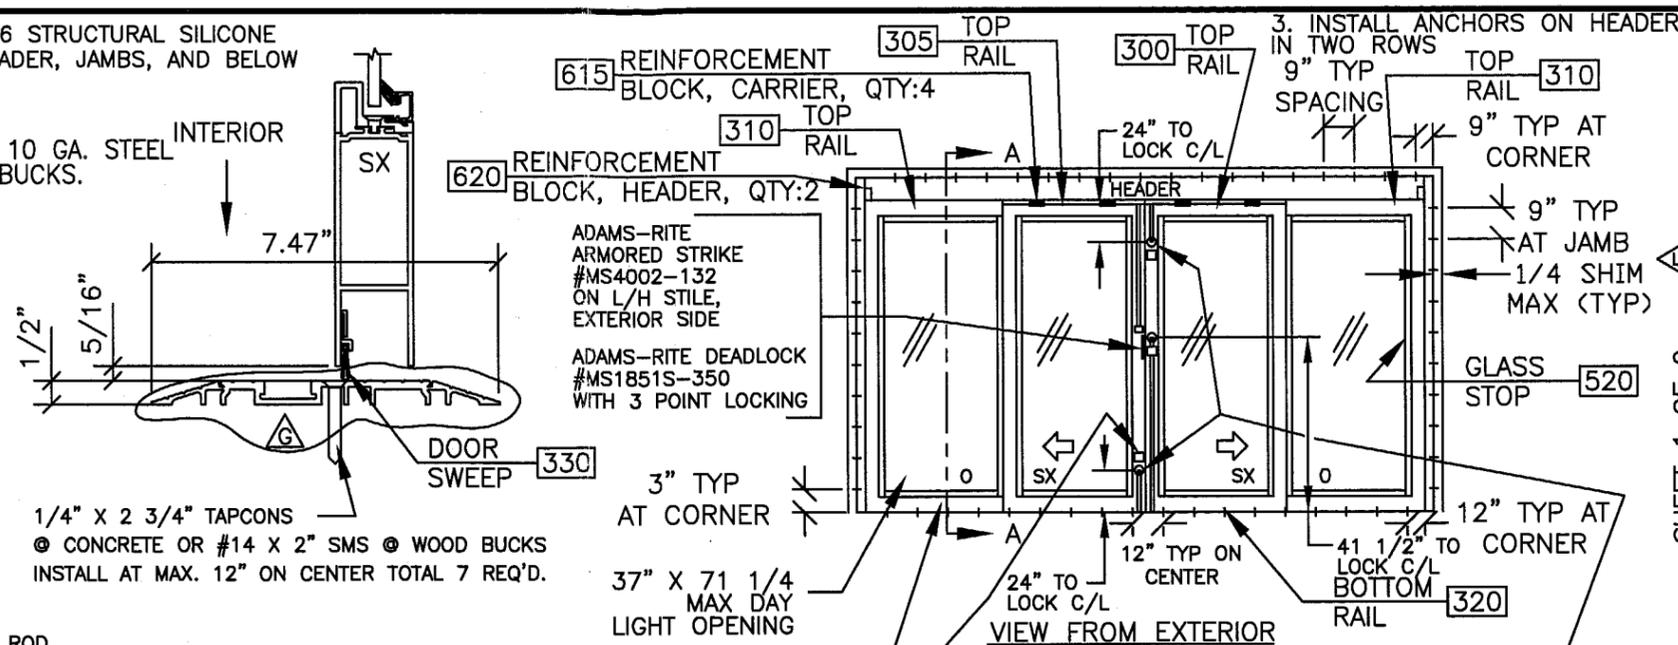

1/4" X 2 3/4" TAPCONS @ CONCRETE OR #14 X 2" SMS @ WOOD BUCKS INSTALL AT MAX. 12" ON CENTER TOTAL 7 REQ'D.

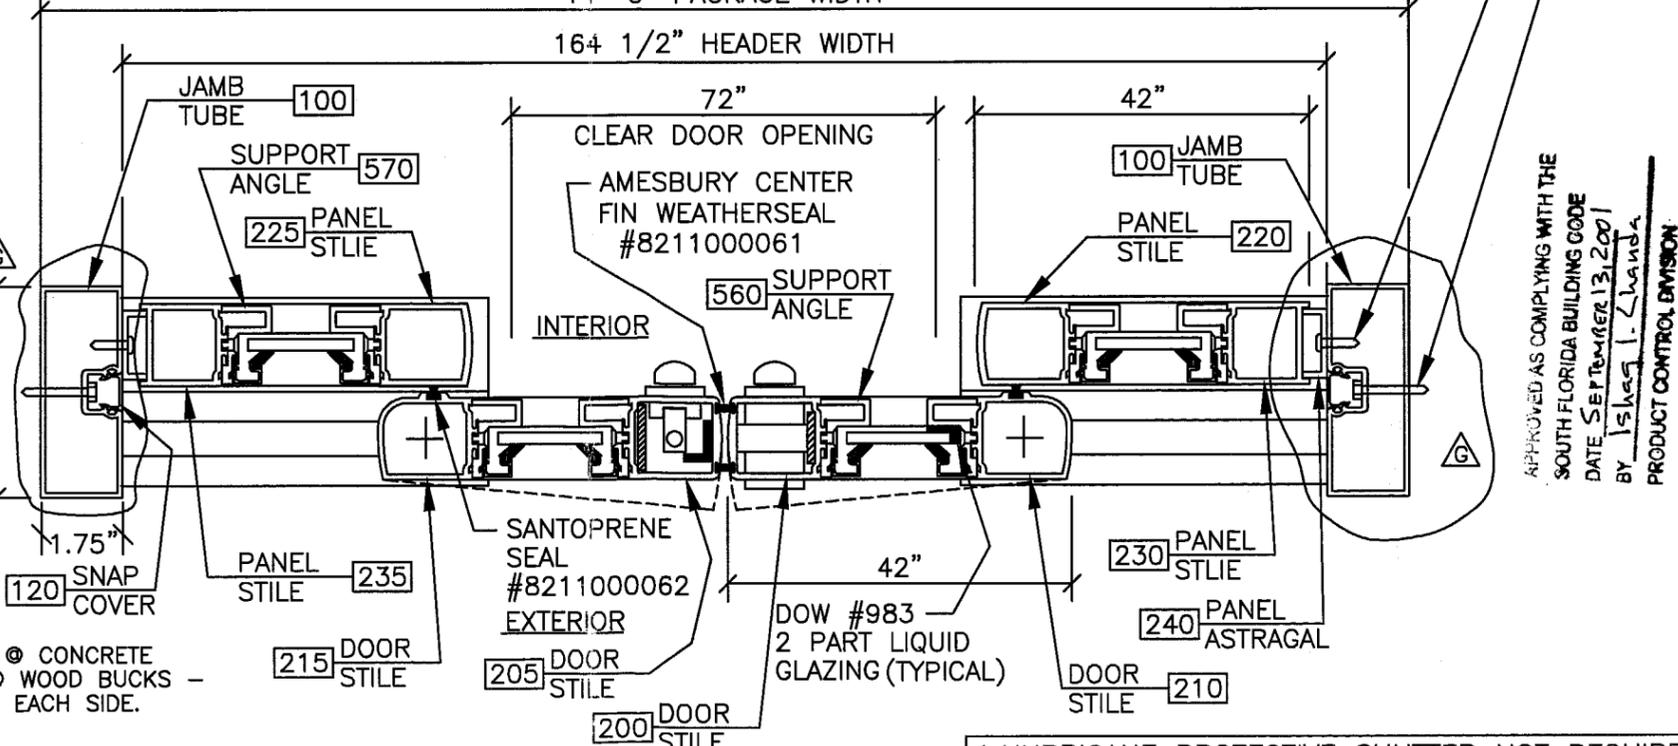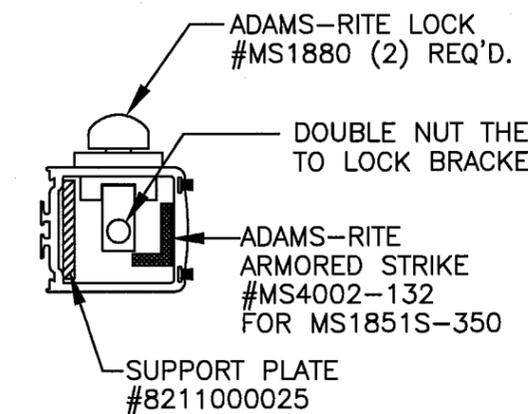

1. HURRICANE PROTECTIVE SHUTTER NOT REQUIRED
2. 1/4" SHIM SPACING MAX ALL AROUND

SHEET 1 OF 2

DOR-O-MATIC PRODUCTS CORP.
6800 INDUSTRIAL LOOP
GREENDALE, WI. 53129

TOLERANCES: UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS:
DECIMAL: ±.005
FRACTIONAL: ±1/32
ANGULAR: ±1/2°
ALL MACHINED SURFACES ±.005
NOTE: MUST BE FREE OF BURRS & SHARP EDGES.

TITLE: 96000 SERIES HURRICANE DOOR UNIT

DRAWN BY: T. THAO
CHECKED BY: Jc
DATE: 02/14/96

REV. LETTER: G
INITIAL RELEASE: 3/1/96

REV. NO.: 00530, 00530, 00104
DATE: 8/23/01, 8/23/01, 3/27/00

DESCRIPTION: LATEST REVISION CLOUDED, REVISED TO UTILIZE 4.5" JAMB AND 6" THRESHOLD, CHANGED TO 96K HEADER, UPDATE DRAWING TO LATEST STD.

MADE BY: AMc

DRAWING NO.: B 8211000051

APPROVED AS COMPLYING WITH THE SOUTH FLORIDA BUILDING CODE
DATE: SEPTEMBER 13, 2001
BY: Ishaq I. Zuhairi
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0612-10



NOTE:

NOTE: MINIMUM EMBEDMENT OF 1-1/4" FOR TAPCONS AND 1-1/2 FOR #14 SMS

ITEM NO.	DRAWING NUMBER	DESCRIPTION	OVERALL LENGTH	QTY.	COLOR
100	1091-TMP 62 OF 85	GROOVED JAMB TUBE, 6063-T6 AL	7'-7 3/8"	1	US28
120	B 8211000030	SNAP IN COVER STRIP FOR GROOVED JAMB TUBE	89 7/8"	2	US28
135	1091-TMP 66 OF 85	7.47" THRESHOLD, 6063-T6 AL	79 5/8"	1	US28
140	B 8211000036	SIDE GUIDE	42"	2	US28
150	B 8211000003	LOOSE PARTS BOARD OUTSIDE SLIDE L/H DBL.		1	US28
155	B 8211000004	LOOSE PARTS BOARD OUTSIDE SLIDE R/H DBL./SGL.		1	US28
200	B 8211000002	R/H DOOR LOCK STILE	80 13/16"	1	US28
205	B 8211000001	L/H DOOR LOCK STILE	80 13/16"	1	US28
210	B 8211000006	R/H DOOR STILE SIDE PAIR & SGL. (OUTSIDE SLIDE)	80 13/16"	1	US28
215	B 8211000007	L/H DOOR STILE SIDE PAIR & SGL. (OUTSIDE SLIDE)	80 13/16"	1	US28
220	B 8211000017	R/H FIXED PANEL LOCK STILE, SGL. & BI-PART WITH SIDE GUIDE, WITHOUT HOOK SLOT, PREP FOR PENCIL SAFETY BEAM	82 5/16"	1	US28
225	B 8211000018	L/H FIXED PANEL LOCK STILE, SGL. & BI-PART WITH SIDE GUIDE, WITHOUT HOOK SLOT, PREP FOR PENCIL SAFETY BEAM	82 5/16"	1	US28
230	B 8211000015	R/H STILE PANEL FIXED PIVOT SIDE, SGL. & DBL.	82 5/16"	1	US28
235	B 8211000016	L/H STILE PANEL FIXED PIVOT SIDE, SGL. & DBL.	82 5/16"	1	US28
240	B 8211000044	ASTRAGAL	81 3/16"	2	US28
300	B 8211000033	R/H DOOR TOP RAIL	38 1/16"	1	US28
305	B 8211000032	L/H DOOR TOP RAIL	38 1/16"	1	US28
310	B 8211000038	PANEL TOP RAIL	38 1/16"	2	US28
320	B 8211000039	DOOR BOTTOM RAIL	38 1/16"	2	US28
325	B 8211000037	PANEL BOTTOM RAIL	38 1/16"	2	US28
330	B 8211000045	SWEEP ASSEMBLY	39 13/16"	2	US28
350	B 8211000029	DOOR ROD 3/8"	39 1/2"	4	PLATED
355	B 8211000029	PANEL ROD 3/8"	39 1/2"	4	PLATED
400	B 8211000012	R/H CARRIER MACHINING	41 3/4"	1	US28
405	B 8211000013	L/H CARRIER MACHINING	41 3/4"	1	US28
500	B 8211000055	GLASS STOP HORIZONTAL	36.813	4	US28
510	B 8211000055	GLASS STOP HORIZONTAL	36.813	4	US28
520	B 8211000054	GLASS STOP VERTICAL	72.313	8	US28
540	B 8211000027	GLASS SUPPORT ANGLE HORIZONTAL	37 19/32"	8	US28
550	B 8211000027	GLASS SUPPORT ANGLE HORIZONTAL	37 19/32"	8	US28
560	B 8211000026	GLASS SUPPORT ANGLE VERTICAL	72.313	4	US28
570	B 8211000026	GLASS SUPPORT ANGLE VERTICAL	72.313	4	US28
600	1091-TMP 56 OF 85	HEADER - MACH. DWG., 6063-T6 AL	164 1/2"	1	US28
605	1091-TMP 58 OF 85	SWING COVER, 6063-T6 AL	164 7/16"	1	US28
610	1091-TMP 57 OF 85	HEADER EXTENSION, 6063-T6 AL	164 7/16"	1	US28
615	1091-TMP 81 OF 85	CARRIER REINFORCEMENT BLOCK, 2024-T4 AL	2" X 1"	2	
620	1091-TMP 80 OF 85	HEADER REINFORCEMENT BLOCK, 2024-T4 AL	1 1/4" X 1"	2	
625	NO DRAWING	1/4" R457 TEMPERED SENTRY GLASS BY DUPONT			
XXX	B 8211000009	INTERLOCKING STRIP EXTRUSION	160 1/2"	1	MILL
XXX	B 8211000010	L/H PIVOT ASSEMBLY		1	MILL
XXX	B 8211000011	R/H PIVOT ASSEMBLY		1	MILL
XXX	B 8211000014	CARRIER END CAP & WEATHER STRIP ASSEMBLY	1.688	2	BLACK
XXX	B 8211000019	ANTI-JAR BRACKET	24"	2	PLATED
XXX	B 8211000020	SUPPORT PLATE 1 3/8 X 1/4 X 30 LG. CRS	30"	1	MILL
XXX	B 8211000021	ROD LOCKING BLOCK IN CARRIER	1.250	2	MILL
XXX	B 8211000022	SHIM FOR UNDER ANTI-JAR BRACKET	24"	8	
XXX	B 8211000024	GUIDE BLOCK	1.375	4	MILL
XXX	B 8211000025	SUPPORT PLATE 1" X 3/16 X 30 LG. CRS	30"	1	PLATED
XXX	B 8211000046	BRACKET ASSY.-PANEL TOP RAIL HINGE STILE END		2	MILL
XXX	B 8211000047	MOUNTING BLOCK FOR PANELS	1.750	3	MILL
XXX	B 8211000048	ANTI-JAR WHEEL INSTALLATION INSTRUCTIONS		4	
XXX	B 8211000049	DOOR LOCK STILE STICKER LABEL	1.750	4	
XXX	B 8211000061	AMESBURY WEATHERSEAL	56 FT.	1	
XXX	B 8211000062	SANTOPRENE SEAL	14 FT.	1	
XXX	B 8211000051	HURRICANE DOORS		1	

DESIGN PRESSURE RATING

POSITIVE	NOT APPROVED	+60 PSF
NEGATIVE	NOT APPROVED	-60 PSF


*UNIT SHALL BE INSTALLED ONLY AT LOCATIONS PROTECTED BY A CANOPY OR OVERHANG SUCH THAT THE ANGLE BETWEEN THE EDGE OF CANOPY OR OVERHANG TO SILL IS LESS THAN 45°. UNLESS UNIT IS INSTALLED IN NON-HABITABLE AREAS AND THE UNIT AND THE AREA ARE DESIGNED TO ACCEPT WATER INFILTRATION.

SHEET 2 OF 2

DOR-O-MATIC® PRODUCTS CORP.
6800 INDUSTRIAL LOOP
GREENDALE, WI. 53219

TITLE: 96000 SERIES HURRICANE DOOR UNIT

REV. E.C.N. NO.	DATE	DESCRIPTION	MADE BY	HEAT TREAT	REV. LETTER	DRAWING NO.
-	3/1/96	INITIAL RELEASE			F	B 8211000051
A	5/9/96	39 13/16" WAS 41 1/2"				
B	5/22/96	ADDED 8211000061, AND 8211000062				
C	3/27/00	UPDATE DRAWING TO LATEST STD.				
D	8/23/01	UPDATE BOM TO ADD 96K HEADER AND FRAME	SJW			
G	8/23/01	CHANGED NAME TO 96000 HURRICANE DOOR UNIT	SJW			

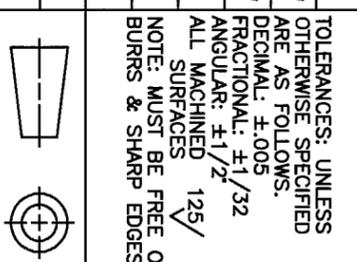


APPROVED AS COMPLYING WITH THE SOUTH FLORIDA BUILDING CODE
DATE: SEPTEMBER 13, 2001
BY: LISA J. CLARKE
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0612-10

DRAWN BY: T. THAO
CHECKED BY: [Signature]
DATE: 02/15/96


GLASS STOP REF. 1/4" SUPPLY GLASS STOP ON EXTERIOR SIDE ONLY

DOOR PANEL




1. TYPICAL ALUMINUM ALLOY 6063-T6 STRUCTURAL SILICONE ADHESIVE IS APPLIED AT TOP OF HEADER, JAMBS, AND BELOW SPACER, AND THRESHOLDS.

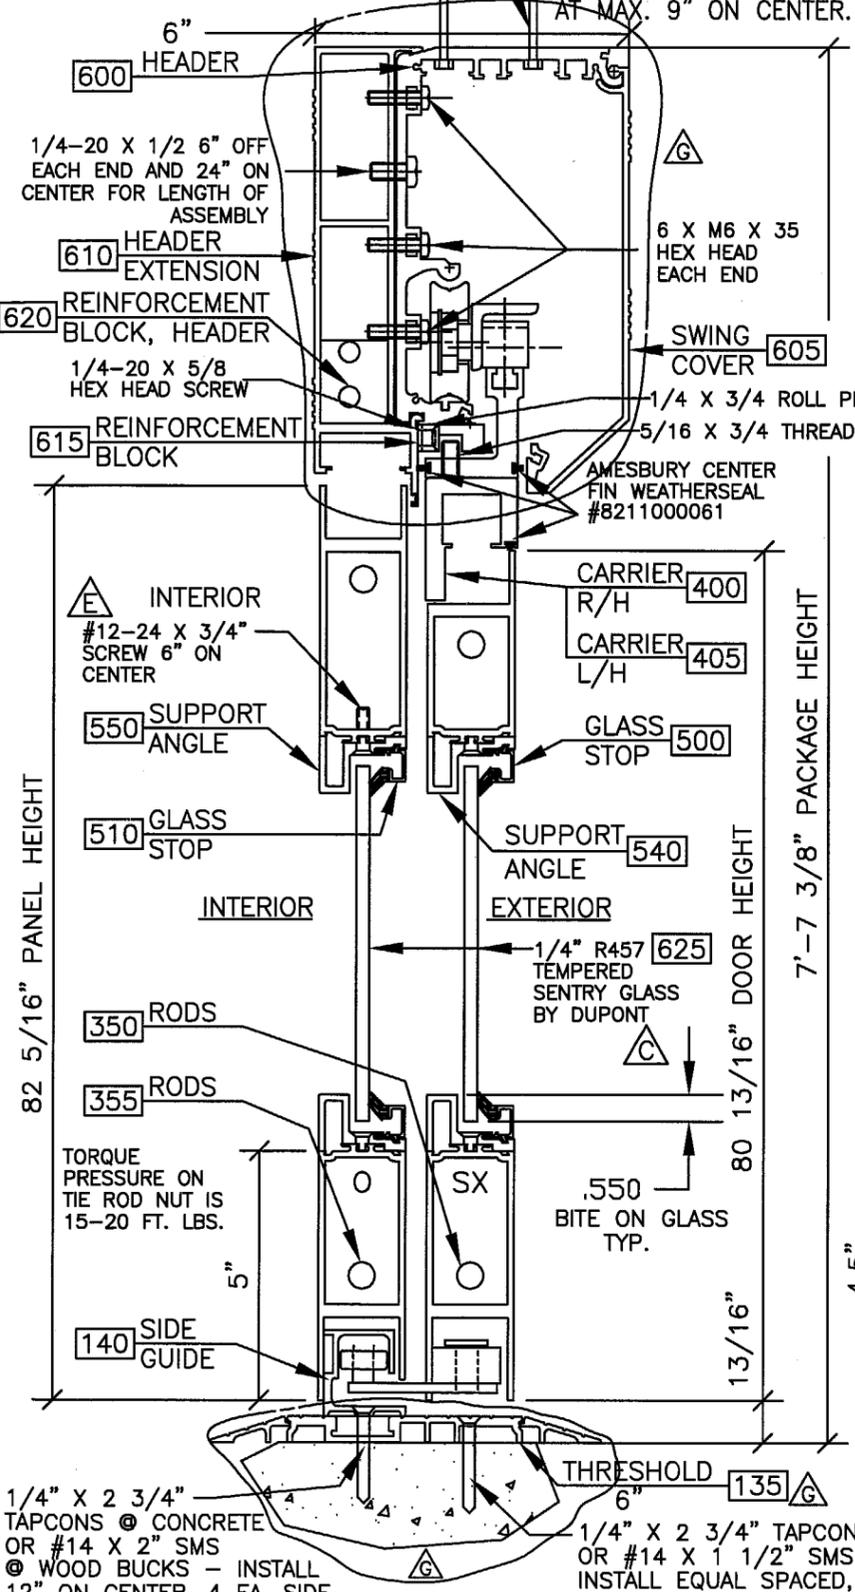

SECTION "A"- "A" SHOWN IN OPEN POSITION

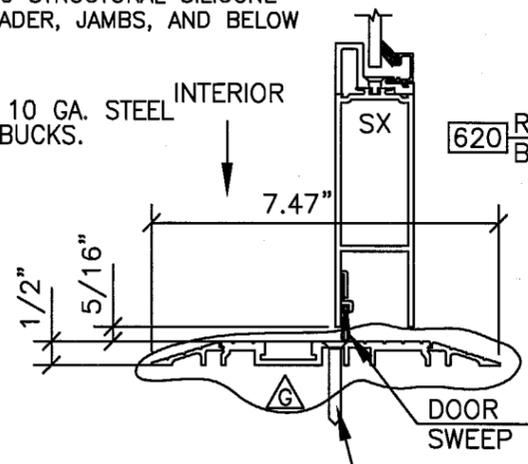

1/4" X 2 3/4" TAPCONS @ CONCRETE OR #14 X 2" SMS @ WOOD BUCKS INSTALL AT MAX. 12" ON CENTER TOTAL 7 REQ'D.

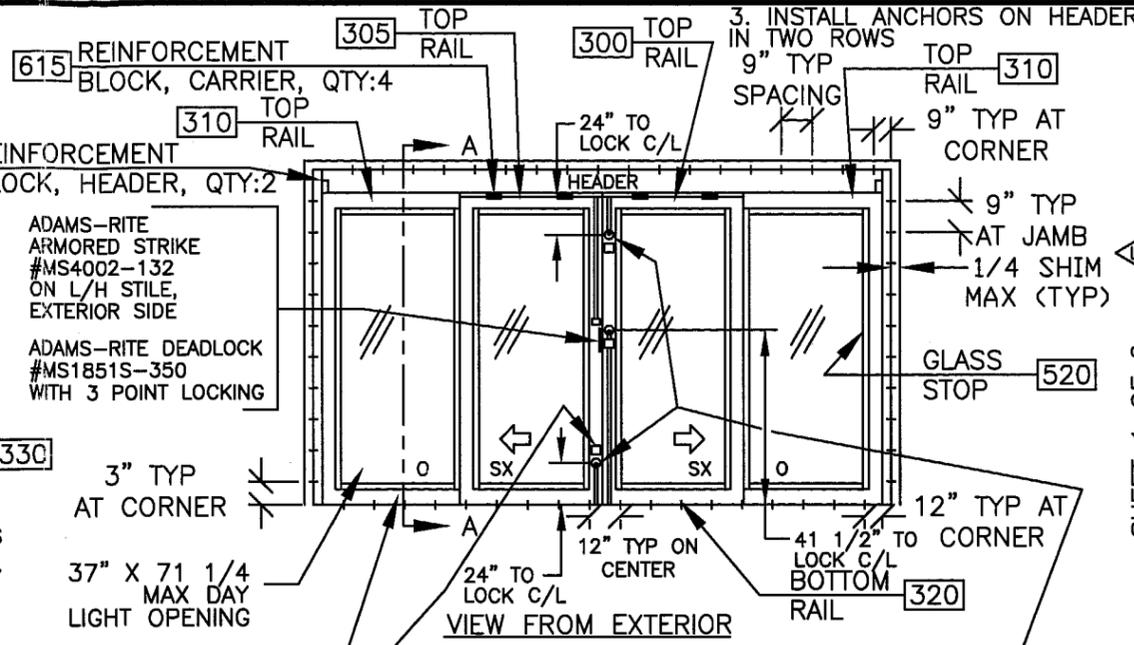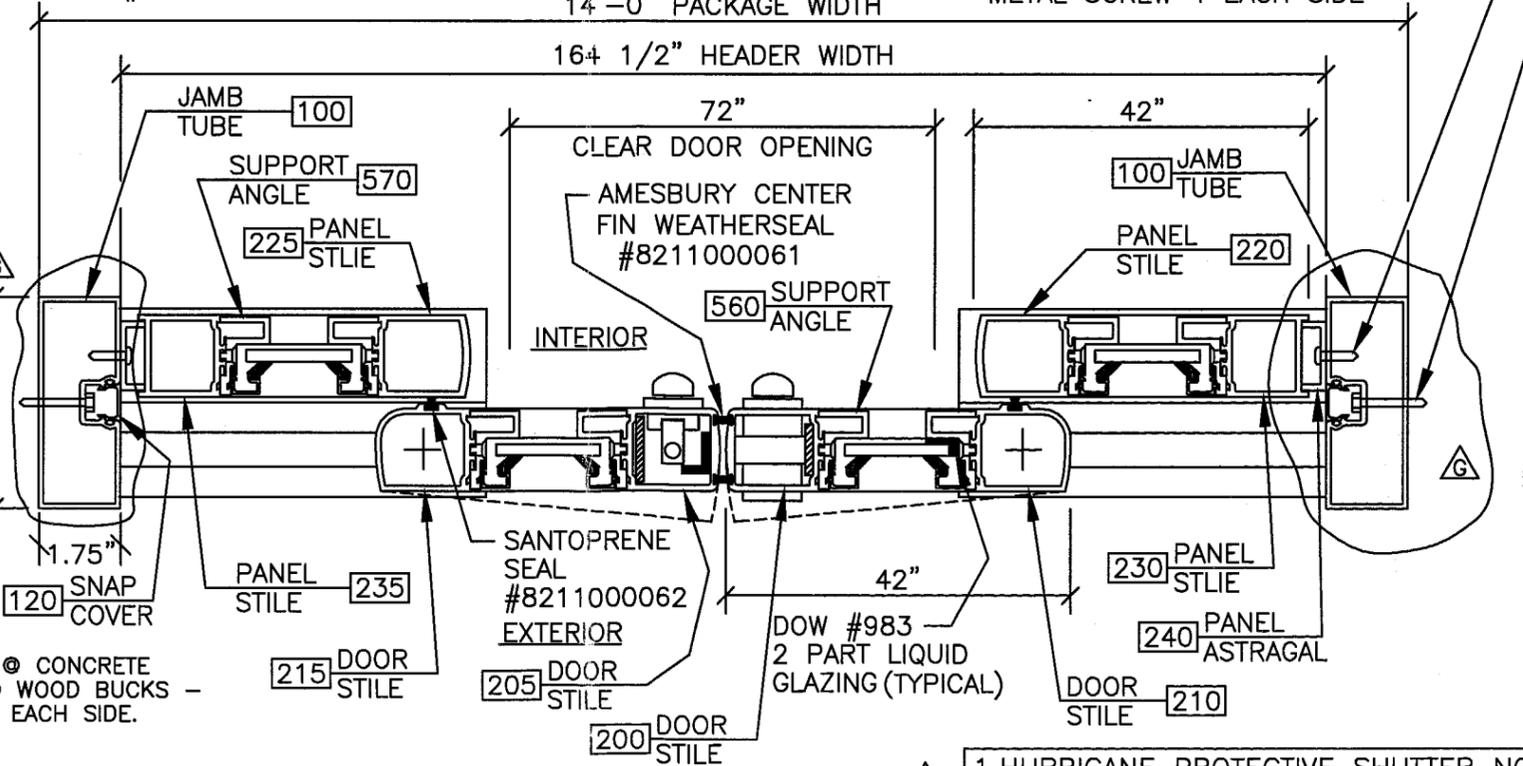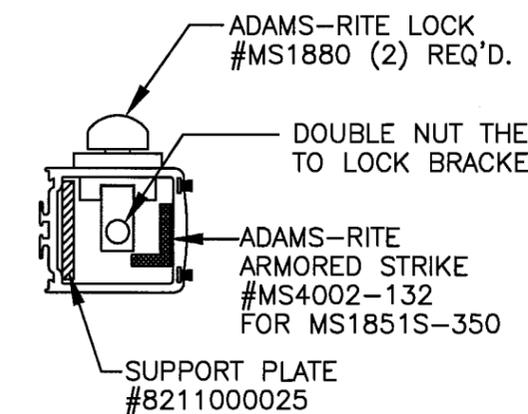

STICKER ON INTERIOR INSTALL ADAMS RITE LOCK #MS1880 (2) REQ'D. THUMBTURN TO FACE INTERIOR ONLY.

SHEET 1 OF 2

DOR-O-MATIC PRODUCTS CORP.
6800 INDUSTRIAL LOOP
GREENDALE, WI. 53129

TITLE 96000 SERIES HURRICANE DOOR UNIT

MATERIAL FINISH

DATE 02/14/96

DATE 02/14/96

DRAWN BY T. THAO

CHECKED BY Jc

REV. LETTER C

INITIAL RELEASE

3/1/96

DRAWING NO. B 8211000051

TOLERANCES: UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS:
DECIMAL: ±.005
FRACTIONAL: ±1/32
ANGULAR: ±1/2°
ALL MACHINED SURFACES 125/
NOTE: MUST BE FREE OF BURRS & SHARP EDGES.

APPROVED AS COMPLYING WITH THE SOUTH FLORIDA BUILDING CODE DATE SEPTEMBER 13, 2001 BY Ishag I. Zhand

PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0612-10

REV.	E.C.N. NO.	DATE	DESCRIPTION	MADE BY
G	00530	8/23/01	LATEST REVISION CLOUDED REVISED TO UTILIZE 4.5" JAMB AND 6" THRESHOLD	SJW
G	00530	8/23/01	CHANGED TO 96K HEADER	SJW
F	00104	3/27/00	UPDATE DRAWING TO LATEST STD.	AMC
REV.				

1. HURRICANE PROTECTIVE SHUTTER NOT REQUIRED
2. 1/4" SHIM SPACING MAX ALL AROUND

NOTE: MINIMUM EMBEDMENT OF 1-1/4" FOR TAPCONS AND 1-1/2 FOR #14 SMS

NOTE:

ITEM NO.	DRAWING NUMBER	DESCRIPTION	OVERALL LENGTH	QTY.	COLOR
100	1091-TMP 62 OF 85	GROOVED JAMB TUBE, 6063-T6 AL	7'-7 3/8"	1	US28
120	B 8211000030	SNAP IN COVER STRIP FOR GROOVED JAMB TUBE	89 7/8"	2	US28
135	1091-TMP 66 OF 85	7.47" THRESHOLD, 6063-T6 AL	79 5/8"	1	US28
140	B 8211000036	SIDE GUIDE	42"	2	US28
150	B 8211000003	LOOSE PARTS BOARD OUTSIDE SLIDE L/H DBL		1	US28
155	B 8211000004	LOOSE PARTS BOARD OUTSIDE SLIDE R/H DBL./SGL.		1	US28
200	B 8211000002	R/H DOOR LOCK STILE	80 13/16"	1	US28
205	B 8211000001	L/H DOOR LOCK STILE	80 13/16"	1	US28
210	B 8211000006	R/H DOOR STILE SIDE PAIR & SGL. (OUTSIDE SLIDE)	80 13/16"	1	US28
215	B 8211000007	L/H DOOR STILE SIDE PAIR & SGL. (OUTSIDE SLIDE)	80 13/16"	1	US28
220	B 8211000017	R/H FIXED PANEL LOCK STILE, SGL. & BI-PART WITH SIDE GUIDE, WITHOUT HOOK SLOT, PREP FOR PENCIL SAFETY BEAM	82 5/16"	1	US28
225	B 8211000018	L/H FIXED PANEL LOCK STILE, SGL. & BI-PART WITH SIDE GUIDE, WITHOUT HOOK SLOT, PREP FOR PENCIL SAFETY BEAM	82 5/16"	1	US28
230	B 8211000015	R/H STILE PANEL FIXED PIVOT SIDE, SGL. & DBL.	82 5/16"	1	US28
235	B 8211000016	L/H STILE PANEL FIXED PIVOT SIDE, SGL. & DBL.	82 5/16"	1	US28
240	B 8211000044	ASTRAGAL	81 3/16"	2	US28
300	B 8211000033	R/H DOOR TOP RAIL	38 1/16"	1	US28
305	B 8211000032	L/H DOOR TOP RAIL	38 1/16"	1	US28
310	B 8211000038	PANEL TOP RAIL	38 1/16"	2	US28
320	B 8211000039	DOOR BOTTOM RAIL	38 1/16"	2	US28
325	B 8211000037	PANEL BOTTOM RAIL	38 1/16"	2	US28
330	B 8211000045	SWEEP ASSEMBLY	39 13/16"	2	US28
350	B 8211000029	DOOR ROD 3/8"	39 1/2"	4	PLATED
355	B 8211000029	PANEL ROD 3/8"	39 1/2"	4	PLATED
400	B 8211000012	R/H CARRIER MACHINING	41 3/4"	1	US28
405	B 8211000013	L/H CARRIER MACHINING	41 3/4"	1	US28
500	B 8211000055	GLASS STOP HORIZONTAL	36.813	4	US28
510	B 8211000055	GLASS STOP HORIZONTAL	36.813	4	US28
520	B 8211000054	GLASS STOP VERTICAL	72.313	8	US28
540	B 8211000027	GLASS SUPPORT ANGLE HORIZONTAL	37 19/32"	8	US28
550	B 8211000027	GLASS SUPPORT ANGLE HORIZONTAL	37 19/32"	8	US28
560	B 8211000026	GLASS SUPPORT ANGLE VERTICAL	72.313	4	US28
570	B 8211000026	GLASS SUPPORT ANGLE VERTICAL	72.313	4	US28
600	1091-TMP 56 OF 85	HEADER - MACH. DWG., 6063-T6 AL	164 1/2"	1	US28
605	1091-TMP 58 OF 85	SWING COVER, 6063-T6 AL	164 7/16"	1	US28
610	1091-TMP 57 OF 85	HEADER EXTENSION, 6063-T6 AL	164 7/16"	1	US28
615	1091-TMP 81 OF 85	CARRIER REINFORCEMENT BLOCK, 2024-T4 AL	2" X 1"	2	
620	1091-TMP 80 OF 85	HEADER REINFORCEMENT BLOCK, 2024-T4 AL	1 1/4" X 1"	2	
625	NO DRAWING	1/4" R457 TEMPERED SENTRY GLASS BY DUPONT			
XXX	B 8211000009	INTERLOCKING STRIP EXTRUSION	160 1/2"	1	MILL
XXX	B 8211000010	L/H PIVOT ASSEMBLY		1	MILL
XXX	B 8211000011	R/H PIVOT ASSEMBLY		1	MILL
XXX	B 8211000014	CARRIER END CAP & WEATHER STRIP ASSEMBLY	1.688	2	BLACK
XXX	B 8211000019	ANTI-JAR BRACKET	24"	2	PLATED
XXX	B 8211000020	SUPPORT PLATE 1 3/8 X 1/4 X 30 LG. CRS	30"	1	MILL
XXX	B 8211000021	ROD LOCKING BLOCK IN CARRIER	1.250	2	MILL
XXX	B 8211000022	SHIM FOR UNDER ANTI-JAR BRACKET	24"	8	
XXX	B 8211000024	GUIDE BLOCK	1.375	4	MILL
XXX	B 8211000025	SUPPORT PLATE 1" X 3/16 X 30 LG. CRS	30"	1	PLATED
XXX	B 8211000046	BRACKET ASS'Y.-PANEL TOP RAIL HINGE STILE END		2	MILL
XXX	B 8211000047	MOUNTING BLOCK FOR PANELS	1.750	3	MILL
XXX	B 8211000048	ANTI-JAR WHEEL INSTALLATION INSTRUCTIONS		4	
XXX	B 8211000049	DOOR LOCK STILE STICKER LABEL	1.750	4	
XXX	B 8211000061	AMESBURY WEATHERSEAL	56 FT.	1	
XXX	B 8211000062	SANTOPRENE SEAL	14 FT.	1	
XXX	B 8211000051	HURRICANE DOORS		1	

G
G
G
G
G

C

C

B
B

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE SEPTEMBER 13, 2001
BY ISHAG I. CHANDA
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0612-10


△ SHEET 2 OF 2

△
DESIGN PRESSURE RATING

	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED
POSITIVE	NOT APPROVED	+60 PSF
NEGATIVE	NOT APPROVED	-60 PSF

*UNIT SHALL BE INSTALLED ONLY AT LOCATIONS PROTECTED BY A CANOPY OR OVERHANG SUCH THAT THE ANGLE BETWEEN THE EDGE OF CANOPY OR OVERHANG TO SILL IS LESS THAN 45°. UNLESS UNIT IS INSTALLED IN NON-HABITABLE AREAS AND THE UNIT AND THE AREA ARE DESIGNED TO ACCEPT WATER INFILTRATION.

REV.	E.C.N. NO.	DATE	DESCRIPTION	MADE BY
G	00530	8/23/01	LATEST REVISION INDICATED BY △ CHANGED NAME TO 96000 HURRICANE DOOR UNIT	SJW
D	00530	8/23/01	UPDATE BOM TO ADD 96K HEADER AND FRAME	SJW
C	00104	3/27/00	UPDATE DRAWING TO LATEST STD.	
B		5/22/96	ADDED 8211000061, AND 8211000062	
A		5/9/96	39 13/16" WAS 41 1/2"	
-		3/1/96	INITIAL RELEASE	



DOR-O-MATIC® PRODUCTS CORP.
6800 INDUSTRIAL LOOP
GREENDALE, WI. 53219

TITLES: 96000 SERIES HURRICANE DOOR UNIT △

MATERIAL: DRAWN BY T. THAO DATE 02/15/96

FINISH: CHECKED BY Jc DATE 02/15/96

HEAT TREAT: REV. LETTER F DRAWING NO. B 8211000051