



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Lomanco, Inc.
2101 W. Main St.
Jacksonville ,AR 72076

Your application for Notice of Acceptance (NOA) of:

Model 135 Static Roof Vent & Model 2000 Powered Roof Vent

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0614.02
EXPIRES: 08/16/2006

Raul Rodriguez
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 08/16/2001

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub-Category: Roof Vent

Approval Date: August 16, 2001

Expiration Date: August 16, 2006

Materials: Aluminum
Maximum Design Pressure N/A
Fire Classification: N/A

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Model 135 Roof Vent	7½" x 20" x 23" Dome- 0.032" thick Base- 0.032" thick	PA 100(A)	Static roof ventilation system
Model 2000 Power Roof Vent	7½" x 20" x 23" Dome- 0.032" thick Base- 0.032" thick	PA 100(A)	Model 135 Roof Vent, with fan and thermostat

TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>	<u>Manufacturer</u>
Asphalt Roof Cement Asphalt Primer		ASTM D 4586 ASTM D 41	Asbestos-free, asphalt based roof cement. Asphalt Primer	generic generic
Roofing Nails	Minimum #12 x 1¼"	PA 114	Corrosion resistant annular ring shank nails	generic
Sheet Metal Screws	Minimum #10 x ½"	PA 114	Sheet metal screw	generic

EVIDENCE SUBMITTED:

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Celotex Corporation Testing Service	PA 100(A)	MDC 99	March 1995



Frank Zuloaga, RRC
 Roofing Product Control Examiner

APPROVED APPLICATIONS


- Tradename:** Model 135 Roof Vent, Model 2000 Power Vent
- System Type C:** Mechanical attachment of static vent system over composition shingles.
- Cutout:** Center the vent hole between rafters and roughly 24" (36" max.) down from the ridge line to keep the top of the roof vent below the ridge line. Mark this position.
- Using marked position as center point, scribe a circle that is the same diameter as the vent throat opening. Starting with the drill hole cut vent hole.
- Installation:** Vents should be evenly spaced on the rear slope of the roof.
- Remove roofing nails from top row of shingles so the flashing of the roof vent will slide under shingles. Apply approved roof cement around the edge of the hole. Carefully slide base of vent under shingles with arrow pointing up. Make sure the throat of the vent is centered over vent hole. Fasten the base to roof decking with ten (10) #12 x 1/4" approved roofing nails 1" from the edge and 6" o.c at both sides and bottom of vent, keeping heads of nails under shingles where possible. Seal all seams and nails with roofing cement.
- Ridge Shingle:** N/A
- Net Free Area:** Refer to manufacturers published literature
- Minimum Slope:** 2:12

LIMITATIONS:


1. Refer to applicable building codes for required ventilation.
2. For Model 2000 Power Vent, thermostat and wiring shall be installed in compliance with Lomanco, Inc. instructions and applicable building code.
3. Model 135 Roof Vent and Model 2000 Power Roof Vent shall be installed over composition shingles roofs only.
4. Model 135 Roof Vent and Model 2000 Power Roof Vent shall not be installed on roof mean heights greater than 33 feet.



DETAIL DRAWINGS

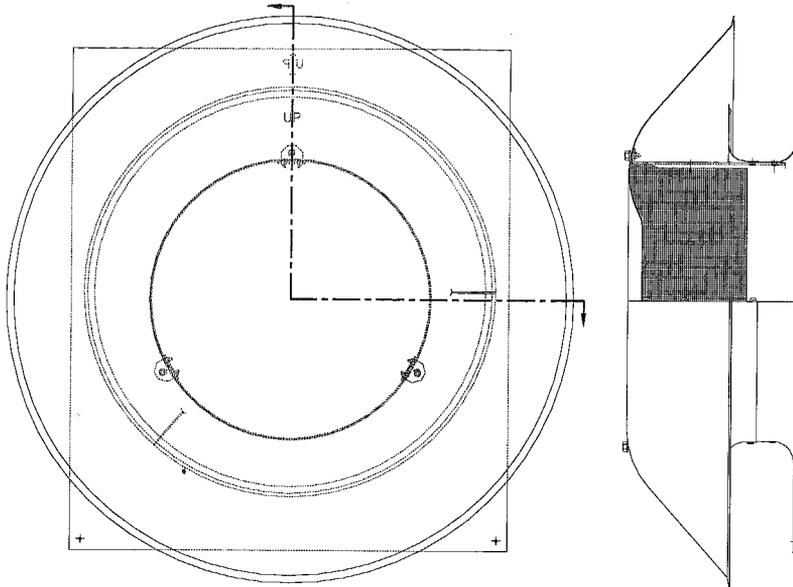

MODEL 135 ROOF VENT

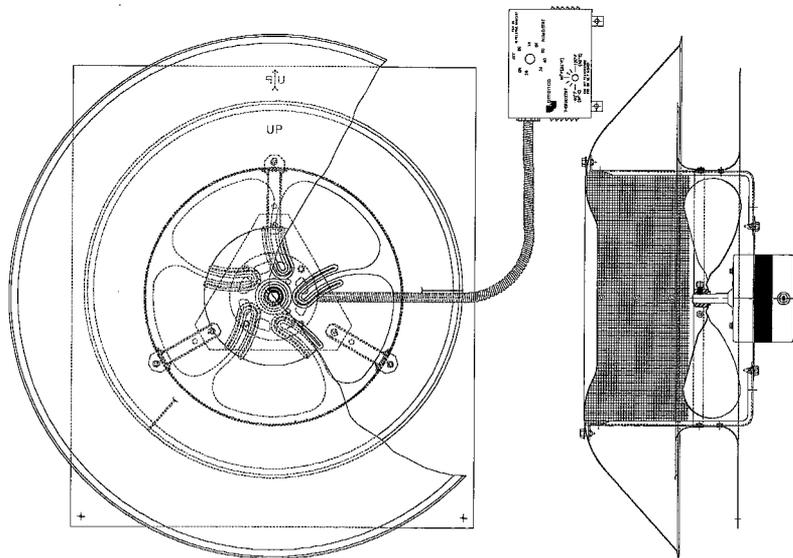

MODEL 2000 ROOF VENT

Frank Zuloaga, RRC
Roofing Product Control Examiner

NOTICE OF ACCEPTANCE STANDARD CONDITIONS

- 1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
- 2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
- 3 Renewals of Acceptance will not be considered if:
 - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
 - b) The product is no longer the same product (identical) as the one originally approved;
 - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
 - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.
- 4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
- 5 Any of the following shall also be grounds for removal of this Acceptance:
 - a) Unsatisfactory performance of this product or process;
 - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.
- 6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
- 7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.
- 8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
- 9 This Acceptance contains pages 1 through 5.

END OF THIS ACCEPTANCE



Frank Zuloaga, RRC
Roofing Product Control Examiner