MIAMI-DADE

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING

BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Lomanco, Inc.
2101 W. Main St.
Jacksonville ,AR 72076

Your application for Notice of Acceptance (NOA) of:
Val-U-Ridge & LPR Ridge Vent
under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0614.06
EXPIRES: 08/16/2006

Raul Rodriguez
Chief Product Control Division

THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 08/16/2001

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub-Category: Roof Vent

Approval Date: **August 16, 2001**

Expiration Date: **August 16, 2006**

Materials: Aluminum
Maximum Design Pressure N/A
Fire Classification: N/A

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

Product	Dimensions	Test Specification	Product Description
Val-U-Ridge Vent	2" x 7 ¾" x 120" Min. thickness 0.025	PA 100(A)	Embossed aluminum ridge ventilation system.
LPR Ridge Vent	3 7/8" x 12" x 120" Min. thickness 0.025	PA 100(A)	Embossed aluminum ridge ventilation system.
Hurricane Strap		PA 100(A)	Reinforcing straps for additional wind resistance.

TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS:

Product	Dimensions	Test Specification	Product Description	Manufacturer
Asphalt Roof Cement		ASTM D 4586	Asbestos-free, asphalt based roof cement.	generic
Asphalt Primer		ASTM D 41	Asphalt Primer	generic
Roofing Nails	Minimum # 12 x 1¼"	PA 114	Corrosion resistant annular ring shank nails	generic
Sheet Metal Screws	Minimum #10 x ½"	PA 114	Sheet metal screw	generic

EVIDENCE SUBMITTED:

Test Agency/Identifier	Name	Report	Date
Center for Applied Engineering, Inc.	PA 100(A)	MDC 96	03/15/95
Center for Applied Engineering, Inc.	PA 100(A)	MDC 97	03/15/95

Frank Zuloaga, RRC
Roofing Product Control Examiner

APPROVED APPLICATIONS

Tradename: Val-U-Ridge and LPR Ridge Vent

System Type A: Mechanical attachment of ridge vent system over composition shingles.

Cutout: Truss Construction: Cut shall be 2" wide and 6" shorter at each end than the total length of the ridge vent to be installed.

Ridge Pole Construction: Cut shall be 3-1/8" wide and 6" shorter at each end than the total length of the ridge vent to be installed.

Installation: Install end plug on the female end of the vent before vent is nailed down. Push louvers upward to form a tight fit. Mark proper alignment and end line for vents with chalk; outer edge of vent shall be approximately 4" from apex of roof.

Apply caulk to bottom flange of vent sections close to where roof hole will be after vent is installed. Align end of first section on the end marks and the bottom of the nailing flange on the chalk line. Nail section down using a 1¼" ring shank nails while keeping bottom of section aligned with chalk line. Caulk male connection and connect male-female ends before nailing next section. Install end plug on last vent section before nailing it down.

Install Hurricane Straps over each end of ridge vent, all connections between sections and at 3' intervals over the remainder of the vent using 1¼" ring shank nails.

Ridge Shingle: None

Net Free Area: Refer to manufacturers published literature

Minimum Slope: 2:12

LIMITATIONS:

1. Refer to applicable building codes for required ventilation.
2. Ridge vent ventilators shall not be installed on roof mean heights greater than 33 feet.

Frank Zuloaga, RRC
Roofing Product Control Examiner

DETAIL DRAWINGS

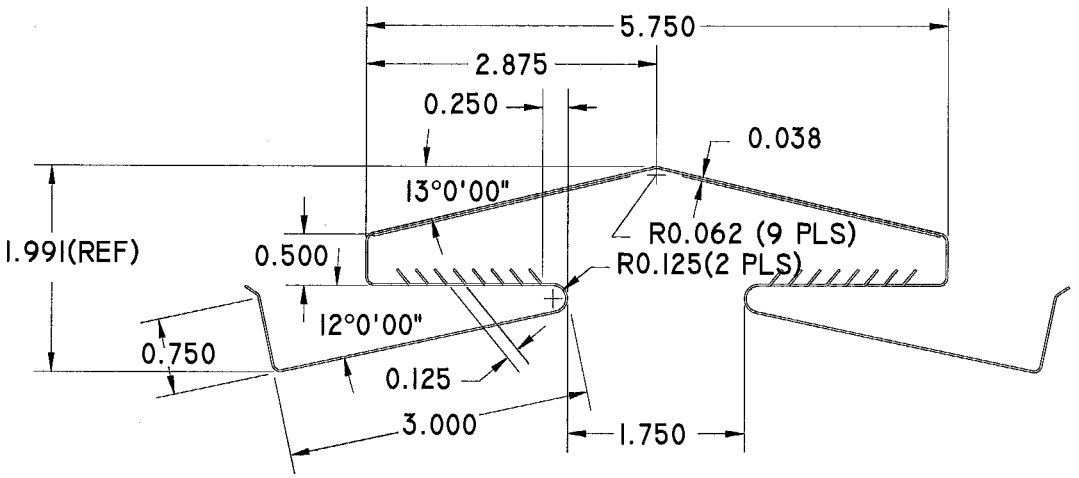

VAL-U-RIDGE VENT

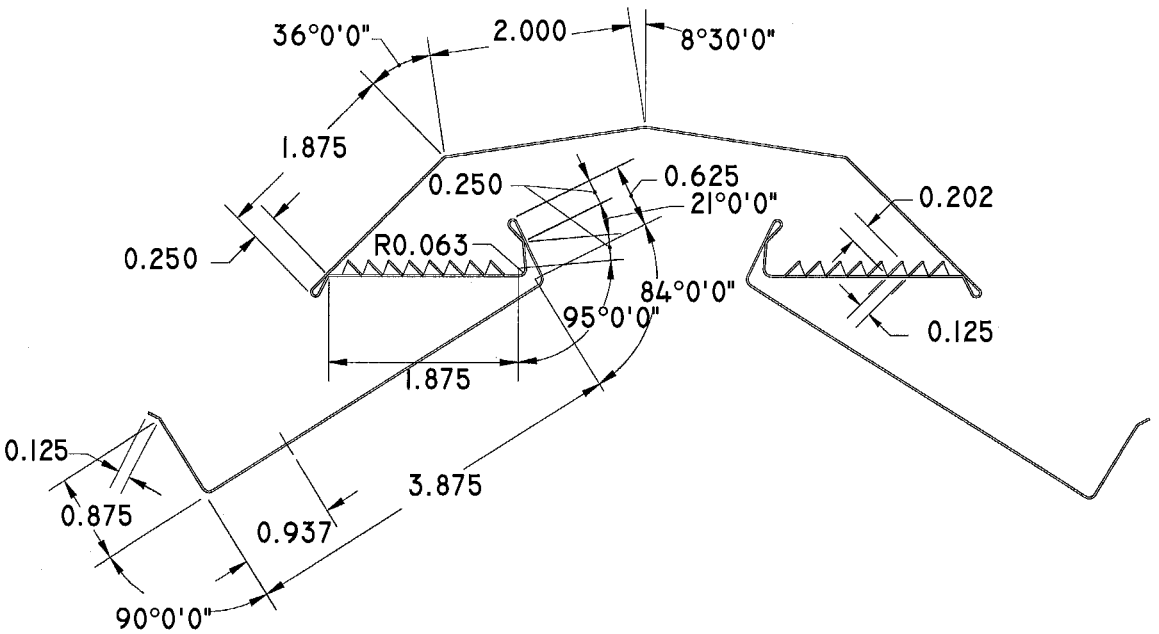

LPR RIDGE VENT

Frank Zuloaga, RRC
Roofing Product Control Examiner

NOTICE OF ACCEPTANCE STANDARD CONDITIONS

1 Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.

2 Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.

3 Renewals of Acceptance will not be considered if:
   a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
   b) The product is no longer the same product (identical) as the one originally approved;
   c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
   d) The engineer who originally prepared, signed and sealed the required documentation initially submitted, is no longer practicing the engineering profession.

4 Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.

5 Any of the following shall also be grounds for removal of this Acceptance:
   a) Unsatisfactory performance of this product or process;
   b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purposes.

6 The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.

7 A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all times. The copies need not be resealed by the engineer.

8 Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.

9 This Acceptance contains pages 1 through 5.

END OF THIS ACCEPTANCE

Frank Zuloaga, RRC
Roofing Product Control Examiner