



BUILDING CODE COMPLIANCE OFFICE
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

CONTRACTOR LICENSING SECTION
(305) 375-2527 FAX (305) 375-2558

CONTRACTOR ENFORCEMENT DIVISION
(305) 375-2966 FAX (305) 375-2908

PRODUCT CONTROL DIVISION
(305) 375-2902 FAX (305) 372-6339

PRODUCT CONTROL NOTICE OF ACCEPTANCE

Stanley Door Systems
7300 Reames Rd.
Charlotte ,NC 28216

Your application for Notice of Acceptance (NOA) of:

"Sta-Tru" S/E 6'8 Out-Swing Glazed Res. Ins. Steel Door w/wo Sidelites

under Chapter 8 of the Code of Miami-Dade County governing the use of Alternate Materials and Types of Construction, and completely described herein, has been recommended for acceptance by the Miami-Dade County Building Code Compliance Office (BCCO) under the conditions specified herein.

This NOA shall not be valid after the expiration date stated below. BCCO reserves the right to secure this product or material at any time from a jobsite or manufacturer's plant for quality control testing. If this product or material fails to perform in the approved manner, BCCO may revoke, modify, or suspend the use of such product or material immediately. BCCO reserves the right to revoke this approval, if it is determined by BCCO that this product or material fails to meet the requirements of the South Florida Building Code.

The expense of such testing will be incurred by the manufacturer.

ACCEPTANCE NO.: 01-0928.03
EXPIRES: 11/01/2006

Raul Rodriguez
Chief Product Control Division

**THIS IS THE COVERSHEET, SEE ADDITIONAL PAGES FOR SPECIFIC AND GENERAL
CONDITIONS
BUILDING CODE & PRODUCT REVIEW COMMITTEE**

This application for Product Approval has been reviewed by the BCCO and approved by the Building Code and Product Review Committee to be used in Miami-Dade County, Florida under the conditions set forth above.

Francisco J. Quintana, R.A.
Director
Miami-Dade County
Building Code Compliance Office

APPROVED: 11/01/2001

Stanley Door Systems

ACCEPTANCE No.: 01-0928.03

APPROVED : November 01, 2001

EXPIRES : November 01, 2006

NOTICE OF ACCEPTANCE: SPECIFIC CONDITIONS

1. SCOPE

- 1.1 This **renews** the Notice of Acceptance No. **01-0129.18**, which was issued on May 03, 2001 It approves a residential insulated steel door, as described in Section 2 of this Notice of Acceptance, designed to comply with the South Florida Building Code (SFBC), 1994 Edition for Miami-Dade County, for the locations where the pressure requirements, as determined by SFBC Chapter 23, do not exceed the Design Pressure Rating values indicated in the approved drawings.

2. PRODUCT DESCRIPTION

- 2.1 The Series **"Sta-Tru" S/E 6' 8" Outswing Glazed Residential Insulated Steel Door w / wo Sidelites** and its components shall be constructed in strict compliance with the following documents: Drawing No. **43968** titled "Stanley Outswing Glazed 11-4 x 6-8 Steel Edge Door-W/ & W/O Sidelites" Sheets 1 through 7 of 7, dated 12/27/00, prepared by R.W Building Consultants, Inc., bearing the Miami-Dade County Product Control approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division. These documents shall hereinafter be referred to as the approved drawings.

3. LIMITATIONS

- 3.1 This approval applies to single unit applications of pair of doors and single door with or without sidelites, as shown in approved drawings. Single door units shall include all components described in the active leaf of this approval.

4. INSTALLATION

- 4.1 The residential insulated steel door and its components shall be installed in strict compliance with the approved drawings.
- 4.2 Hurricane protection system (shutters): the installation of this unit **will require** a hurricane protection system.

5. LABELING

- 5.1 Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved".

6. BUILDING PERMIT REQUIREMENTS

- 6.1 Application for building permit shall be accompanied by copies of the following:
- 6.1.1 This Notice of Acceptance
- 6.1.2 Duplicate copies of the approved drawings, as identified in Section 2 of this Notice of Acceptance, clearly marked to show the components selected for the proposed installation.
- 6.1.3 Any other documents required by the Building Official or the South Florida Building Code (SFBC) in order to properly evaluate the installation of this system.

Ishaq I. Chanda
Ishaq I. Chanda, P.E. Product Control Examiner
Product Control Division

Stanley Door Systems

ACCEPTANCE No.: 01-0928.03

APPROVED : November 01, 2001

EXPIRES : November 01, 2006

NOTICE OF ACCEPTANCE: STANDARD CONDITIONS

1. Renewal of this Acceptance (approval) shall be considered after a renewal application has been filed and the original submitted documentation, including test supporting data, engineering documents, are no older than eight (8) years.
2. Any and all approved products shall be permanently labeled with the manufacturer's name, city, state, and the following statement: "Miami-Dade County Product Control Approved", or as specifically stated in the specific conditions of this Acceptance.
3. Renewals of Acceptance will not be considered if:
 - a) There has been a change in the South Florida Building Code affecting the evaluation of this product and the product is not in compliance with the code changes;
 - b) The product is no longer the same product (identical) as the one originally approved;
 - c) If the Acceptance holder has not complied with all the requirements of this acceptance, including the correct installation of the product;
 - d) The engineer who originally prepared, signed and sealed the required documentation initially submitted is no longer practicing the engineering profession.
4. Any revision or change in the materials, use, and/or manufacture of the product or process shall automatically be cause for termination of this Acceptance, unless prior written approval has been requested (through the filing of a revision application with appropriate fee) and granted by this office.
5. Any of the following shall also be grounds for removal of this Acceptance:
 - a) Unsatisfactory performance of this product or process.
 - b) Misuse of this Acceptance as an endorsement of any product, for sales, advertising or any other purpose.
6. The Notice of Acceptance number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the Notice of Acceptance is displayed, then it shall be done in its entirety.
7. A copy of this Acceptance as well as approved drawings and other documents, where it applies, shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at all time. The engineer need not reseal the copies.
8. Failure to comply with any section of this Acceptance shall be cause for termination and removal of Acceptance.
9. This Notice of Acceptance consists of pages 1, 2 and this last page 3.

Ishaq I. Chanda
Ishaq I. Chanda, P.E. Product Control Examiner
Product Control Division

END OF THIS ACCEPTANCE

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

(For File ONLY. Not part of NOA)

A. DRAWINGS (Transferred from file#01-0129.18)

1. Manufacturer's die drawings and sections.
2. Dwg. No. **43968** titled "Stanley Outswing Glazed 11-4 x 6-8 Steel Edge Door-W/ & W/O Sidelites" Sheets 1 thru 7 of 7, dated 12/27/00, prepared by R.W Bldg. Consultants, Inc.

B. TESTS (Transferred from file#01-0129.18)

1. Test reports on 1) Air Infiltration Test, per PA 202-94
2) Uniform Static Air Pressure Test, Loading per PA 202-94
3) Water Resistance Test, per PA 202-94
4) Forced Entry Test, per SFBC 3603.2 (b) and PA 202-94
along with marked-up drawings and installation diagram of a out/in-swinging steel edge opaque residential insulated steel doors, prepared by Certified Testing Laboratories, Test Report No. **CTLA 592W** dated 09-08-00, signed and sealed by Ramesh C. Patel, P. E.
2. Test reports on 1) Air Infiltration Test, per PA 202-94
2) Uniform Static Air Pressure Test, Loading per PA 202-94
3) Water Resistance Test, per PA 202-94
4) Forced Entry Test, per SFBC 3603.2 (b) and PA 202-94
along with marked-up drawings and installation diagram of a out/in-swinging wood edge glazed residential insulated steel doors with and without sidelites, prepared by Certified Testing Laboratories, Test Report No. **CTLA 554W** dated 06-06-00, with addendum letter dated 12/11/00, all signed and sealed by Ramesh C. Patel, P. E.
(Submitted for reference only)

C. CALCULATIONS (Transferred from file#01-0129.18)

1. Anchor Calculations and structural analysis dated 09-03-00, 07-21-00, with addendum dated 12/20/00, prepared, signed and sealed by Mark C. Fetherman, P.E.

D. MATERIAL CERTIFICATIONS (Transferred from file#01-0129.18)

Plastic lite frame material

1. Photocopy of **4500 Hours** Xenon Arch tensile test report No. **ETC-00-417-10343.0** dated 09-11-01, issued by ETC laboratories Inc. for **GE ASA Polycarbonate plastic**, controlled & **4500 Hours** xenon Arch exposed samples to Stanley Doors, tested per ASTM D-63896a, signed and sealed by Joseph L. Donald. (**original test report in file #01-0928.07**)

Ishaq I. Chanda

Ishaq I. Chanda, P.E. Product Control Examiner
Product Control Division

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

(For File ONLY. Not part of NOA)

2. Photo copy Test report No. **ETC-00-417-10343.0** dated 03-07-01, issued by ETC laboratories Inc. for **GE ASA Polycarbonate plastic** to Stanley Doord for "self ignition" per ASTM 1929D, and for" Rate of Burning" per ASTM D635-97 and for "Smoke density" per ASTMD-2843-93, all the test reports for **GE ASA Polycarbonate plastic** (original test report pending from manufacturer).
3. Photocopy **4500 Hours Xenon Arch** completed tensile test report No. **PRI00034** dated December 14, 2000, issued by PRI Asphalt Technologies to **ODL for Spartech Polycom PP5530-C13, 4500 Hours Xenon Arch** exposed samples, tested per ASTM D-63896a, signed and sealed by Charles L. Thomas, P. E. (original test report pending from Tensile Test report No. CTLA-545W (REF:DADE 00007), dated May 18, 2000, issued by Certified Testing Laboratories, for steel skin samples tested per ASTM A370/E8, signed and sealed by Ramesh Patel, P.E.
4. Test Report No. **114884-3** "Measuring the Density of Smoke from the Burning or Decomposition of Plastics" per ASTM D-2843-93", dated 11/24/98, all the test reports for ODL Spartech 1643.05 Filled Polypropylene Fiberglass & Mica samples (ODLI-2), issued by **SGS U.S. Testing Co. Inc.** signed and sealed by Joseph G. Cappetta, P.E.

Polyurethane foam core

5. Photo copy Test reports No. 15977-104313 (**Infinity**) & 15977-104314 (**Retro**) for "Surface burning characteristics" per ASTM E-84, both dated 12-23,1998, for BASF polyurethane cores, issued by Omega Point Laboratories (original in file #98-1104.03).
6. Photo copy Test report No. ETC-98-417-7209.O (**Infinity**) & test report No. ETC-98-417-7208.O (**Retro**) "self ignition temperature" per ASTMD1929-96 both dated 1-11-99 for BASF polyurethane cores, issued by ETC Laboratories (original in file #98-1104.03).

E. STATEMENTS (Transferred from file#01-0129.18)

1. Statement letter of conformance and "No financial interest", dated 05-30-00, sealed signed by Mark C. Fetherman, P.E.(original in file #00-0809.02)
2. Letter issued by Stanley Door System dated January 18, 2001, designating Mr. Rick Wright to represent them in matters pertaining to Miami-Dade County product approvals signed by Doug Noznesky.

Ishaq I. Chanda
Ishaq I. Chanda, P.E. Product Control Examiner
Product Control Division

STANLEY DOOR SYSTEMS

STA-TRU STEEL EDGE OUTSWING 6-8 GLAZED STEEL DOOR
W/AND W/OUT SIDELITES IN A WOOD FRAME

GENERAL NOTES

1. THIS PRODUCT IS DESIGNED TO MEET THE SOUTH FLORIDA BUILDING CODE 1994 EDITION FOR MIAMI-DADE COUNTY.
2. WOOD BUCKS BY OTHERS, MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
3. PRODUCT ANCHORS SHALL BE AS LISTED AND SPACED AS SHOWN ON DETAILS. ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.
4. MIAMI-DADE APPROVED IMPACT RESISTANT SHUTTERS ARE REQUIRED.
5. DESIGNED PRESSURE RATING SEE TABLES PAGE 1.
6. SIDELITES ARE AN OPTION AND CAN BE IN A SINGLE OR DOUBLE DOOR CONFIGURATION.

RESIDENTIAL INSULATED STEEL DOOR (Common to all frame conditions)

Door Panel & Sidelite Construction:

Face sheets: 24 GA.(0.021") minimum thickness, Galvanized steel A-525 commercial quality - AKDQ per ASTM 620 with yield strength $F_y(\text{min.})=26,240$ psi

Core design: Polyurethane foam core, with 1.7 pcf lbs. density by BASF.

Door Panel Construction: Glazed type. The perimeter stiles are a roll formed steel edge from .028" thk. galvanized steel. The vertical edges of the face sheet are crimped to form a mechanical lock with the hinge and latch steel edge stiles. The top and bottom edges of the face sheets are bent 90° over the steel edge top and bottom. The panels are sandwich glazed using a two piece polypropylene lite frame with mitered & welded corners.



Sidelite Panel Construction: The vertical edges of the skin are flush and glued to the top and bottom finger jointed pine stiles. The horizontal edges of the panel skin are roll formed over the finger jointed side stiles to form a mechanical lock. Panels are sandwich glazed using a two piece plastic lite frame with mitered & welded corners.

TABLE OF CONTENTS

SHEET #	DESCRIPTION
1	COMMON (GENERAL NOTES & TYPICAL ELEVATIONS)
2	VERTICAL CROSS SECTIONS & BILL OF MATERIALS
3	HORIZONTAL CROSS SECTIONS
4	HORIZONTAL CROSS SECTIONS
5	ANCHORING LAYOUTS & DETAILS
6	ANCHORING LAYOUTS, DOOR MODELS & GLAZING DETAILS
7	UNIT COMPONENTS

DESIGN PRESSURE RATING

UNIT TYPE	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED	
SINGLE	+50.0 PSF	-50.0 PSF
SINGLE W/SIDELITES	+50.0 PSF	-50.0 PSF
DOUBLE	+50.0 -44.0 PSF W/IMPERIAL AST.	+50.0 -50.0 PSF W/WINDJAMBER II AST.
DOUBLE W/SIDELITES	+50.0 -44.0 PSF W/IMPERIAL AST.	+50.0 -50.0 PSF W/WINDJAMBER II AST.

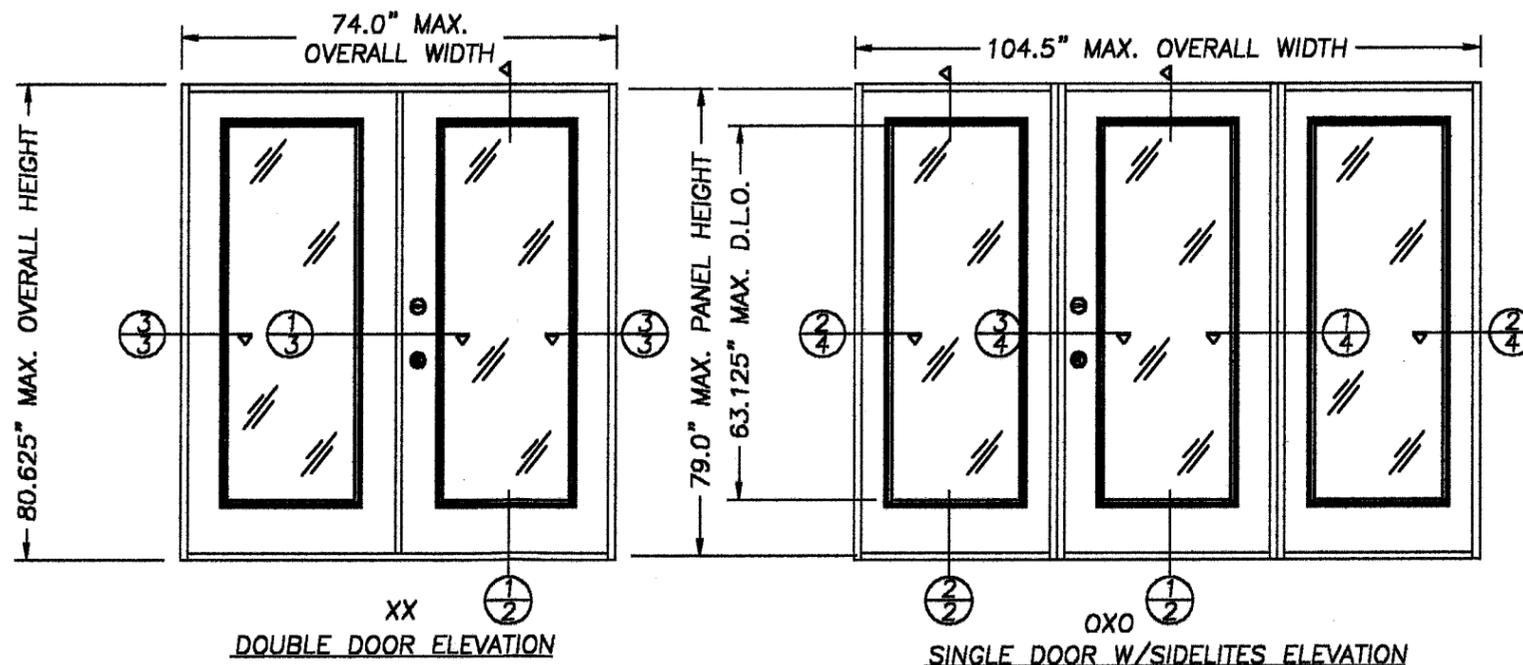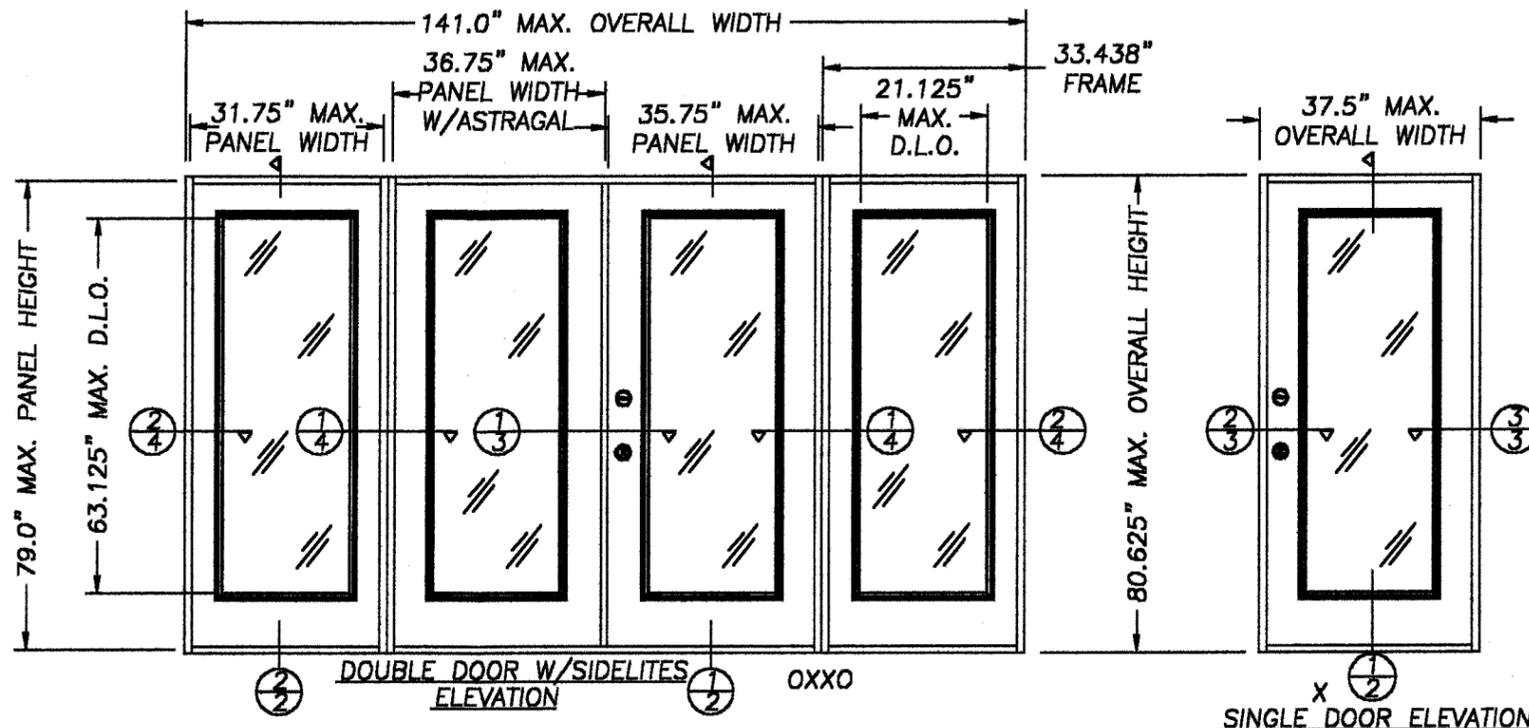

STANLEY
STANLEY DOOR SYSTEMS
7300 REAMES ROAD
CHARLOTTE, NC 28216
PH. (704) 921-3470

PRODUCT: STANLEY OUTSWING GLAZED 11-4 x 6-8 STEEL EDGE DOOR W/ & W/O SIDELITES
PART OR ASSEMBLY:
GENERAL NOTES AND TYPICAL ELEVATIONS

NO.	DATE	BY	REVISIONS

RW BUILDING CONSULTANTS, INC.
813.684.3831


ALL DOOR MODELS ARE VIEWED FROM THE INTERIOR SIDE (OUTSWING DOORS)

PRODUCT RENEWED


ACCEPTANCE NO. 01-0928-03
EXPIRATION DATE NOVEMBER 1, 2006
By: *Ishag I. Lhanda*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

APPROVED AS COMPLYING WITH THE SOUTH FLORIDA BUILDING CODE
DATE: **MAY 03 2006**
BY: *Manuel Ruiz*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0129-18


DATE: 12/27/00
SCALE: N.T.S.
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: 43968
SHEET 1 OF 7

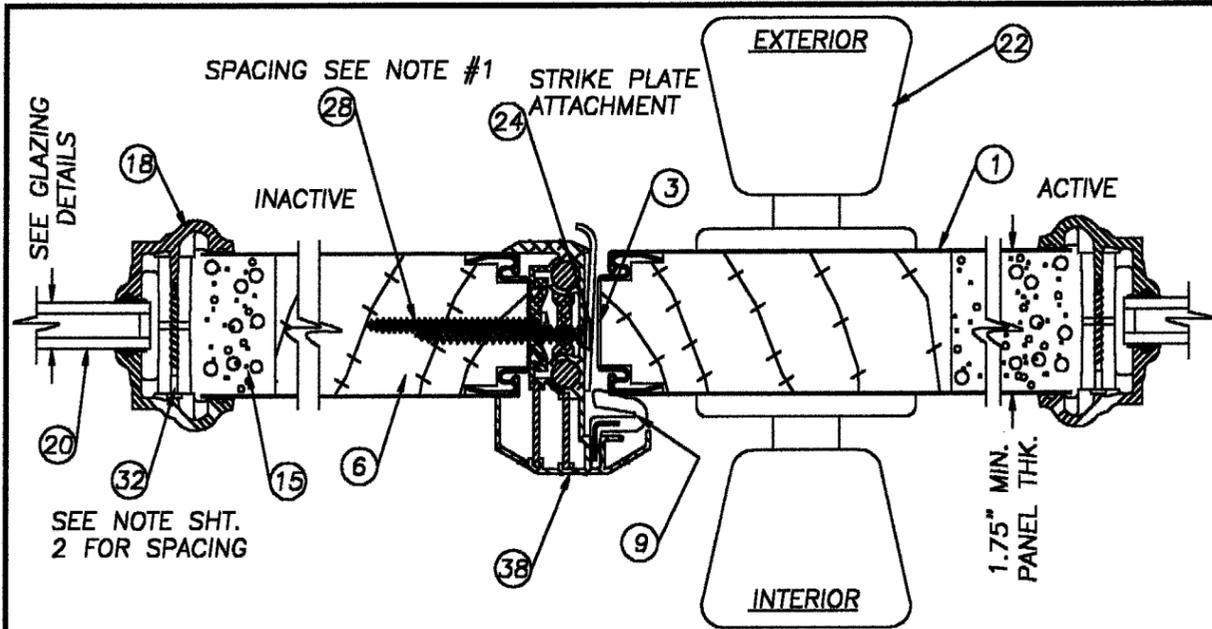


1 HORIZONTAL CROSS SECTION
3 AT ASTRAGAL, TYP. (W/ITEM #38 WR68S)

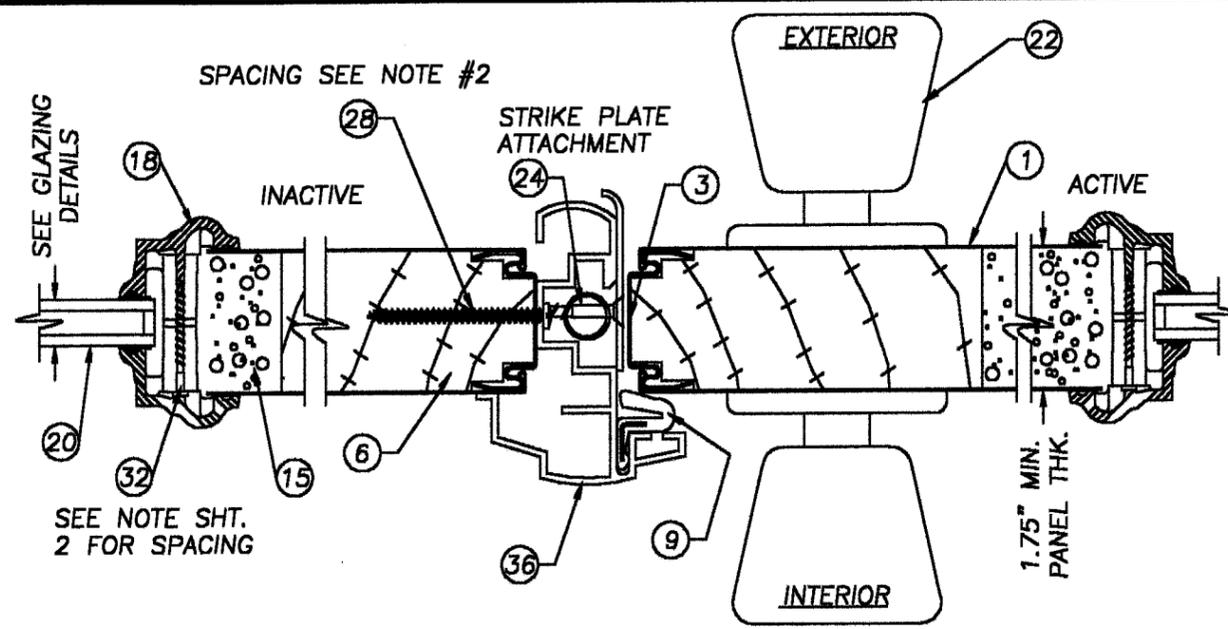

1 OPTIONAL HORIZONTAL CROSS SECTION
3 AT ASTRAGAL, TYP. (W/ITEM #36 IMPERIAL)

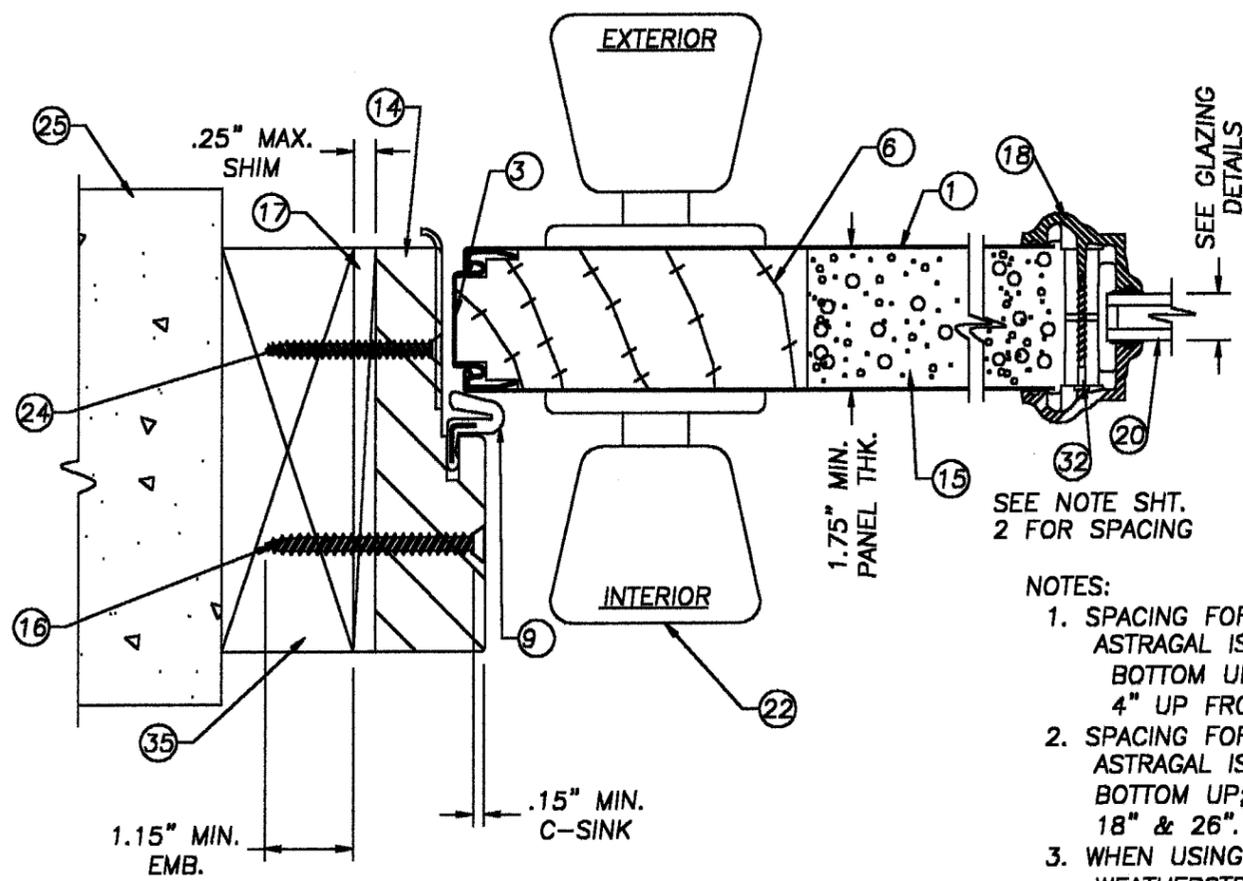

2 HORIZONTAL CROSS SECTION
3 AT LATCH JAMB TO BUCK, TYP.

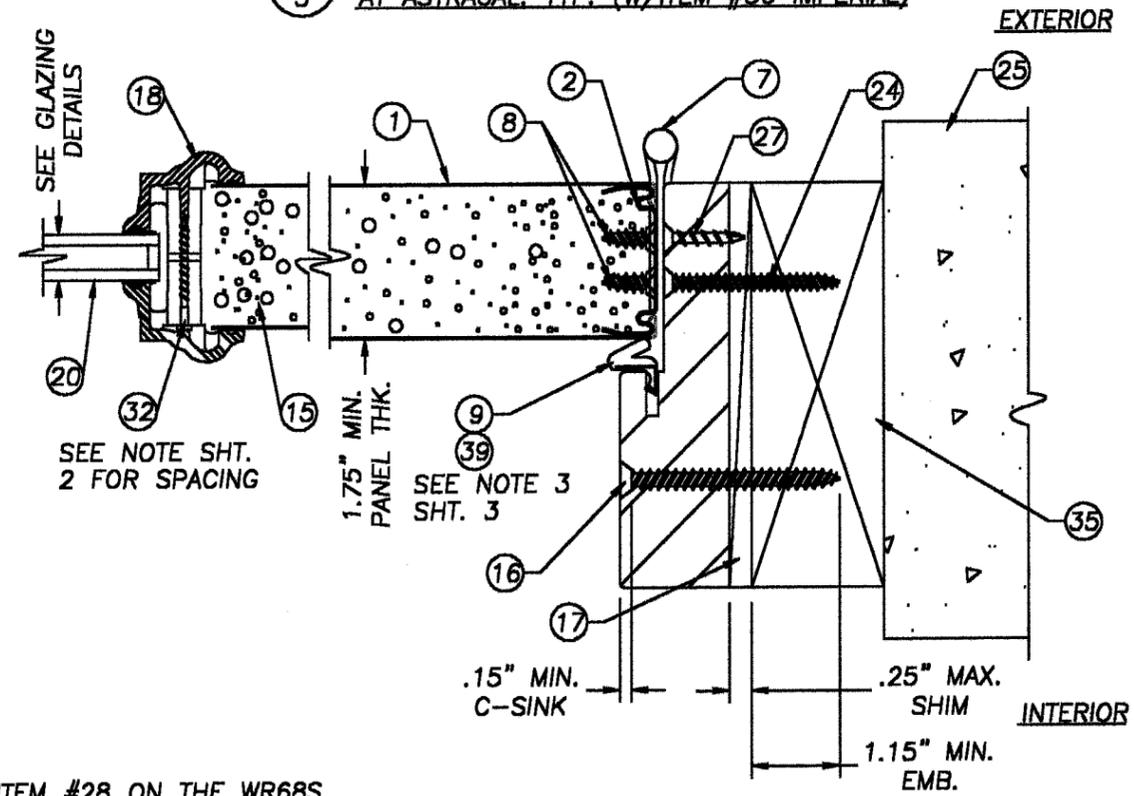

3 HORIZONTAL CROSS SECTION
3 AT HINGE JAMB TO BUCK, TYP.

- NOTES:
1. SPACING FOR ITEM #28 ON THE WR68S ASTRAGAL IS AS FOLLOWS: TOP DOWN & BOTTOM UP; 1", 3", 5", 26", & (1) 4" UP FROM THE STRIKE.
 2. SPACING FOR ITEM #28 ON THE IMPERIAL ASTRAGAL IS AS FOLLOWS: TOP DOWN & BOTTOM UP; 1", 2 1/2", 4", 5 1/2", 13", 18" & 26".
 3. WHEN USING HOLMES MAGNETIC TYPE WEATHERSTRIP ON THE FRAME USE ITEM #39; HOLMES COMPRESSION TYPE WEATHERSTRIP, ON THE HINGE JAMB.

PRODUCT RENEWED
 ACCEPTANCE No. 01-0928.03
 EXPIRATION DATE Nov 1, 2006
 Ishaq I. Chaudhry
 PRODUCT CONTROL DIVISION
 BUILDING CODE COMPLIANCE OFFICE

APPROVED AS COMPLYING WITH THE
 SOUTH FLORIDA BUILDING CODE
 DATE MAY 03 2001
 BY [Signature]
 PRODUCT CONTROL DIVISION
 BUILDING CODE COMPLIANCE OFFICE
 ACCEPTANCE NO. 01-0129.18

STANLEY
 STANLEY DOOR SYSTEMS
 7300 REAMES ROAD
 CHARLOTTE, NC 28216
 PH. (704) 921-3470

PRODUCT: STANLEY OUTSWING GLAZED
 11-4 x 6-8 STEEL EDGE
 DOOR W/ & W/O SIDELITES
 PART OR ASSEMBLY:
 HORIZONTAL
 CROSS SECTIONS

NO.	DATE	BY	REVISIONS

RW BUILDING
 CONSULTANTS, INC.
 813.684.3831

DATE: 12/27/00
 SCALE: 1/2"=1"
 DWG. BY: TJH
 CHK. BY: RW
 DRAWING NO.: 43968
 SHEET 3 OF 7

STANLEY

STANLEY DOOR SYSTEMS
7300 REAMES ROAD
CHARLOTTE, NC 28216
PH. (704) 921-3470


PRODUCT: STANLEY OUTSWING GLAZED
11-4 x 6-8 STEEL EDGE
DOOR W/ & W/O SIDELITES
PART OR ASSEMBLY:
HORIZONTAL
CROSS SECTIONS

NO.	DATE	REVISIONS	BY


RW BUILDING
CONSULTANTS, INC.
813.684.3831

DATE: 12/27/00
SCALE: 1/2"=1"
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: 43968
SHEET 4 OF 7


NOTE:
THE SIDELITE IS FASTENED INTO THE
JAMB WITH ITEM #23 (#8 x 2" PH.
FH SCREW) SPACED AS FOLLOWS:
6" DOWN FROM TOP AND 6" UP
FROM BOTTOM WITH (2) MORE EVENLY
SPACED, A TOTAL OF (4) SCREWS.

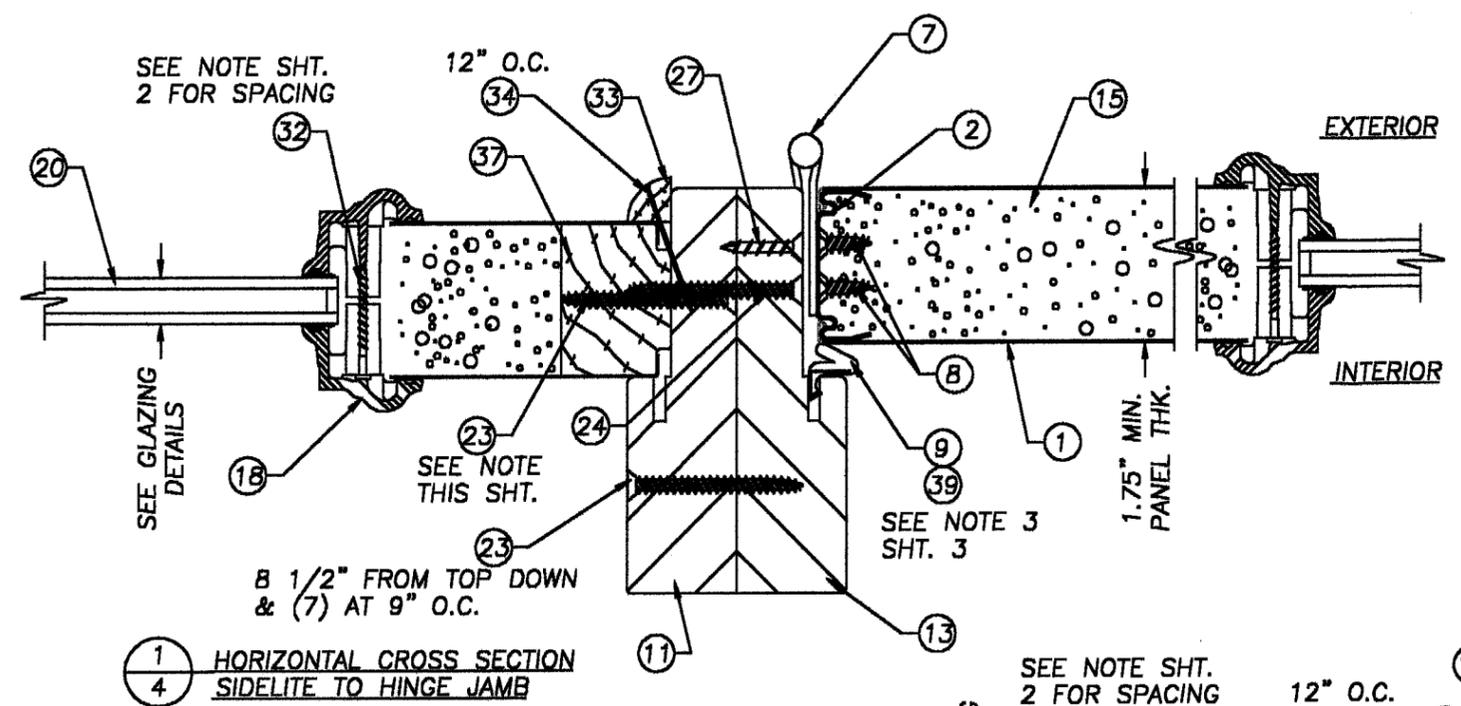

1 HORIZONTAL CROSS SECTION
4 SIDELITE TO HINGE JAMB

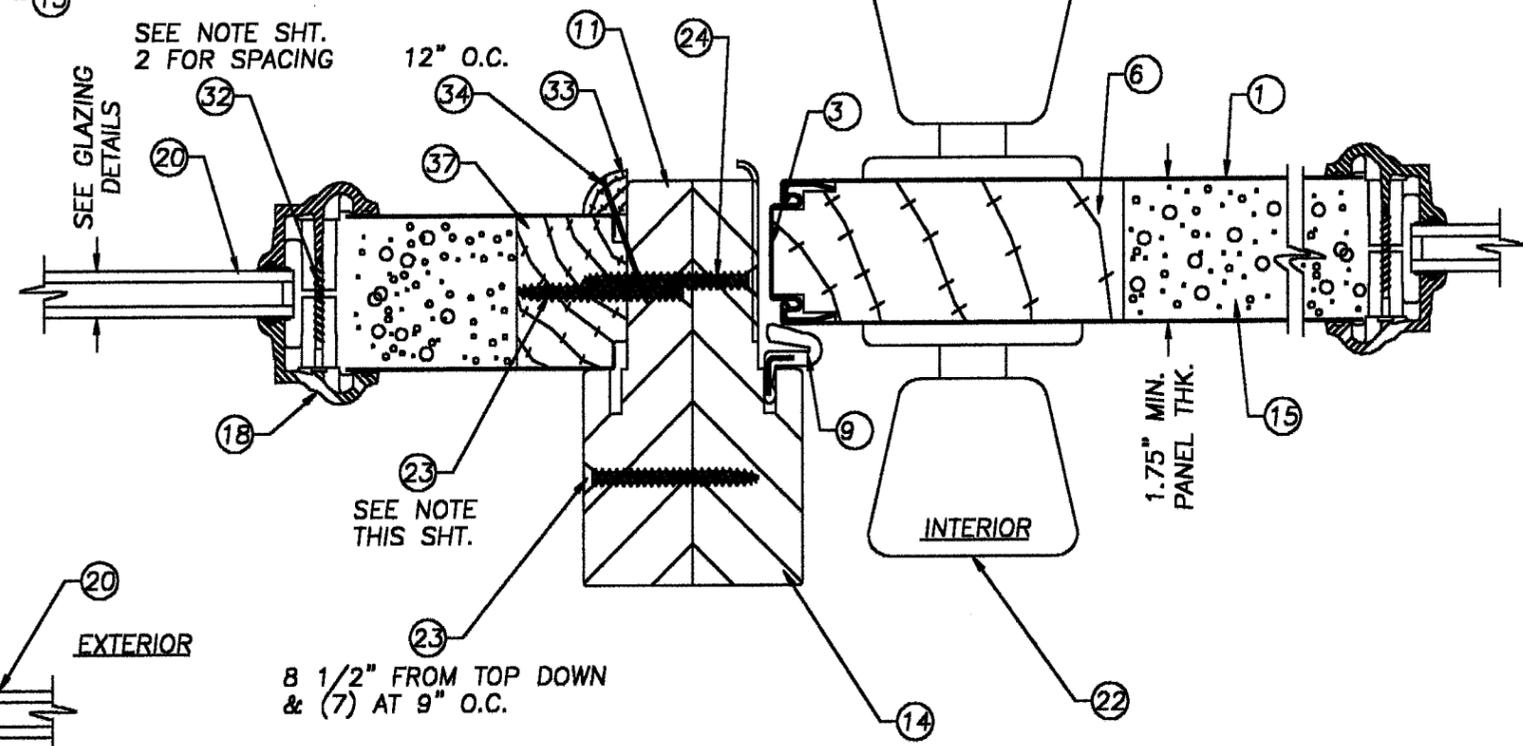

3 HORIZONTAL CROSS SECTION
4 SIDELITE TO LATCH JAMB









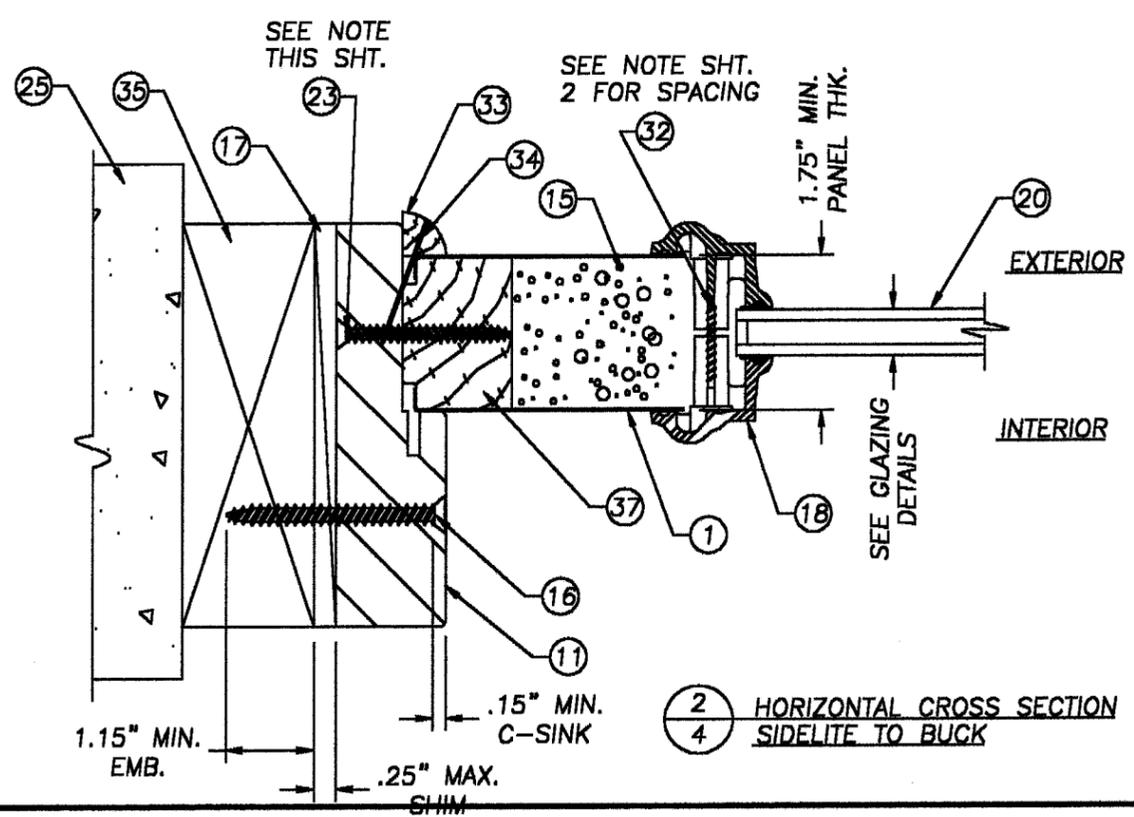


2 HORIZONTAL CROSS SECTION
4 SIDELITE TO BUCK

PRODUCT RENEWED

ACCEPTANCE NO. 01-0928-03
EXPIRATION DATE Nov 1, 2006
By Ishag I. Chaudhry
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE MAY 03 2001
BY [Signature]
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0129-18

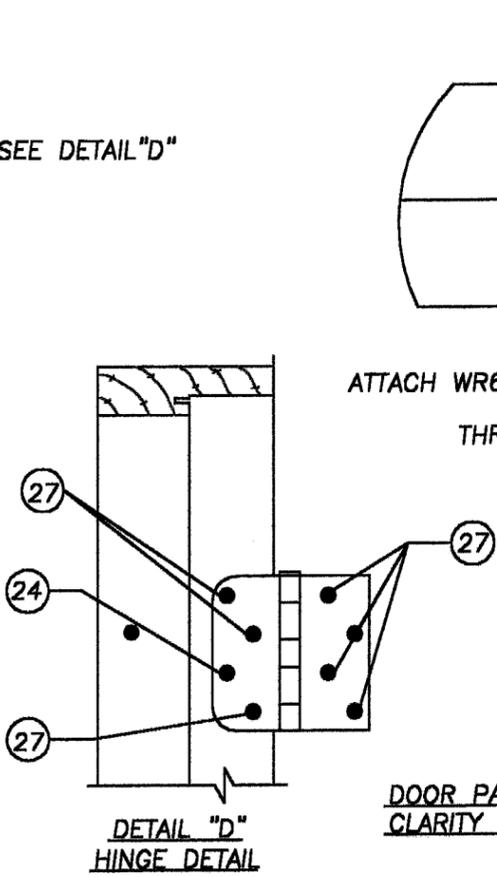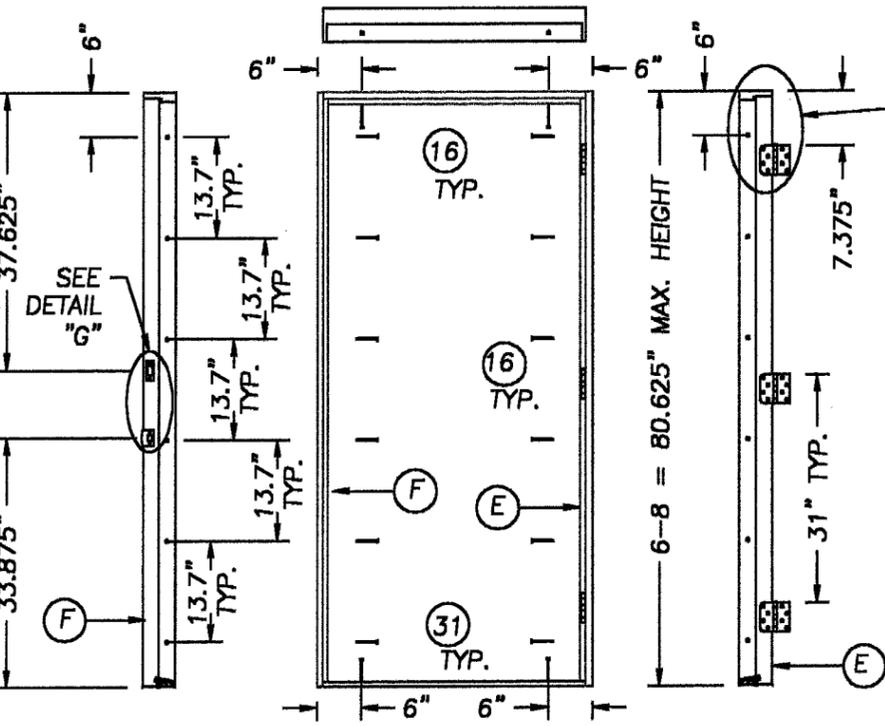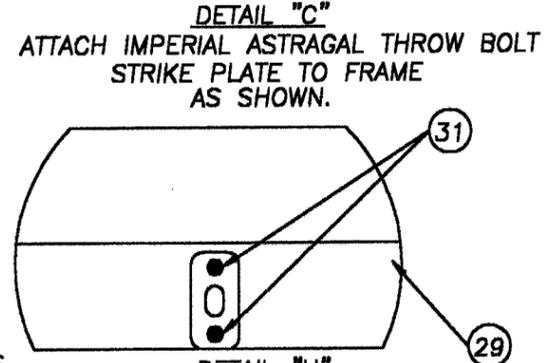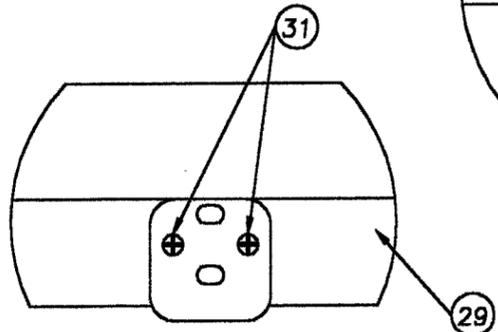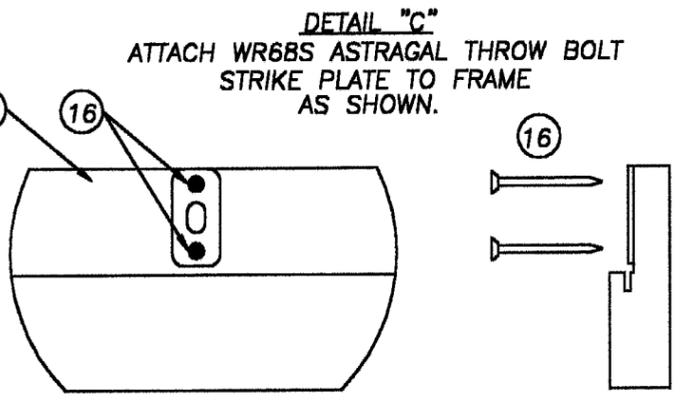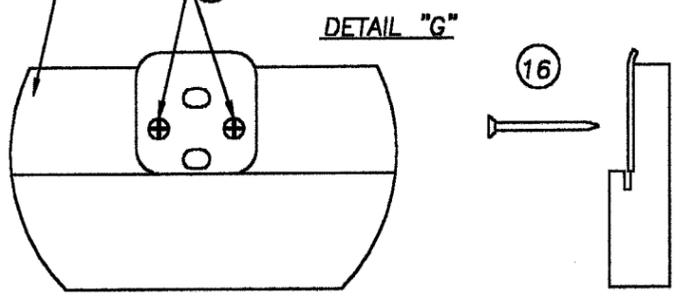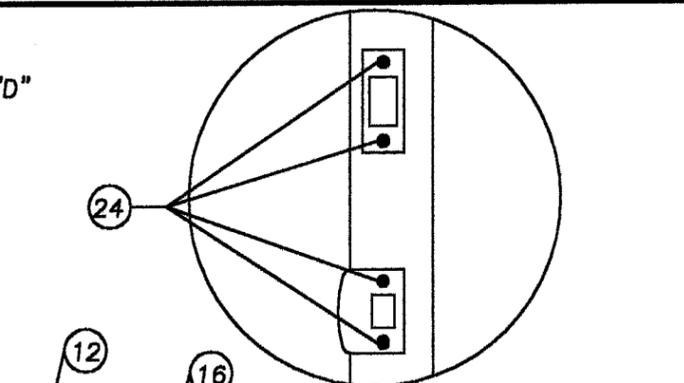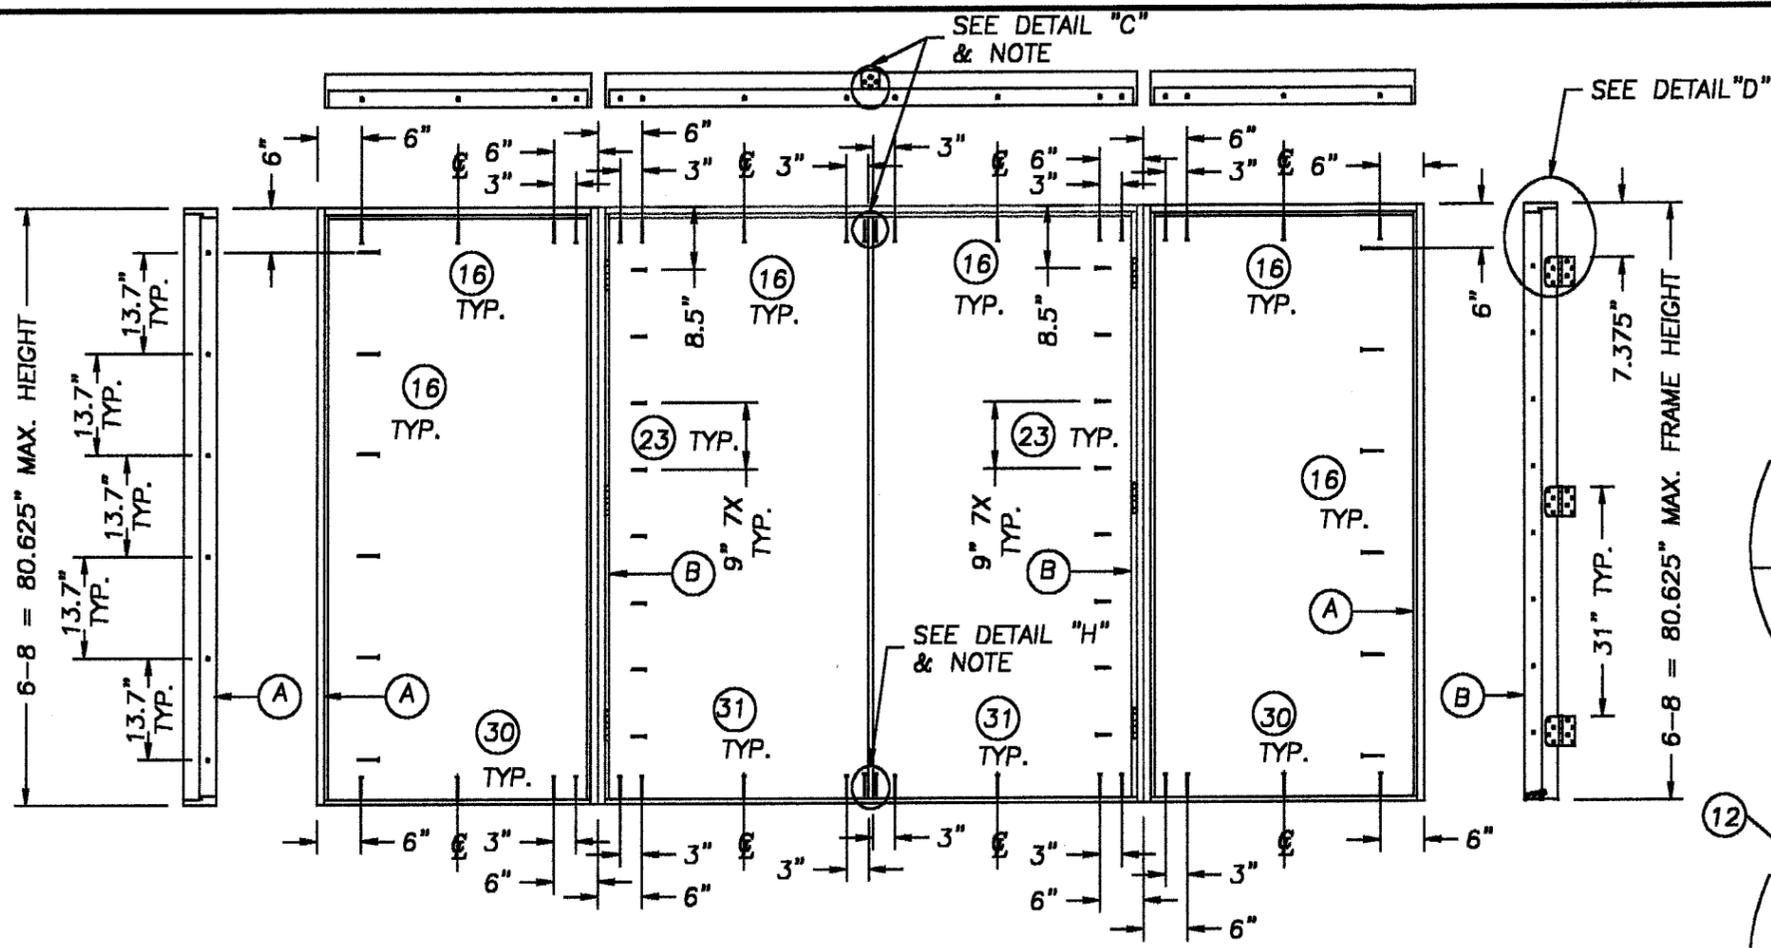

SEE DETAIL "D"

SEE DETAIL "D"

SEE DETAIL "D"

SEE DETAIL "D"

DETAIL "H"
ATTACH WR68S ASTRAGAL THROW BOLT STRIKE PLATE TO THRESHOLD AS SHOWN.

DETAIL "C"
ATTACH IMPERIAL ASTRAGAL THROW BOLT STRIKE PLATE TO FRAME AS SHOWN.

DETAIL "H"
ATTACH IMPERIAL ASTRAGAL THROW BOLT STRIKE PLATE TO THRESHOLD AS SHOWN

DETAIL "C"
ATTACH WR68S ASTRAGAL THROW BOLT STRIKE PLATE TO FRAME AS SHOWN.

NOTE: ANCHORING ASTRAGAL STRIKE PLATE SCREWS AT THE HEADER & THRESHOLD MUST BE USED TO ACHIEVE FULL ANCHORING LOAD.

DOOR PANELS NOT SHOWN FOR CLARITY OF ANCHORING LAYOUTS

STANLEY
STANLEY DOOR SYSTEMS
7300 REAMES ROAD
CHARLOTTE, NC 28216
PH. (704) 921-3470

PRODUCT: STANLEY OUTSWING GLAZED 11-4 x 6-8 STEEL EDGE DOOR W/ & W/O SIDELITES
PART OR ASSEMBLY: ANCHORING LAYOUTS & DETAILS

NO.	DATE	REVISIONS	BY




RW BUILDING CONSULTANTS, INC.
813.664.3831

PRODUCT RENEWED





ACCEPTANCE NO. 01-0928-03
EXPIRATION DATE Nov 1, 2006
By Ishaq I. Chaudhry
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

APPROVED AS COMPLYING WITH THE SOUTH FLORIDA BUILDING CODE
DATE MAY 03 2007
BY Maurice Sig
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0129-18

DATE: 12/27/00
SCALE: N.T.S.
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: 43968
SHEET 5 OF 7

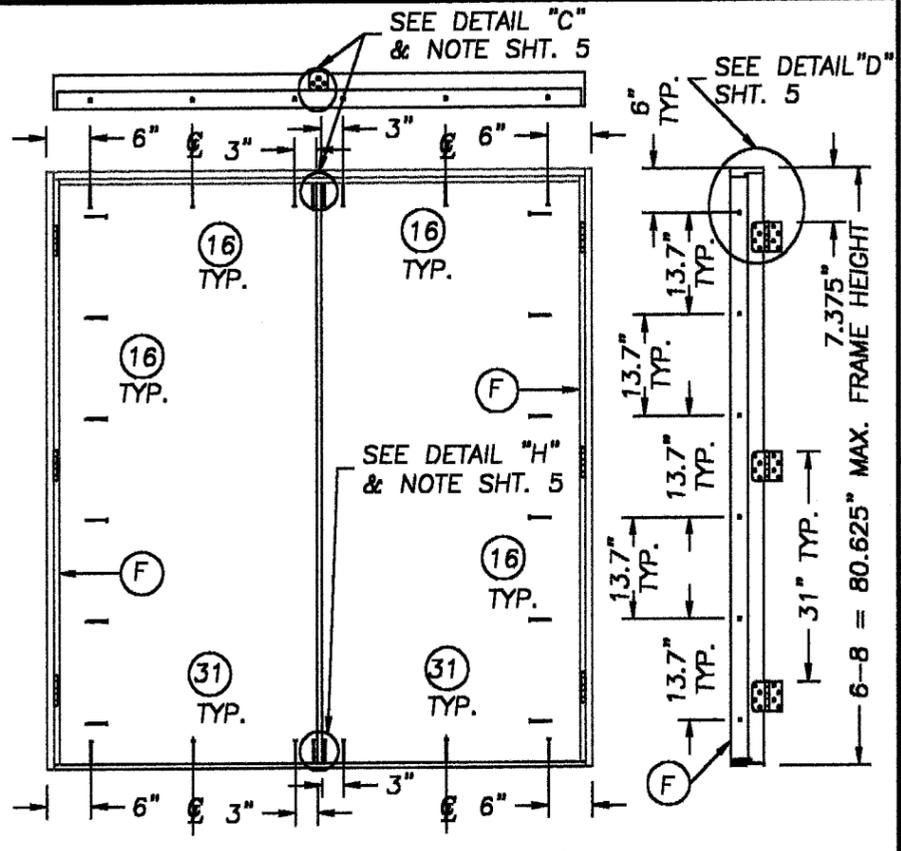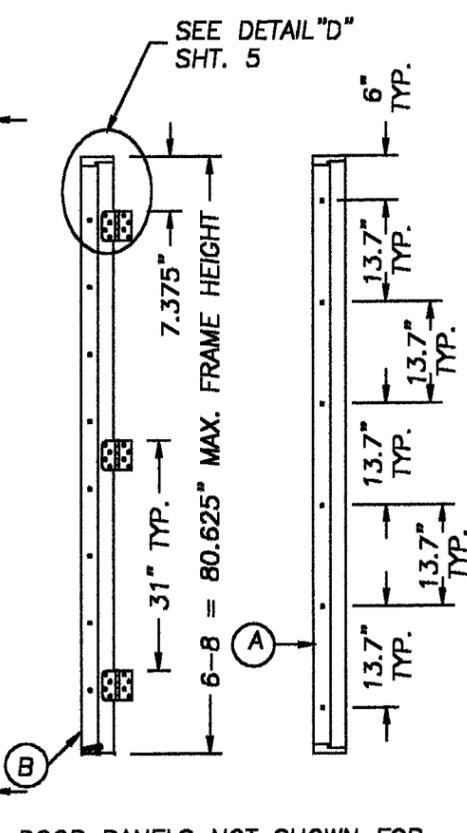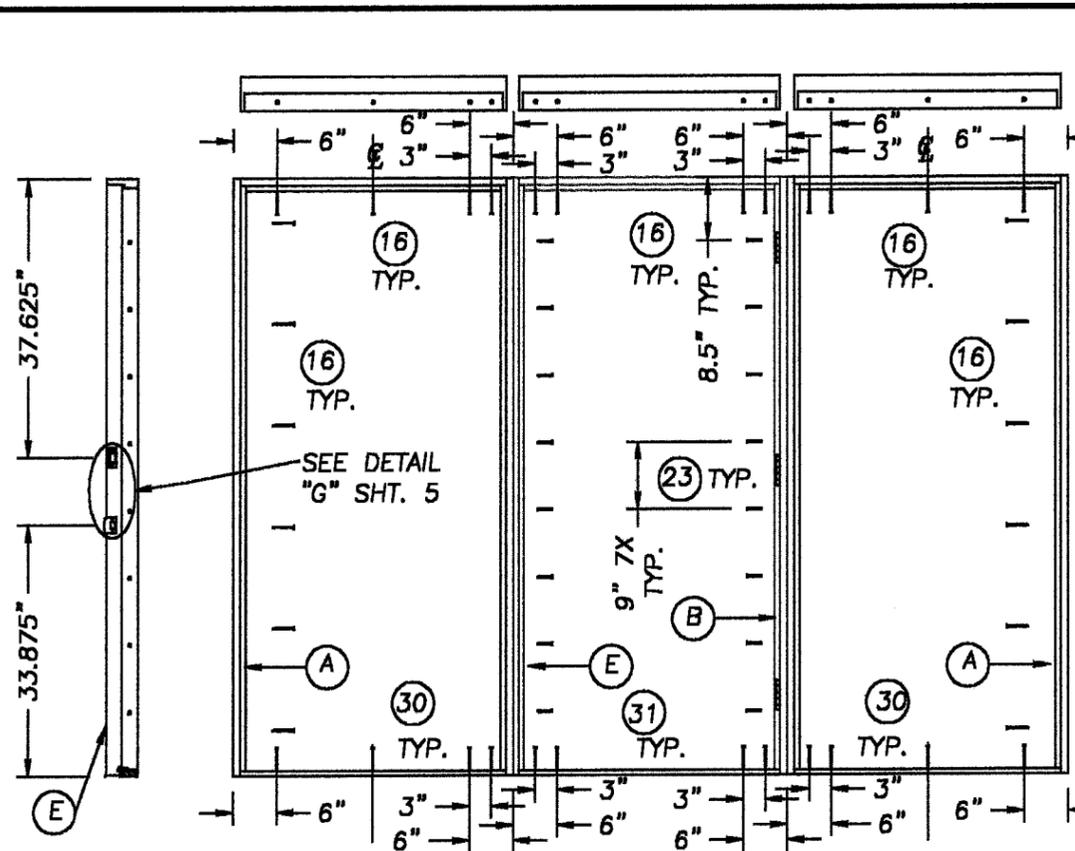

DOOR PANELS NOT SHOWN FOR CLARITY OF ANCHORING LAYOUTS

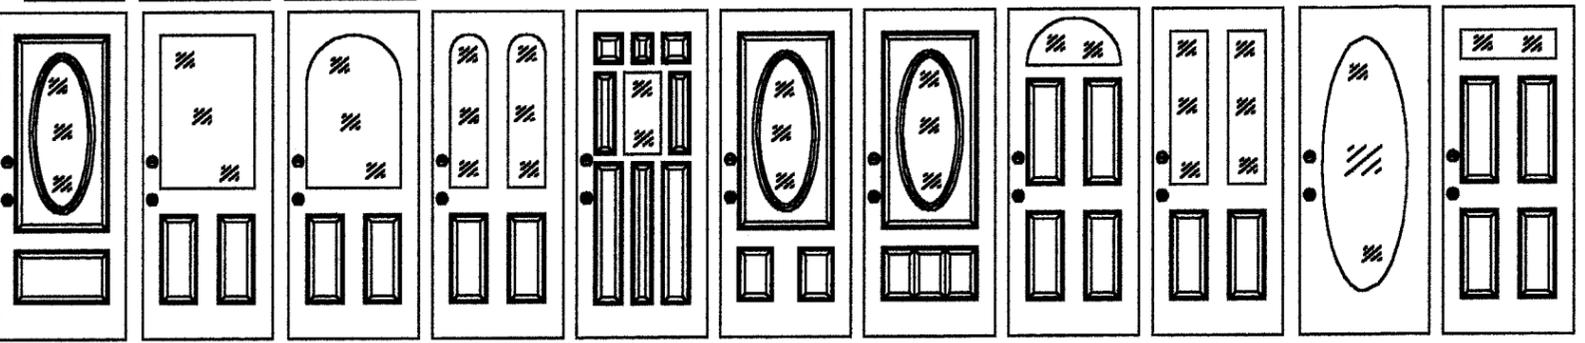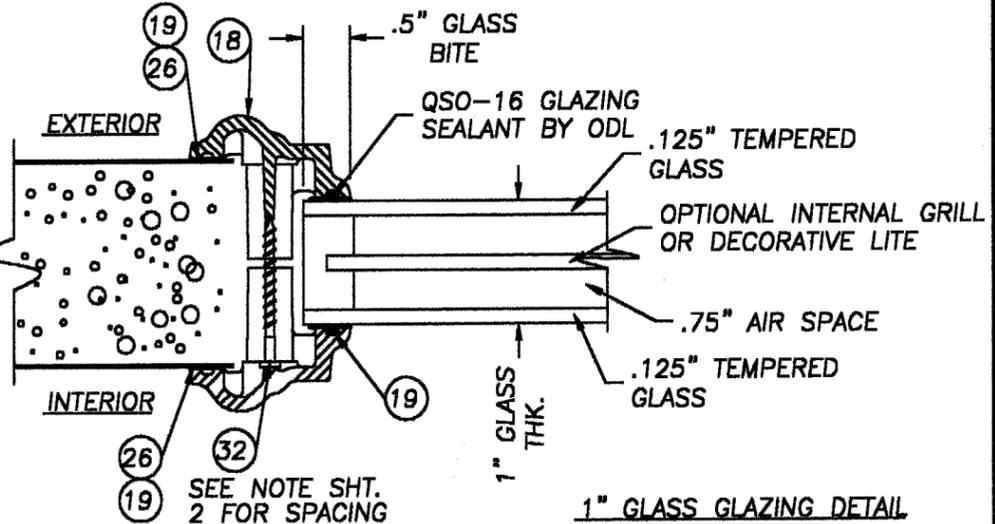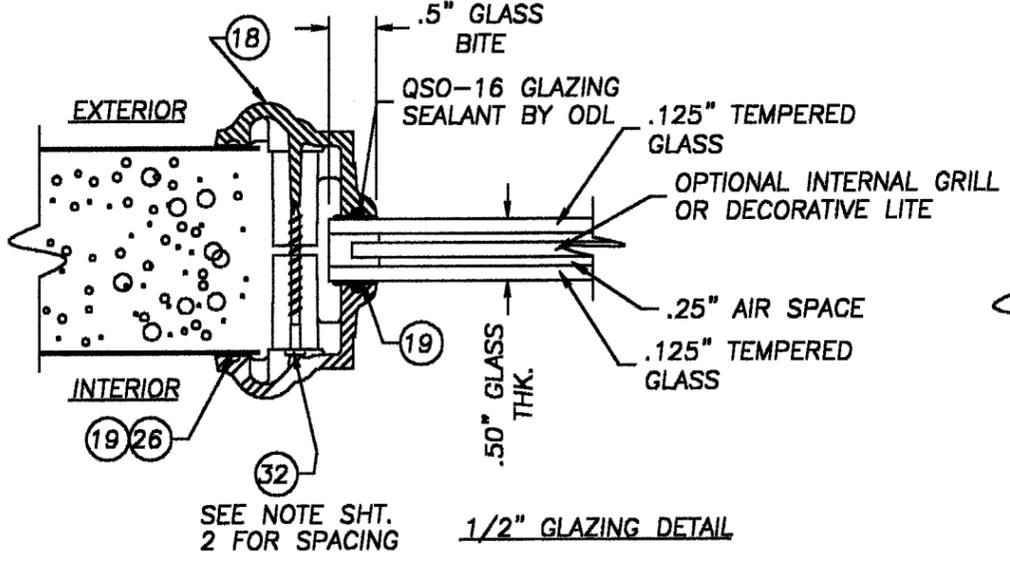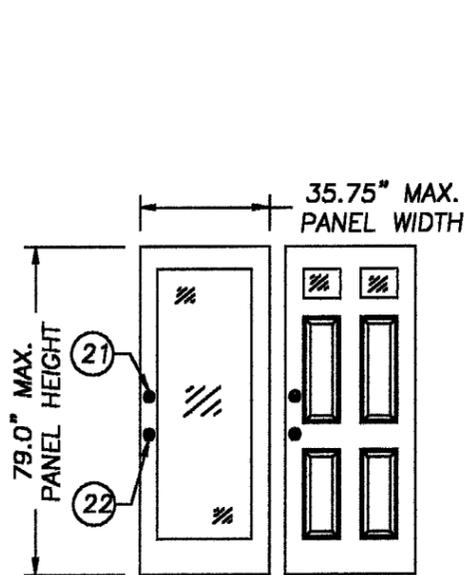

GLAZED DOOR MODELS

NOTE: GLASS LITE FRAME SURROUNDS
ODL Spartech Polycor PP5530 C13 or
Trinity GE ASA Polycarbonate

PRODUCT RENEWED

ACCEPTANCE NO. 01-0928-63
EXPIRATION DATE Nov 1, 2006
By *Ishaq I. Ghanda*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE **MAY 03 2001**
By *Maurice [Signature]*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0129-18


STANLEY
STANLEY DOOR SYSTEMS
7300 REAMES ROAD
CHARLOTTE, NC 28216
PH. (704) 921-3470

PRODUCT: STANLEY OUTSWING GLAZED
11-4 x 6-8 STEEL EDGE
DOOR W/ & W/O SIDELITES
PART OR ASSEMBLY:
ANCHORING LAYOUTS, DOOR
MODELS & GLAZING DETAILS


NO.	DATE	REVISIONS	BY

RW BUILDING
CONSULTANTS, INC.
813.684.3831


DATE: 12/27/00
SCALE: N.T.S.
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: 43968
SHEET 6 OF 7

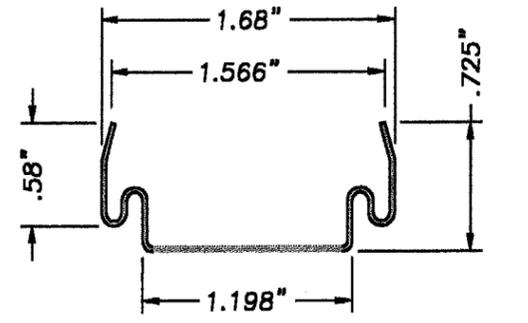


DOOR PANEL STEEL EDGE CAP
TOP, BOTTOM & SIDE .028" THK. STEEL

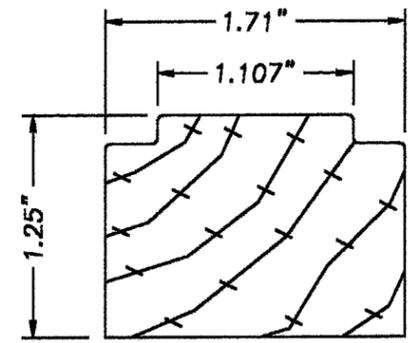


WOOD SIDELITE SIDE STYLE

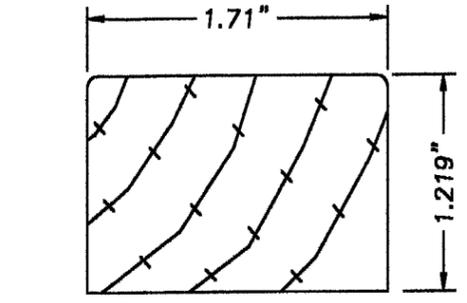


SIDELITE TOP & BOTTOM WOOD STYLE

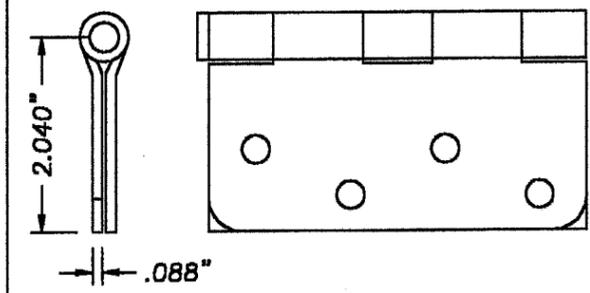


4 x 4 DOOR HINGE

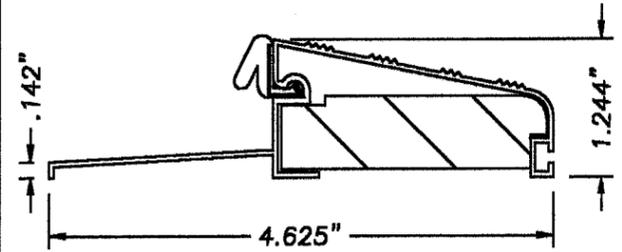


OUTSWING BUMP FACE
ALUMINUM THRESHOLD
.045" WALL THK.

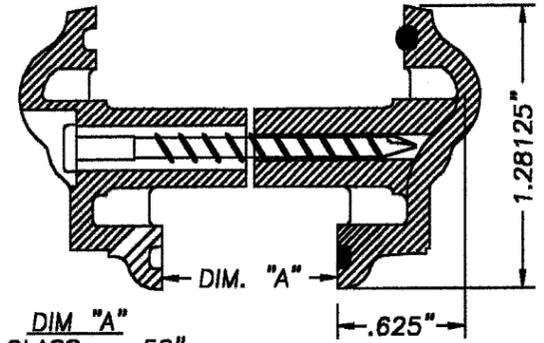


DIM "A"
.5" GLASS = .58"
1" GLASS = 1.08"
ODL Spartech Polycor PP5530 C13
Trinity GE ASA Polycarbonate Lite Frame

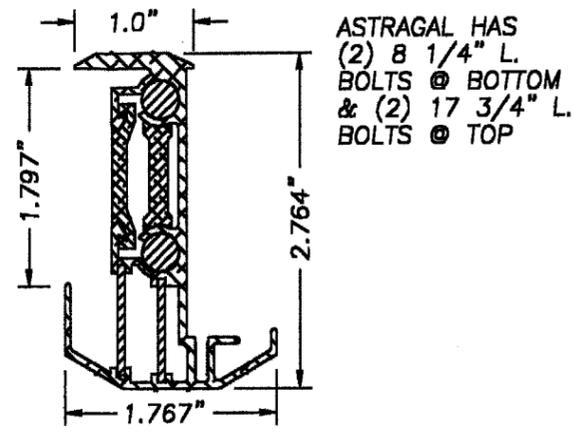


ASTRAGAL HAS
(2) 8 1/4" L. BOLTS @ BOTTOM
& (2) 17 3/4" L. BOLTS @ TOP
ASTRAGAL WINDJAMBER II
(WR68S) T-6063 EXTRUDED ALUMINUM

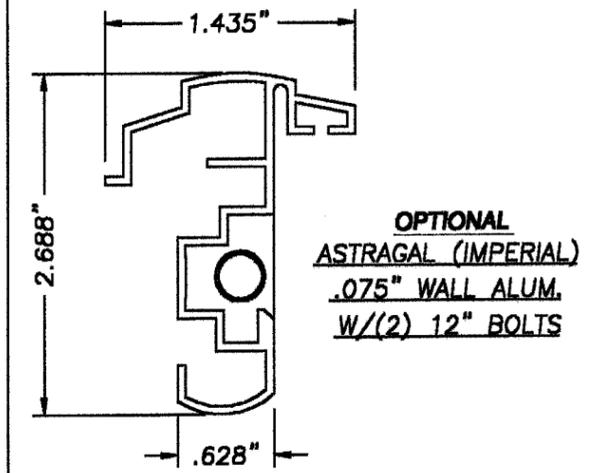


OPTIONAL
ASTRAGAL (IMPERIAL)
.075" WALL ALUM.
W/(2) 12" BOLTS

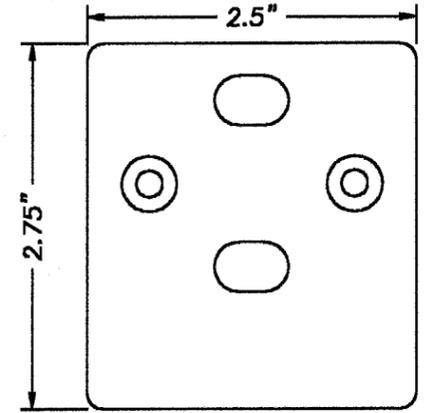


ASTRAGAL THRESHOLD STRIKE PLATE
WR68S .50" ALUM.

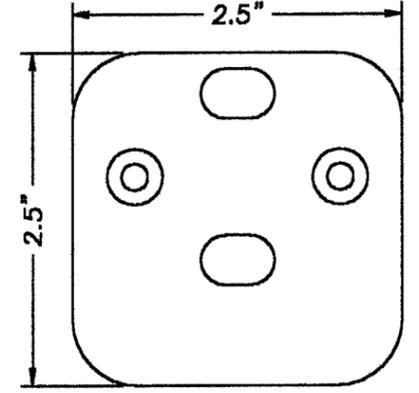


ASTRAGAL HEADER STRIKE PLATE
WR68S .066" STEEL

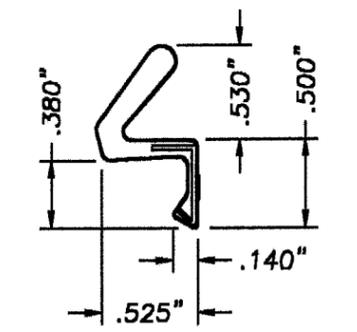


SCHLEGEL Q-LON QDS650

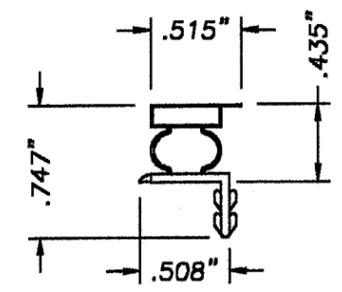

HOLMES MAGNETIC WEATHERSTRIP

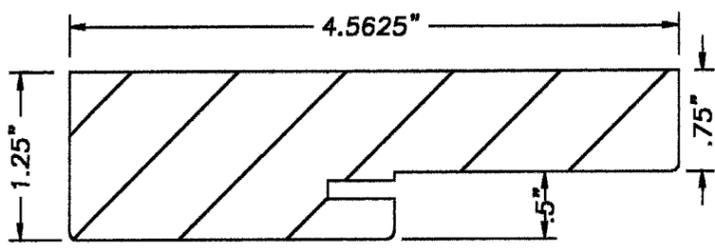

WOOD FRAME

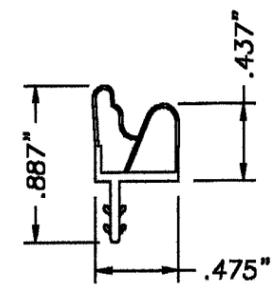

HOLMES COMPRESSION WEATHERSTRIP

PRODUCT RENEWED

ACCEPTANCE No. 01-0928-03
EXPIRATION DATE November 1, 2001
By Ashag J. Chanda
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE MAY 03 2001
BY *Manuel*
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0129-18

RW BUILDING
CONSULTANTS, INC.
813.684.3831

DATE: 12/27/00
SCALE: N.T.S.
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: 43968
SHEET 7 OF 7

STANLEY
STANLEY DOOR SYSTEMS
7300 REAMES ROAD
CHARLOTTE, NC 28216
PH. (704) 921-3470

NO.	DATE	REVISIONS	BY

UNIT COMPONENTS

PRODUCT: STANLEY OUTSWING GLAZED 11-4 x 6-8 STEEL EDGE DOOR W/O SIDELITES

PART OR ASSEMBLY: