



**BUILDING CODE COMPLIANCE OFFICE (BCCO)  
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908**

**NOTICE OF ACCEPTANCE (NOA)**

---

**Tech Specialty Products, Inc.  
315 South Hicks Road.  
Palatine, Ill 60067**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION: Ful-O-Mite Exterior Insulation and Finish System.**

**APPROVAL DOCUMENT:** Drawing No.02-213, Sheets 1 and 2, titled "Ful-O-Mite Exterior Insulation and Finish system" dated 02/13/202, with no revisions, prepared by Tilteco, Inc. signed and sealed by W. A. Tillit Jr. PE., bearing the Miami-Dade County Product Control Approval stamp with the NOA number and expiration date by the Miami-Dade County Product Control Division.

**MISSILE IMPACT RATING: Large and Small Missile.**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.


**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews the NOA # 98-0901.20 and consists of this page 1 as well as approval document mentioned above.


The submitted documentation was reviewed by **Candido F. Font PE.**




**NOA No: 01-1115.06  
Expiration Date: December 10, 2006  
Approval Date: April 11, 2002  
Page 1**

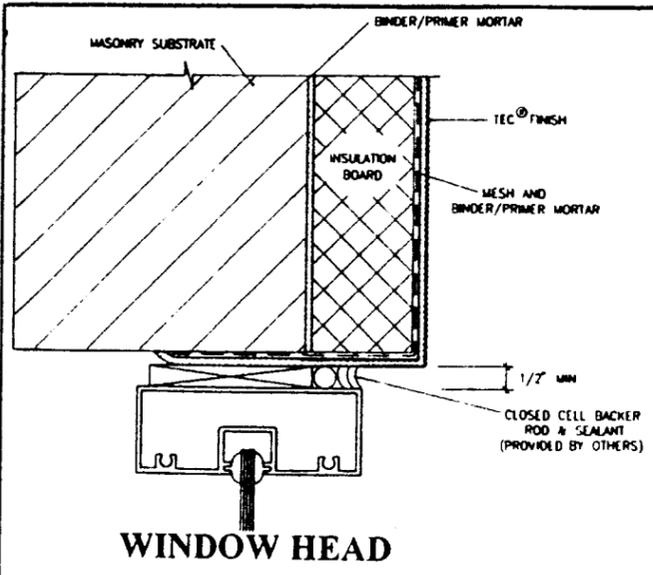


WINDOW HEAD

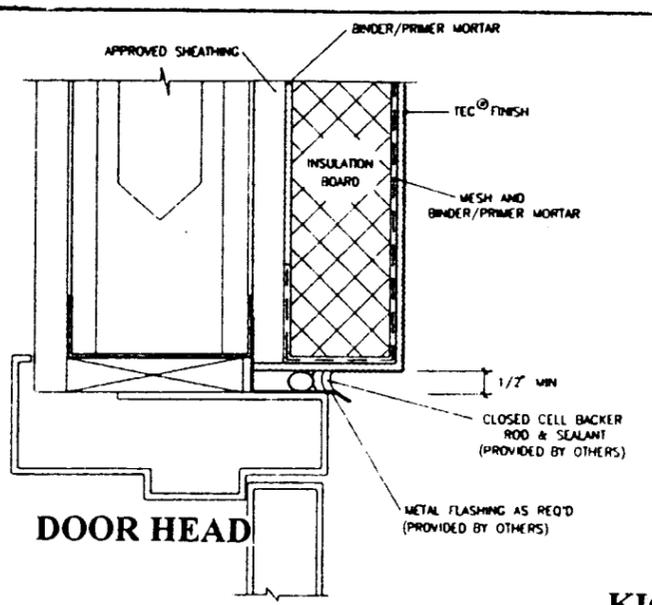


DOOR HEAD

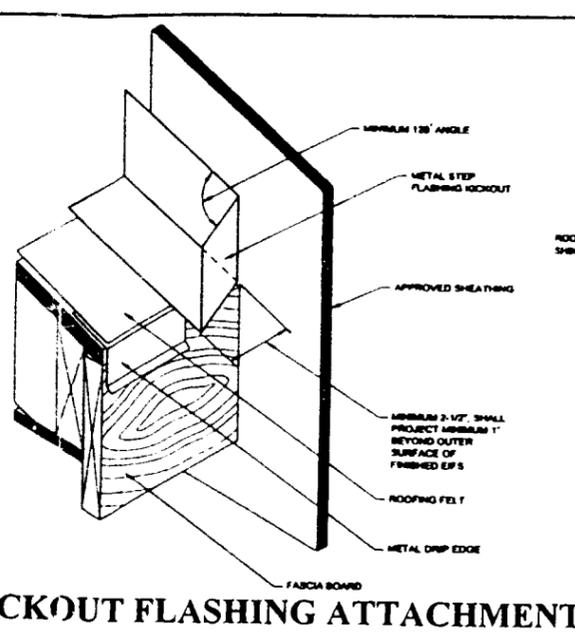


KICKOUT FLASHING ATTACHMENT

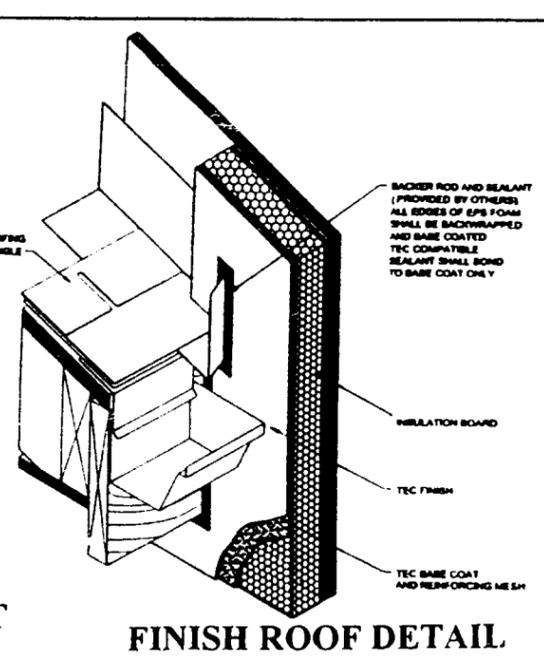


FINISH ROOF DETAIL

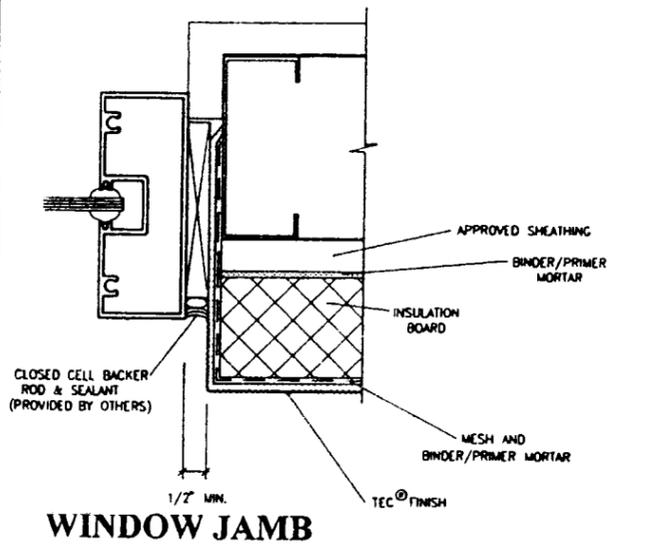


WINDOW JAMB

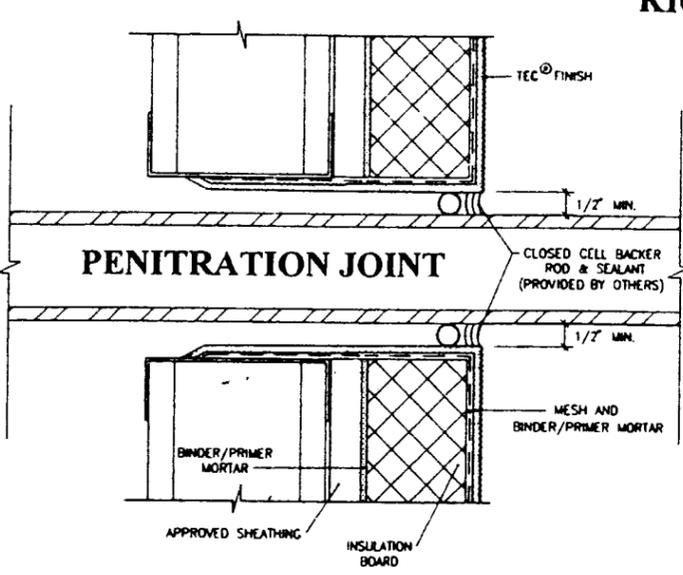


PENITRATION JOINT

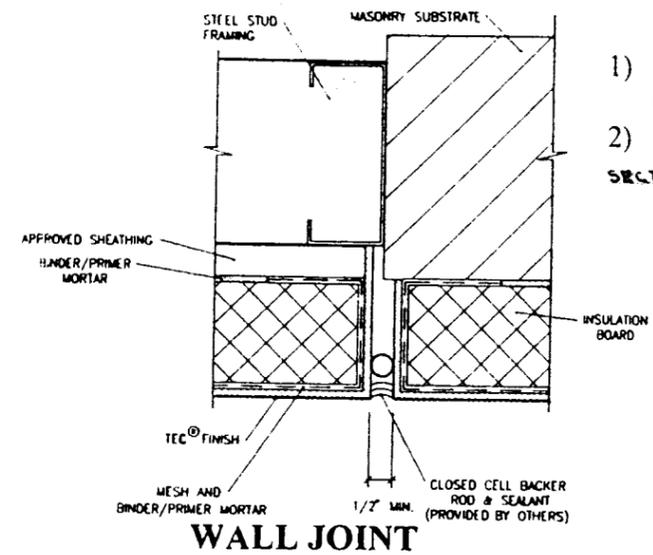


WALL JOINT

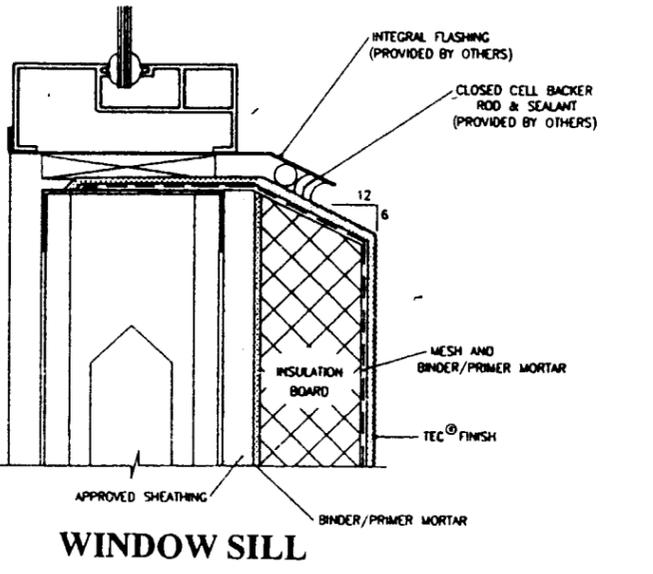

WINDOW SILL

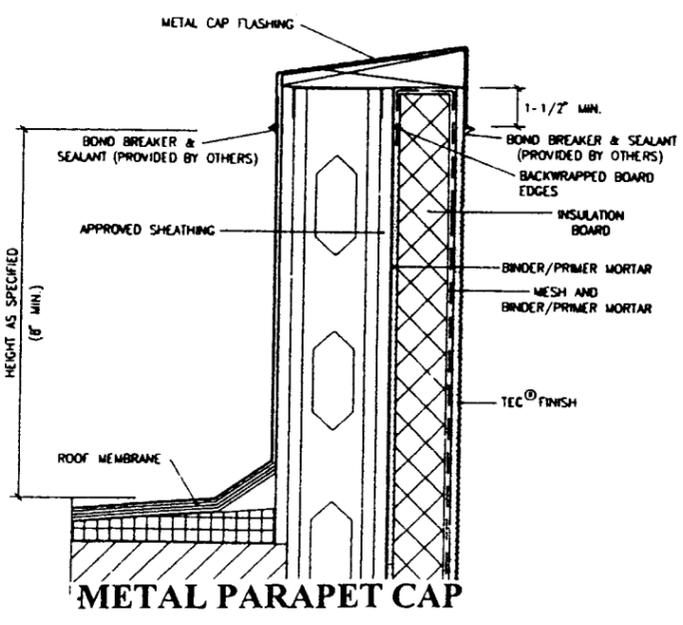

METAL PARAPET CAP

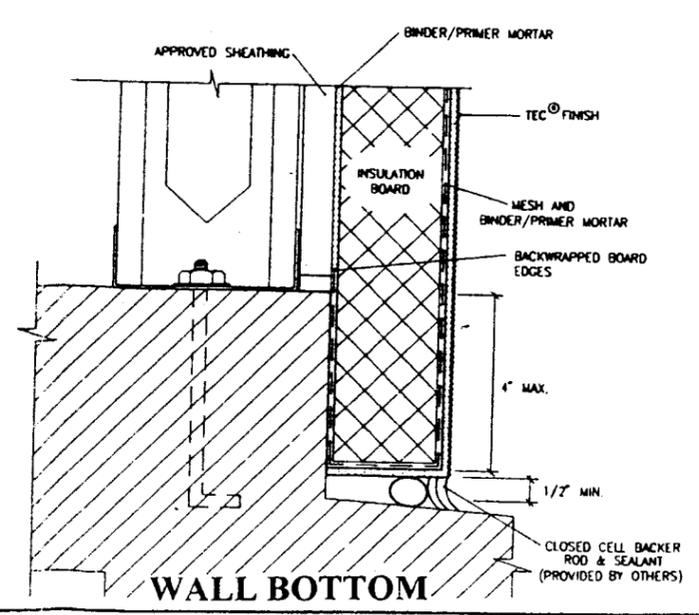

WALL BOTTOM

- 1) All roofing details shall comply with Chapter 34 of the S.F.B.C.
- 2) All other details shall comply with SECTION 2 on sheet 1 of 2.

STRUCTURALLY REVIEWED BY:

**TILECO INC.**  
TILLIT TESTING & ENGINEERING COMPANY  
6595 NW 36th STREET, STE. 217  
MIAMI, FLORIDA 33166

**WALTER A. TILLIT JR., P.E.**  
STRUCTURAL ENGINEER  
FL. LIC. NO. 44167

3/1/02

Ful-O-Mite Exterior Insulation and Finish System

Tec Specialty Products, Inc.  
315 South Hicks Road, Palatine, Ill. 60067

Drawing #02-213 Sheet 2 of 2 February 13, 2002


PRODUCT RENEWED

ACCEPTANCE No. 01-1115.06

EXPIRATION DATE 12/10/06

By: PRODUCT CONTROL DIVISION  
BUILDING CODE COMPLIANCE OFFICE

## Tec Inc Steel Stud Wall System

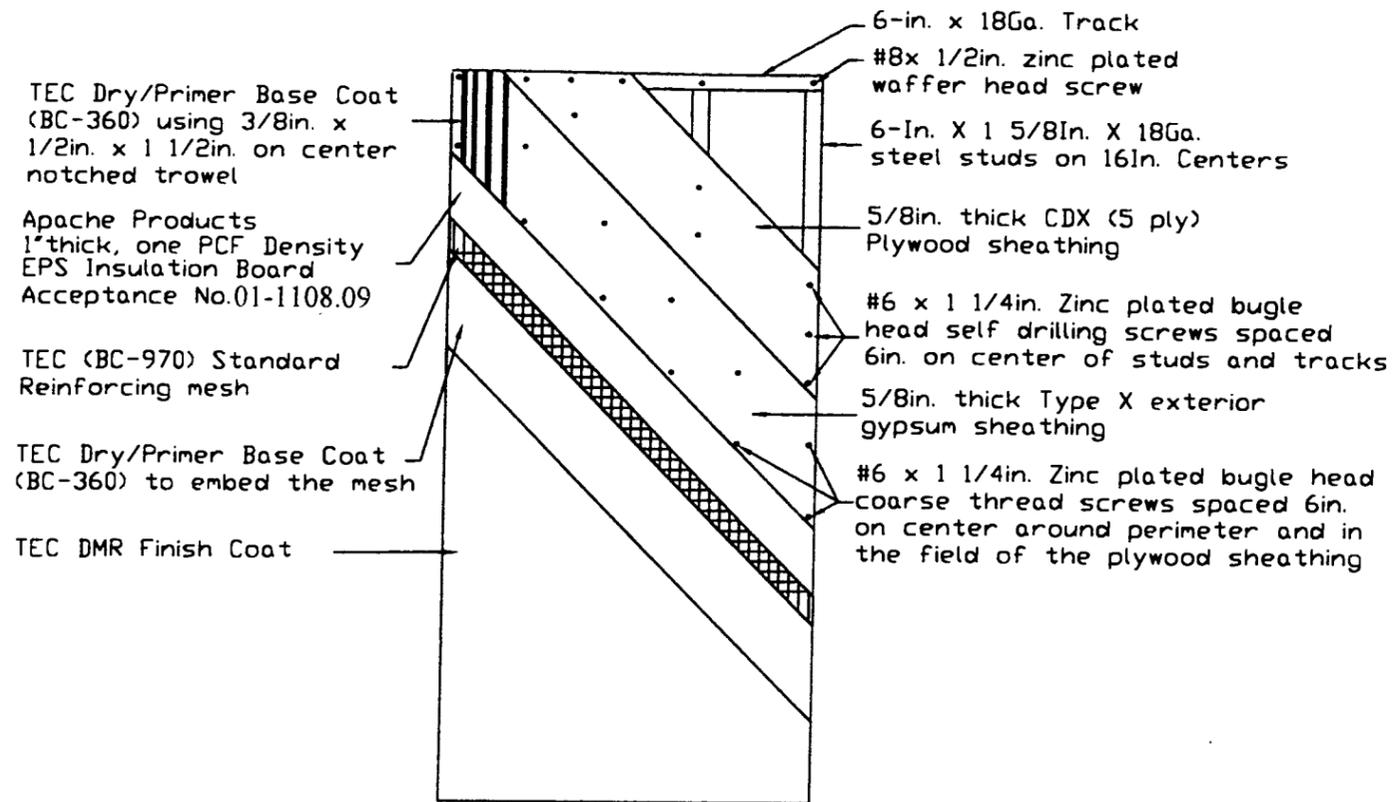


Panel size 96in high

Design Pressure Rating  
± 75 PSF

### EIFS Installation Notes:

1. Tec Base Coat and Adhesive (BC-360) mixed with potable water is applied to the back of the insulation board using a notched trowel and forming uniform parallel ribbons.
2. EPS insulation is applied to the exterior gypsum sheathing surface or the masonry wall, horizontally with staggered joints. The next day the exposed face of the insulation is rasped to a smooth surface.
3. Apply a 1/16-inch coat of Tec Base Coat to the exposed surface of the insulation with a stainless steel trowel. The standard mesh is embedded in the wet base coat by troweling from the center to the edges. The mesh is lapped by 2-1/2 inch.
4. Once the base coat is dry the finish is applied to an approximate 1/16 inch thick and troweled to the desired texture.

## Tec Inc Masonry Wall System

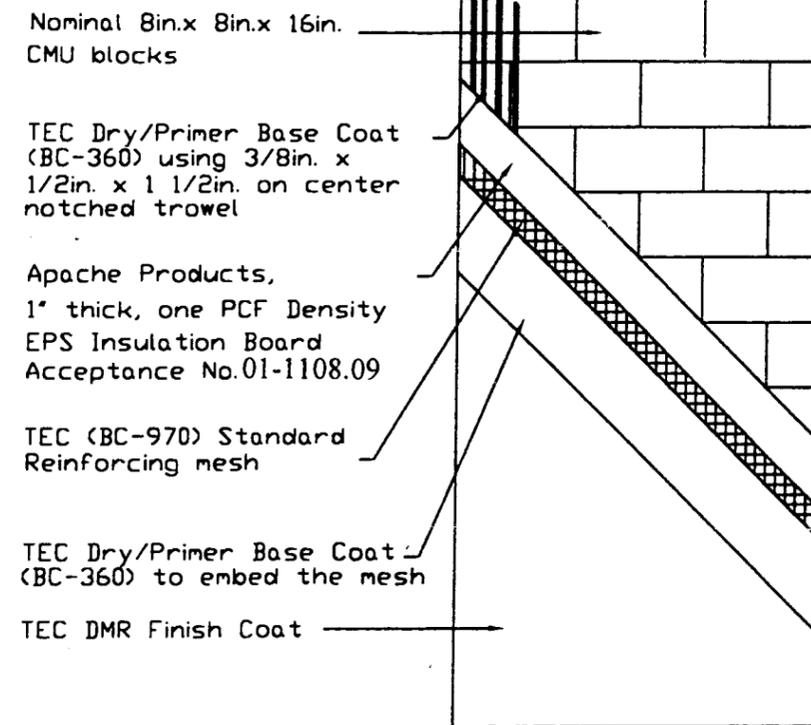

Panel size 96in high

### General Notes:

1. This system has been designed in accordance with the South Florida Building Code 1994 Edition and its latest supplements.
2. This system has been tested in accordance with the Dade County Protocol PA-202 and PA-203 for structural and cyclic testing.
3. This system shall be applied by a licensed plastering contractor following this Notice of Acceptance, the recommendation of Tec Specialty Products, Inc. and the applicable section of the South Florida Building Code.
4. The engineer and/or architect of record for each project using this system shall size all stud framing and/or masonry wall as required by governing codes and this document.
5. Insulation boards shall be positioned in a running bond pattern.
6. All studs used with this system shall be completely sheathed at the interior flange or bridged at maximum every 5' of stud length or as specified by stud manufacturer.
7. All steel studs shall be structural with 1-5/8" min. flange width and have minimum yield strength of 33000 PSI.
8. All concrete masonry units shall conform to ASTM C-90 and Type S, mortar per ASTM C-270.
9. Details on sheet 2 of 2 are typical and show intent to prevent water infiltration into and behind the system. Alternate details and specific conditions not covered by the typical details are the responsibility of the licensed design professional in consultation with Tec Specialty Products, Inc.
10. This system is not to be used on horizontal surfaces exposed to weather, except as a soffit. It is intended to be used on a wall application only.

STRUCTURALLY REVIEWED BY:

**TILECO INC.**  
TILIT TESTING & ENGINEERING COMPANY  
6595 NW 36<sup>th</sup> STREET, STE. 217  
MIAMI, FLORIDA 33166

**WALTER A. TILLIT JR., P.E.**  
STRUCTURAL ENGINEER  
FL LIC. NO. 44167

*W. Tillit Jr.*  
3/1/02

Ful-O-Mite Exterior Insulation and Finish System

Tec Specialty Products, Inc.  
315 South Hicks Road, Palatine, Ill. 60067

Drawing #02-213 Sheet 1 of 2 February 13, 2002

**PRODUCT RENEWED**

ACCEPTANCE No. 01-1115.06

EXPIRATION DATE 12/10/06

By [Signature]  
PRODUCT CONTROL DIVISION  
BUILDING CODE COMPLIANCE OFFICE