



**BUILDING CODE COMPLIANCE OFFICE (BCCO)  
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908**

**NOTICE OF ACCEPTANCE (NOA)**

---

**Condoor, Inc.  
7190 Coral Way  
Miami, FL 33155**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION: Series "CONDOOR" Outswing Raised Wood Door Slab**

**APPROVAL DOCUMENT:** Drawing No. 99-01, titled "CONDOOR Out-Swinging Raised Wood Door Slabs", sheets 1 through 12, prepared by manufacturer, dated 6/18/99, bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

**MISSILE IMPACT RATING: None**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 99-1119.05** and, consists of this page 1 as well as approval document mentioned above. The submitted documentation was reviewed by **Raul Rodriguez**.



**NOA No 02-0226.08  
Expiration Date: July 18, 2007  
Approval Date: April 18, 2002  
Page 1**

Product Type And Series

CONDOOR Raised Panel Door Melissa

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Intermediate Rail: 1.75" x 2" x 26". One (1)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick


Size: 7.75" x 7.75". Nine (9)

7.75" x 25.375". Six (6)

Mullions:

Size: 1.75" x 2" x 7.75". Six (6)

1.75" x 52" x 18.75". Four (4)

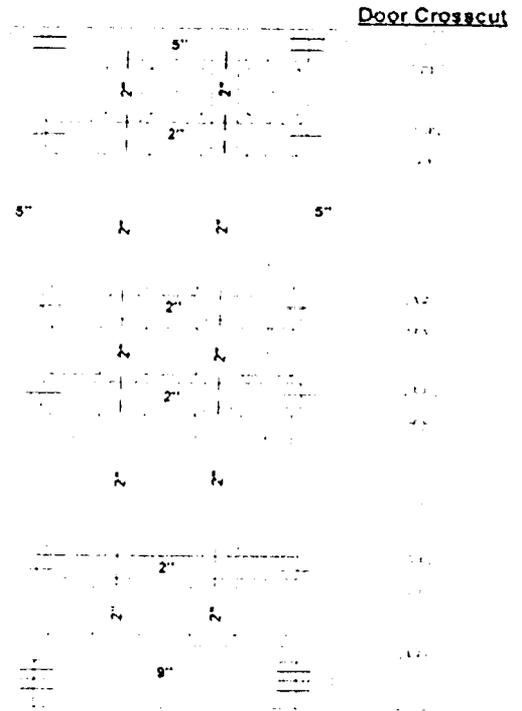

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
Acceptance No. 02-0276-08  
Expiration Date July 18, 2007  
By [Signature]  
Miami Dade Product Control  
Division

APPROVED AS COMPLYING WITH THE  
SOUTH FLORIDA BUILDING CODE  
DATE January 04, 2000  
BY Manuel Gertz  
PRODUCT CONTROL DIVISION  
BUILDING CODE COMPLIANCE OFFICE  
ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaeformis)

Installation: See each system's Notice of Acceptance

DESIGN PRESSURE  
Positive: +48.3  
Negative: -63.4

CONDOOR, INC.  
P.O. BOX 559041  
Miami, FL 33155  
PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 1 of 12

Product Type And Series

CONDOOR Raised Panel Door Florida

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Intermediate Rail: 1.75" x 2" x 26". One (1)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"


Infill Panels: .75" thick

Size: 7.33" x 35.5". Six (6)

7" x 26". One (1)

Mullions:

Size: 1.75" x 2" x 35.5". Four (4)

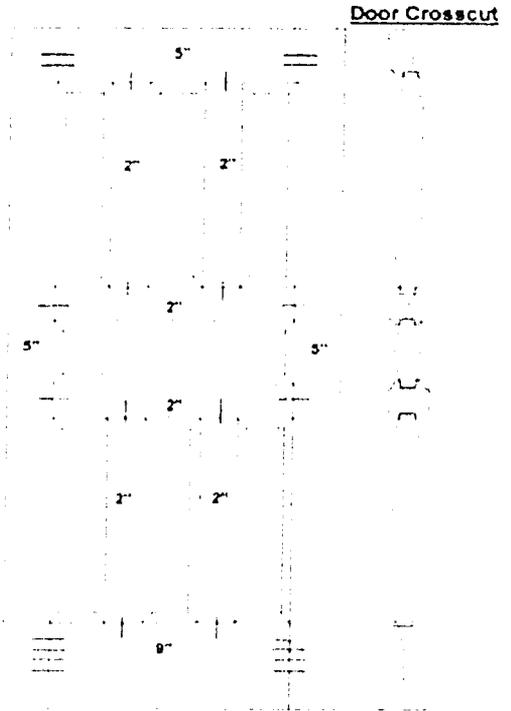

**PRODUCT RENEWED**  
 as complying with the Florida  
 Building Code  
 Acceptance No. 02-0226.08  
 Expiration Date July 18, 2007  
 By [Signature]  
 Miami Dade Product Control  
 Division

APPROVED AS COMPLYING WITH THE  
 SOUTH FLORIDA BUILDING CODE  
 DATE January 04, 2000  
 BY [Signature]  
 PRODUCT CONTROL DIVISION  
 BUILDING CODE COMPLIANCE OFFICE  
 ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaeformis)

Installation: See each system's Notice of Acceptance

DESIGN PRESSURE

Positive: +48.3

Negative: -63.4

CONDOOR, INC.  
 P.O. BOX 559041  
 Miami, FL 33155  
 PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 2 of 12

Product Type And Series

CONDOOR Raised Panel Door Madrid

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Intermediate Rail: 1.75" x 2" x 26". One (1)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick

Size: 6.5" x 20.665". Six (6)


9" x 15.5". Four (4)

Mullions:

Size: 1.75" x 2" x 6.5". Four (4)

1.75" x 2" x 10.25". Three (3)

1.75" x 2" x 82". Two (2)

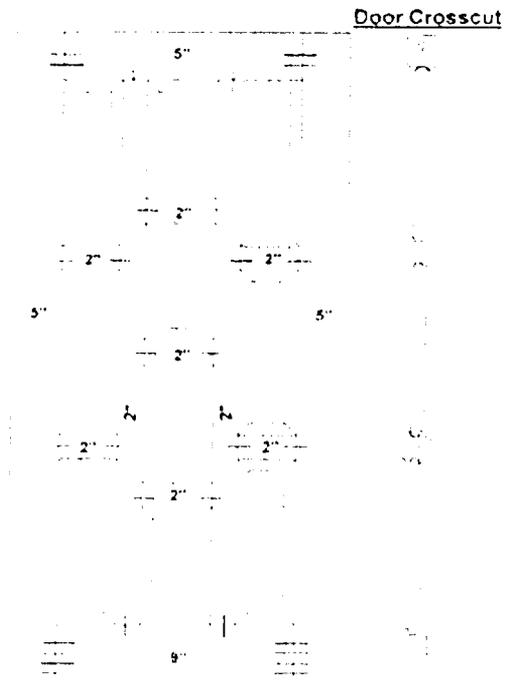

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
Acceptance No 02-0226-08  
Expiration Date July 18, 2007  
By [Signature]  
**Miami Dade Product Control**  
Division

APPROVED AS COMPLYING WITH THE  
SOUTH FLORIDA BUILDING CODE  
DATE January 09, 2000  
BY [Signature]  
PRODUCT CONTROL DIV. S. D.  
BUILDING CODE COMPLIANCE OFFICE  
ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaefomis)

Installation: See each system's Notice of Acceptance

DESIGN PRESSURE
Positive: +48.3
Negative: -63.4

CONDOOR, INC. P.O. BOX 559041 Miami, FL 33155 PH. 305-262-8788	CONDOOR Out-Swinging Raised Panel Wood Door Slabs		
	Drawn By: J. Hermoso		
	Revisions:		
	Drawing No. 99-01	Date: 06/18/99	Page 3 of 12

Product Type And Series

CONDOOR Raised Panel Door Georgia

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Intermediate Rail: 1.75" x 3" x 26". One (1)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick

Size: 9" x 26". Two (2)

9" x 11". Two (2)


11" x 34". One (1)

4.5" x 58". Two (2)

Mullions:

Size: 1.75" x 3" x 58". Two (2)

1.75" x 3" x 11". Two (2)

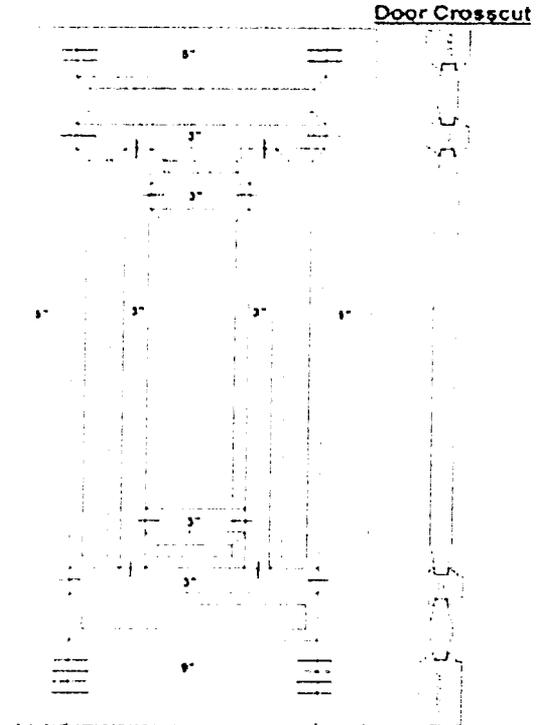

**PRODUCT RENEWED**  
 as complying with the Florida  
 Building Code  
 Acceptance No. 02-0226-08  
 Expiration Date July 18, 2007  
 By *[Signature]*  
 Miami Dade Product Control  
 Division

APPROVED AS COMPLYING WITH THE  
 SOUTH FLORIDA BUILDING CODE  
 DATE *January 07 2009*  
 BY *Manuel J...*  
 PRODUCT CONTROL DIV. S...  
 BUILDING CODE COMPLIANCE OFFICE  
 ACCEPTANCE NO. *99-1119.05*

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaeformis)

Installation: See each system's Notice of Acceptance

**DESIGN PRESSURE**

Positive: +48.3

Negative: -63.4

CONDOOR, INC.  
 P.O. BOX 559041  
 Miami, FL 33155  
 PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 4 of 12

Product Type And Series

CONDOOR Raised Panel Door Augusta

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Intermediate Rail: 1.75" x 2" x 26". One (1)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick

Size: 7.5" x 8". Two (2)

7.5" x 17.75". Four (4)

7.5" x 16.5". Four (4)

7.5" x 26". One (1)

Mullions:

Size: 1.75" x 2" x 18.5". Four (4)

1.75" x 2" x 17.5". Four (4)


Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaeformis)

Installation: See each system's Notice of Acceptance

Door Crosscut

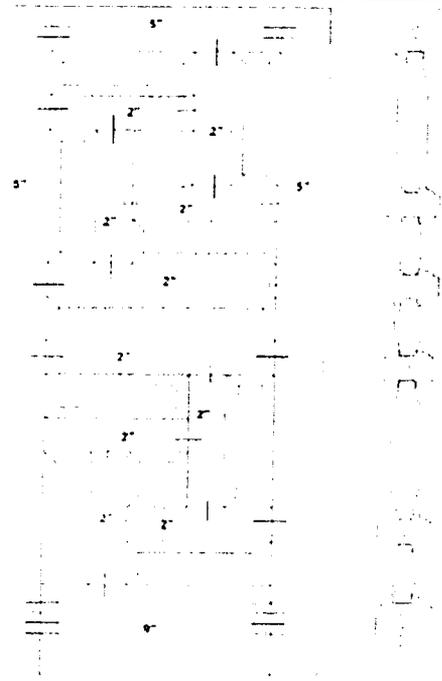

**PRODUCT RENEWED**  
 as complying with the Florida  
 Building Code  
 Acceptance No. 02-0226.08  
 Expiration Date July 18, 2007  
 By [Signature]  
 Miami Dade Product Control  
 Division

APPROVED AS COMPLYING WITH THE  
 SOUTH FLORIDA BUILDING CODE  
 DATE January 07, 2000  
 BY [Signature]  
 PRODUCT CONTROL DIVISION  
 BUILDING CODE COMPLIANCE OFFICE  
 ACCEPTANCE NO. 99-1119.05

DESIGN PRESSURE  
 Positive: +48.3  
 Negative: -63.4

CONDOOR, INC. P.O. BOX 559041 Miami, FL 33155 PH. 305-262-8788	CONDOOR Out-Swinging Raised Panel Wood Door Slabs		
	Drawn By: J. Hermoso		
	Revisions:		
	Drawing No. 99-01	Date: 06/18/99	Page 5 of 12

Product Type And Series

CONDOOR Raised Panel Door 6 Panels

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Lock Rail: 1.75" x 4.5" x 26" Two (2)

.625" dia. 5" long wood dowels

2.5" penetration into the rail

Intermediate Rail: 1.75" x 4.5" x 26". Two (2)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick

Size: 10.75" x 7.5". Two (2)


10.25" x 24.75". Four (4)

Mullions:

Size: 1.75" x 4.5" x 24.75". Two (2)

1.75" x 4.5" x 7.5". One (1)

Door Crosscut

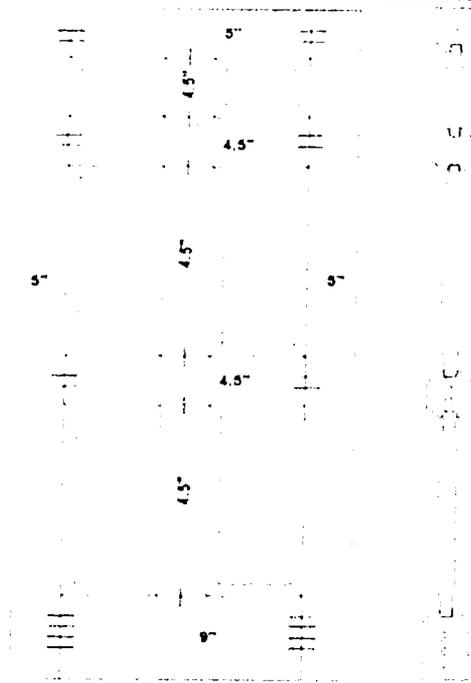

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
Acceptance No 02-0226-08  
Expiration Date July 18, 2007  
By [Signature]  
Miami Dade Product Control  
Division

APPROVED AS COMPLYING WITH THE  
SOUTH FLORIDA BUILDING CODE  
DATE January 07, 2000  
BY [Signature]  
PRODUCT CONTROL DIVISION  
BUILDING CODE COMPLIANCE OFFICE  
ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaefomis)

Installation: See each system's Notice of Acceptance

DESIGN PRESSURE
Positive: +48.3
Negative: -63.4

CONDOOR, INC.  
P.O. BOX 559041  
Miami, FL 33155  
PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 6 of 12

Product Type And Series

CONDOOR Raised Panel Door 8 Panels

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Lock Rail: 1.75" x 4.5" x 26" Two (2)

.625" dia. 5" long wood dowels

2.5" penetration into the rail

Intermediate Rail: 1.75" x 4.5" x 26". Two (2)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.


Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick

Size: 10.25" x 13.125". Eight (8)

Mullions:

Size: 1.75" x 4.5" x 13.125". Four (4)

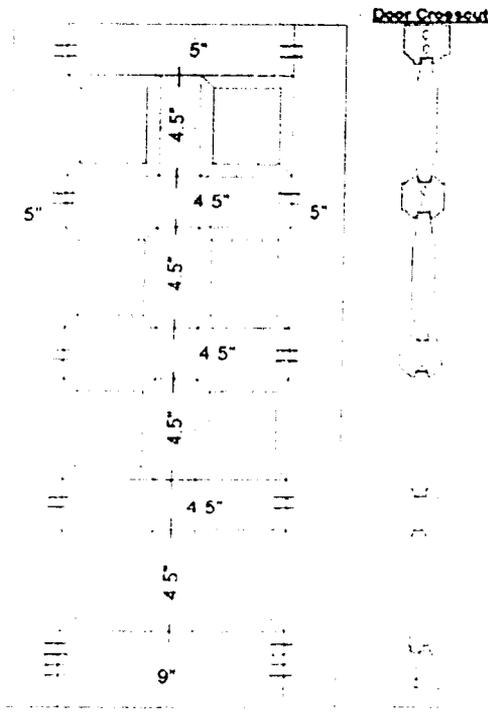

**PRODUCT RENEWED**  
 as complying with the Florida  
 Building Code  
 Acceptance No. 02-0226-08  
 Expiration Date July 18, 2007  
 By [Signature]  
 Miami Dade Product Control  
 Division

APPROVED AS COMPLYING WITH THE  
 SOUTH FLORIDA BUILDING CODE  
 DATE January 07, 2000  
 BY [Signature]  
 PRODUCT CONTROL DIVISION  
 BUILDING CODE COMPLIANCE OFFICE  
 ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaefomis)

Installation: See each system's Notice of Acceptance

<b>DESIGN PRESSURE</b>
Positive: +48.3
Negative: -63.4

CONDOOR, INC. P.O. BOX 559041 Miami, FL 33155 PH. 305-262-8788	CONDOOR Out-Swinging Raised Panel Wood Door Slabs		
	Drawn By: J. Hermoso		
	Revisions:		
	Drawing No. 99-01	Date: 06/18/99	Page 7 of 12

Product Type And Series

CONDOOR Raised Panel Door 10 Panels Diamond

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Intermediate Rail: 1.75" x 2" x 26". One (1)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick

Size: 12" x 11.60". Ten (10)

Mullions:

Size: 1.75" x 2" x 11.60". Five (5)

**PRODUCT RENEWED**  
 as complying with the Florida  
 Building Code  
 Acceptance No. 02-0226-08  
 Expiration Date July 18, 2007  
 By [Signature]  
 Miami Dade Product Control  
 Division

APPROVED AS COMPLYING WITH THE  
 SOUTH FLORIDA BUILDING CODE  
 DATE February 07, 2000  
 BY [Signature]  
 PRODUCT CONTROL DIVISION  
 BUILDING CODE COMPLIANCE OFFICE  
 ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaeformis)

Installation: See each system's Notice of Acceptance

DESIGN PRESSURE  
 Positive: +48.3  
 Negative: -63.4

CONDOOR, INC.  
 P.O. BOX 559041  
 Miami, FL 33155  
 PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 8 of 12

Product Type And Series

CONDOOR Raised Panel Door 15 Panels

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 5" x 26". Two (2)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Intermediate Rail: 1.75" x 2" x 26". One (1)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.


Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick

Size: 11.60" x 7.33". Fifteen (15)

Mullions:

Size: 1.75" x 2" x 11". Ten (10)

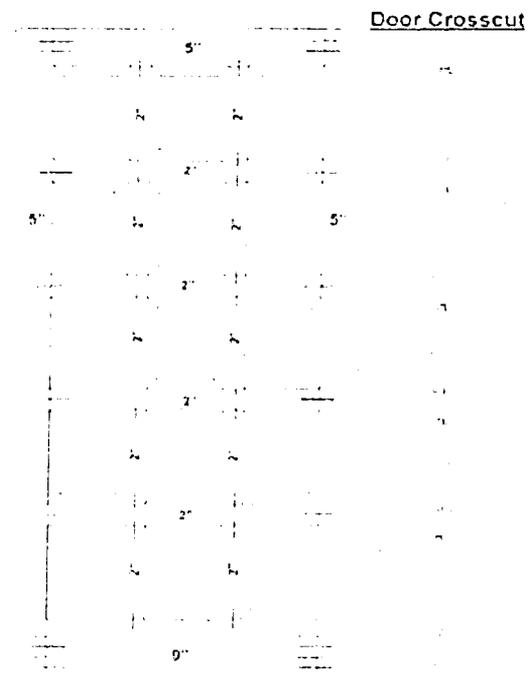

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
Acceptance No. 02-0226.08  
Expiration Date July 18, 2007  
By [Signature]  
Miami Dade Product Control  
Division

APPROVED AS COMPLYING WITH THE  
SOUTH FLORIDA BUILDING CODE  
DATE January 07, 2000  
BY [Signature]  
PRODUCT CONTROL DIVISION  
BUILDING CODE COMPLIANCE OFFICE  
ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaeformis)

Installation: See each system's Notice of Acceptance

**DESIGN PRESSURE**  
Positive: +48.3  
Negative: -63.4

CONDOOR, INC.  
P.O. BOX 559041  
Miami, FL 33155  
Ph: 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 9 of 12

Product Type And Series

CONDOOR Raised Panel Door Nevada 6 Panels

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 96"

Corner Construction

Top Rail: 1.75" x 8" x 26". Three (3)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Lock Rail: 1.75" x 4.5" x 26" Two (2)

.625" dia. 5" long wood dowels

2.5" penetration into the rail

Intermediate Rail: 1.75" x 4.5" x 26". Two (2)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Stiles: 1.75" x 5" x 96"

Infill Panels: .75" thick


Size: 10.75" x 20". Two (2)

10.25" x 25". Four (4)

Mullions:

Size: 1.75" x 4.5" x 25". Two (2)

1.75" x 4.5" x 19". One (1)

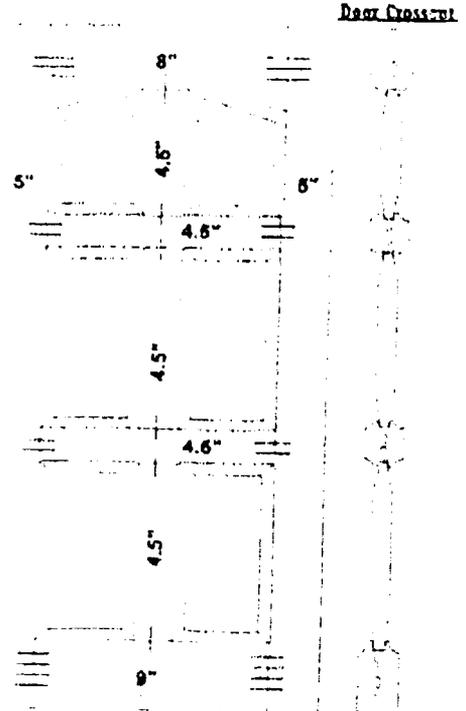

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
Acceptance No. 02-0226-08  
Expiration Date July 18, 2007  
By [Signature]  
Miami Dade Product Control  
Division

APPROVED AS COMPLYING WITH THE  
SOUTH FLORIDA BUILDING CODE  
DATE January 07, 2000  
BY [Signature]  
PRODUCT CONTROL DIV. S.D.A.  
BUILDING CODE COMPLIANCE OFFICE  
ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaefomis)

Installation: See each system's Notice of Acceptance

**DESIGN PRESSURE**

Positive: +48.3

Negative: -63.4

CONDOOR, INC.  
P.O. BOX 559041  
Miami, FL 33155  
PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs  
Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 10 of 12

Product Type And Series

CONDOOR Raised Panel Door Nevada w/raised mouldings

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 80"

Corner Construction

Top Rail: 1.75" x 8" x 26". Three (3)

.625 dia. 5" long wood dowels  
2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels  
2.5" penetration into the rail.

Lock Rail: 1.75" x 7.5" x 26" Three (3)

.625" dia. 5" long wood dowels  
2.5" penetration into the rail

Stiles: 1.75" x 5" x 80"

Infill Panels: .75" thick


Size: 10.50" x 23.25". Two (2)

10.50" x 32.25". Two (2)

Mullions:

Size: 1.75" x 5" x 23.25". One (1)

1.75" x 5" x 32.25". One (1)

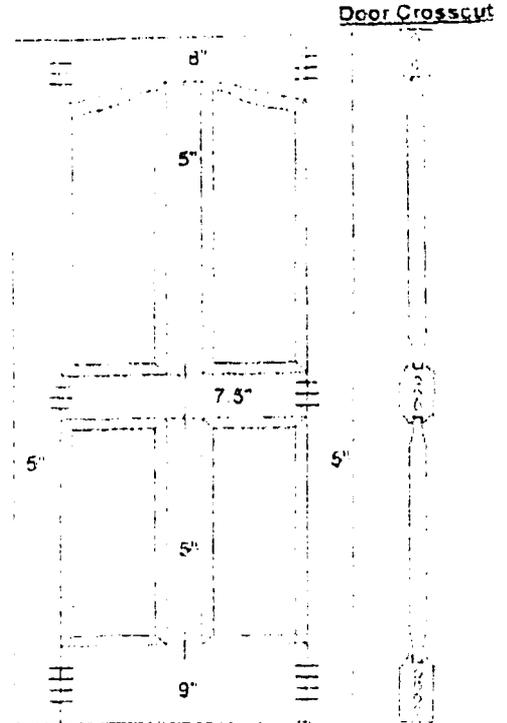

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
Acceptance No 02-0226.08  
Expiration Date July 18, 2007  
By [Signature]  
Miami Dade Product Control  
Division

APPROVED AS COMPLYING WITH THE  
SOUTH FLORIDA BUILDING CODE  
DATE January 07, 2000  
BY [Signature]  
PRODUCT CONTROL DIVISION  
BUILDING CODE COMPLIANCE OFFICE  
ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species.

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaefomis)

Installation: See each system's Notice of Acceptance

**DESIGN PRESSURE**

Positive: +48.3

Negative: -63.4

CONDOOR, INC.  
P.O. BOX 559041  
Miami, FL 33155  
PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 11 of 12

Product Type And Series

Door Crosscut

CONDOOR Raised Panel Door Nebraska w/flat panels

Configuration:

Single Slab

Dimensions: 1.75" x 36" x 80"

Corner Construction

Top Rail: 1.75" x 8" x 26". Three (3)

.625 dia. 5" long wood dowels

2.5" penetration into the rail.

Bottom Rail: 1.75" x 9" x 26". Four (4)

.625" dia. 5" long wood dowels

2.5" penetration into the rail.

Lock Rail: 1.75" x 7.5" x 26" Three (3)

.625" dia. 5" long wood dowels

2.5" penetration into the rail

Stiles: 1.75" x 5" x 80"

Infill Panels: .75" thick

Size: 10.50" x 23.25". Two (2)

10.50" x 32.25". Two (2)

Mullions:

Size: 1.75" x 5" x 23.25". One (1)

1.75" x 5" x 32.25". One (1)

**PRODUCT RENEWED**  
as complying with the Florida  
Building Code  
Acceptance No. 02-0226.08  
Expiration Date July 18, 2007

By [Signature]  
Miami Dade Product Control  
Division

APPROVED AS COMPLYING WITH THE  
SOUTH FLORIDA BUILDING CODE  
DATE January 07, 2000  
BY [Signature]  
PRODUCT CONTROL DIVISION  
BUILDING CODE COMPLIANCE DIVISION  
ACCEPTANCE NO. 99-1119.05

Door Leaf Construction:

Stiles and rails are solid wood construction of either one of the following wood species:

- a.) South American Mahogany (Swietenia Macrophylla) or
- b.) South American Oak (Amburana Cearensis) or
- c.) South American Cherry (Cedrelinga Catenaefomis)

Installation: See each system's Notice of Acceptance

DESIGN PRESSURE

Positive: +48.3

Negative: -63.4

CONDOOR, INC.  
P.O. BOX 559041  
Miami, FL 33155  
PH. 305-262-8788

CONDOOR Out-Swinging Raised Panel Wood Door Slabs

Drawn By: J. Hermoso

Revisions:

Drawing No. 99-01

Date: 06/18/99

Page 12 of 12