



MIAMI-DADE
BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

Marley Mouldings Limited.
135 Bear Creek Road.
Marion VA, 24354

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami Dade-County Product Control Division (In Miami-Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Marley Mouldings: CAP C-1028 PVC, CORE-FILL 1428A PVC & P64-020

APPROVAL DOCUMENT: Drawing No. S-2344, titled "Extruded PVC", sheet 1 of 1, dated 02/21/03, prepared by R.W. Building Consultants, Inc., signed and sealed by L. F. Schmidt PE, bearing the Miami Dade County Product Control Approval stamp with the Notice of Acceptance number and approval date by the Miami Dade County Product Control Division.

MISSILE IMPACT RATING: None.

LABELING: Each carton containing certified extrusions shall be labeled with the extruder name city, state and "MDCA". In addition, each Certified Extrusion shall be labeled every 4 ft or less on the underside with the Extruder Name and "MDCA".

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of page 1.

The submitted documentation was reviewed by **Candido F. Font PE.**



NOA No: 02-0408.05
Expiration Date: April 03, 2008
Approval Date: April 03, 2003
Page 1

Marley Mouldings Limited.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

(For File ONLY. Not part of NOA)

A. DRAWINGS

1. Drawing No. S-2344, titled Extruded PVC, sheet 1 of 1, dated 02/21/03, prepared by R. W. Building Consultants, Inc., signed and sealed by L. F. Schmidt PE.

B. TESTS

1. Test report on Smoke Density per ASTM D2843, Rate of Burning per ASTM D 635, Self Ignition Temperature per ASTM D 1929 and Flexural Strength before and after Xenon Arch exposure per ASTM D790 of Cap C-1028 PVC, Core-Fill 1428A PVC & P64-020 PVC, prepared by ETC Laboratories Inc., report # ETC 00-707-10076.1, dated 10/03/01, signed and sealed by J. L. Doldan, PE.

C. CALCULATION


N/A

D. STATEMENTS.

1. Code Compliance Letter by Lyndon F. Schmidt issued on 03/05/03 and signed by L. F. Schmidt, PE.

E. MATERIAL CERTIFICATION

N/A

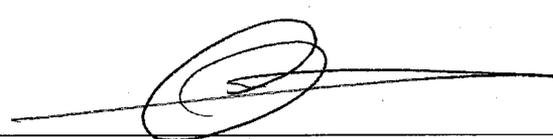


Candido F. Font PE.
Sr. Product Control Examiner
NOA No: 02-0408.05
Expiration Date: April 03, 2008
Approval Date: April 03, 2003

CAP C-1028 PVC

DESCRIPTION:

RIGID PVC CAP STOCK OVER PVC

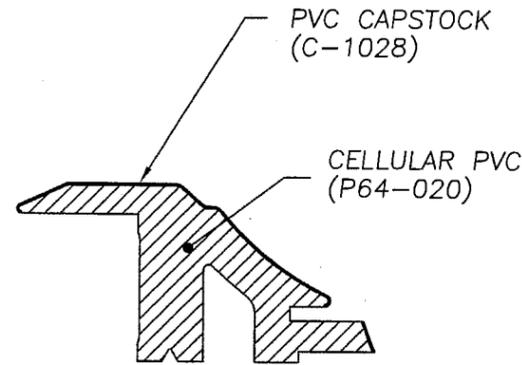

TESTED PROPERTIES


TEST DESCRIPTION	TEST METHOD	RESULTS
SMOKE DENSITY	ASTM D2843	66.9%
RATE OF BURNING	ASTM D635	.82 IN/MIN
SELF IGNITION TEMP	ASTM D1929	840°F
FLEXURAL STRENGTH	ASTM D790	2783 PSI
FLEXURAL STRENGTH *	ASTM D790	2583 PSI

* AFTER WEATHERING, PER SECTION 2605.2 OF FBC 2001

CORE-FILL 1428A PVC

DESCRIPTION:

PAINT OVER PVC SUBSTRATE WITH PVC REGRIND CORE

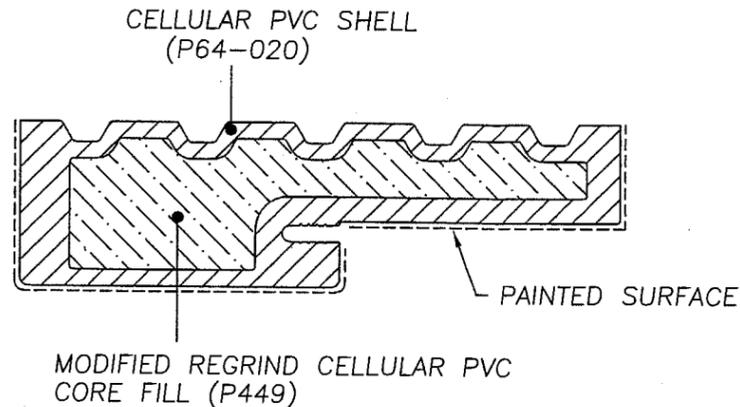

TESTED PROPERTIES


TEST DESCRIPTION	TEST METHOD	RESULTS
SMOKE DENSITY	ASTM D2843	68.3%
AVG. TIME OF BURNING	ASTM D635	5 SEC
AVG. EXTENT OF BURNING	ASTM D635	.98"
SELF IGNITION TEMP	ASTM D1929	880°F
FLEXURAL STRENGTH	ASTM D790	3263 PSI
FLEXURAL STRENGTH *	ASTM D790	3604 PSI

* AFTER WEATHERING, PER SECTION 2605.2 OF FBC 2001

P64-020

DESCRIPTION:

RAW (UNPAINTED) PVC

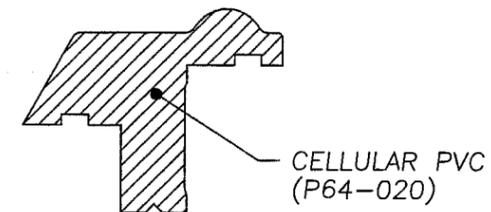

TESTED PROPERTIES

TEST DESCRIPTION	TEST METHOD	RESULTS
SMOKE DENSITY	ASTM D2843	59.1%
AVE TIME OF BURNING	ASTM D635	5 SEC
AVE EXTENT OF BURNING	ASTM D635	.98"
SELF IGNITION TEMP	ASTM D1929	960°F
FLEXURAL STRENGTH	ASTM D790	3366 PSI
FLEXURAL STRENGTH *	ASTM D790	3058 PSI

* AFTER WEATHERING, PER SECTION 2605.2 OF FBC 2001

NOTES:

1. THIS IS A COMPONENT APPROVAL AND DOES NOT INCLUDE AN EVALUATION OF STRUCTURAL PERFORMANCE OF THESE COMPONENTS.
2. SYSTEMS INCORPORATING THESE COMPONENTS SHALL APPLY FOR A NOA TO THE MIAMI-DADE COUNTY PRODUCT CONTROL DIVISION AND SHALL SUBMIT TEST REPORTS AND OTHER REQUIRED DOCUMENTS SHOWING THAT THE SYSTEM USING THESE COMPONENTS WILL RESIST THE LOADS ACCORDING TO CHAPTER 16 OF THE FBC 2001.
3. THE EXTRUSIONS REPRESENTED HERE ARE FOR ILLUSTRATIVE PURPOSES ONLY AND ARE NOT INCLUSIVE OF ALL PRODUCTS AVAILABLE.



 3-5-03
 LYNDON F. SCHMIDT
 FLORIDA P.E. NO. 43409
 19506 FRENCH LACE DRIVE
 LUTZ, FL 33558

Approved as complying with the
 Florida Building Code
 Date 04/03/03
 NOA# 02-0406.05
 Miami Dade Product Control
 Division
 By: 

MARLEY MOULDINGS

P.O. BOX 610
 MARION, VA 24354
 PHONE 276.783.8161

PRODUCT:	EXTRUDED PVC	PART OR ASSEMBLY:	ILLUSTRATIVE REPRESENTATIONS	REVISIONS	
				NO.	DATE


 BUILDING
 CONSULTANTS, INC.
 813.659.9197

DATE: 02/21/03
 SCALE: NTS
 DWG. BY: LRL
 CHK. BY: RW
 DRAWING NO.: S-2344
 SHEET 1 OF 1