MIAMI-DADE

BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

Tamko Roofing Products, Inc.
220 W 4th St.
Joplin, MO 64801

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Ridge Vent for Shingle Roof

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This consists of pages 1 through 4.
The submitted documentation was reviewed by Frank Zuloaga, RRC

ROOFING COMPONENT APPROVAL

Category: Roofing
Sub-Category: Roof Vent
Material: Plastic

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT

Product	Dimensions	Test Specification	Product Description
Ridge Vent for Shingle Roof	0.9" x 10.25" x 20'	TAS 100	Plastic low profile attic ridge vent consisting of a two layer composite consisting of a nylon-polyester, for installation in shingle roof systems.

TRADE NAMES OF PRODUCTS MANUFACTURED BY OTHERS

Product	Dimensions	Test Specification	Product Description	Manufacturer
Roofing Nails	Min. 2-1/2" galvanized smooth shank nails	TAS 114	Corrosion resistant annular smooth shank nails	All Dade County Approved Suppliers
Flashing cement	Various	ASTM D 4586	Cut back, asphalt modified adhesive for flashing attachment.	Generic (with current NOA)

EVIDENCE SUBMITTED

Test Agency/Identifier	Name	Report	Date
Center for Applied Engineering, Inc.	TAS 100 Wind Driven Rain	CAE 96167	10/01/96

APPROVED APPLICATIONS

Tradename: Ridge Vent

System Type C: Mechanical attachment of ridge vent under composition ridge shingle.

Slot: Cut a minimum 3 $^{5}/_{8}$" slot along the apex of the roof by cutting 1 $^{13}/_{16}$" on each side of the ridge. The slot shall terminate approximately 6" from the rake edge.

Installation: Install exterior Aluminum diverter along entire length of ridge at location that will maintain a minimum space of 7/8" between diverter and ridge cap shingle after complete installation. Apply roof cement/sealant at diverter and roof deck interface along entire ridge line.

Loosen about 3 inches of black nylon matrix from black fabric and cut out with snips. Fold ends to create an end cap, fasten and roll out (fabric side down). Center Roll Vent over ventilation slot. Apply approximatley a ¼" continuous bead of roofing cement between fabric bottom of vent and roof deck.

To splice (if necessary), remove approximatley 4 inches of black nylon matrix from one section and 4 inches of black fabric from the other section. Overlap the fabric with the matrix and from a splice.

Ridge Shingle: Install pre-manufactured or field cut ridge shingles over the ridge vent in compliance with the shingle manufacturers Product Control Approval and the installation instructions using 2 ½" annular ring shank galvanized nails.

Ventilation Calculations: Refer to manufacturer's published literature

LIMITATIONS:

1. Refer to applicable Building Code required ventilation.
2. Ridge Vent shall comply with applicable Building Code.
3. Ridge Vent shall not be installed on rof mean heights greater than 33 feet.
4. Ridge Vent shall comply with 1517.6 of the Florida Building Code (FBC).

DETAIL A

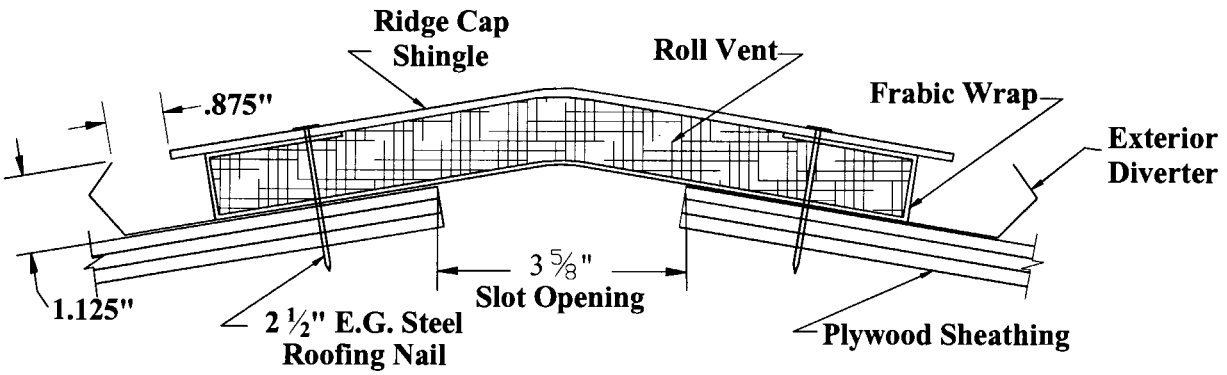

END OF THIS ACCEPTANCE