



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908**

NOTICE OF ACCEPTANCE (NOA)

**U. S. Fence
7830 Freeway Circle
Middleburg Heights, OH 44130**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Extruded PVC Vinyl Fencing

APPROVAL DOCUMENT: Drawing No. USF 1, titled " PVC Fence ", sheets 1 through 5 of 5, prepared by Robert F. Robins, P.E., dated May 21, 2002, bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: None

LABELING: Each fence section shall bear a permanent label with the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.







This NOA revises NOA # 00-1030.01 and consists of this page 1 as well as approval document mentioned above. The submitted documentation was reviewed by **Helmy A. Makar, P.E.**



**NOA No 02-0603.09
Expiration Date: 10/04/2006
Approval Date: 07/25/2002
Page 1**

ROBERT F. ROBINS
FLORIDA P.E. #52401


Robert F. Robins
6117102

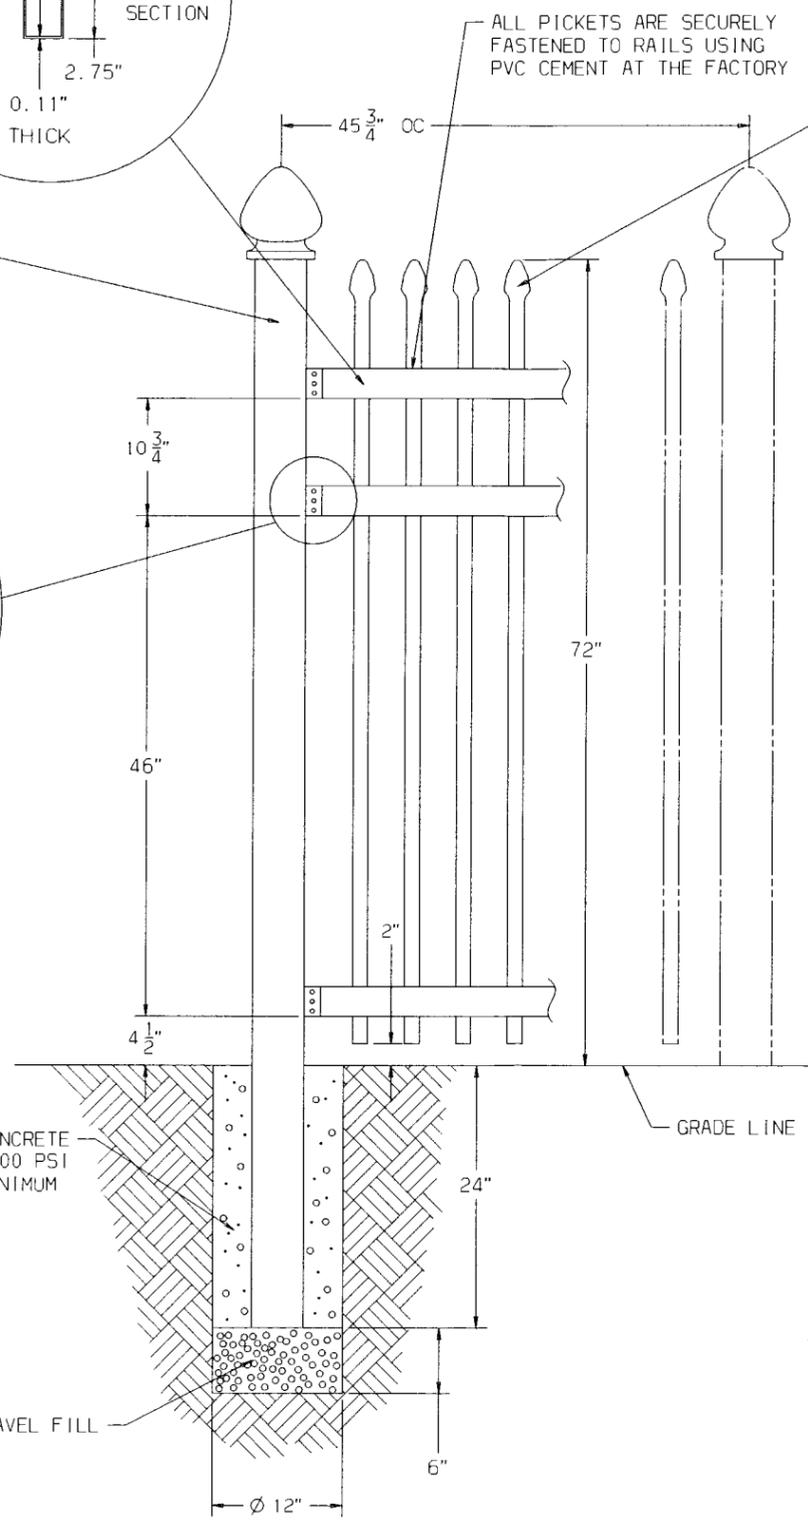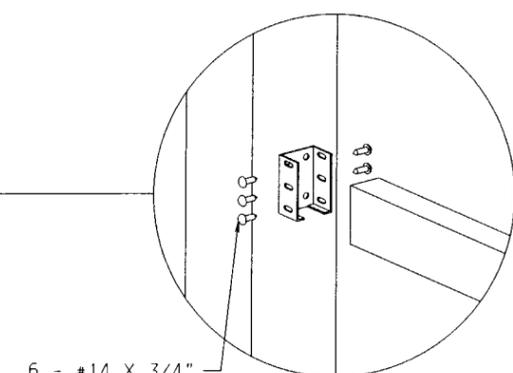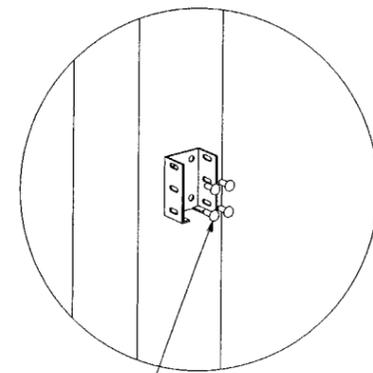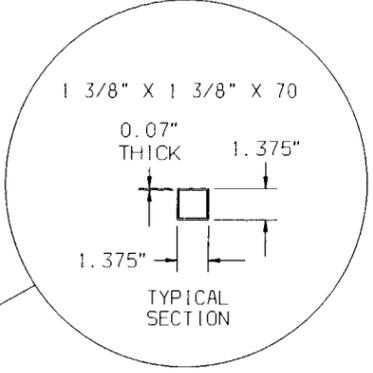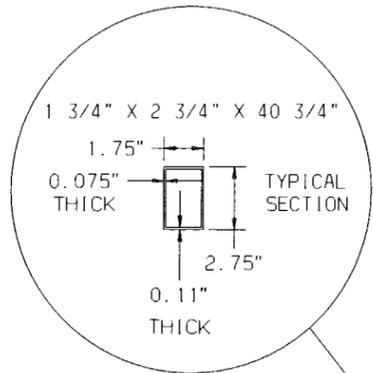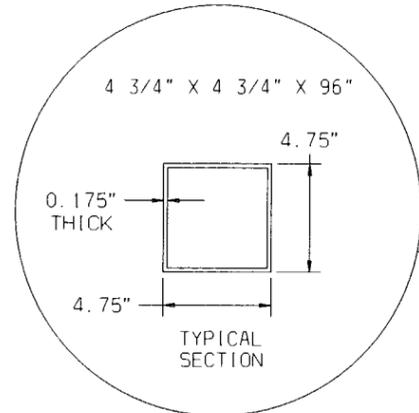



THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH THE FLORIDA BUILDING CODE SECTION 1619.2

PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	Value	ASTM
1-40212-13-0101 (D4216)		
Specifications		
Specific Gravity (± 0.02) 0.125" Specimen	1.46	D-792
Izod impact FT*lbs/in notch	17.0	D-792
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celcius	72	D-648
Tio2 - Titanium Dioxide UV Inhibitor	10/100	-

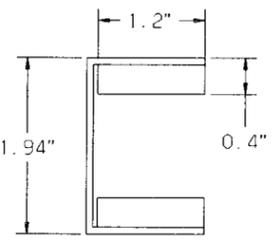

FENCE RAIL HANGER
ALUMINUM ALLOY (3003-H14)
0.75 THICK (GAGE)
WHITE POWDER COATING

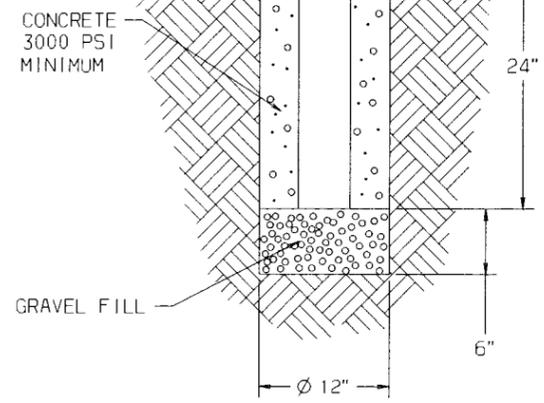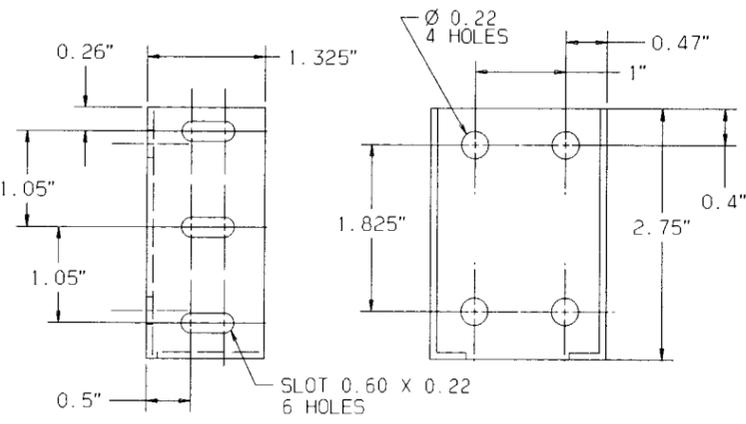






PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 02-0603.09
Expiration Date 10/04/2006
By *Helmut A. Heber*
Miami Dade Product Control
Division

PVC FENCE
CLASSIC GOTHIC PICKET

DRAWING NO: USF1
SHEET 1 OF 5
05-21-02
U.S. FENCE
MIDDLEBURG HEIGHTS, OH


ROBERT F. ROBINS
FLORIDA P.E. #52401

Robert F. Robins
6/17/02

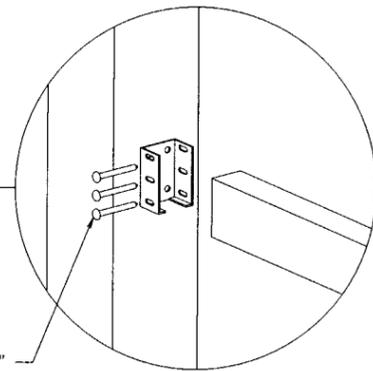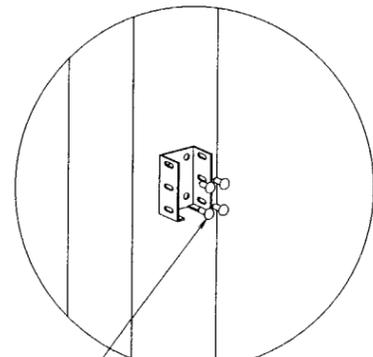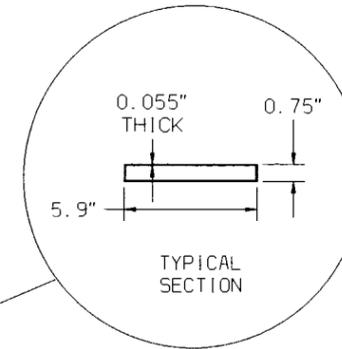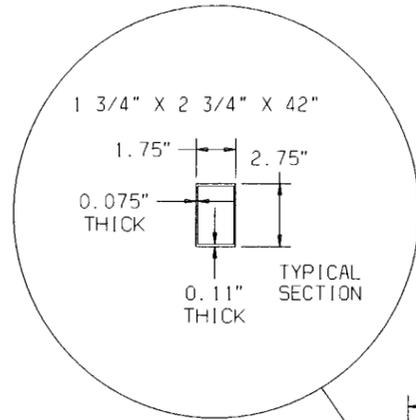
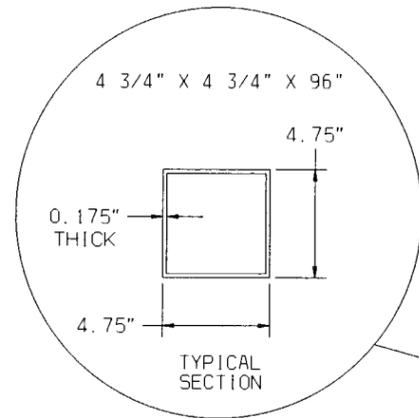


4 - #14 X 3/4"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE

3 - #14 X 2 1/4"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE
FROM BACKSIDE ONLY

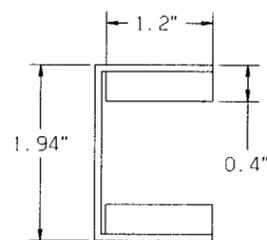

FENCE RAIL HANGER
ALUMINUM ALLOY (3003-H14)
0.75 THICK (GAGE)
WHITE POWDER COATING

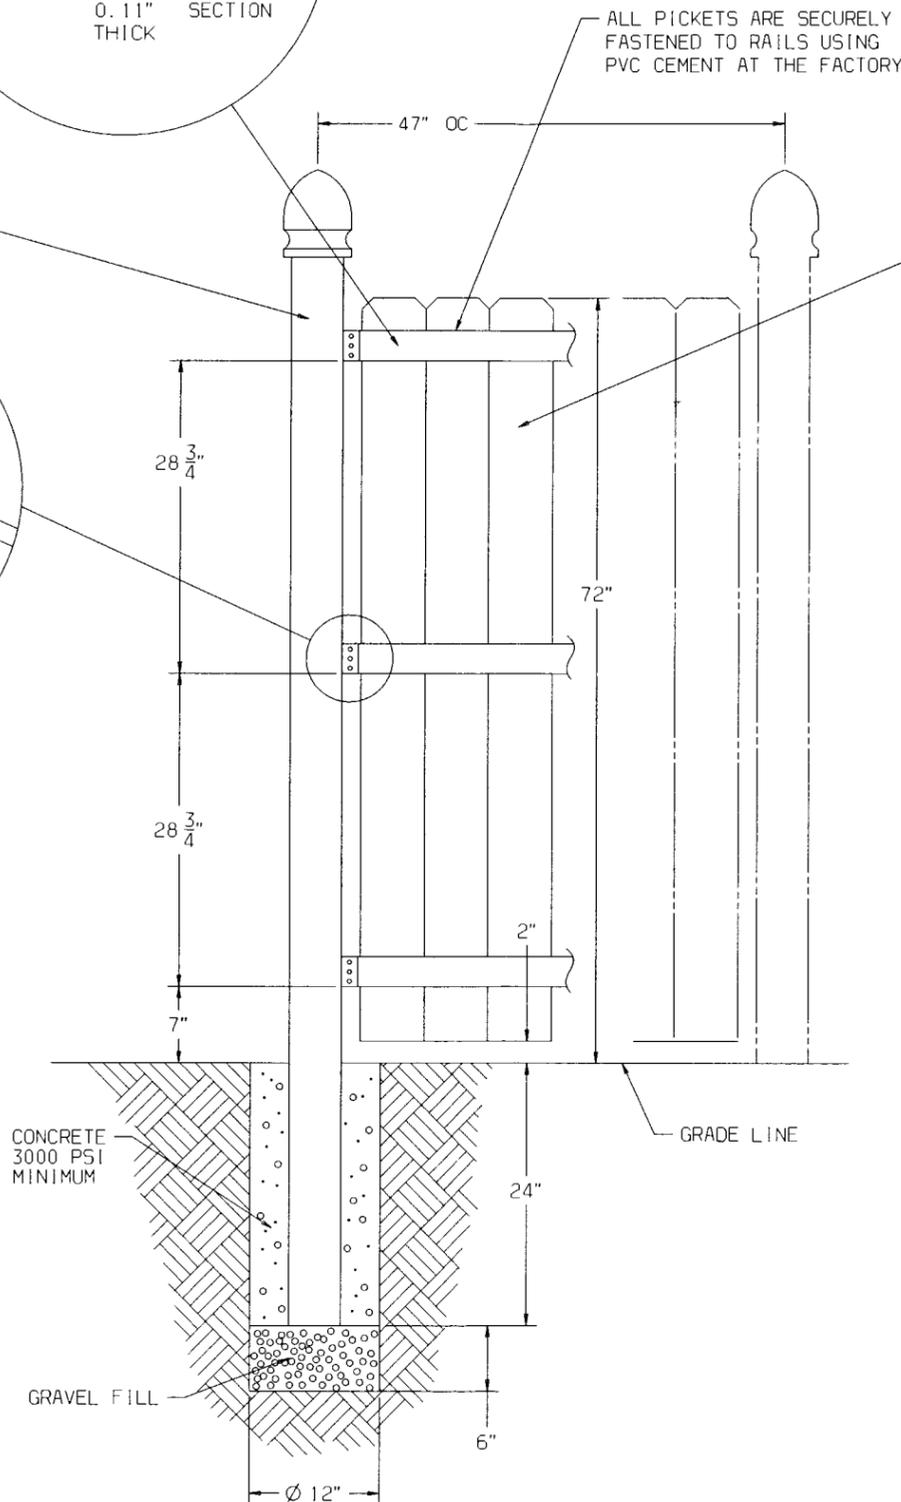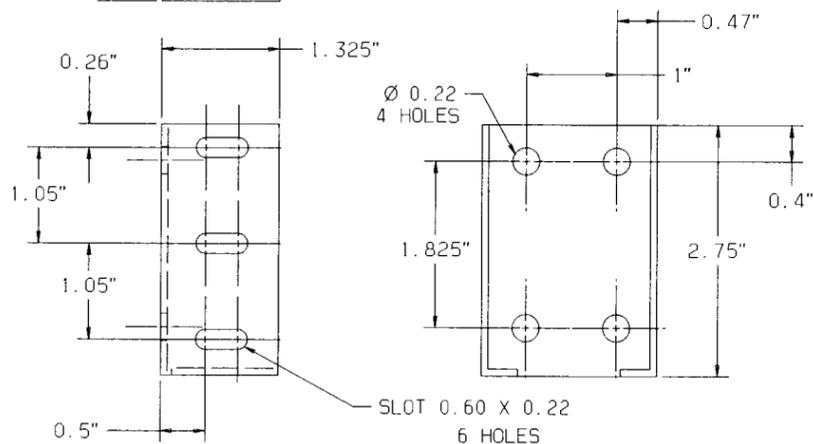

ALL PICKETS ARE SECURELY
FASTENED TO RAILS USING
PVC CEMENT AT THE FACTORY

THIS FENCE, ITS VERTICAL SUPPORTS AND
FOUNDATIONS ARE IN COMPLIANCE WITH
THE FLORIDA BUILDING CODE SECTION 1619.2

PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40212-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (± 0.02) 0.125" Specimen	1.46	D-792
Izod impact FT+lbs/in notch	17.0	* D-792
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celcius	72	D-648
Tio2 - Titanium Dioxide UV Inhibitor	10/100	-



PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 02-0603.09
Expiration Date 10/04/2006
By *Halima A. Miller*
Miami Dade Product Control
Division

PVC FENCE
AMERICAN DOGEAR

DRAWING NO: USF1
SHEET 2 OF 5
05-21-02


U.S. FENCE
MIDDLEBURG HEIGHTS, OH

Robert F. Robins
6/17/02

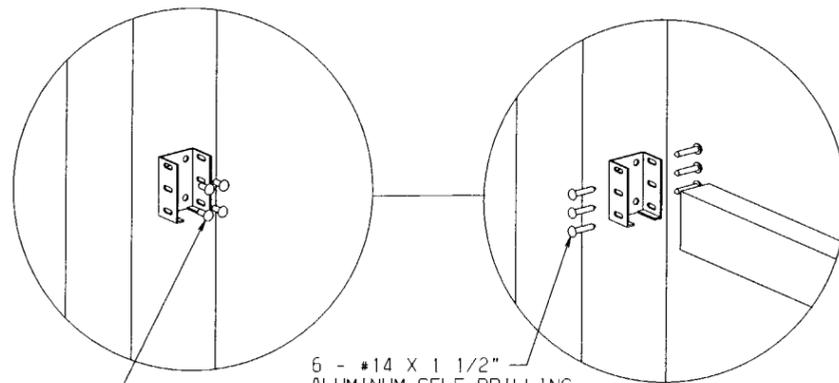
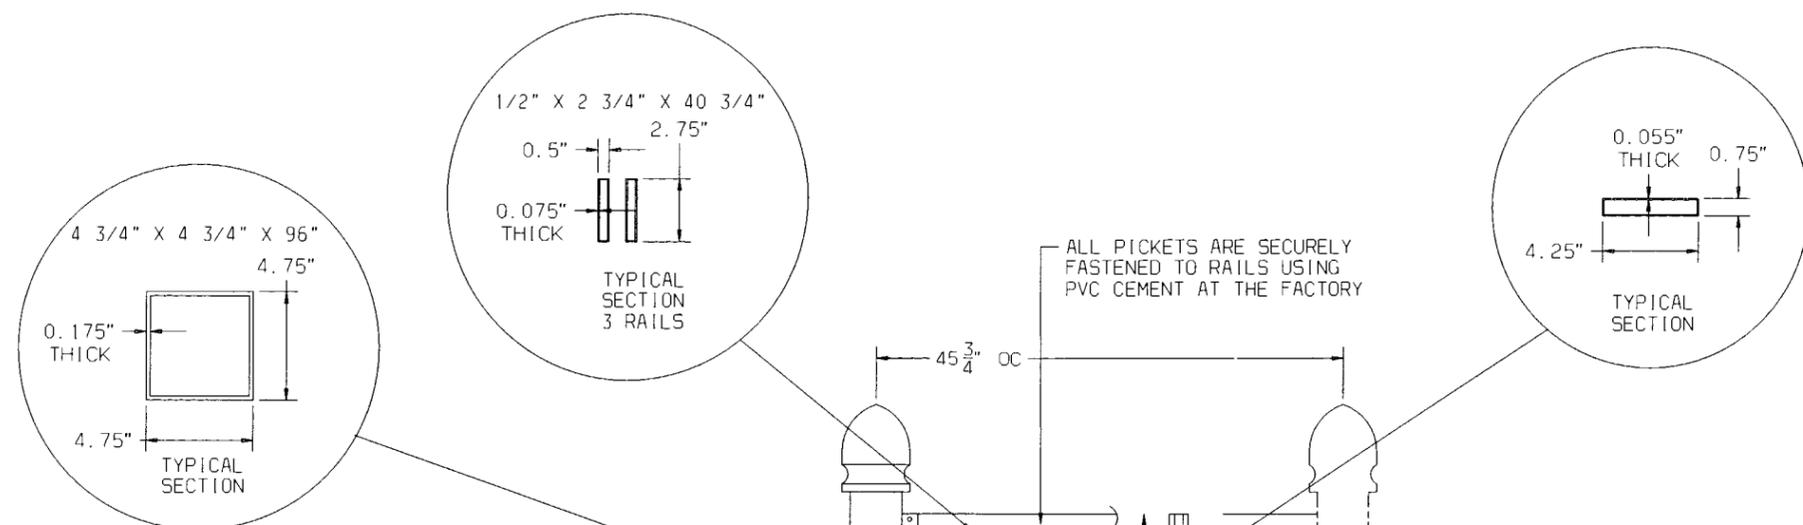


4 - #14 X 3/4"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE

6 - #14 X 1 1/2"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE
THREE EACH SIDE OF THE
RAIL, OFFSET

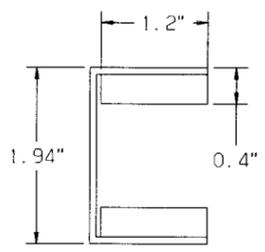

FENCE RAIL HANGER
ALUMINUM ALLOY (3003-H14)
0.75 THICK (GAGE)
WHITE POWDER COATING

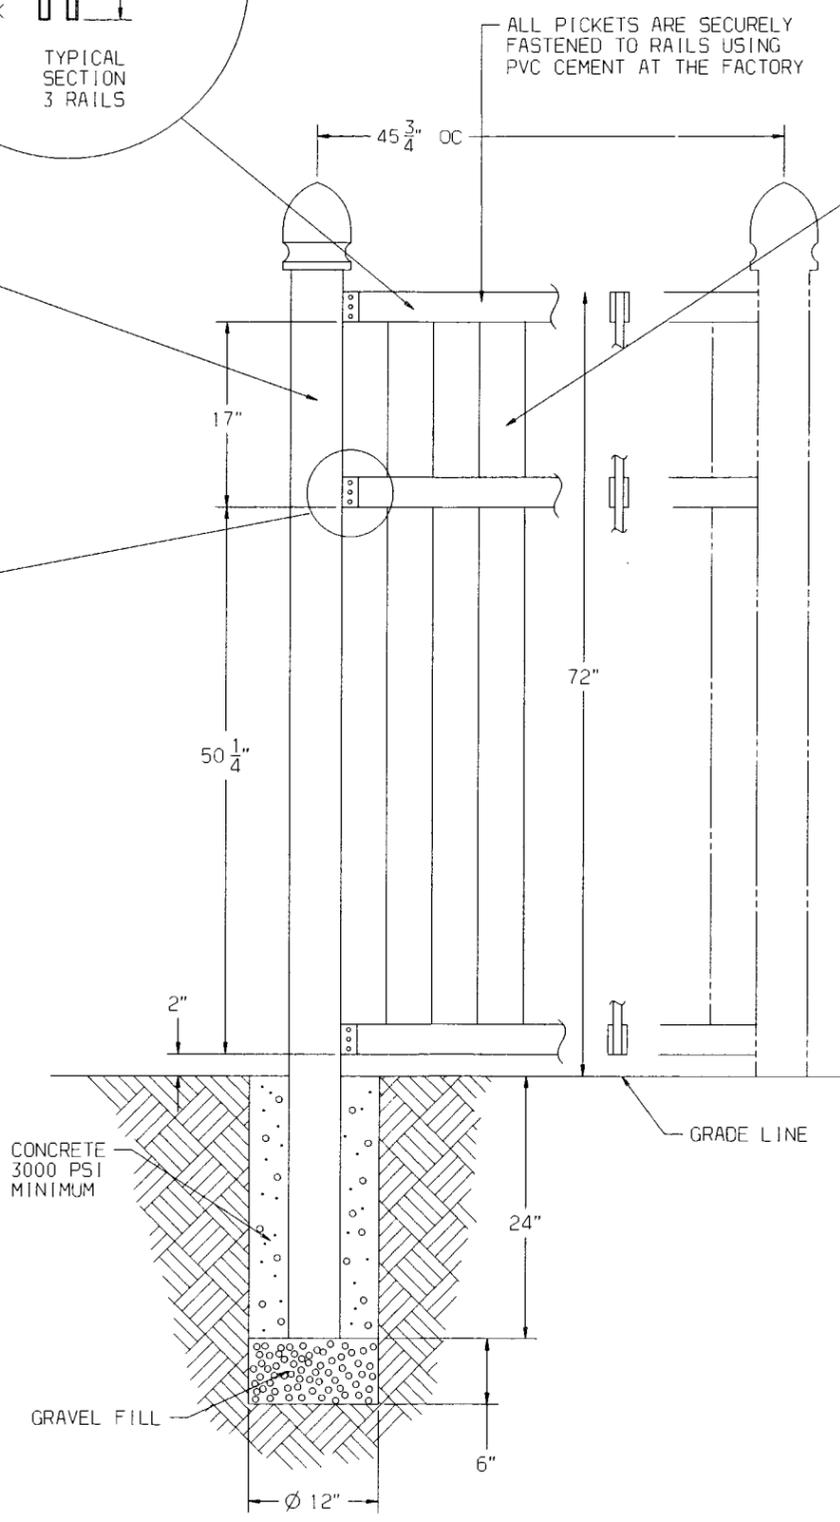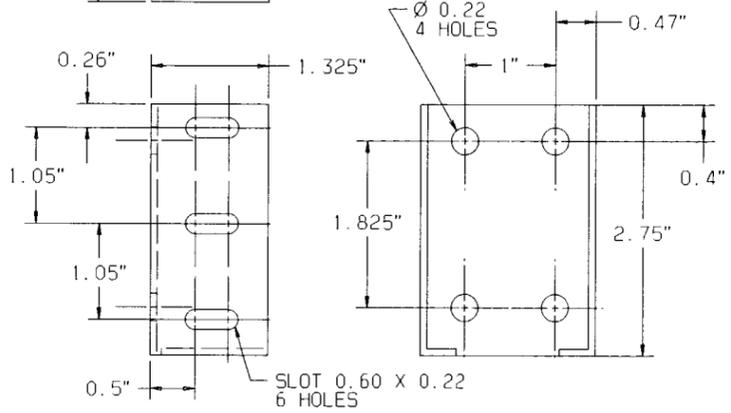

ALL PICKETS ARE SECURELY
FASTENED TO RAILS USING
PVC CEMENT AT THE FACTORY

THIS FENCE, ITS VERTICAL SUPPORTS AND
FOUNDATIONS ARE IN COMPLIANCE WITH
THE FLORIDA BUILDING CODE SECTION 1619.2

PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40212-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (± 0.02) 0.125" Specimen	1.46	D-792
Izod impact FT*lbs/in notch	17.0	D-792
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celcius	72	D-648
Tio2 - Titanium Dioxide UV Inhibitor	10/100	-



PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-0603.09
Expiration Date 10/04/2006
By *Helmut A. Mahr*
Miami Data Product Control
Division

PVC FENCE
ESTATE BOARD


DRAWING NO: USF1
SHEET 3 OF 5
05-21-02
U.S. FENCE
MIDDLEBURG HEIGHTS, OH

ROBERT F. ROBINS
FLORIDA P.E. #52401


Robert F. Robins
6/17/02

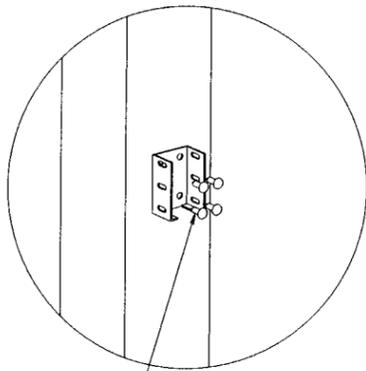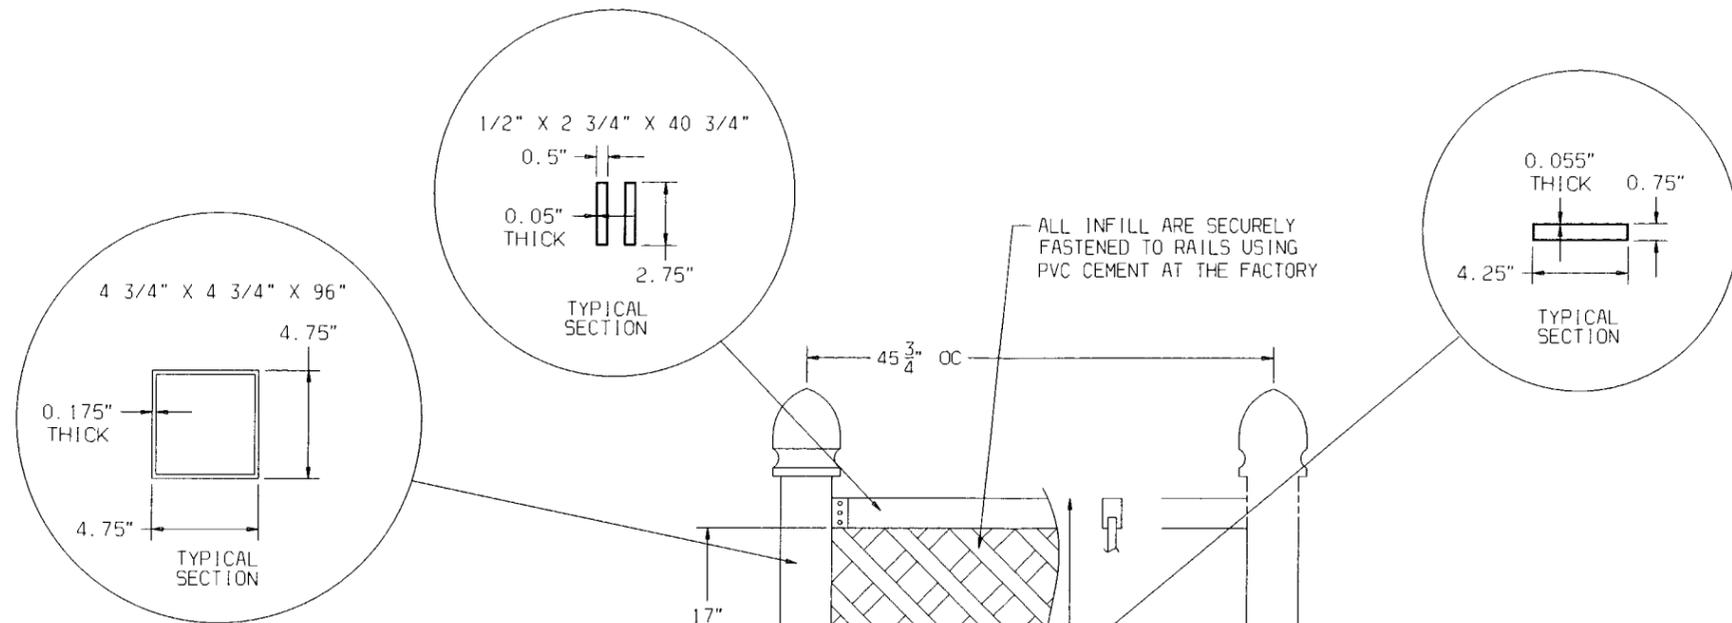




4 - #14 X 3/4"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE

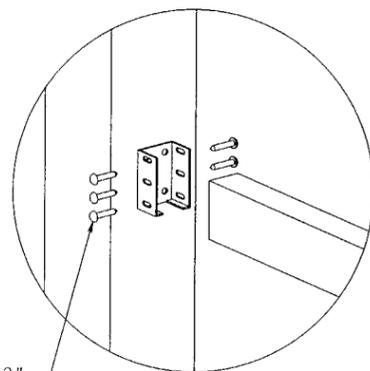

6 - #14 X 1 1/2"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE
THREE EACH SIDE OF
THE RAIL

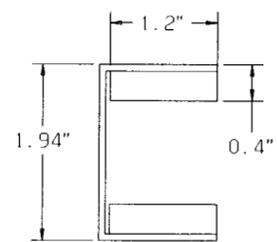

FENCE RAIL HANGER
ALUMINUM ALLOY (3003-H14)
0.75 THICK (GAGE)
WHITE POWDER COATING

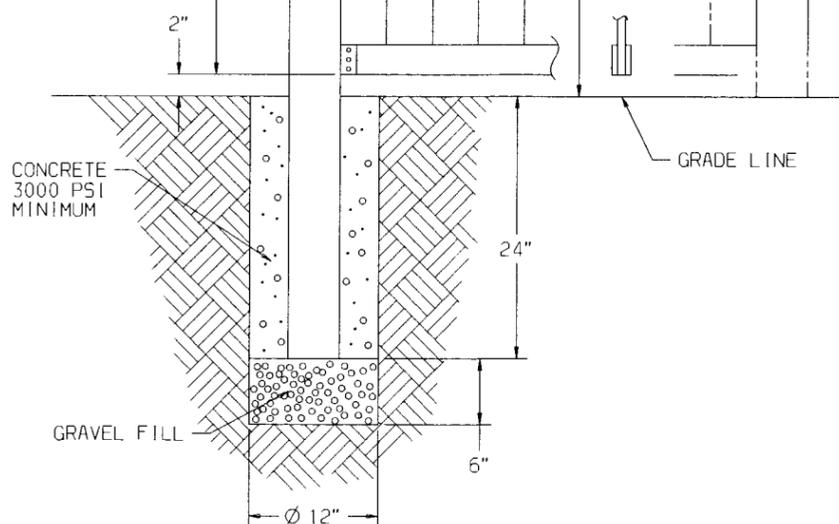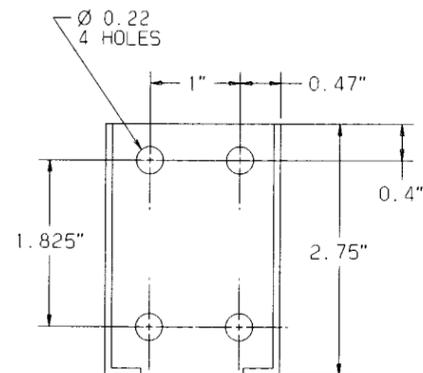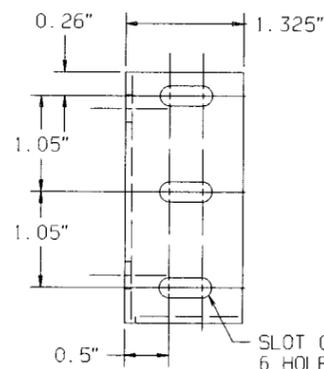

THIS FENCE, ITS VERTICAL SUPPORTS AND FOUNDATIONS ARE IN COMPLIANCE WITH THE FLORIDA BUILDING CODE SECTION 1619.2

PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40212-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (±0.02) 0.125" Specimen	1.46	D-792
Izod impact FT*lbs/in notch	17.0	D-792
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celcius	72	D-648
Tio2 - Titanium Dioxide UV Inhibitor	10/100	-






PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 02-0603.09
Expiration Date 10/01/2006
By *Helmut A. Miller*
Miami Dade Product Control
Division

PVC FENCE
LATTICE TOP

DRAWING NO: USF1
SHEET 4 OF 5
05-21-02


U. S. FENCE
MIDDLEBURG HEIGHTS, OH

Robert F. Robins
617102

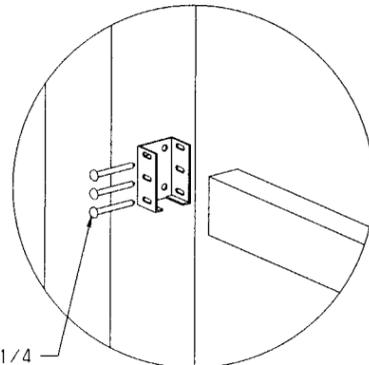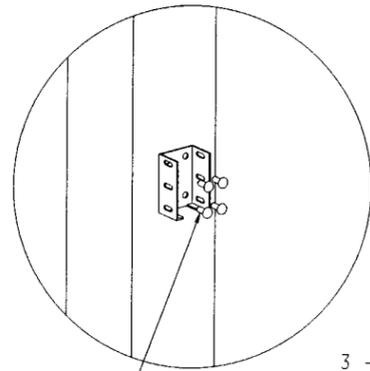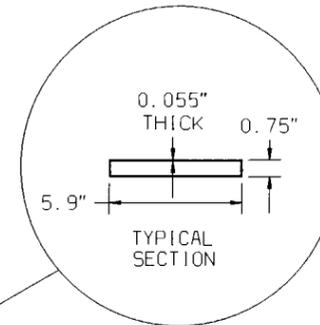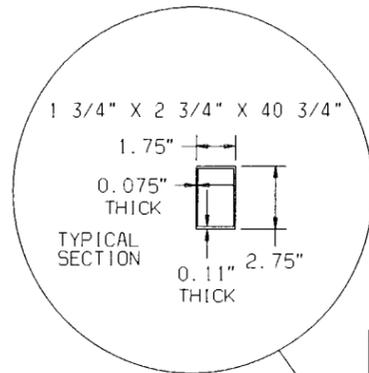
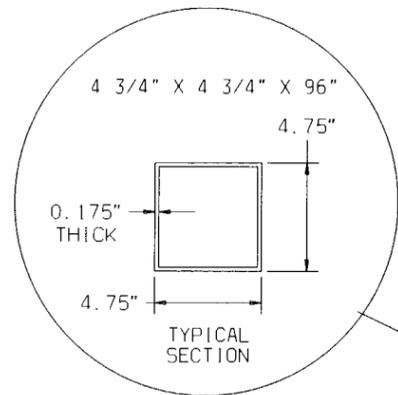


4 - #14 X 3/4"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE

3 - #14 X 2 1/4"
ALUMINUM SELF-DRILLING
PANHEAD SQUARE DRIVE
FROM BACKSIDE ONLY

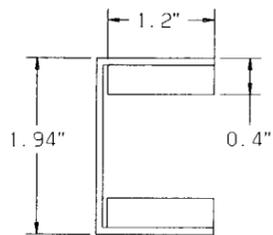

FENCE RAIL HANGER
ALUMINUM ALLOY (3003-H14)
0.75 THICK (GAGE)
WHITE POWDER COATING

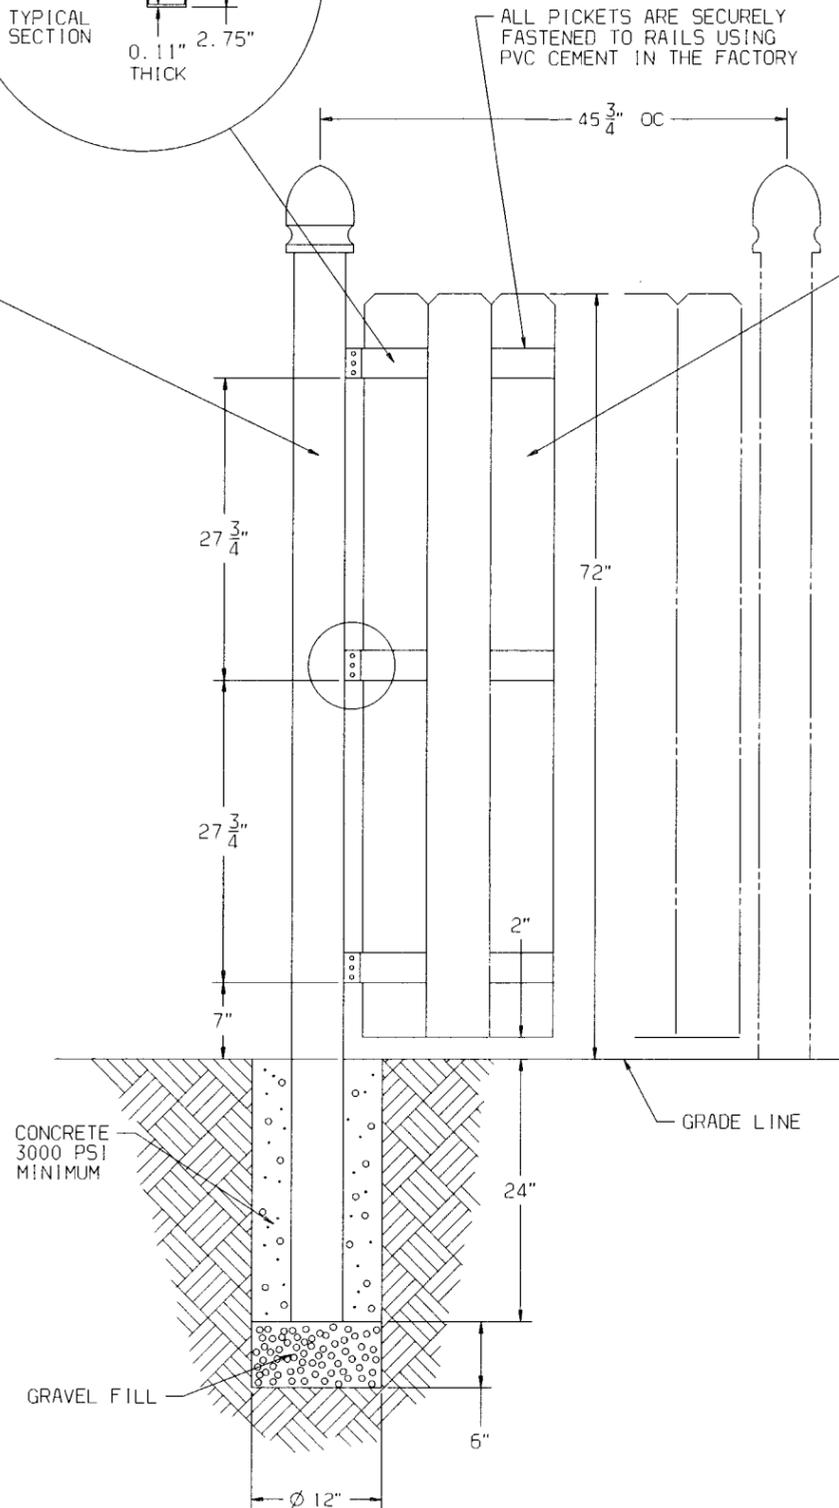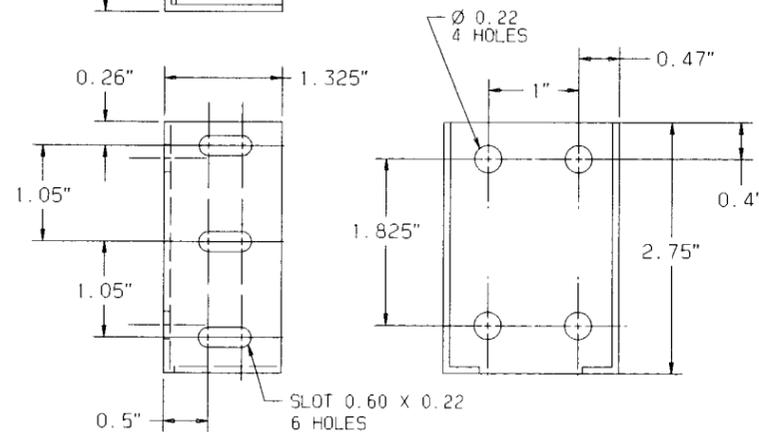

ALL PICKETS ARE SECURELY
FASTENED TO RAILS USING
PVC CEMENT IN THE FACTORY

THIS FENCE, ITS VERTICAL SUPPORTS AND
FOUNDATIONS ARE IN COMPLIANCE WITH
THE FLORIDA BUILDING CODE SECTION 1619.2

PVC MATERIAL SPECIFICATIONS

ASTM Cell Classification	1-40212-13-0101	(D4216)
Specifications	Value	ASTM
Specific Gravity (± 0.02) 0.125" Specimen	1.46	D-792
Izod impact FT*lbs/in notch	17.0	D-792
Tensile Yield Strength, PSI	6,200	D-638
Tensile Modulus, PSI	365,000	D-638
Flexural Yield Strength, PSI	12,000	D-790
Flexural Modulus, PSI	410,000	D-790
DTUL@264 PSI, Degrees Celcius	72	D-648
Tio2 - Titanium Dioxide UV Inhibitor	10/100	-

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 02-0603.09
Expiration Date 10/02/2006
By *Helmut A. Miller*
Miami Dade Product Control
Division

PVC FENCE
DOGEARED SHADOWBOX

DRAWING NO: USF1
SHEET 5 OF 5
05-21-02

U.S. FENCE
MIDDLEBURG HEIGHTS, OH