



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908**

NOTICE OF ACCEPTANCE (NOA)

**Hanson Roof Tile d.b.a. Pioneer Concrete Tile
1340 SW 34th Ave
Deerfield Beach, FL 33442**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by the BCCO and accepted by the Building Code and Product Review Committee to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The BCCO (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BCCO reserves the right to revoke this acceptance, if it is determined by BCCO that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the South Florida Building Code, 1994 Edition for Miami-Dade County or Florida Building Code.

DESCRIPTION: Barrel Roof Tile

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of pages 1 through 5.
The submitted documentation was reviewed by Frank Zuloaga, RRC



**NOA No.: 02-0709.06
Expiration Date: 12/16/02
Approval Date: 08/22/02
Page 1 of 5**

ROOFING ASSEMBLY APPROVAL

Category: Roofing
Sub Category: Roofing Tile
Materials: Concrete

1. SCOPE

This renews a roofing system using **Hanson ‘Barrel’ Concrete Roof Tile**, as manufactured by Hanson Roof Tile d.b.a. Pioneer Concrete Tile described in Section 2 of this Notice of Acceptance. For the locations where the pressure requirements, as determined by applicable building code do not exceed the values listed in section 4 herein. The attachment calculations shall be done as a moment based system.

2. PRODUCT DESCRIPTION

<u>Manufactured by Applicant</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Hanson Barrel Tile	Length: 18" Width: 9-½" Varying thickness	TAS 112	High profile, two-piece, extruded concrete roof tile. For mortar set or adhesive set applications.
Trim Pieces	Length: varies Width: varies Varying thickness	TAS 112	Accessory trim, concrete roof pieces for use at hips, rakes, ridges and valley terminations. Manufactured for each tile profile.

2.1 Components or products manufactured by others

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>	<u>Manufacturer</u>
#30 Felt	N/A	ASTM D 226 Type II	Saturated organic felt to be used as a nailed anchor sheet.	Generic (With current NOA)
#43 Coated Base Sheet	N/A	ASTM D 2626	Saturated and coated organic base sheet for single or double ply underlayment.	Generic (With current NOA)
Mineral Surface Cap Sheet	N/A	ASTM D 249	Mineral surfaced asphalt roll roofing for use as a top ply in a double ply underlayment system.	Generic (With current NOA)
Lenzingtex-ZB 140 Underlayment	59" x 164' roll 22 lbs./roll	TAS 104	Single ply, nail-on underlayment.	Lenzing Performance, Inc. (With current NOA)



NOA No.: 02-0709.06
Expiration Date: 12/16/02
Approval Date: 08/22/02
Page 2 of 5

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>	<u>Manufacturer</u>
Rainproof II	30" x 75' roll 36" x 75' roll or 60" x 75' roll	TAS 104	Single ply, nail-on underlayment with 2" self-adhering top edge.	Protect-O-Wrap, Inc. (With current NOA)
Ice and Water Shield	36" x 75' roll	TAS 103	Self-adhering underlayment for use as a top ply in a two-ply underlayment system with Approved #30 or #43 as the base layer.	W.R. Grace Co. (With current NOA)
Roof Tile Mortar ("TileTite™")	N/A	TAS 123	Prepared mortar mix designed for mortar set roof tile applications.	Bermuda Roof Company, Inc. (With current NOA)
Roof Tile Adhesive ("Polypro® AH160")	N/A	See NOA	Two-component polyurethane adhesive designed for adhesive set roof tile applications.	Polyfoam Products, Inc. (With current NOA)
Tile-Bond	Factory premixed canisters	See NOA	Single component polyurethane foam roof tile adhesive	Flexible Products (With current NOA)

3. LIMITATIONS

- 3.1 Fire classification is not part of this acceptance.
- 3.2 For mortar or adhesive set tile applications, a static field uplift test in accordance with RAS 106 may be required, refer to applicable building code.
- 3.3 Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with TAS 112, appendix 'A'. Such testing shall be submitted to the Building Code Compliance Office for review.
- 3.4 Minimum underlayment shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- 3.5 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- 3.6 This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with applicable building code.



4. INSTALLATION

4.1 Hanson Barrel Concrete Roof Tile and its components shall be installed in strict compliance with Roofing Application Standard RAS 120.

4.2 Data For Attachment Calculations

Table 1: Aerodynamic Multipliers - λ (ft³)	
Tile Profile	λ (ft³) Direct Deck Application
Hanson Barrel Tile	0.263

Table 2: Restoring Moments due to Gravity - M_g (ft-lbf)					
Tile Profile	3": 12"	4": 12"	5": 12"	6": 12"	7": 12" or greater
Hanson Barrel Tile	6.80	6.70	6.56	6.39	6.21

Table 3: Attachment Resistance Expressed as a Moment - M_r (ft-lbf) For Single Patty Adhesive Set Systems		
Tile Profile	Tile Application	Minimum Attachment Resistance
Hanson Barrel Tile	Polyfoam PolyPro™	133 (Concrete tile) ⁵
	Flexible TileBond	84 (Concrete tile) ⁶
5 Place 23 grams per pan and 23 grams per cap of PolyPro™.		
6 Place 11.8 grams per pan and 11.6 grams per cap of TileBond.		

Table 3A: Attachment Resistance Expressed as a Moment - M_r (ft-lbf) For Mortar Set Systems		
Tile Profile	Tile Application	Attachment Resistance
Hanson Barrel Tile	Mortar Set ¹	24.5

5. LABELING

All tiles shall bear the imprint or identifiable marking of the manufacturer's name or logo, or following statement: "Miami-Dade County Product Control Approved".

6. BUILDING PERMIT REQUIREMENTS

6.1 Application for building permit shall be accompanied by copies of the following:


6.1.1 This Notice of Acceptance.

6.1.2 Any other documents required by the Building Official or applicable building code in order to properly evaluate the installation of this system.



PROFILE DRAWINGS

HANSON BARREL CONCRETE ROOF TILE

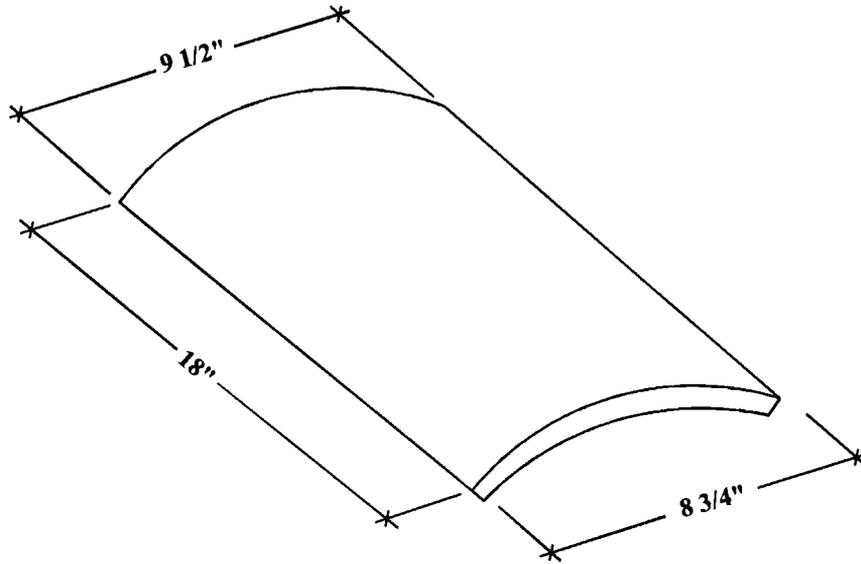

BARREL TILE

END OF THIS ACCEPTANCE



NOA No.: 02-0709.06
Expiration Date: 12/16/02
Approval Date: 08/22/02
Page 5 of 5