



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908**

NOTICE OF ACCEPTANCE (NOA)

**Rmax, Inc.
13524 Welch Road
Dallas, TX 75244**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Rigid Polyisocyanurate Foam Sheathing

APPROVAL DOCUMENT: Drawing No. **TSDS**, titled "Properties of Polyisocyanurate Foam Insulation", sheets 1 of 1, prepared by Rmax Inc, dated 4/27/99, bearing the Miami-Dade County Product Control Approval stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: None

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 98-1110.01** and, consists of this page 1 as well as approval document mentioned above. The submitted documentation was reviewed by **Candido Font, P.E.**




**NOA No 02-0719.09
Expiration Date: July 8, 2007
Approval Date: August 22, 2002
Page 1**

RMAX POLYISOCYANURATE INSULATION PROPERTIES

DESCRIPTION	TEST	RESULT	TYPICAL CONSTRUCTION
-------------	------	--------	----------------------

Density (0.75")	ASTM D-1622 *	1.97 pcf
Compressive Strength (1.3")	ASTM D-1621 *	25.0 psi
Water Absorption By Volume (0.75")	ASTM C-209 *	0.28%
Dimensional Stability 14 Days Exposure	ASTM D-2126 *	
@ 70° C/97% RH (1.3")		3.61% by volume
@ -40° C/amb RH (1.3")		-0.18% by volume
@ 93° C/amb RH (1.3")		-0.03% by volume
Flame Spread (4.0" Foam core)	ASTM E-84 *	15
Smoke Density (4.0" Foam core)	ASTM E-84 *	85
Self Ignition Temp (4.0" Foam core)	ASTM D-1929 *	1031 °F
Thermal Resistance @ 75 F (0.75")	ASTM C-518 *	4.6 h ft ² F/Btu
Water Vapor Transmission (0.75")	ASTM E-96 *	0.027 perms

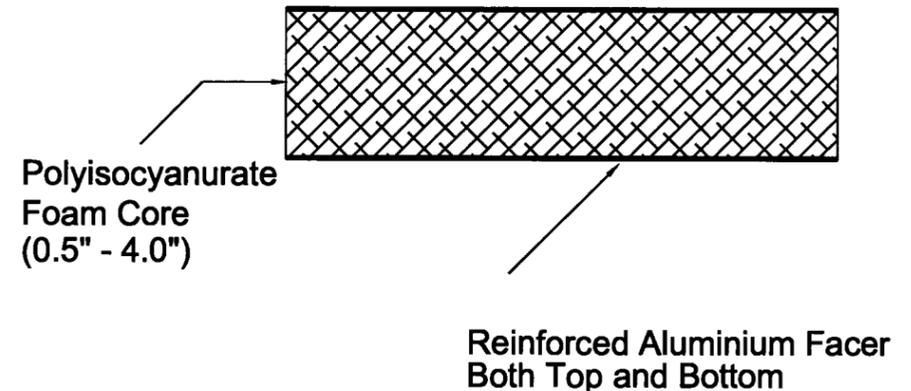

NUMBER IN PARENTHESES REPRESENTS THE THICKNESS OF THE SPECIMEN TESTED.

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE July 09 1999
BY [Signature]
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 98-1110-01

PRODUCT REVIEWED
as required by the Florida
Building Code
Acceptance No. 02-071909
Deployment Date 01/09/01
[Signature]
Product Control
Division

General Notes:

1. Rmax insulative sheathing is manufactured to meet the physical property requirements of ASTM C1289 Type I Class I.
2. Application of this product shall comply with all pertinent sections of the South Florida Building Code in particular Section 3505.3.
3. Installations using these products must be fully protected on the interior side of walls and roofs by a minimum 1/2 inch gypsum board or other suitable thermal barrier.
4. This product has not been evaluated for outdoor exposure, it is designed to be protected from the elements at all times by siding materials of wood, wood-based products, hardboard, aluminum, vinyl, brick or stucco veneers.

Rmax, Inc.		13524 Welch Rd. Dallas, TX 75244
Title: Properties of Polyisocyanurate Foam Insulation		
Products: Rmax Foil Faced Polyisocyanurate Sheathing		
Checked By:	Scale: None	Date: 4/27/99
Revision: 1st Release	Drawing:	
Date: 4/27/99	TSDS	Page 1 of 1