



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908**

NOTICE OF ACCEPTANCE (NOA)

**Jeld-Wen, Inc.
31725 Highway 97 North
Chiloquin, OR 97624**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: The Jeld-Wen Series "Nord/Morgan"- Outswing Single Opaque Wood Door w/wo Sidelites & Bolts

APPROVAL DOCUMENT: Drawing No. S-2033, titled "Wood stile & rail door Opaque 6-8/8-0" Sheets 1 through 9 of 9, prepared by R. W. Building Consultant Inc dated 07/19/00 and last revised on 08-27-02 by manufacturer, bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: None

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises and replaces NOA # 00-0915.05 and, consists of this page 1 as well as approval document mentioned above.

The submitted documentation was reviewed by **Ishaq I. Chanda, P. E.**



**NOA No 02-0722.12
Expiration Date: August 23, 2004
Approval Date: September 19, 2002
Page 1**

Nord/Morgan/Nicolai Wood Door

6-8 AND 8-0 OPAQUE OUTSWING
SINGLE DOOR W/ AND W/O SIDELITES

GENERAL NOTES

1. THIS PRODUCT IS DESIGNED TO MEET THE SOUTH FLORIDA BUILDING CODE 1994 EDITION FOR MIAMI-DADE COUNTY.
2. WOOD BUCKS BY OTHERS, MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
3. PRODUCT ANCHORS SHALL BE AS LISTED AND SPACED AS SHOWN ON DETAILS. ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.
4. IMPACT RESISTANT SHUTTERS ARE REQUIRED
5. DESIGNED PRESSURE RATING SEE TABLE PAGE 1.
6. SIDELITES ARE AN OPTION AND CAN BE IN A SINGLE OR DOUBLE CONFIGURATION.

RESIDENTIAL STILE & RAIL WOOD DOOR (Common to all frame conditions)

Frame Construction: The head and side jambs are finger jointed ponderosa pine measuring 4.5625" X 1.25". The head and side jambs are mortised, butted and joined using (3) 16GA. 2" X 1/2" crown staples at the top corners. The bump threshold is attached to the floor.

Door Panel Construction: The panel is a stile and rail construction. The stiles and rails are constructed from solid wood of either Douglas Fir or Western Hemlock. They are laminated with a .0625" thk. wood veneer of the following species: Douglas Fir, Western Hemlock, Ponderosa Pine, Northern Red Oak, Red Maple, Black Cherry, Yellow Poplar, True Hickory, True Mahogany, Black Walnut, & Red Alder. The veneer face sheet is glued to the stiles and rails. The top and intermediary rails are connected to the perimeter stiles w/(2) 1/2" min. dia. x 4" long wooden dowels and the bottom rail is connected to the perimeter stile w/(3) 1/2" dia. min. x 4" long wooden dowels. The inset panels are of Ponderosa Pine or Douglas Fir and are glued into the stiles and rails.


Sidelite Construction: Panel is a stile and rail construction same as the door panel. The glazing is captured between the wood cap on the exterior and the wood glass stop on the interior. It is wet glazed using PRC 365 silicone.

TABLE OF CONTENTS


SHEET #	DESCRIPTION
1	COMMON (GENERAL NOTES, TYPICAL ELEVATION)
2	VERTICAL CROSS SECTIONS & B.O.M.
3	HORIZONTAL CROSS SECTIONS 1/3, 2/3, 3/3 & 4/3
4	HORIZONTAL CROSS SECTIONS 1/4, 2/4 & 3/4
5	ANCHORING LOCATIONS, SINGLE W/(2) SL & DETAILS
6	ANCHORING LOCATIONS SINGLE & SINGLE W/(1) SL
7	GLAZING DETAILS & RAIL DETAILS
8	FRAME COMPONENTS
9	DOOR MODELS

DESIGN PRESSURE RATING


	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED	
6-8 MODELS	+60.0psf	-70.0psf
8-0 MODELS W/OUT BOLT	+55.0psf	-55.0psf
8-0 MODELS W/BOLTS	+60.0psf	-70.0psf

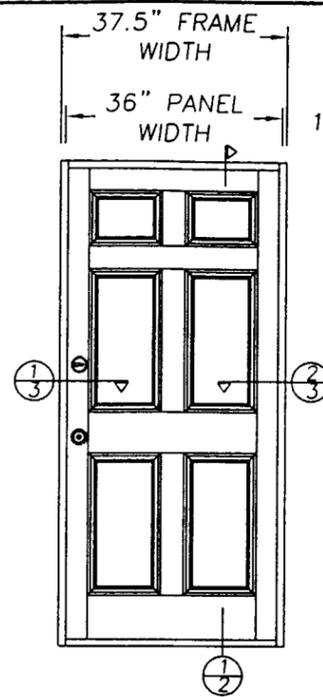

6-8 SINGLE ELEVATION

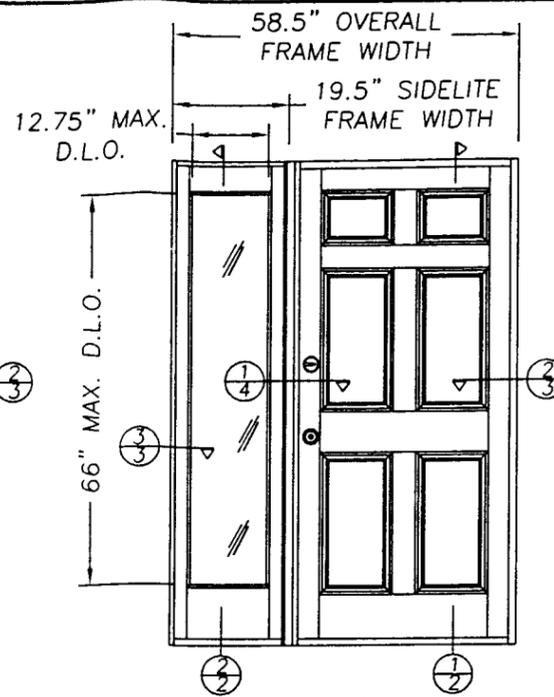


6-8 SINGLE W/(1) SIDELITE ELEVATION

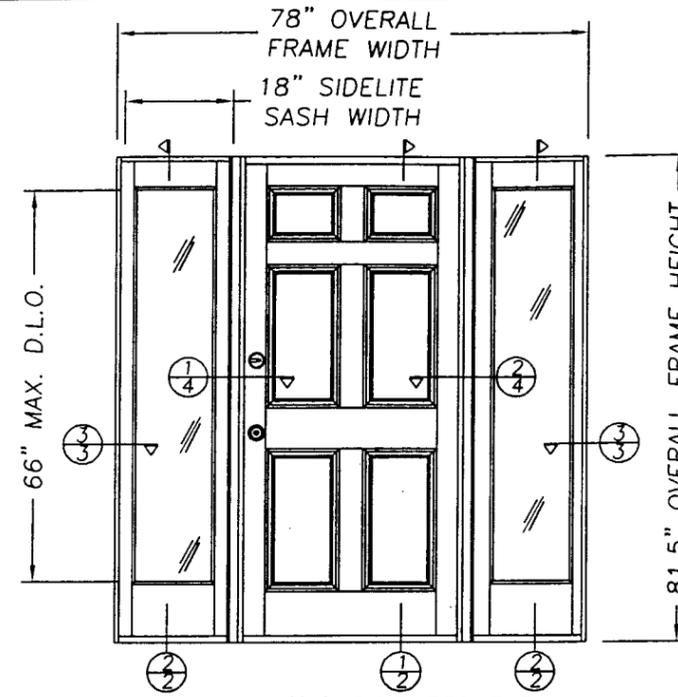


6-8 SINGLE W/(2) SIDELITES ELEVATION


ALL 6-8 MODELS ARE VIEWED FROM INTERIOR

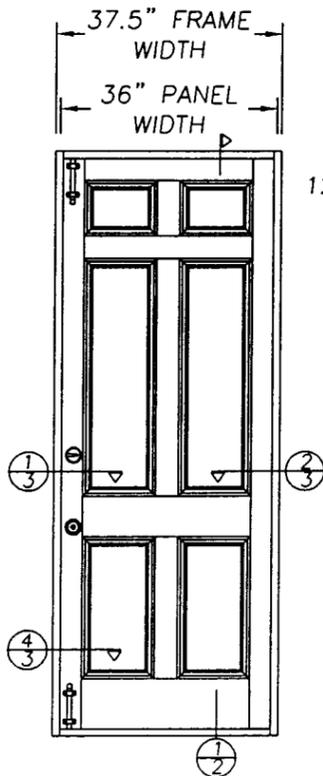

8-0 SINGLE ELEVATION

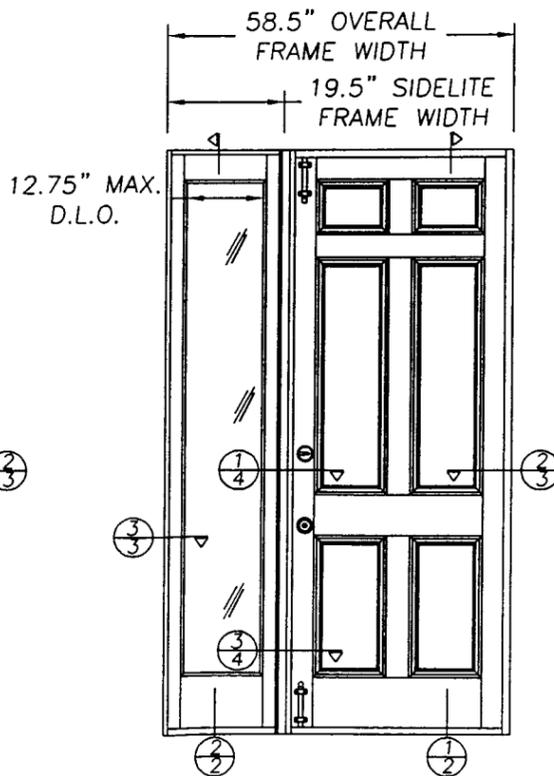

8-0 SINGLE W/(1) SIDELITE ELEVATION

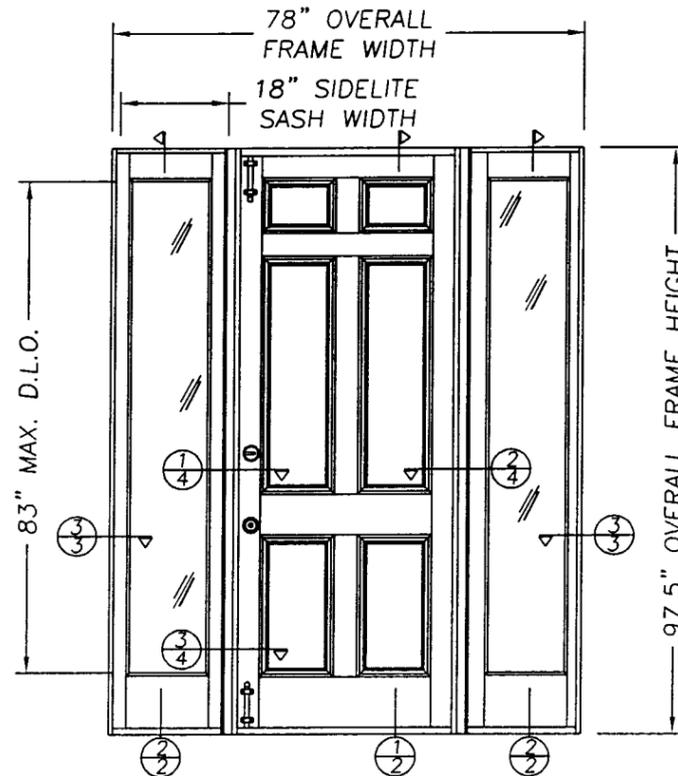

8-0 SINGLE W/(2) SIDELITES ELEVATION

ALL 8-0 MODELS ARE VIEWED FROM INTERIOR
THE SURFACE BOLTS ARE AN OPTION
USED TO ACHIEVE A HIGHER PRESSURE
SEE SHEET 3 SECTION 4/3 AND SHEET 4
SECTION 3/4 FOR SURFACE BOLT OPTIONS

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 02-0722-12
Expiration Date AUG 23, 2004
By Shag I. Chaudh
Miami Dade Product Control
Division


JELD-WEN, INC.
31725 HIGHWAY 97 NORTH
CHILOQUIN, OR. 97624
PH. 541.783.2057

PRODUCT: WOOD STILE & RAIL DOOR
WOOD OPAQUE 6-8/8-0 OUTSWING
SINGLE W/&W/O SIDELITES
PART OR ASSEMBLY:
ELEVATIONS AND GENERAL NOTES

NO.	DATE	BY	REVISIONS
4	07/15/02	KMN	GENERAL REVISION
3	07/12/01	TJH	GENERAL REVISION
2	05/03/01	TJH	GENERAL REVISION
1	04/19/01	TJH	GENERAL REVISION

RW BUILDING
CONSULTANTS, INC.
813.684.3831

DATE: 7/19/00
SCALE: N.T.S.
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: S-2033
SHEET 1 OF 9

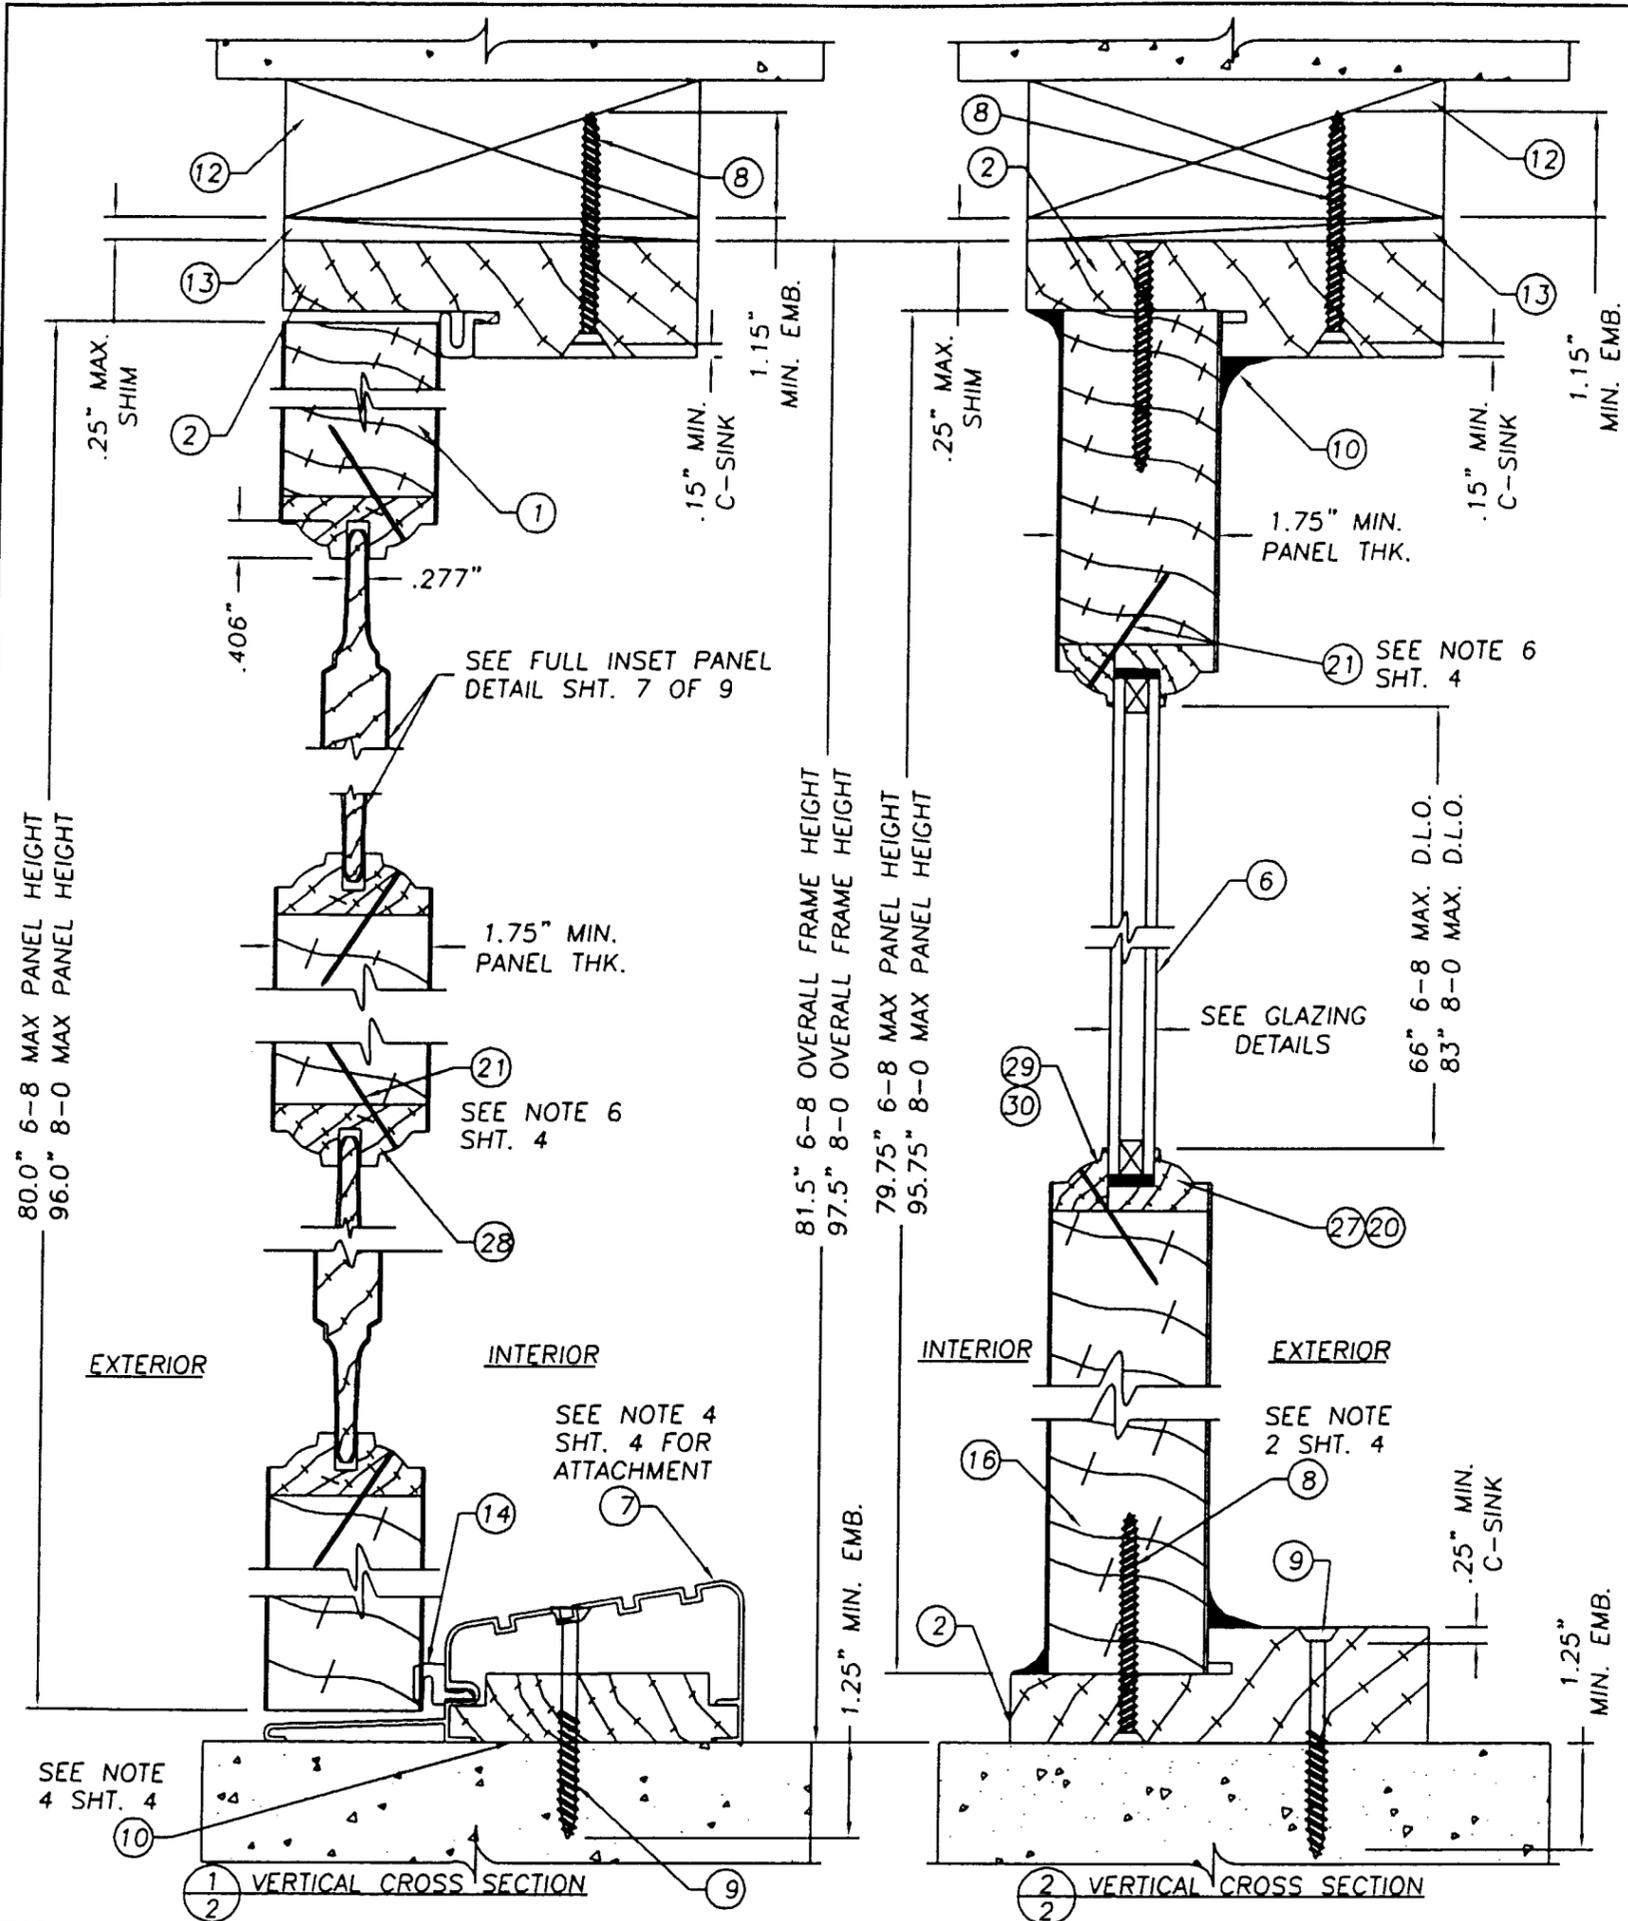

Item	DESCRIPTION	Material
1	NORD/MORGAN/NICOLAI STILE & RAIL 6-8/8-0 WOOD DOOR (DOUGLAS FIR, WESTERN HEMLOCK, PONDEROSA PINE, NORTHERN RED OAK, RED MAPLE, BLACK CHERRY, YELLOW POPLAR, TRUE HICKORY, TRUE MAHOGANY, BLACK WALNUT, & RED ALDER)	
2	HEAD JAMB (1 1/4" x 4 5/8" PONDEROSA PINE)	PINE
3	LATCH JAMB (1 1/4" x 4 5/8" PONDEROSA PINE)	PINE
4	HINGE JAMB (1 1/4" x 4 5/8" PONDEROSA PINE)	PINE
5	BLANK JAMB (1 1/4" x 4 5/8" PONDEROSA PINE)	WOOD
6	1/2" INSULATED TEMPERED GLASS (BY PPG)	GLASS
	1/8" TEMPERED GLASS (BY PPG)	GLASS
7	BUMPER THRESHOLD (.051" WALL EXTRUDED ALUM. IMPERIAL)	ALUMINUM
8	#8 x 2 1/2" PHILLIPS FLATHEAD WOOD SCREW	STEEL
9	1/4" x 2 3/4" LG. TAPCON OR ITW BUILDDEX TAPCON OR ELCO TAPCON	STEEL
10	SILICONE CAULK (CR LAWRENCE 33S)	SILICONE
11	NOT USED	-
12	2x WOOD BUCK	WOOD
13	1/4" MAX. SHIMS	WOOD
14	COMPRESSION WEATHERSTRIP (Q-LON QDS-650)	FOAM
15	#10 x 2" PHILLIPS FLATHEAD WOOD SCREW	STEEL
16	NORD/MORGAN/NICOLAI STYLE & RAIL 6-8/8-0 WOOD SIDELITE (DOUGLAS FIR, WESTERN HEMLOCK, PONDEROSA PINE & NORTHERN RED OAK)	
17	KWIKSET TITAN 400 SERIES LOCK	
18	1/4" x 1 3/8" WOOD MULLION CAP	PINE
19	LVL MULLION SPACER 5/8" x 4 9/16"	LVL
20	WOOD CAP FOR .50" THK. GLASS	PINE
21	BRAD TRIM NAIL 1 1/2" L.	STEEL
22	GLAZING COMPOUND (PRC 365 BY DE-SOTO INTER.)	SILICONE
23	4" x 4" BUTT HINGE 12GA. (.089" MIN)	STEEL
24	#9 x 1" PHILLIPS FLATHEAD WOOD SCREW	STEEL
25	#10 x 3" PHILLIPS FLATHEAD WOOD SCREW	STEEL
26	KWIKSET TITAN SERIES DEADBOLT	
27	WOOD CAP FOR .125" THK. GLASS	PINE
28	WOOD CAP FOR DOOR EMBOSS PANEL	PINE
29	WOOD GLASS STOP FOR .125" THK. GLASS	PINE
30	WOOD GLASS STOP FOR .50" THK GLASS	PINE
31	#10 x 2 1/2" PHILLIPS FLATHEAD WOOD SCREW	STEEL
32	BRAD TRIM NAIL 1" L.	STEEL
33	SURFACE BOLT (IVES, .25" STEEL)	STEEL
34	SURFACE BOLT STRIKE PLATE (IVES, .125" STEEL)	STEEL
35	1/4" CARRIAGE BOLT x 3" LG. (SURFACE BOLT ATTACH.)	STEEL
36	1/4" JAMB NUT (SURFACE BOLT ATTACH.)	STEEL

JELD-WEN, INC.
 31725 HIGHWAY 97 NORTH
 CHILOQUIN, OR. 97624
 PH. 541.783.2057

PRODUCT: WOOD STILE & RAIL DOOR
 WOOD STILE & RAIL DOOR
 OPAQUE 6-8/8-0 OUTSWING
 SINGLE W/&W/OUT SIDELITES
 PART OR ASSEMBLY:
 VERTICAL CROSS SECTION
 & BILL OF MATERIALS


NO.	DATE	REVISIONS	BY
6	08/27/02	GENERAL REVISION	KMN
5	08/26/02	GENERAL REVISION	KMN
4	07/15/02	GENERAL REVISION	KMN
3	07/12/01	GENERAL REVISION	TJH
2	05/03/01	GENERAL REVISION	TJH
1	04/19/01	GENERAL REVISION	TJH

RW BUILDING
 CONSULTANTS, INC.
 813.684.3831


PRODUCT REVISED
 as complying with the Florida
 Building Code
 Acceptance No. 02-0722-12
 Expiration Date AUG 23, 2004
 By Ishag I. Chanda
 Miami Dade Product Control
 Division

DATE: 7/19/00
 SCALE: 1/2" = 1"
 DWG. BY: TJH
 CHK. BY: RW
 DRAWING NO.: S-2033
 SHEET 2 OF 9


SEE NOTE 3
SHT. 4
.25" MAX.
SHIM

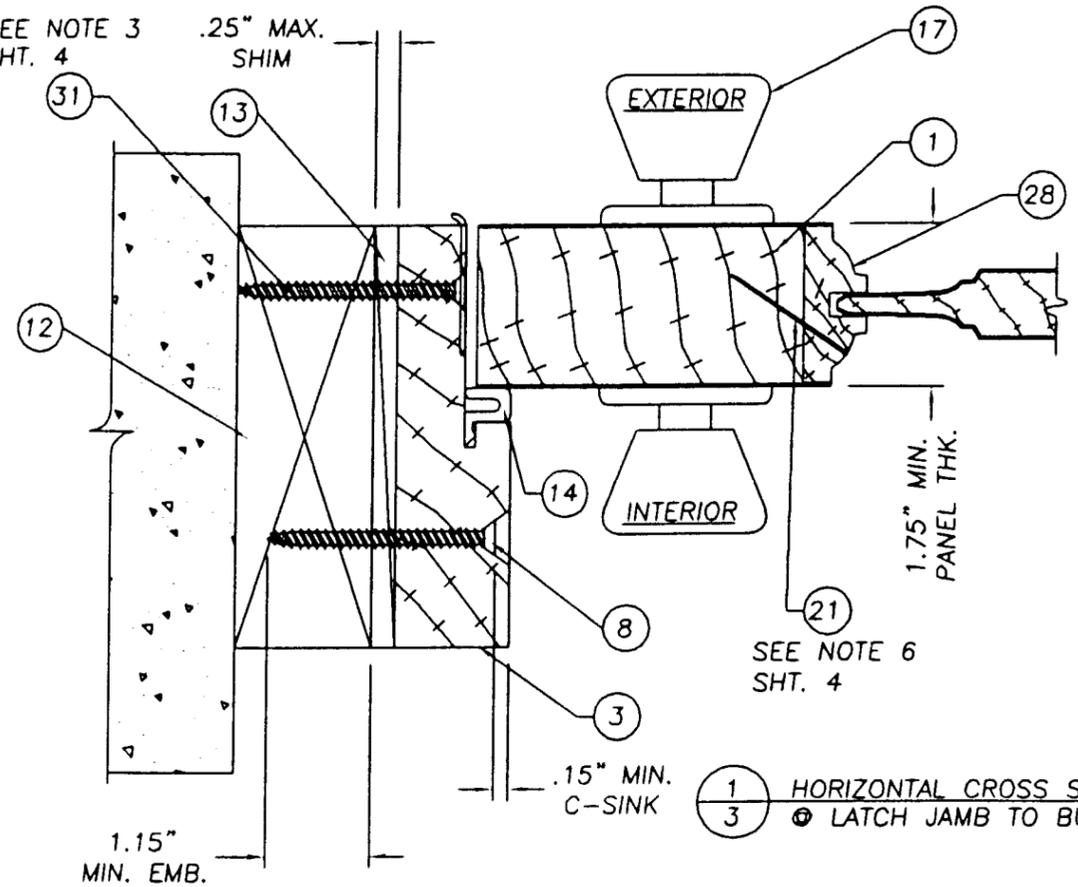


1 HORIZONTAL CROSS SECTION
3 @ LATCH JAMB TO BUCK

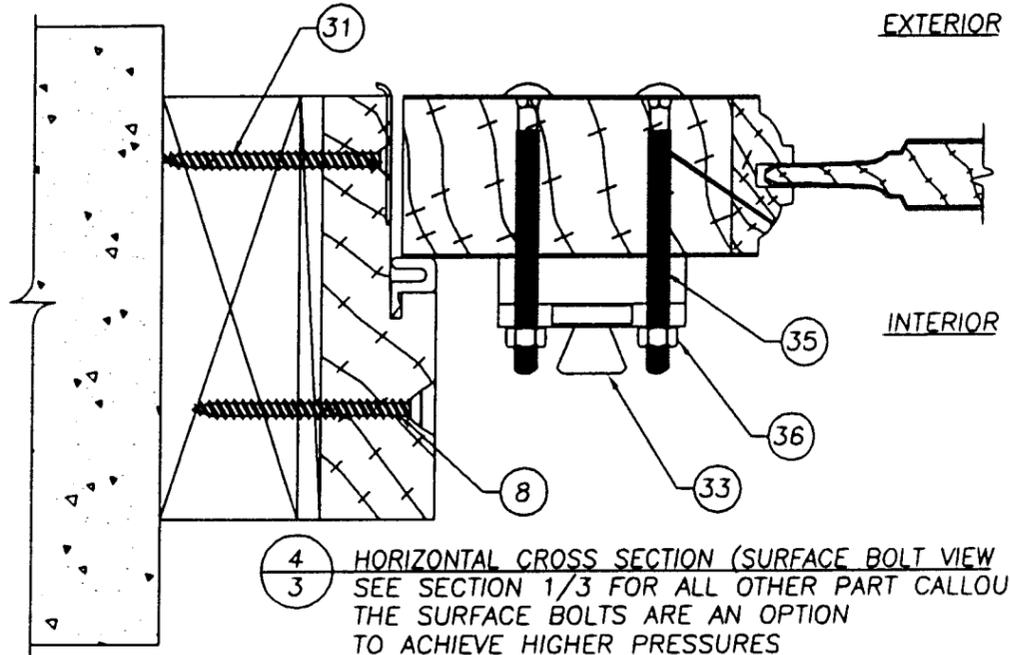

4 HORIZONTAL CROSS SECTION (SURFACE BOLT VIEW)
3 SEE SECTION 1/3 FOR ALL OTHER PART CALLOUTS)
THE SURFACE BOLTS ARE AN OPTION
TO ACHIEVE HIGHER PRESSURES
8-0 DOORS ONLY

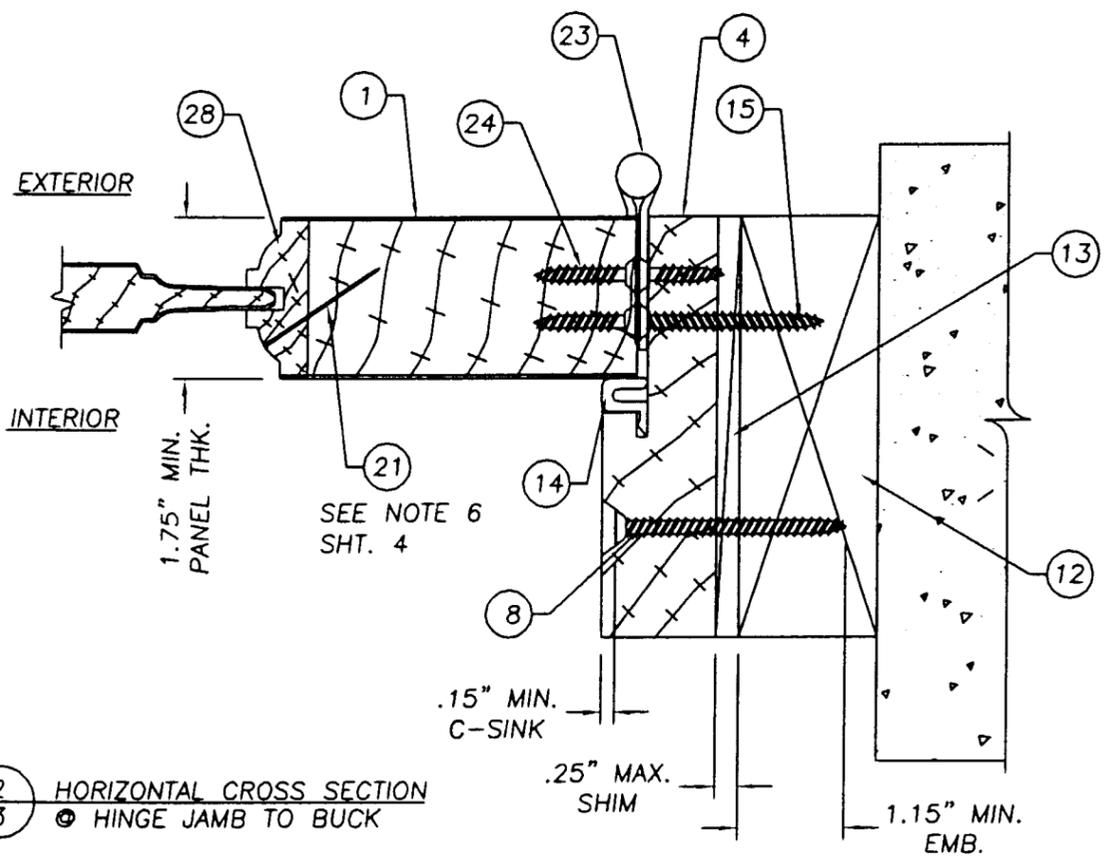

2 HORIZONTAL CROSS SECTION
3 @ HINGE JAMB TO BUCK

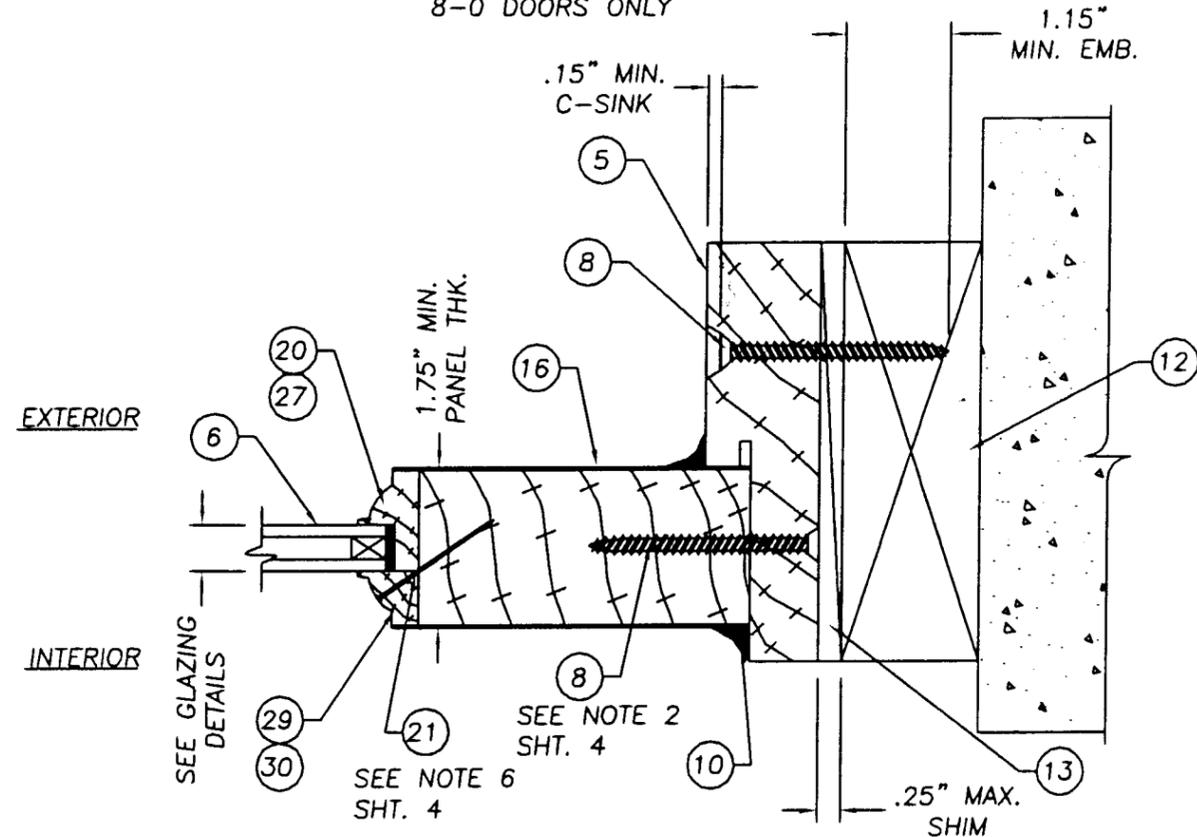

3 HORIZONTAL CROSS SECTION
3 @ SIDELITE TO BUCK, TYP.

JELD-WEN, INC.
31725 HIGHWAY 97 NORTH
CHILOQUIN, OR. 97624
PH. 541.783.2057


PRODUCT:
WOOD STILE & RAIL DOOR
OPAQUE 6-8/8-0 OUTSWING
SINGLE W/&W/OUT SIDELITES
PART OR ASSEMBLY:
HORIZONTAL CROSS SECTION
1/3, 2/3, 3/3 & 4/3

NO.	DATE	REVISIONS
5	08/27/02	GENERAL REVISION KMN
4	08/26/02	GENERAL REVISION KMN
3	07/12/01	GENERAL REVISION TJH
2	05/03/01	GENERAL REVISION TJH
1	04/19/01	GENERAL REVISION TJH

RW BUILDING
CONSULTANTS, INC.
813.684.3831

DATE: 7/19/00
SCALE: 1/2" = 1"
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.:
S-2033
SHEET 3 OF 9

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-0722.12
Expiration Date AUG 23, 2004
By: *Shaqi Chaudh*
Miami Dade Product Control
Division

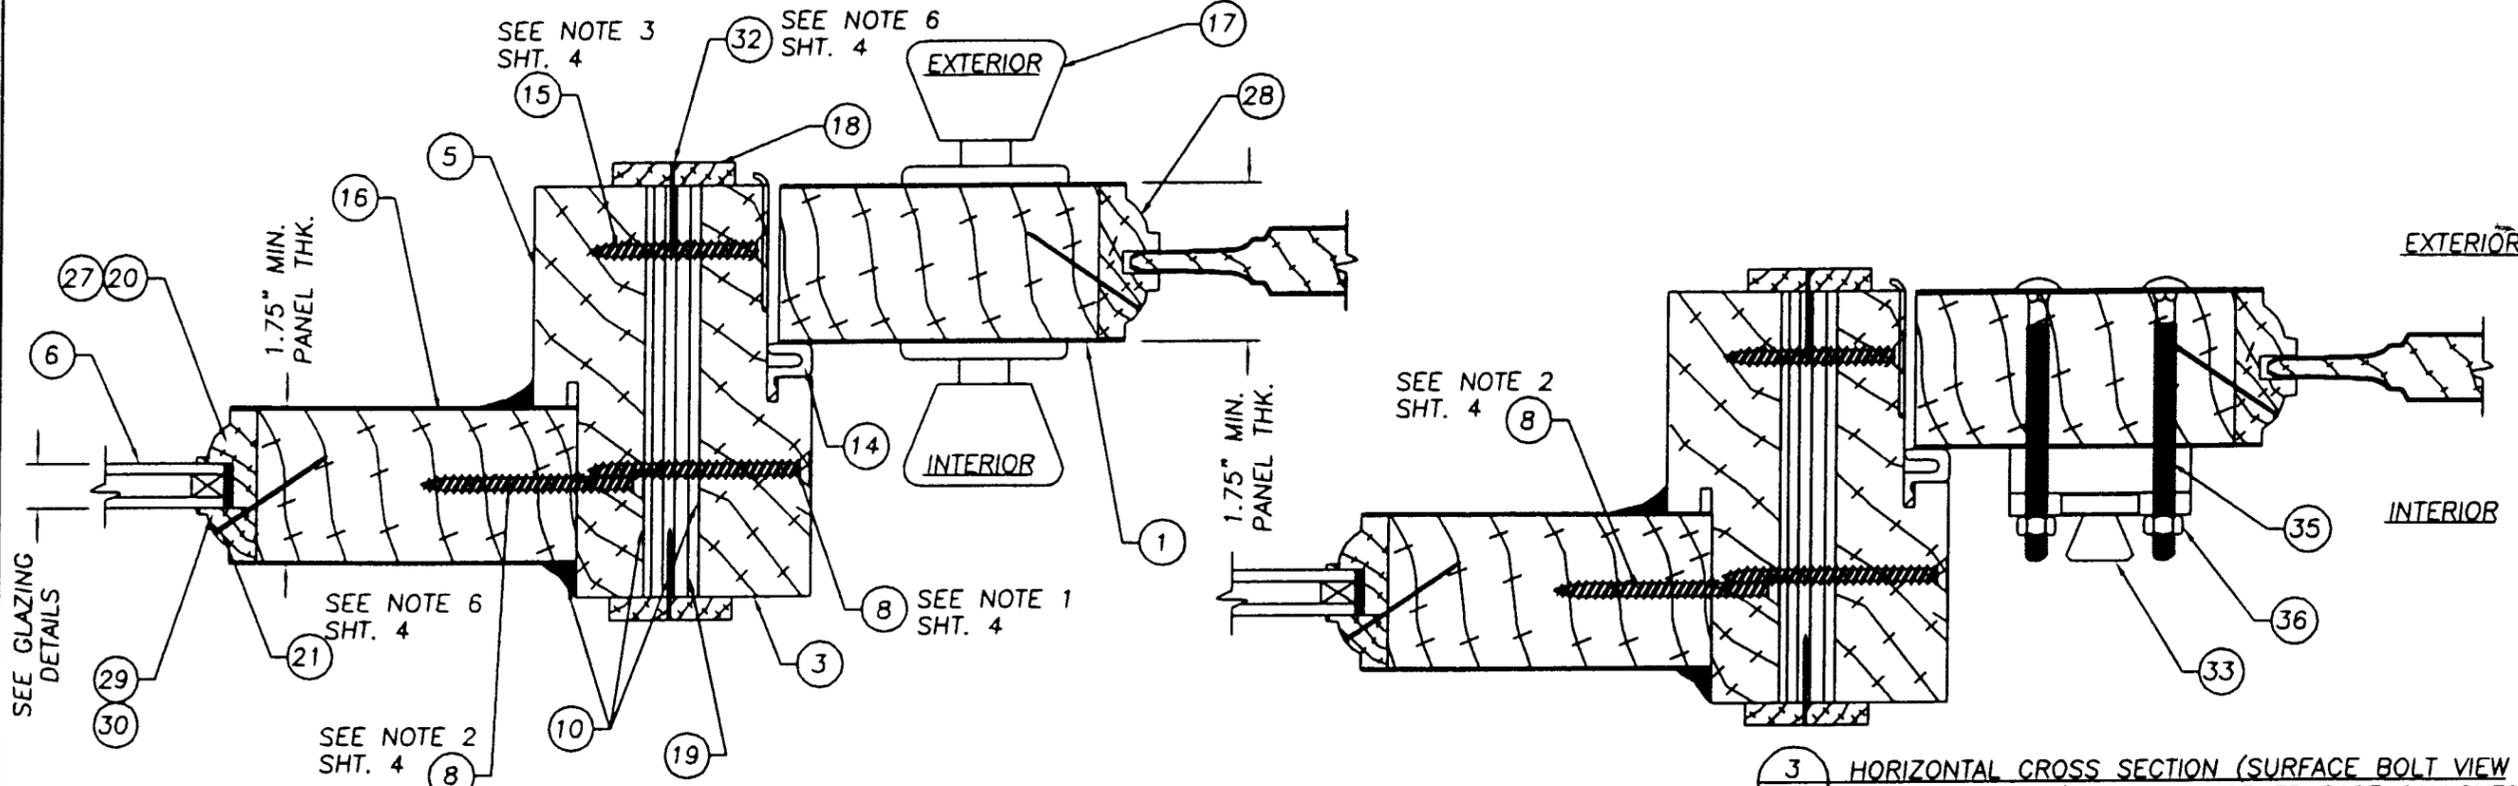


1 HORIZONTAL CROSS SECTION
4 @ LATCH JAMB TO SIDELITE

3 HORIZONTAL CROSS SECTION (SURFACE BOLT VIEW
4 SEE SECTION 1/4 FOR ALL OTHER PART CALLOUTS)
THE SURFACE BOLTS ARE AN OPTION
TO ACHIEVE HIGHER PRESSURES
8-0 DOORS ONLY

NOTES: (TYP. TO ALL FRAME CONFIGURATIONS)

1. SPACING FOR ITEM #8 AT THE MULLION IS AS FOLLOWS; 8-0 UNITS 6" DOWN FROM TOP & (6) MORE AT 14.375" O.C. 6-8 UNITS SAME AS THE PERIMETER SPACING FOR THE 6-8 UNITS.
2. SPACING FOR ITEM #8 ATTACHING THE SIDELITE INTO THE FRAME: 6" FROM TOP AND BOTTOM CORNERS AND (2) MORE EVENLY SPACED, (4) TOTAL.
3. WHEN ATTACHING STRIKE & DEADBOLT PLATES TO THE JAMB USE: ON SINGLE UNITS; ITEM #31 (#10 x 2 1/2"), ON SINGLE UNITS W/SIDELITES ITEM #15 (#10 x 2").
4. THE THRESHOLD IS NOT ATTACHED TO THE FRAME, IT IS NOTCHED AND ATTACHED TO THE FLOOR WITH ITEMS #9 1/4" x 2 3/4" TAPCON AND #10 (CR LAWRENCE 33S SILICONE CAULK). APPLY A CONTINUOUS BEAD .125" THK. x .375" W. AROUND ALL (4) OUTER EDGES WITH A MINIMUM OF (2) ROWS IN A ZIG ZAG PATTERN IN THE MIDDLE THE ENTIRE LENGTH OF THE THRESHOLD, .125" THK. x .375" W.
5. THE TOP CORNERS OF THE DOOR FRAME, AND ALL FOUR CORNERS OF THE SIDELITE FRAME ARE STAPLED TOGETHER USING (3) 16GA. x 2" LG. x 1/2" CROWN STAPLES.
6. SPACING FOR ITEM #21 & #31 IS A MAX. OF 8" O.C.

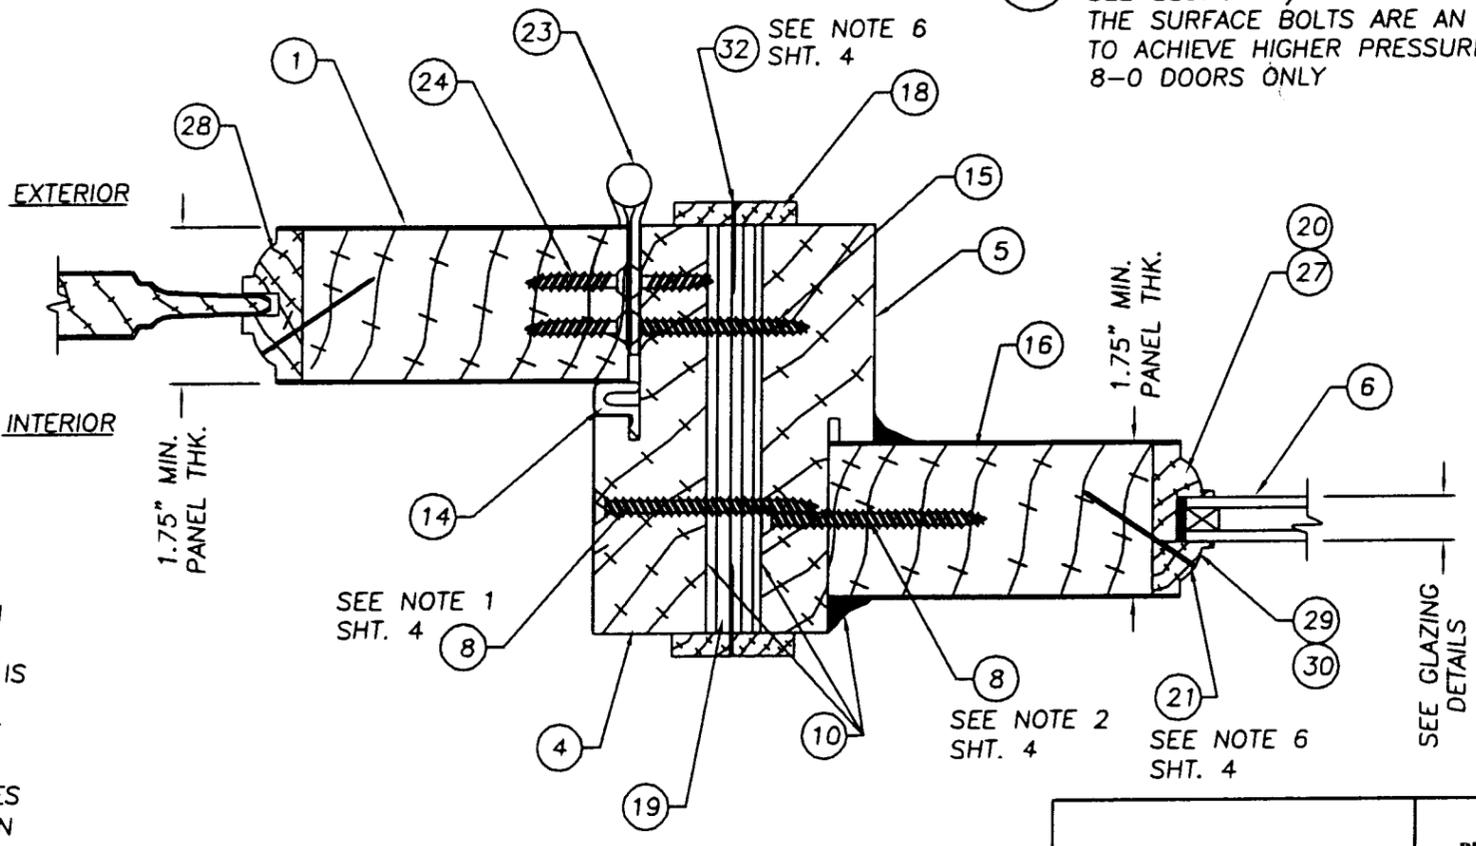

2 HORIZONTAL CROSS SECTION
4 @ HINGE JAMB TO SIDELITE

JELD-WEN, INC.
31725 HIGHWAY 97 NORTH
CHILOQUIN, OR. 97624
PH. 541.783.2057


PRODUCT: WOOD STILE & RAIL DOOR
OPAQUE 6-8/8-0 OUTSWING
SINGLE W/W/OUT SIDELITES
PART OR ASSEMBLY:
HORIZONTAL CROSS
SECTIONS 1/4, 2/4 & 3/4

NO.	DATE	BY	REVISIONS
4	08/26/02	KMN	GENERAL REVISION
3	07/12/01	TJH	GENERAL REVISION
2	05/03/01	TJH	GENERAL REVISION
1	04/19/01	TJH	GENERAL REVISION


RW BUILDING
CONSULTANTS, INC.
813.684.3831

DATE: 7/19/00
SCALE: 1/2" = 1"
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: S-2033
SHEET 4 OF 9

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-0722.12
Expiration Date Aug 23, 2004
By Ishaq I. Chauda
Miami Dade Product Control
Division

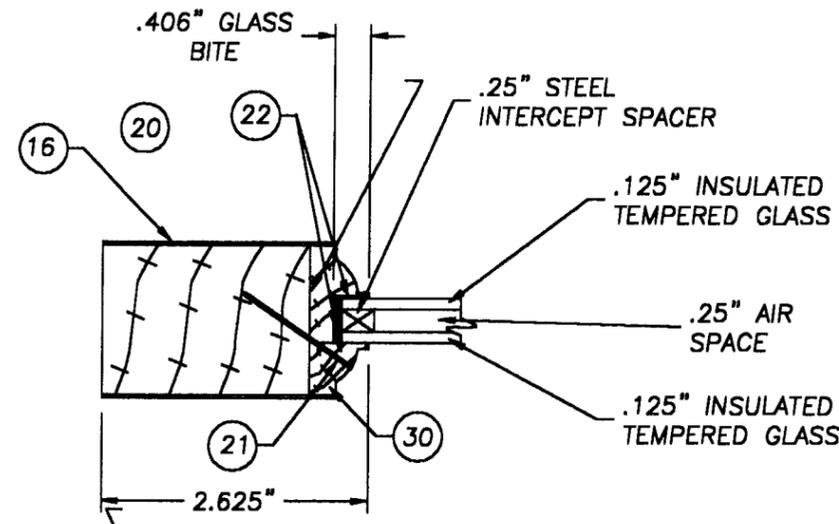


**.50" INSULATED TEMPERED GLASS
GLAZING DETAIL
SCALE: 1/2" = 1"**

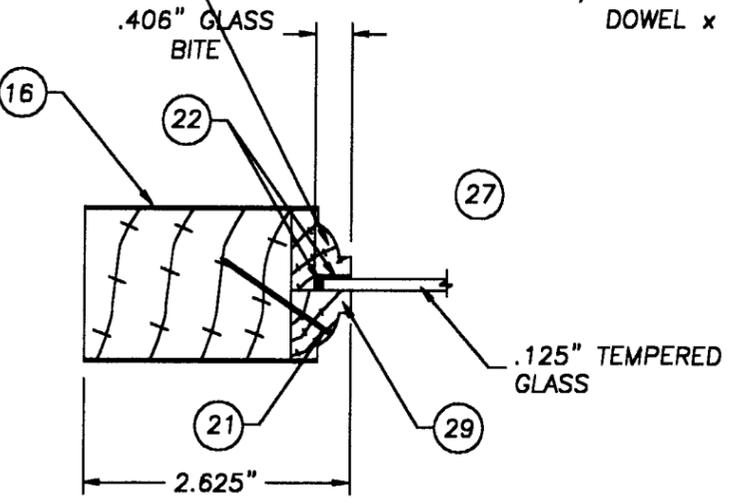

**.125" TEMPERED GLASS
GLAZING DETAIL
SCALE: 1/2" = 1"**


NORD DOOR .50" WOOD
DOWEL x 4.0" LG., 3PLCS
MORGAN/NICOLAI DOOR .625" WOOD
DOWEL x 4.0" LG., 3PLCS

DIMENSION "A" CHART	
OPENING FOR	DIM. "A"
1/8" GLASS	.152"
1/2" GLASS	.527"
INSET PANEL	.375"

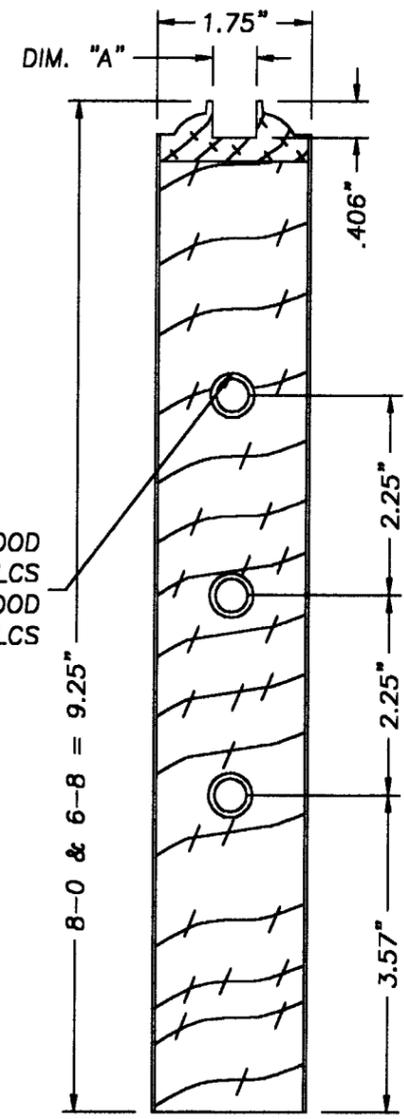

**BOTTOM RAIL
SCALE: 1/2" = 1"**


NORD DOOR .50" WOOD
DOWEL x 4.0" LG., 3PLCS
MORGAN/NICOLAI DOOR .625" WOOD
DOWEL x 4.0" LG., 3PLCS

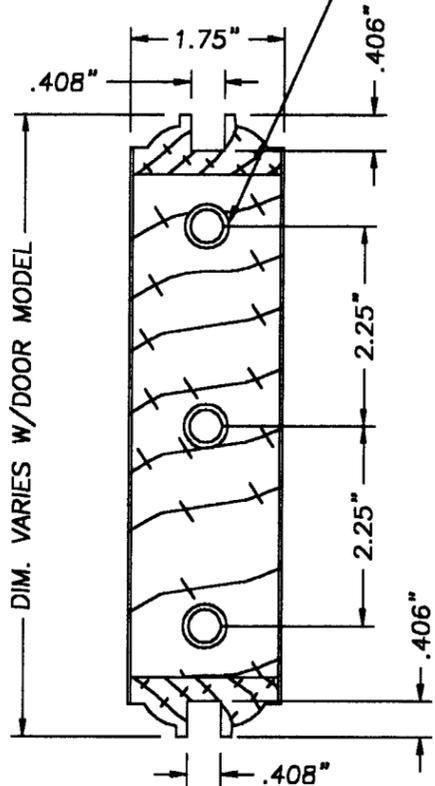


**LOCK RAIL
MULLION
INTERMEDIATE STILE
SCALE: 1/2" = 1"**

NORD DOOR HOLE FOR .50" WOOD
DOWEL x 4.0" LG., 2PLCS
MORGAN/NICOLAI DOOR HOLES FOR
.625" WOOD DOWEL x 4.0" LG., 2PLCS


NORD DOOR .50" WOOD
DOWEL x 4.0" LG., 2PLCS
MORGAN/NICOLAI DOOR .625" WOOD
DOWEL x 4.0" LG., 2PLCS

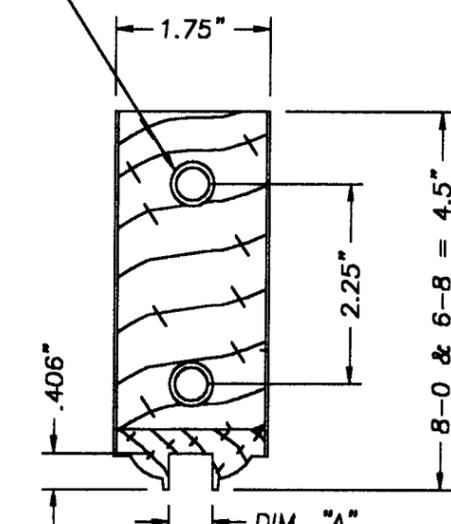

**TOP RAIL
SCALE: 1/2" = 1"**

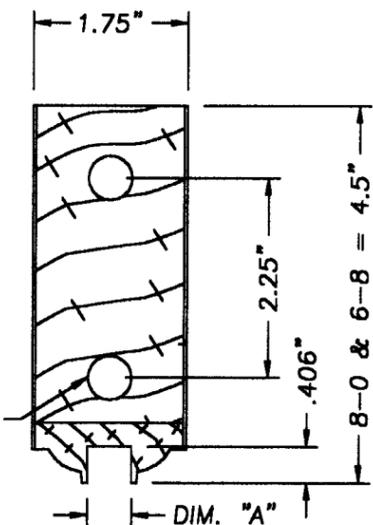

**SIDE STILE
SCALE: 1/2" = 1"**

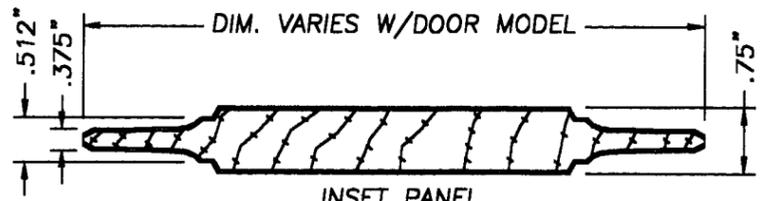

**INSET PANEL
N.T.S.**

NOTES:

1. DOWELS ARE GLUED AND PRESSED 2.0" INTO THE RAILS AND STILES AT PANEL ASSEMBLY WITH PVA TYPE "1" EXTERIOR GLUE.
2. THE INSET PANELS ARE NOT GLUED INTO THE STILES OR RAILS. THEY ARE LEFT TO FLOAT WITH THE DOOR AS IT EXPANDS AND CONTRACTS TO ELIMINATE DOOR CRACKING.
3. SECTION 3603.2(e)(1)(cc) OF THE SOUTH FLORIDA BUILDING CODE REQUIRES SWINGING DOORS OF STILE, RAIL AND PANEL CONSTRUCTION SHALL HAVE RAILS AND STILES NOT LESS THAN 1-3/4" IN THICKNESS WITH RETAINING TONGUES OR SPLINES NOT LESS THAN 3/8" IN LEAST DIMENSION.

**JELD-WEN, INC.
31725 HIGHWAY 97 NORTH
CHILOQUIN, OR. 97624
PH. 541.783.2057**

PRODUCT:
WOOD STILE & RAIL DOOR
OPAQUE 6-8/8-0 OUTSWING
SINGLE W/&W/OUT SIDELITES
PART OR ASSEMBLY:
GLAZING DETAILS &
RAIL DETAILS

NO	DATE	REVISIONS	BY
3	07/12/01	GENERAL REVISION	TJH
2	05/03/01	GENERAL REVISION	TJH
1	04/19/01	GENERAL REVISION	TJH


**RW BUILDING
CONSULTANTS, INC.
813.684.3831**

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 01-0722-12
Expiration Date AUGUST 23, 2004
By Ishag I. Chaudhry
Miami Dade Product Control
Division

APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE AUGUST 23, 2001
By Ishag I. Chaudhry
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0915-05


DATE: 7/20/00
SCALE: AS NOTED
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: S-2033
SHEET 7 OF 9

2
3
4

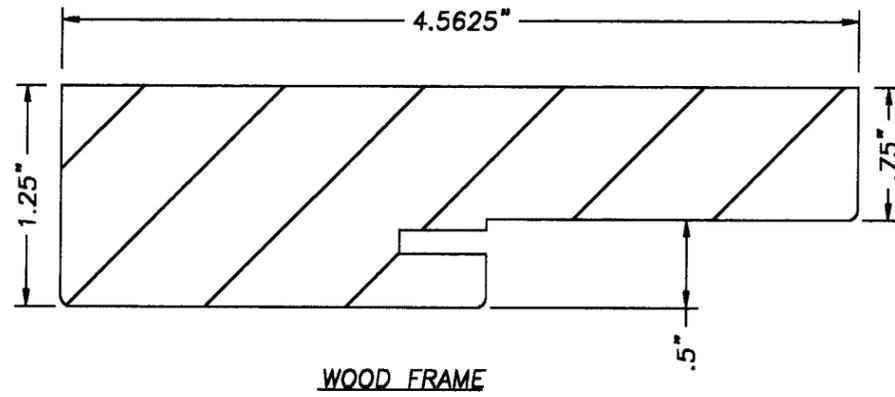


WOOD FRAME

7

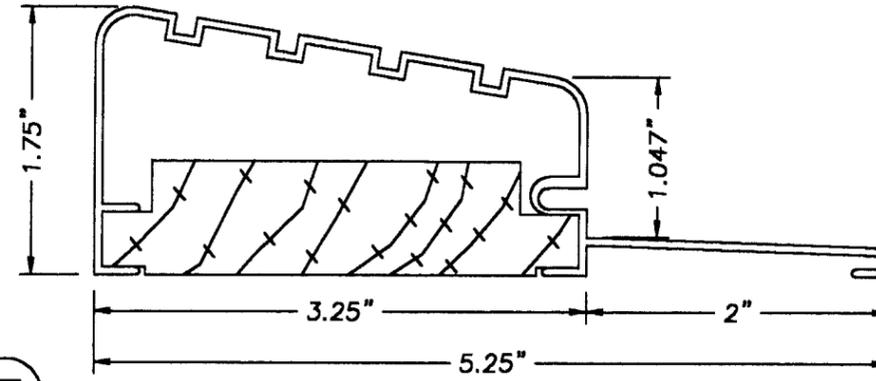


OUTSWING BUMP FACE ALUMINUM THRESHOLD
.051" WALL THK.

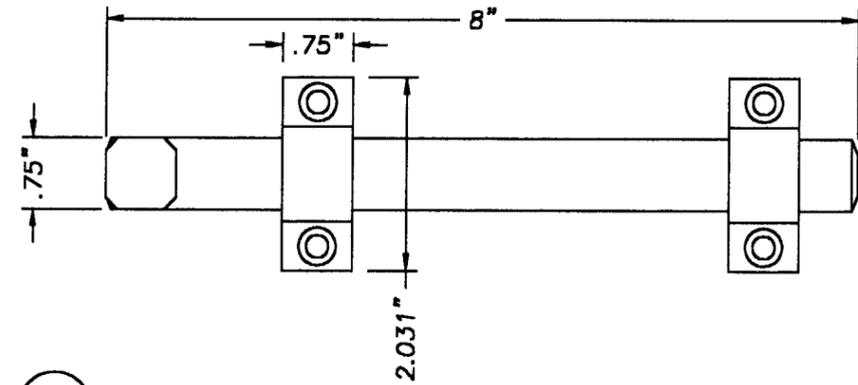

34


SURFACE BOLT (IVES MODEL #455 .25" STEEL)

23

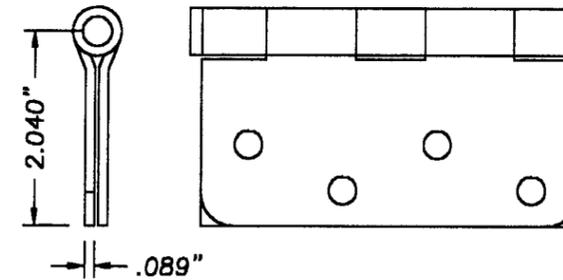

4 x 4 DOOR HINGE

35

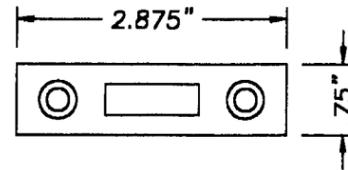

SURFACE BOLT STRIKE (IVES .125" STEEL)

JELD-WEN, INC.
31725 HIGHWAY 97 NORTH
CHILOQUIN, OR. 97624
PH. 541.783.2057

PRODUCT:
WOOD STILE & RAIL DOOR
OPaque 6-8/8-0 OUTSWING
SINGLE W/&W/OUT SIDELITES
PART OR ASSEMBLY:
FRAME COMPONENTS


NO.	DATE	REVISIONS	BY
3	07/12/01	GENERAL REVISION	TJH
2	05/03/01	GENERAL REVISION	TJH
1	04/19/01	GENERAL REVISION	TJH

RW BUILDING
CONSULTANTS, INC.
813.684.3831

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 02-0722-12
Expiration Date AUG 23, 2004
By Ishaq I. Chanda
Miami Dade Product Control
Division


APPROVED AS COMPLYING WITH THE
SOUTH FLORIDA BUILDING CODE
DATE AUGUST 23, 2001
BY Ishaq I. Chanda
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0915.05

DATE: 7/20/00
SCALE: N.T.S.
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: S-2033
SHEET 8 OF 9

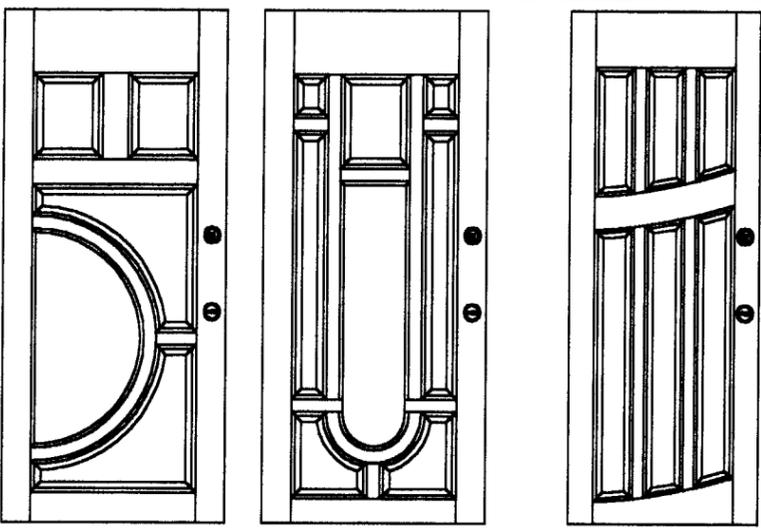


6-8 DOOR MODELS N.T.S. (OPAQUE)
INTERIOR VIEW (OUTSWING DOORS)

6-8 SIDELITE MODEL

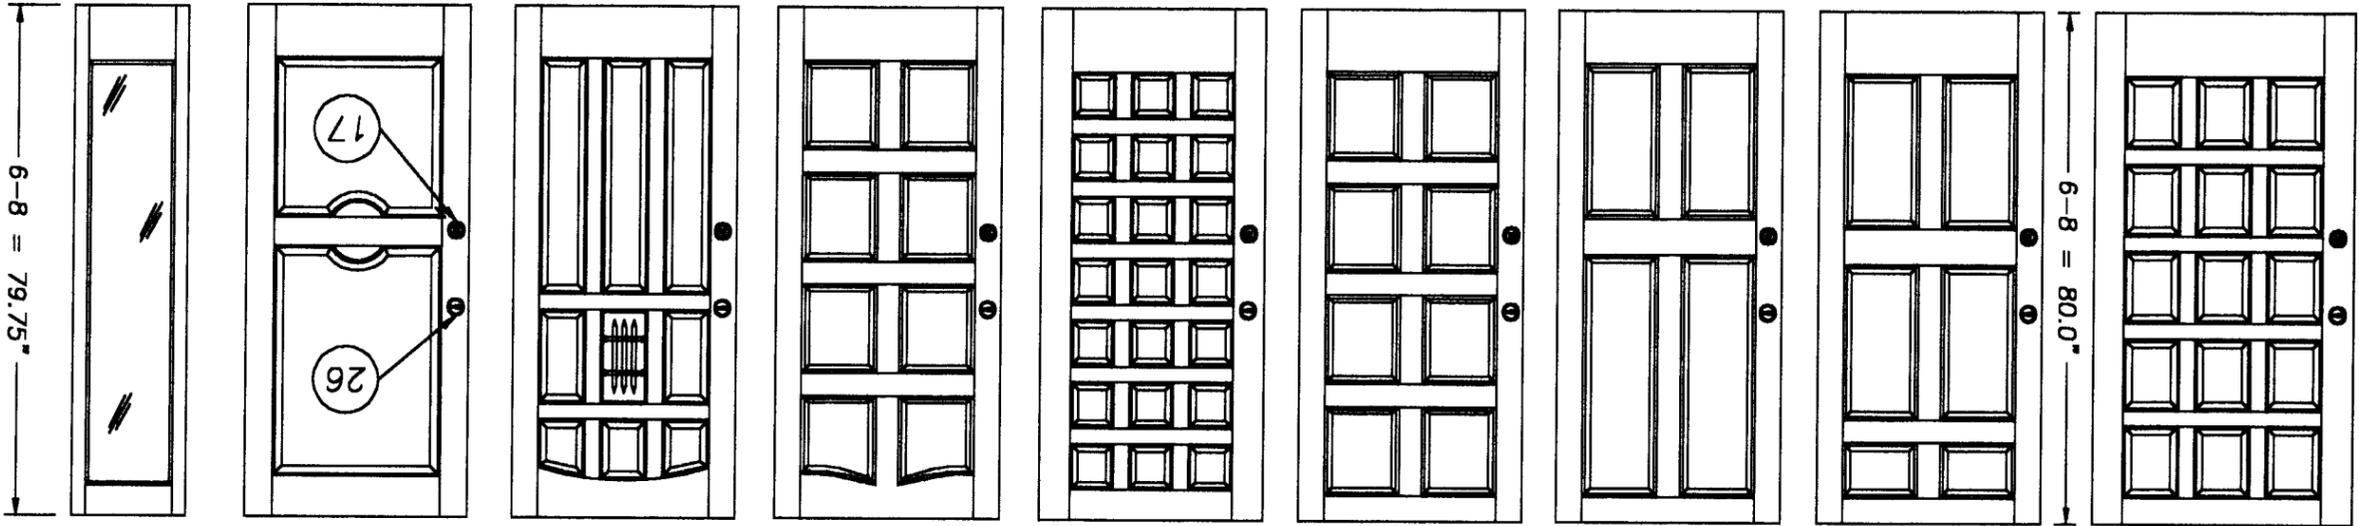

8-0 DOOR MODELS N.T.S. (OPAQUE)
INTERIOR VIEW (OUTSWING DOORS)

8-0 SIDELITE MODEL

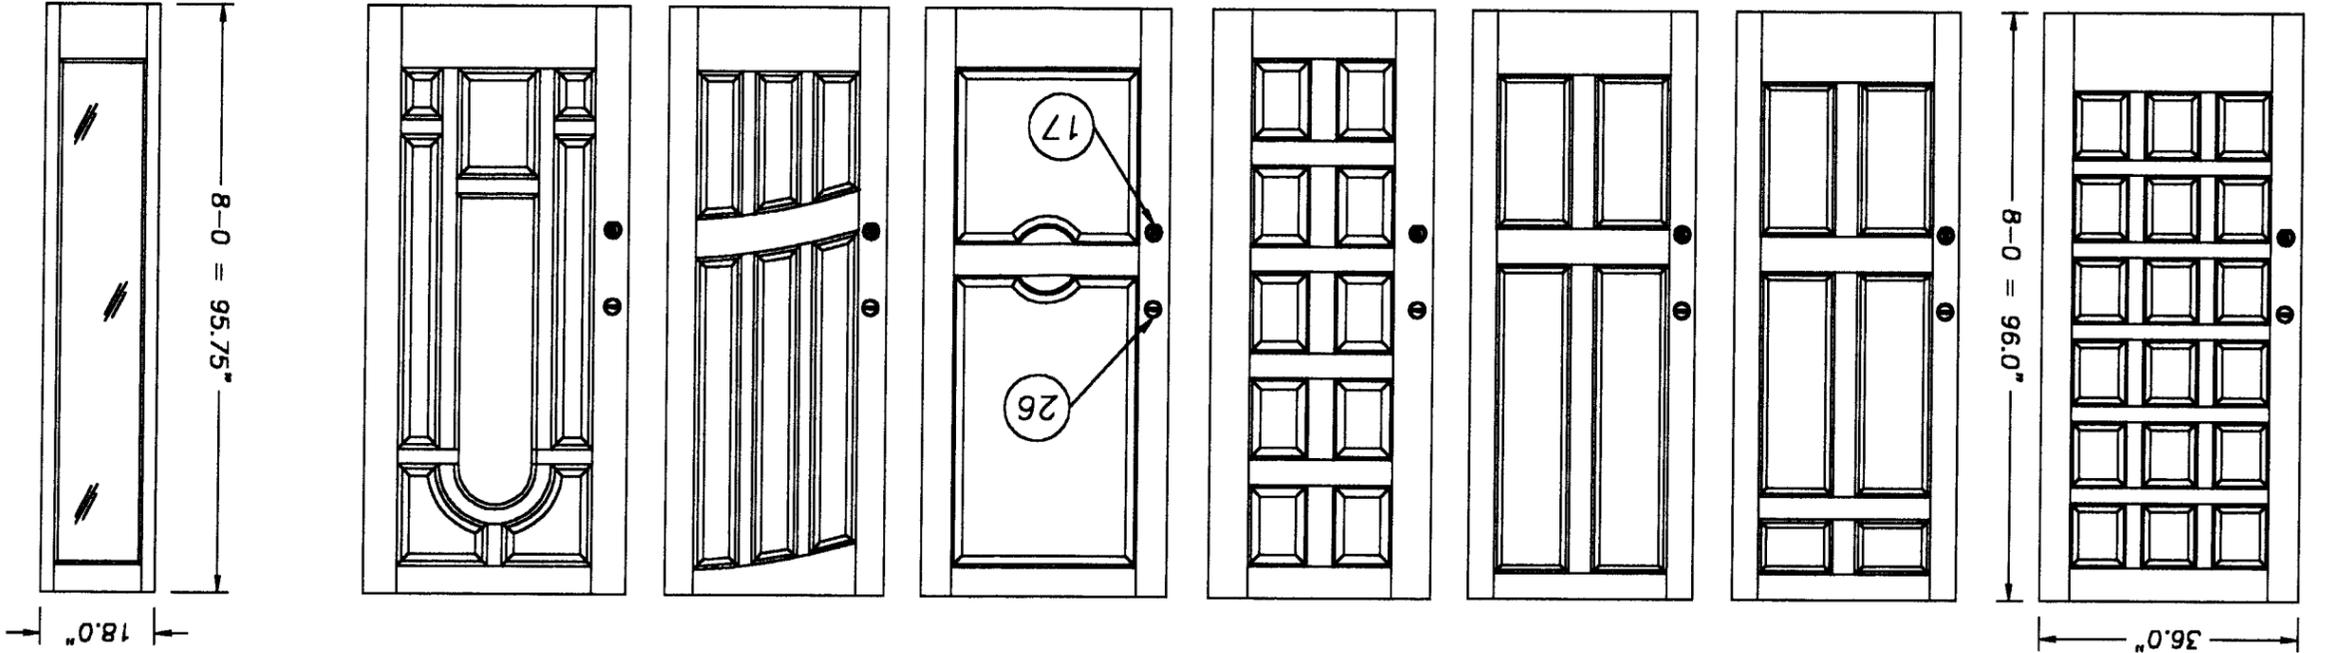

DATE: 7/20/00
SCALE: N.T.S.
DWG. BY: TJH
CHK. BY: RW
DRAWING NO.: S-2033
SHEET 9 OF 9

APPROVED AS SHOWN WITH THE
SOUTH FLORIDA BUILDING CODE
DATE: AUGUST 23, 2001
BY: SHAH L. LANDA
PRODUCT CONTROL DIVISION
BUILDING CODE COMPLIANCE OFFICE
ACCEPTANCE NO. 01-0915-05

PRODUCT REVISED
as copying with the Florida
Building Code
Acceptance Date: 02-07-22-12
Expiration Date: 08-23-1200
By: SHAH L. LANDA
Miami Dade Product Control
Division

813.684.3831
CONSULTANTS, INC.
BUILDING
RW

NO.	DATE	BY	REVISIONS
3	07/12/01	TJH	GENERAL REVISION
2	05/03/01	TJH	GENERAL REVISION
1	04/19/01	TJH	GENERAL REVISION

PRODUCT:
WOOD STILE & RAIL DOOR
OPAQUE 6-8/8-0 OUTSWING
SINGLE W/&W/OUT SIDELITES
PART OR ASSEMBLY:
DOOR MODELS

JELD-WEN, INC.
31725 HIGHWAY 97 NORTH
CHILCOQUIN, OR. 97624
PH. 541.783.2057