



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 372-6339**

NOTICE OF ACCEPTANCE (NOA)

www.miamidade.gov/buildingcode

**Regency Plus, Inc.
1024 Locust Gap Highway
Mt. Carmel, PA 17851**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "5405" White PVC Horizontal Sliding Window – L.M.I.

APPROVAL DOCUMENT: Drawing No. **RPLS0063**, titled "Impact Series 5405 Horizontal Slider Window", sheets 1 through 5 of 5, dated 11/26/08 with revision A dated 04/15/09, prepared by PTC LLC, signed and sealed by Paul E. Winter, P.E., bearing the Miami-Dade County Product Control Approval stamp with the Notice of Acceptance number and approval date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA consists of this page 1 and evidence page E-1, as well as approval document mentioned above. The submitted documentation was reviewed by **Manuel Perez, P.E.**



**NOA No. 08-1210.12
Expiration Date: July 22, 2014
Approval Date: July 22, 2009
Page 1**

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Manufacturer's die drawings and sections.
2. Drawing No **RPLS0063**, Sheets 1 through 5 of 5, titled "Impact Series 5405 Horizontal Slider Window", dated 11/26/08 with revision A dated 04/15/09, prepared by PTC LLC, signed and sealed by Paul E. Winter, P.E.

B. TESTS

1. Test reports on:
 - 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94along with marked-up drawings and installation diagram of white PVC horizontal sliding window, prepared by National Certified Testing Laboratories, Test Report No. **NTCL-110-11507-1**, dated 08/18/08, revised 09/03/08, with addendum letters dated 03/31/09 and 05/01/09, all signed and sealed by Harold Rupp, P.E.

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with FBC-2007, prepared by PTC LLC, dated 11/24/08, signed and sealed by Paul E. Winter, P.E.
Complies with ASTM E1300-02

D. QUALITY ASSURANCE

1. Miami Dade Building Code Compliance Office (BCCO).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **09-0312.02** issued to E.I. DuPont DeNemours & Co., Inc. for their "**DuPont Butacite® PVB, Interlayer**" dated 05/13/09, expiring on 12/11/10.
2. Notice of Acceptance No. **07-1016.05** issued to Dominion Plastics, Inc. for their "**White PVC Plastic Extrusions**" dated 11/15/07, expiring on 10/24/12.

F. STATEMENTS

1. Statement letter of conformance and no financial interest, dated December 2, 2008, signed and sealed by Paul E. Winter, P.E.

G. OTHERS

1. None.


Manuel Perez, P.E.
Product Control Examiner
NOA No. 08-1210.12
Expiration Date: July 22, 2014
Approval Date: July 22, 2009

REGENCY PLUS, INC.

IMPACT SERIES 5405 HORIZONTAL SLIDER WINDOW - LMI

INSTALLATION ANCHORAGE DETAILS

GENERAL NOTES:

1. THE PRODUCT ANCHORAGE SHOWN HEREIN IS DESIGNED TO COMPLY WITH THE 2007 FLORIDA BUILDING CODE (FBC) AT THE DESIGN PRESSURE(S) STATED HEREIN.
2. THE PRODUCT DETAILS CONTAINED HEREIN ARE BASED UPON SIGNED AND SEALED TEST REPORT # NCTL-110-11507-1 DATED 08/20/08 AND ASSOCIATED LABORATORY STAMPED DRAWINGS AND WERE TESTED IN ACCORDANCE WITH CURRENT DADE COUNTY PROTOCOLS.
3. THE PRODUCT HAS BEEN EVALUATED FOR CONFORMANCE TO THE STANDARDS LISTED IN THE CURRENT FLORIDA BUILDING CODE (FBC) AND IS IN COMPLIANCE WITH SAID STANDARDS, INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ) REQUIREMENTS.
4. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE STRUCTURE IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.
5. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.
6. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, THEN THE BUILDING OFFICIAL MAY ELECT ONE OF THE FOLLOWING OPTIONS:
 - A. OUTSIDE HVHZ: REQUIRE THAT A LICENSED ENGINEER OR ARCHITECT PREPARE AND SUBMIT SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
 - B. INSIDE HVHZ: REQUIRE THAT A ONE-TIME SITE SPECIFIC APPROVAL BE APPLIED FOR AND OBTAINED FROM THE MIAMI-DADE COUNTY PRODUCT CONTROL DIVISION.

7. WINDOW FRAME MATERIAL: RIGID VINYL PVC (N.O.A. 07-1016.05)
8. EACH WINDOW ASSEMBLY SHALL BE LABELED WITH A PERMANENT LABEL AND/OR STAMP WITH THE EXTRUDER CODE AND "MDCA" AS STATED IN N.O.A. NO. 07-1016.05.
9. GLASS MEETS THE REQUIREMENTS OF ASTM E1300.
10. DESIGNATIONS "X" AND "O" STAND FOR THE FOLLOWING:
X: OPERABLE PANEL
O: FIXED PANEL
11. A 1/3 INCREASE IN ALLOWABLE STRESS FOR WIND LOADS WAS NOT USED IN THE DESIGN OF THE PRODUCT(S) SHOWN HEREIN. WIND LOAD DURATION FACTOR (Cd = 1.6) HAS BEEN USED FOR WOOD ANCHOR DESIGN.
12. IN AREAS WHERE WIND-BORNE DEBRIS PROTECTION REQUIREMENTS EXIST, USE OF AN APPROVED IMPACT PROTECTIVE SYSTEM IS NOT NEEDED.

INSTALLATION NOTES:

1. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
2. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
3. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR THRU MAIN FRAME WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM SIZE IS 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
4. FOR INSTALLATION INTO WOOD FRAMING, USE #12 WOOD SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT. MINIMUM EDGE DISTANCE IS 7/8 INCH.
5. FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE / MASONRY, OR DIRECTLY INTO CONCRETE / MASONRY, USE 1/4 INCH ITW TAPCONS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT. MINIMUM EDGE DISTANCE IS 2-1/2 INCHES.
6. FOR PARTING STOP INSTALLATION USE #8 X 1 1/2 INCH DRYWALL SCREWS.
7. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER AND SIDING.
8. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
9. FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
10. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
11. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:
 - A. WOOD PT SOUTHERN YELLOW PINE - MINIMUM SPECIFIC GRAVITY IS 0.55. LUMBER MUST COMPLY WITH FBC SECTIONS 2411.3.3.3 AND 2326.2 AS TO WOOD PROTECTION.
 - B. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 3192 psi AND CONFORMS TO ACI 301, ACI 318-05, ACI 355 AND FBC.
 - C. MASONRY - STRENGTH TO CONFORM TO ACI 530-05, ASTM C-90 AND FBC, GRADE "N", TYPE 1 (OR GREATER).

TABLE OF CONTENTS		
SHEET	REV.	SHEET DESCRIPTION
1	A	GENERAL AND INSTALLATION NOTES
2	B	ELEVATION AND ANCHOR LAYOUTS
3	A	VERTICAL SECTIONS
4	B	HORIZONTAL SECTIONS, GLAZING DETAIL & CORNER DETAIL
5	B	COMPONENTS AND BILL OF MATERIALS

DESIGN PRESSURE RATING (PSF)	IMPACT RATING
±55.0	LARGE MISSILE IMPACT

APPROVED BY: Paul E. Winter	DATE: 05/26/09
REV	DESCRIPTION
A	PER MIAMI-DADE COMMENTS DATED 3/3/09
S	04/15/09
BY	DATE
SMC	

REGENCY PLUS, INC.
1024 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851

TITLE: **IMPACT SERIES 5405 HORIZONTAL SLIDER WINDOW GENERAL AND INSTALLATION NOTES**

DRAWN BY: SMC DATE: 11/26/08
SCALE: N.T.S. DRAWING NO: RPLS0063
REV: A SHEET: 1 OF 5


FPC, LLC
1535 N. Cyclopedia Street, Suite 025
Rockledge, Florida 32955
Phone 321.690.1788
Fax 321.690.1789

PROJECT: #300-1008.21
Paul E. Winter
Florida License No. 22693


Paul E. Winter
5/27/09

1535 N. Cyclopedia Street, Suite 025
Rockledge, Florida 32955
FBPE Certificate of Authorization NO. 20355

Approved as complying with the Florida Building Code
Date JULY 22, 2009
NOA# 08-1210-12
Miami Dade Product Control Division
By *Manuel Perez*

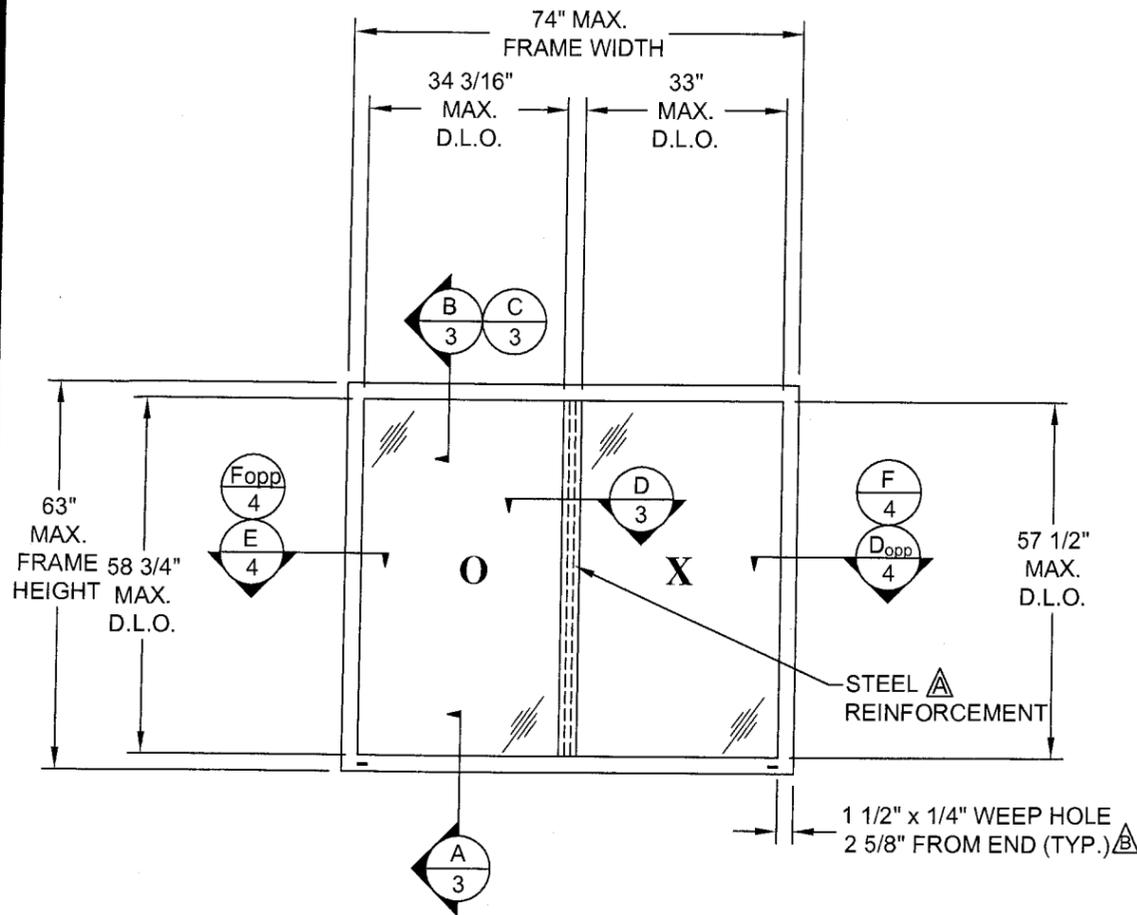

ELEVATION 
EXTERIOR VIEW

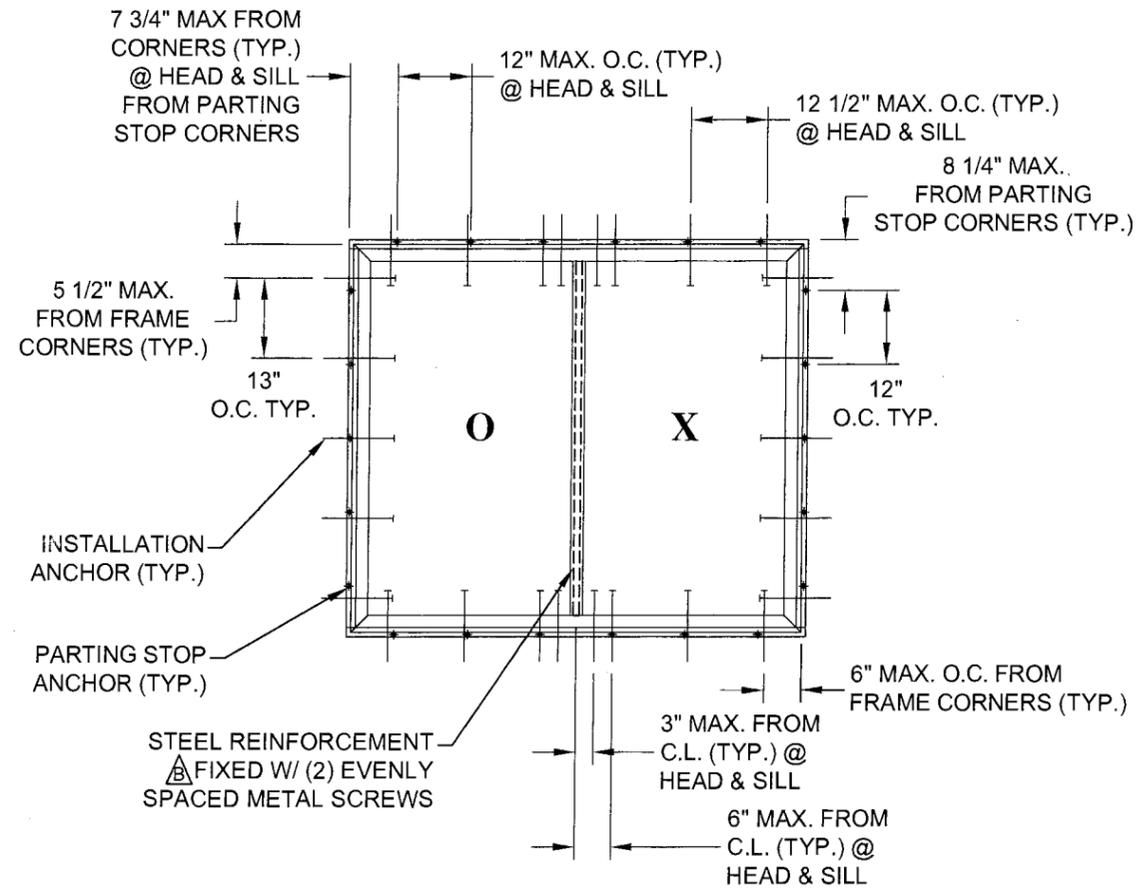

ANCHOR LAYOUT 
EXTERIOR VIEW

APPROVED BY: Paul E. Winter	DATE: 05/26/09
B	PER MIAMI-DADE COMMENTS DATED 4/28/09
A	PER MIAMI-DADE COMMENTS DATED 3/3/09
REV	DESCRIPTION
	DATE
	BY

REGENCY PLUS, INC.
1024 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851

TITLE: IMPACT SERIES 5405 HORIZONTAL SLIDER WINDOW
ELEVATION AND ANCHOR LAYOUT

PREPARED BY: PTC, LLC
SCALE: N.T.S.
REV: B

DRAWN BY: SMC
DATE: 11/26/08
DRAWING NO.: RPLS0063
SHEET: 2 OF 5


PTC, LLC
Phone 321.690.1788
Fax 321.690.1789


PROJECT #308-1008.21

Paul E. Winter
Florida P.E. No. 22893




PTC, LLC
1535 N. Cogswell Street, Suite C25
Rockledge, Florida 32955
FBPE Certificate of Authorization I.D. 25935


Approved as complying with the
Florida Building Code
Date: July 22, 2009
NOA# 08-1210-12
Miami Dade Product Control
Division
by 

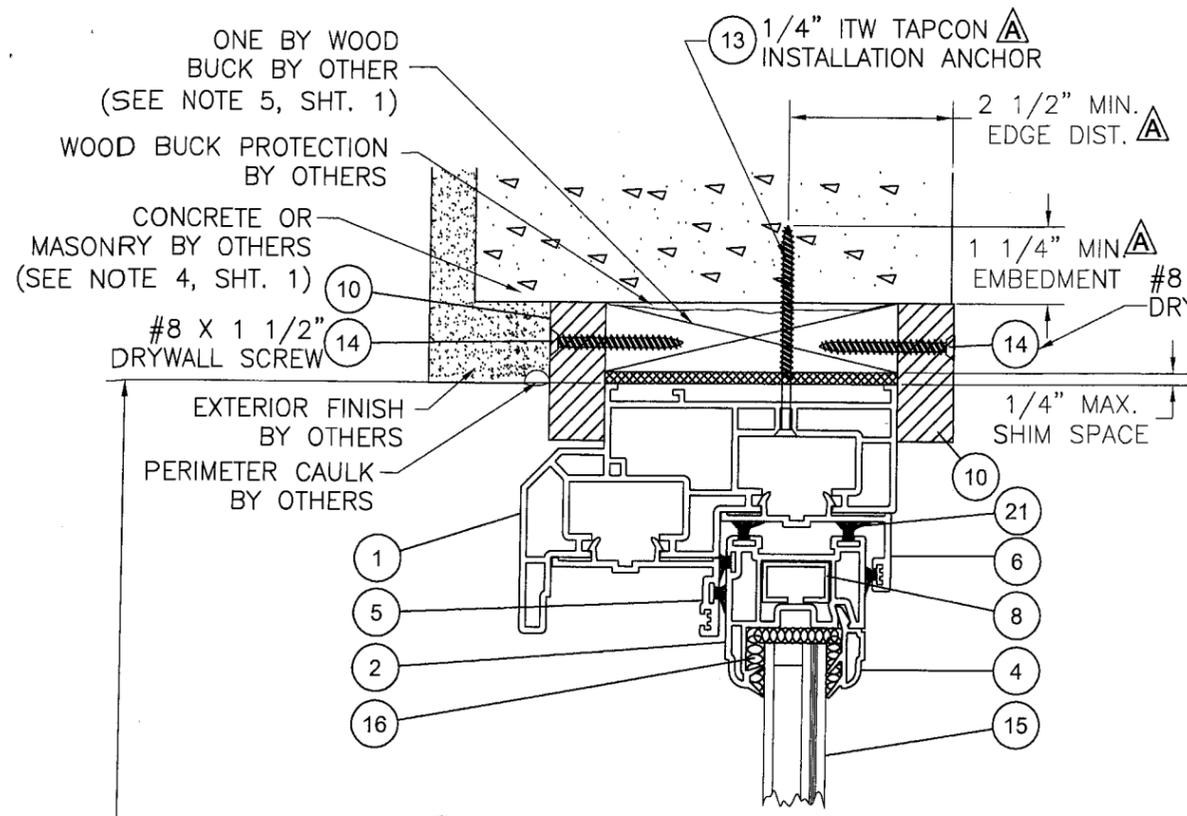


B VERTICAL SECTION
 CONCRETE / MASONRY SUBSTRATE
 OPERABLE PANEL SHOWN,
 FIXED SIMILAR

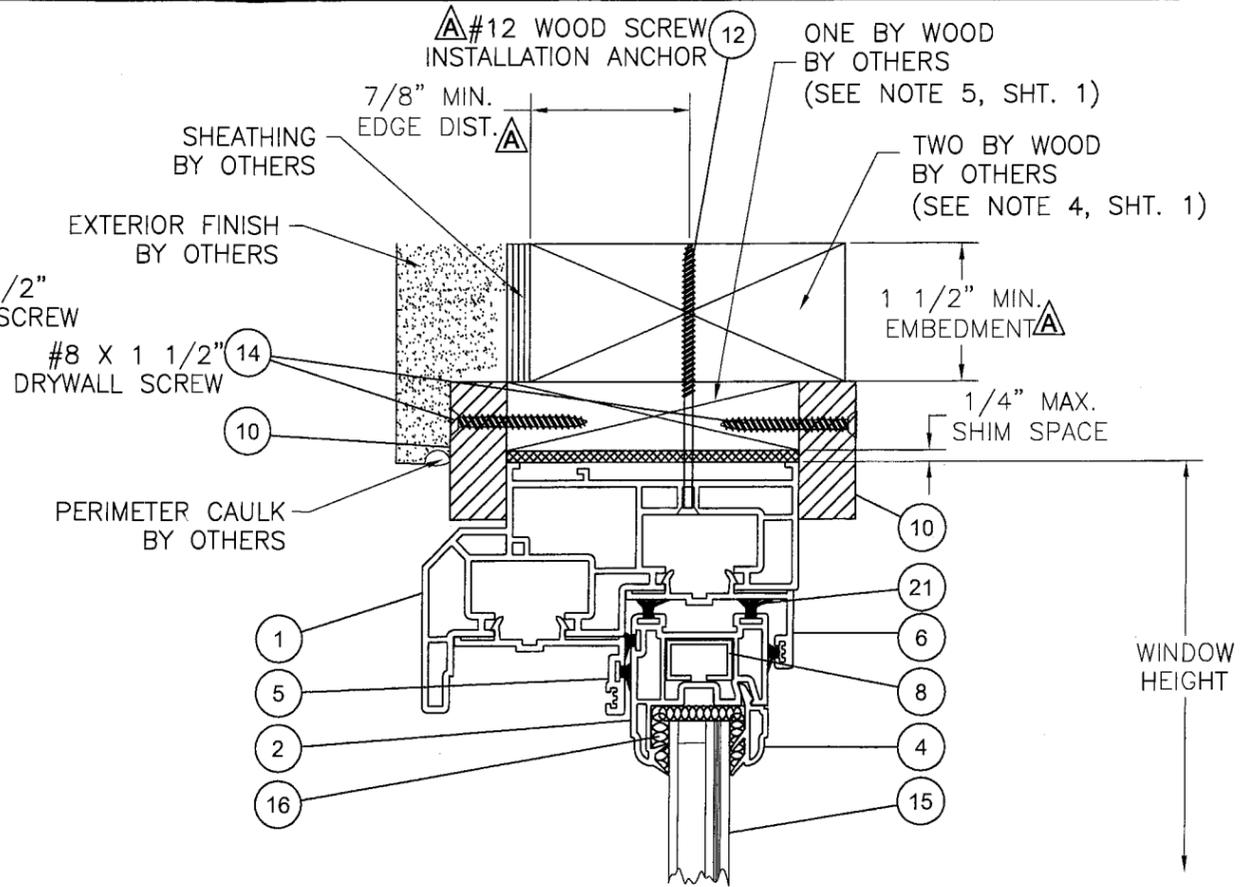

C VERTICAL SECTION
 WOOD SUBSTRATE
 OPERABLE PANEL SHOWN,
 FIXED SIMILAR

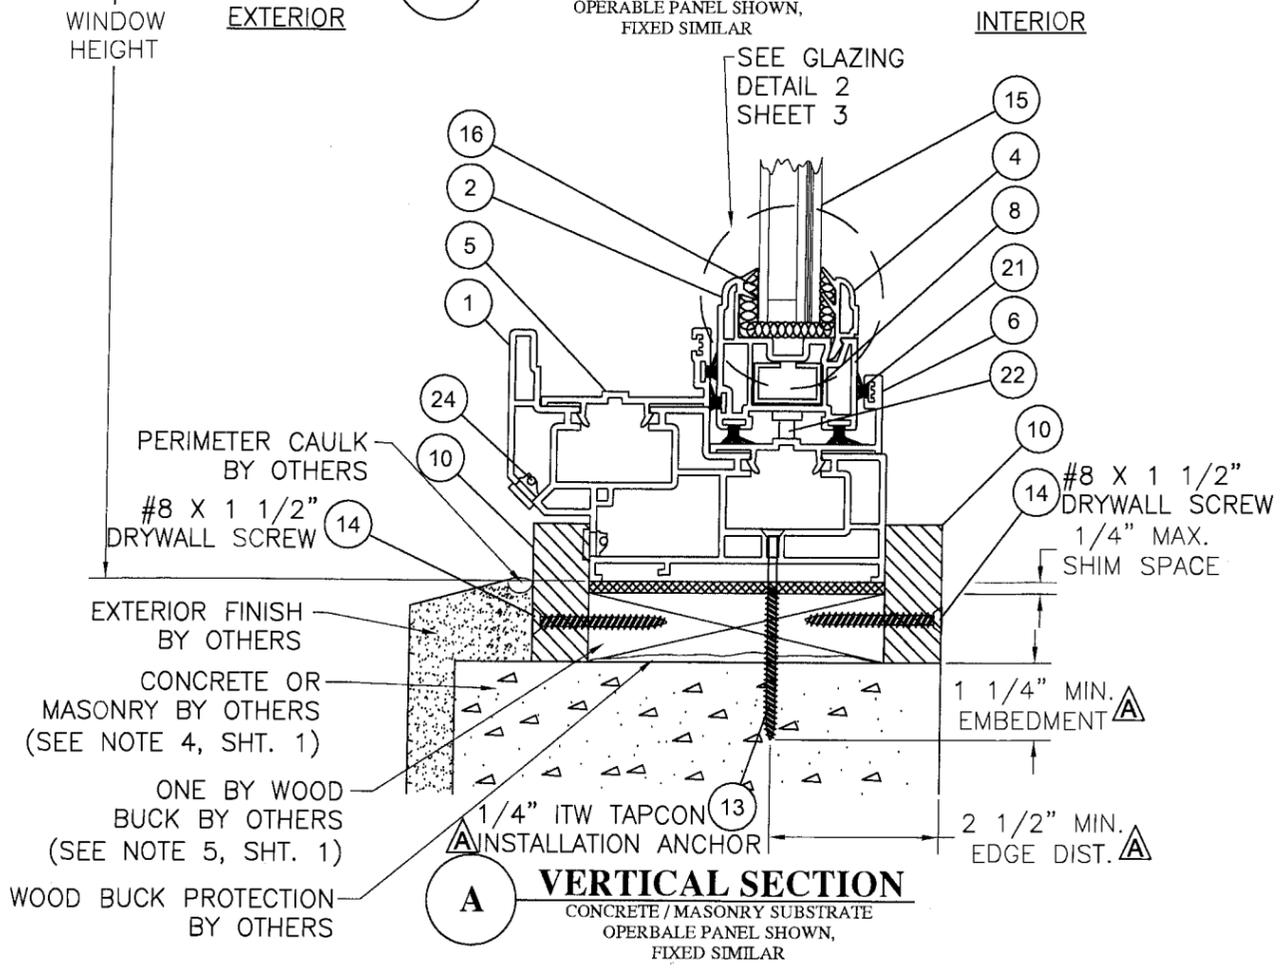

A VERTICAL SECTION
 CONCRETE / MASONRY SUBSTRATE
 OPERABLE PANEL SHOWN,
 FIXED SIMILAR

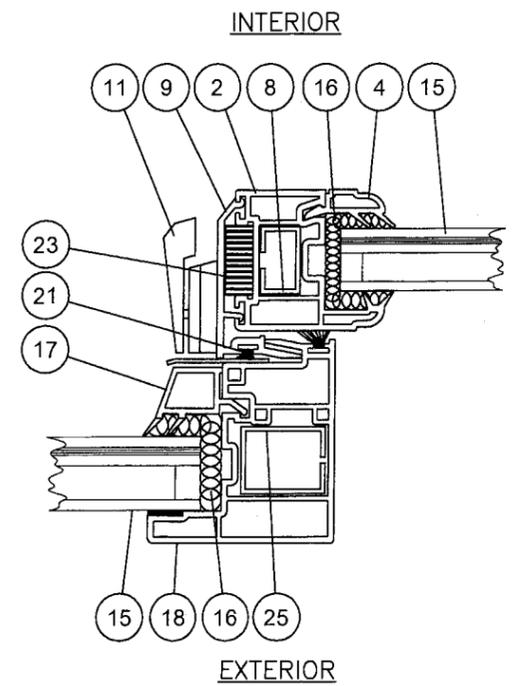


D HORIZONTAL SECTION

DATE:	05/26/09
APPROVED BY:	Paul E. Winter
PER MIAMI-DADE COMMENTS DATED 3/3/09	04/15/09 SMC
DESCRIPTION	REV
BY	DATE

PROJECT #308-1008.21	DATE:	11/26/08
1024 LOCUST GAP HIGHWAY MT. CARMEL, PA 17851	DRAWING NO.:	RPLS0063
TITLE: IMPACT SERIES 5405 HORIZONTAL SLIDER WINDOW VERTICAL SECTIONS	SCALE:	N.T.S.
PREPARED BY: PTC, LLC Phone 321.690.1788 Fax 321.690.1789	REV:	A
DRAWN BY: SMC	SHEET:	3 OF 5

PROJECT #308-1008.21
 Paul E. Winter
 Florida P.E. No. 22963
 1535 N. Cogswell Street, Suite C25
 Rockledge, Florida 32955
 FBPE Certificate of Authorization NO. 25635


Approved as complying with the
 Florida Building Code
 Date July 22, 2009
 NOA# 08-1210-12
 Miami Dade Product Control
 Division
 by Manuel Perez

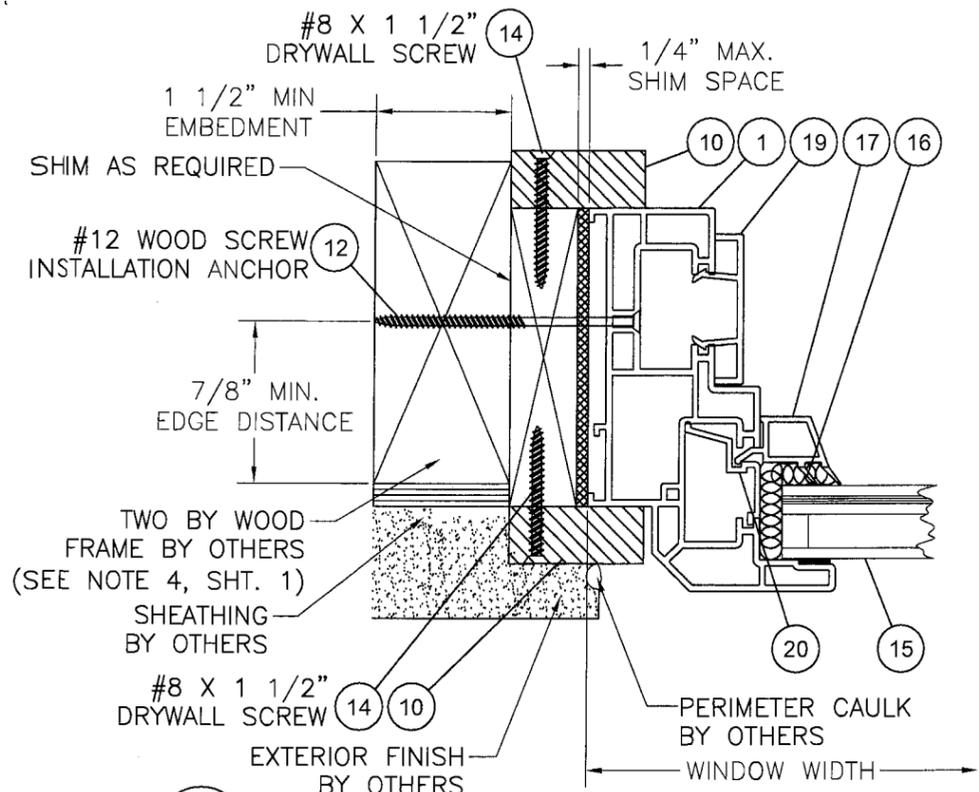


E HORIZONTAL SECTION
WOOD FRAME SUBSTRATE
(FIXED PANEL SHOWN,
OPERABLE PANEL SIMILAR)

INTERIOR


EXTERIOR

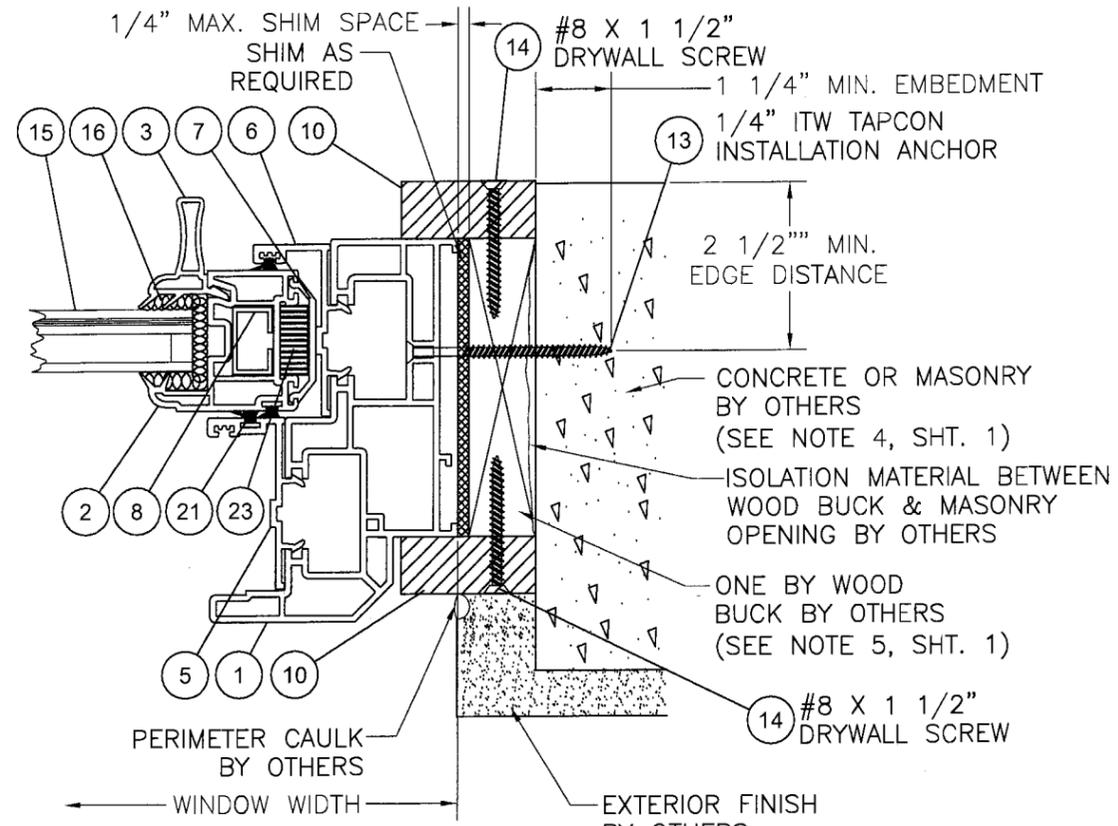


F HORIZONTAL SECTION
CONCRETE / MASONRY SUBSTRATE
(OPERABLE PANEL SHOWN,
FIXED PANEL SIMILAR)

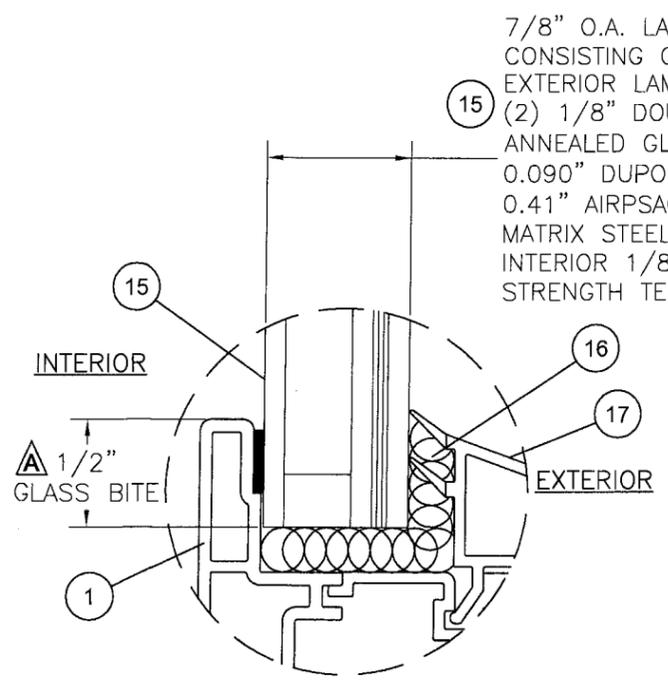

GLAZING DETAIL 1

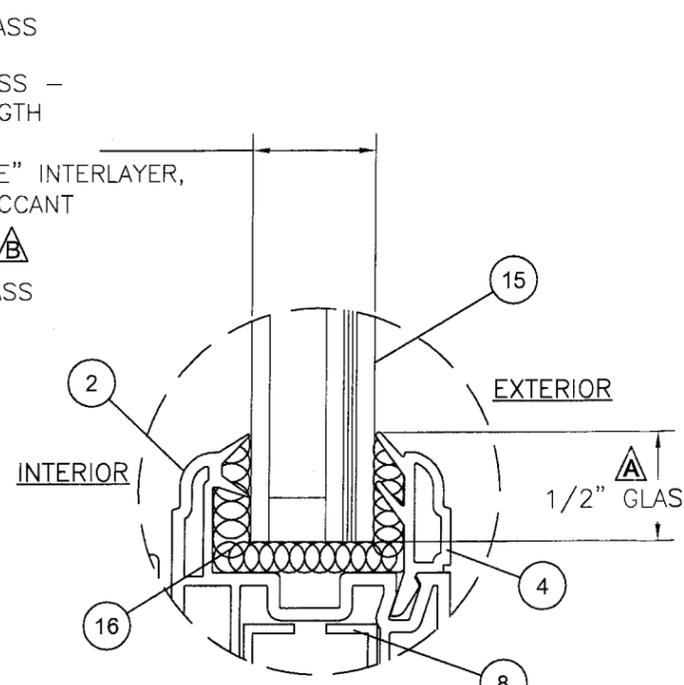

GLAZING DETAIL 2

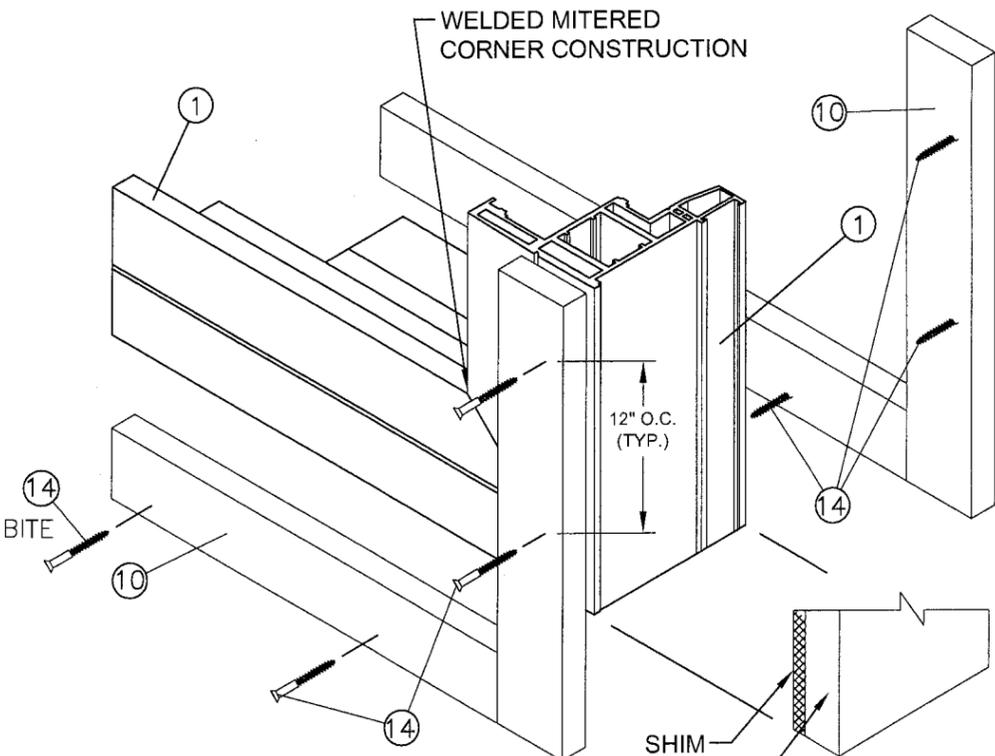

NOTE: CORNER DETAIL Δ 1X PT WOOD BUCK BY OTHERS
PARTING STOP EXTERIOR PERIMETER TO BE SEALED TO 1X PT WOOD BUCK WITH SIKA 551 SILICONE

DATE: 05/26/09

APPROVED BY: Paul E. Winter

REV	DESCRIPTION	DATE	BY
B	PER MIAMI-DADE COMMENTS DATED 4/28/09	05/26/09	SMC
A	PER MIAMI-DADE COMMENTS DATED 3/3/09	04/15/09	SMC

REGENCY PLUS, INC.
1024 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851

TITLE: IMPACT SERIES 5405 HORIZONTAL SLIDER WINDOW HORIZONTAL SECTIONS, GLAZING DETAIL & CORNER DETAIL

PREPARED BY: PTC, LLC
Phone: 321.690.1788
Fax: 321.690.1789

DRAWN BY: SMC
SCALE: N.T.S.
REV: B

DATE: 11/26/08
DRAWING NO.: RPLS00063
SHEET: 4 OF 5









PROJECT #508-1008.21

Paul E. Winter
Florida P.E. No. 27893







PTC, LLC
1535 N. Cogswell Street, Suite C25
Rockledge, Florida 32955
FBPE Certificate of Authorization NO. 25335

5/27/09

Approved as complying with the Florida Building Code
Date July 22, 2009
NOA# 08-1216-12
Miami Dade Product Control Division
By *Maurice Perez*

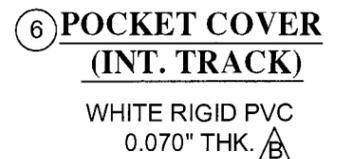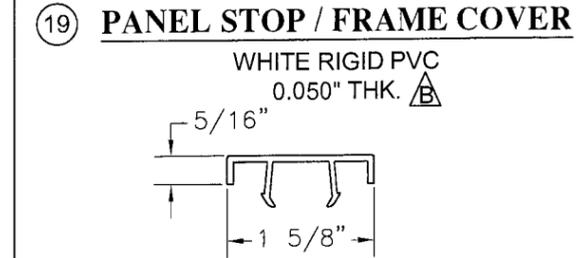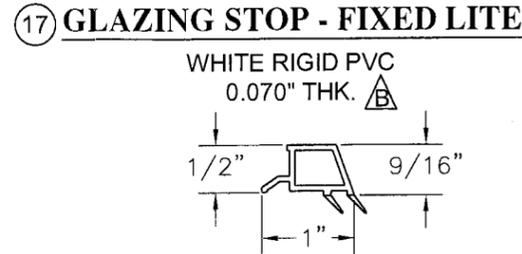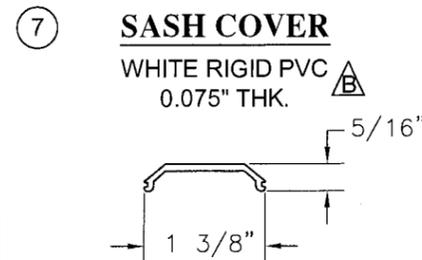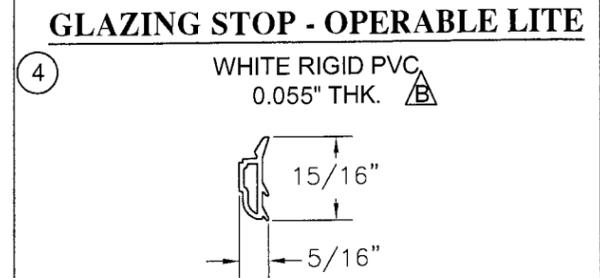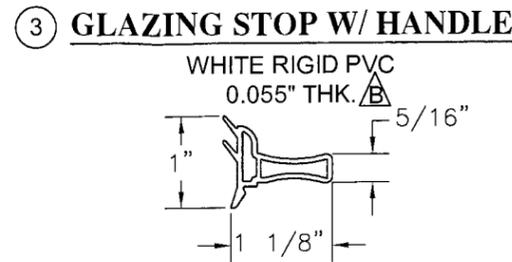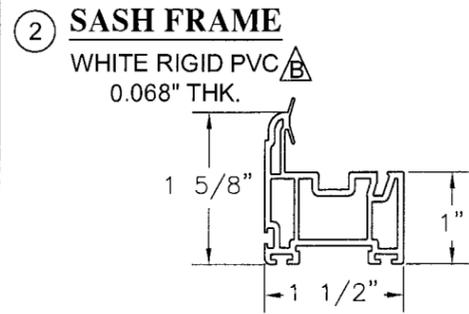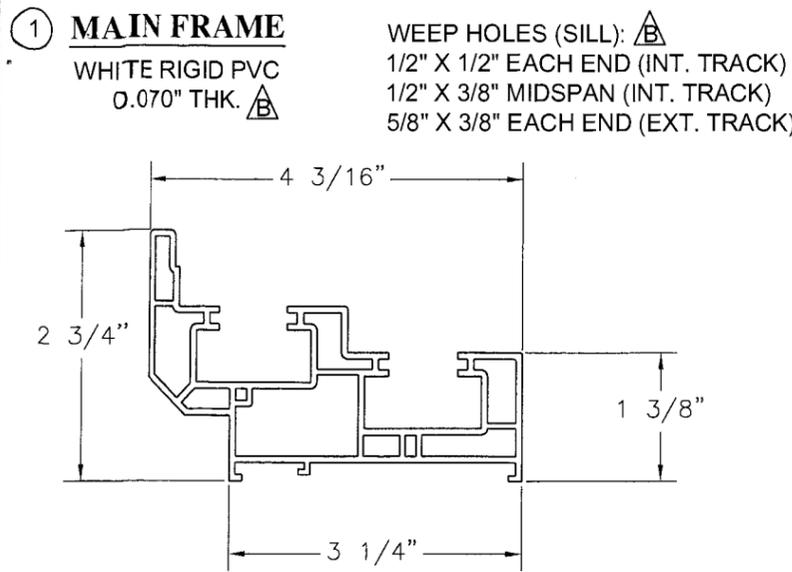

WEEP HOLES:
3/4" X 3/8" EACH END
1/4" X 9/16" MID SPAN

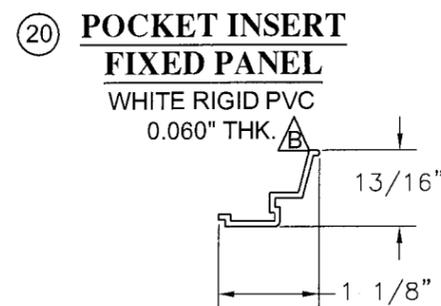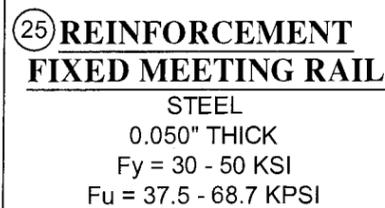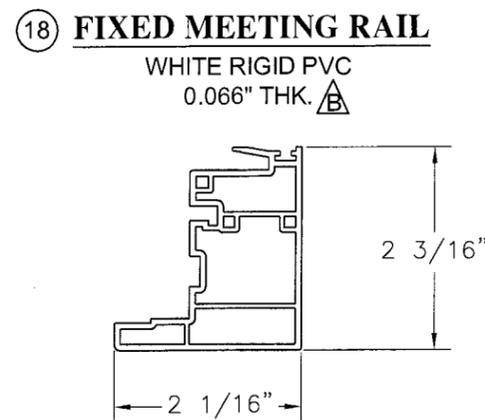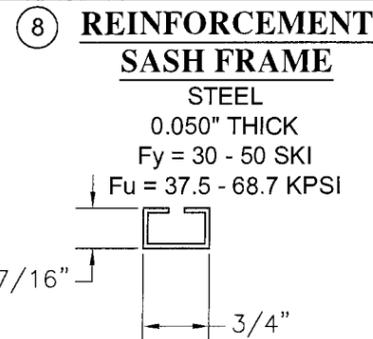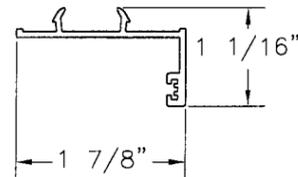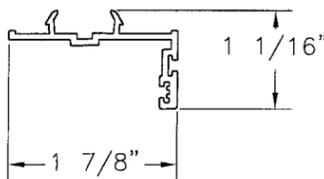

BILL OF MATERIALS

ITEM #	DESCRIPTION	MATERIAL	SUPPLIER
1	MAIN FRAME	WHITE RIGID PVC	DOMINION PLASTICS
2	SASH FRAME	WHITE RIGID PVC	DOMINION PLASTICS
3	GLAZING STOP WITH HANDLE	WHITE RIGID PVC	DOMINION PLASTICS
4	GLAZING STOP - OPERABLE LITE	WHITE RIGID PVC	DOMINION PLASTICS
5	POCKET COVER (EXT. TRACK)	WHITE RIGID PVC	DOMINION PLASTICS
6	POCKET COVER (INT. TRACK)	WHITE RIGID PVC	DOMINION PLASTICS
7	SASH COVER	WHITE RIGID PVC	DOMINION PLASTICS
8	REINFORCEMENT (SASH FRAME) 15 GA.	STEEL ALLOY 1008/1010*	REGENCY PLUS, INC.
9	INTERLOCK COVER	WHITE RIGID PVC	DOMINION PLASTICS
10	PARTING STOP	WOOD PT SYP	G=0.55 MIN.
11	CAM SWEEP LOCK & KEEPER	STEEL	TRUTH
12	#12 WOOD SCREW (INSTALLATION ANCHOR	STEEL	-----
13	1/4" TAPCON (INSTALLATION ANCHOR)	STEEL	ITW
14	#8 X 1 1/2" DRYWALL SCREW	STEEL	-----
15	7/8" O.A. INSULATED GLASS (SEE GLAZING DETAIL ON SHEET 3)	GLASS	EDGESEAL
16	SIKA FLEX 552	SILICONE	SIKA
17	GLAZING STOP - FIXED LITE	WHITE RIGID PVC	DOMINION PLASTICS
18	FIXED MEETING RAIL	WHITE RIGID PVC	DOMINION PLASTICS
19	PANEL STOP / FRAME COVER	WHITE RIGID PVC	DOMINION PLASTICS
20	POCKET INSERT - FIXED PANEL	WHITE RIGID PVC	DOMINION PLASTICS
21	FINSEAL WEATHERSTRIP	VINYL	ULTRAFAB
22	NYLON HOUSED METAL ROLLERS	NYLON / STEEL	SAUNDERS ENG'G
23	TILT LATCH	-----	VISION IND.
24	WEEP HOLE COVERS	PLASTIC	RO-MAI
25	REINFORCEMENT (FIXED MEETING RAIL) 15 GA.	STEEL ALLOY 1008/1010	REGENCY PLUS, INC.

*ASTM A-A1008A / A109

APPROVED BY: Paul E. Winter

DATE: 05/26/09

PER MIAMI-DADE COMMENTS DATED 4/28/09	SMC	05/26/09	SMC
PER MIAMI-DADE COMMENTS DATED 3/3/09	A	04/15/09	SMC
DESCRIPTION	REV	DATE	BY

REGENCY PLUS, INC.
1024 LOCUST GAP HIGHWAY
MT. CARMEL, PA 17851

TITLE: IMPACT SERIES 5405 HORIZONTAL SLIDER WINDOW COMPONENTS AND BILL OF MATERIALS

PREPARED BY: PTC, LLC
1535 N. Cogswell Street, Suite C25
Rockledge, Florida 32955
Phone 321.690.1788
Fax 321.690.1789

DATE: 11/26/08
DRAWING NO.: RPLS0063
SHEET: 5 OF 5

SCALE: N.T.S.

REV: B

PROJECT #308-1008.2.1

Paul E. Winter
Florida P.E. No. 22693

5/27/09

PTC, LLC

1535 N. Cogswell Street, Suite C25
Rockledge, Florida 32955

FBPE Certificate of Authorization No. 25935

Approved as complying with the
Florida Building Code
Date JULY 22, 2009
NOA# 08-1210-12
Miami Dade Product Control
Division
By Maurice Perez