



MIAMI-DADE COUNTY
BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 372-6339

NOTICE OF ACCEPTANCE (NOA)

www.miamidade.gov/buildingcode

DAB Door Company, Inc.
12195 NW 98th Avenue
Hialeah Gardens, FL 33018

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: 16'-2" Wide x 16' High Steel Sectional Garage Door w/ Window Lite Option

APPROVAL DOCUMENT: Drawing No. **03-06**, titled "Sectional Garage Door" (Model 824), dated 09/30/03, with last revision E dated 12/24/08, sheets 1 through 5 of 5, prepared by Al-Farooq Corporation, signed and sealed by Humayoun Farooq, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA # **05-0915.12** and consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



[Handwritten Signature]
 09/11/09

NOA No. 09-0324.06
Expiration Date: August 14, 2011
Approval Date: May 06, 2009
 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **03-06**, titled "Sectional Garage Door" (Model 824), dated 09/30/03, with last revision E dated 12/24/08, sheets 1 through 5 of 5, prepared by Al-Farooq Corporation, signed and sealed by Humayoun Farooq, P.E.

B. TESTS

1. Test reports on 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
2) Large Missile Impact Test per FBC, TAS 201-94
3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
4) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94
Along with marked-up drawings and installation diagram of DAB 824 24ga sectional garage door, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-08-2149A/B**, dated 06/27/08, signed and sealed by Candido F. Font, P.E.
"Submitted under NOA # 08-1106.05"
2. Test Report on Large Missile Impact Test per FBC, TAS 201 and Cyclic Wind Pressure Test per FBC, TAS 203, of "Sectional Residential Door with Windows", prepared by Hurricane Engineering & Testing Inc., Report No. **HETI 03-1348A**, dated 09/29/03, signed and sealed by Rafael E. Droz-Seda, P.E.
3. Test Report on Uniform Static Air Pressure Test per FBC, TAS 202, of "Sectional Residential Door" prepared by Hurricane Engineering & Testing Inc., Report No. **HETI 03-1337A**, dated 09/29/03, signed and sealed by Rafael E. Droz-Seda, P.E.
4. Test Report on Tensile Test per ASTM E-8 of "Sectional Residential Door (skin)", prepared by Hurricane Engineering & Testing Inc, Report No. **HETI 03-T058**, dated 10/31/03, signed and sealed by Rafael E. Droz-Seda, P.E.
"Submitted under NOA # 05-0915.12"
5. Test report on Salt Spray (Corrosion) Test per ASTM B 117 of a painted G-40 steel panels, prepared by Celotex Corporation, Test Report No. **258592**, dated 10/28/03, signed by W. A. Jackson, P.E.
"Submitted under NOA # 03-0210.04"

C. CALCULATIONS

1. Anchor verification calculations prepared by Al-Farooq Corporation, complying with F.B.C 2007, dated 01/20/09, signed and sealed by Humayoun Farooq, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 09-0324.06
Expiration Date: August 14, 2011
Approval Date: May 06, 2009

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

D. QUALITY ASSURANCE

1. Miami Dade Building Code Compliance Office (BCCO)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **08-0305.02**, issued to SABIC Innovative Plastics, for their Lexan Sheet Products, approved on 04/24/08 and expiring on 07/17/13.
2. Notice of Acceptance No. **07-1016.07**, issued to Insulfoam, LLC, for their Insulfoam Expanded Polystyrene Insulation, approved on 11/29/07 and expiring on 11/29/12.
3. Notice of Acceptance No. **07-1107.08**, issued to Dyplast Products, LLC, for their Expanded Polystyrene Block Type Insulation, approved on 04/26/07 and expiring on 08/27/08.
4. Notice of Acceptance No. **07-0301.10**, issued to Dyplast Products, LLC, for their Dyplast ISO-C1 Polyisocyanurate Insulation, approved on 06/07/07 and expiring on 01/11/12.

“Submitted under NOA # 05-0228.02”

5. Test Report on Accelerated Weathering Using Xenon Arc Light Apparatus Test per ASTM G155 of “PVC Extrusion Material”, prepared by Hurricane Engineering & Testing, Inc., Report No. **HETI 04-A002**, dated 09/27/04, signed and sealed by Rafael E. Droz-Seda, P.E.
6. Test Reports on Tensile Test per ASTM D638 of “PVC Extrusion Material”, prepared by Hurricane Engineering & Testing Inc., Report No. **HETI 04-T251**, dated 11/29/04 signed and sealed by I. Ghia, P.E.
7. Test Report on Self-Ignition Temperature Test, Rate of Burn Test and Smoke Density Test of “REHAU non-foam PVC extrusion material”, prepared by ETC Laboratories, Report No. **04-761-15019.0**, dated 05/06/04, signed and sealed by J. L. Doldan, P.E.

F. STATEMENTS


1. Statement letter of code conformance issued by Al-Farooq Corporation, dated 12/19/08, signed and sealed by Humayoun Farooq, P.E.
2. Statement letter of no financial interest issued by Al-Farooq Corporation, dated 12/19/08, signed and sealed by Humayoun Farooq, P.E.

G. OTHER

1. Notice of Acceptance No. **05-0915.12**, issued to DAB Door Company, Inc, approved on 04/20/06 and expiring on 08/14/11.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 09-0324.06
Expiration Date: August 14, 2011
Approval Date: May 06, 2009



7-1/2" X 3" X .071"
GALV. STEEL END ROLLER HINGE
W/ (6) # 14 X 5/8" SMS

7-1/2" X 2-1/8" X .050"
GALV. STEEL CENTER HINGE
W/ (4) # 14 X 1/2" SMS

LOCK
2/ DOOR

1" W X .15 THK. LATCH

SPRING LOADED SLIDE BOLT LOCK (BOTH SIDES)
FASTENED W/ (4) # 14 X 1/2" S.M.S.
5/8" MIN. LOCK ENGAGEMENT CONFORMS TO
FBC 1012 REGARDING GARAGE DOORS

.158 DIA. GALV. AIRCRAFT TYPE
CABLE & NICO-PRESS SLEEVE
W/ MIN. 5 TO 1 SAFETY FACTOR

2-3/4" WX 5-5/8" HX .090" THK.
STEEL PLATE, 1-3/8" DEEP
WITH (3) # 14 X 3/4"
SELF DRILLING SCREWS

BRACKET
STD. LIFT DOOR

BRACKET
LOW HEADROOM
DOOR OPTION

7-7/8" WX 3-1/8" HX .010" THK.
STEEL PLATE

OPTIONAL VENTS
(3) 5" WIDE AT 7" O.C. MAX.
OPNG. AREA NOT TO EXCEED
120 SQ. IN.

COLONIAL DESIGN

OPTIONAL FLUSH FACE
WOOD GRAIN DESIGN

MAX. DOOR WIDTH
16'-2"

INSIDE ELEVATION
RAISED PANEL EMBOSSED DOOR

DAB DOOR MODEL 824
MAX. SIZE 16'-2" WIDE X 16'-0" HIGH

DESIGN PRESSURE RATING = + 27.0 PSF
- 30.0 PSF






THIS PRODUCT IS RATED FOR LARGE MISSILE IMPACT

GENERAL NOTES

1. THIS PRODUCT HAS BEEN DESIGNED AND TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE 2004/2007 EDITION INCLUDING HIGH VELOCITY HURRICANE ZONE.
2. ANCHORS SHALL BE AS LISTED, SPACED AS SHOWN ON DETAILS. ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO.
3. ALL BOLTS, NUTS AND WASHERS SHALL BE ZINC PLATED CARBON STEEL.
4. ANCHORING OR LOADING CONDITIONS OTHER THAN THOSE SHOWN IN THESE DETAILS ARE NOT PART OF THIS APPROVAL.
5. A LOAD DURATION INCREASE IS USED IN DESIGN OF ANCHORS INTO WOOD ONLY.

SCHEDULE 'A'

CENTER STILES CONFIGURATION	
DOOR WIDTHS	# OF CENTER STILES
8'-0" TO 9'-10"	2
10'-0" TO 11'-10"	2
12'-0" TO 13'-10"	3
14'-0" TO 15'-10"	4
15'-11" TO 16'-2"	5

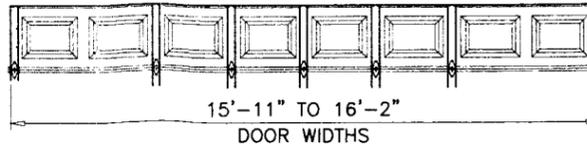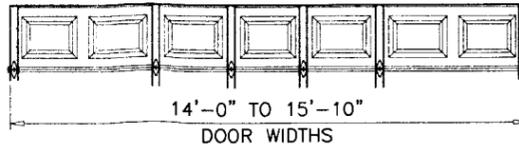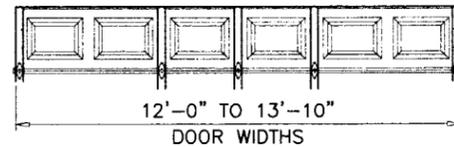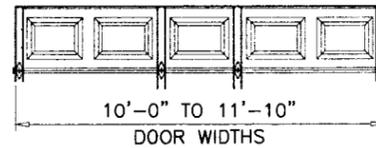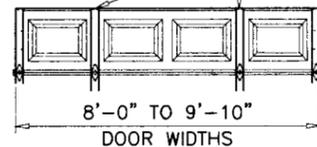

OUTSIDE KEYED LOCK

LOCK BAR LOCKING SHOWN
ALTERNATE TO LOCKS SHOWN ABOVE

LOCK BAR GUIDES
INSTALLED ON END STILE
WITH (4) # 14 X 5/8" SMS

.18T X 1" W LOCK BAR
ENGAGES IN TRACK
ON EACH SIDE OF DOOR

DOOR HEIGHT	CONSISTS OF	
6'-6"	2 SECTIONS 18"	2 SECTIONS 21"
6'-9"	1 SECTION 18"	3 SECTIONS 21"
7'	4 SECTIONS 21"	-
7'-3"	-	-
7'-6"	5 SECTIONS 18"	-
7'-9"	4 SECTIONS 18"	1 SECTION 21"
8'	3 SECTIONS 18"	2 SECTIONS 21"
8'-3"	2 SECTIONS 18"	3 SECTIONS 21"
8'-6"	1 SECTION 18"	4 SECTIONS 21"
8'-9"	5 SECTIONS 21"	-
9'	6 SECTIONS 18"	-
9'-3"	5 SECTIONS 18"	1 SECTION 21"
9'-6"	4 SECTIONS 18"	2 SECTIONS 21"
9'-9"	3 SECTIONS 18"	3 SECTIONS 21"
10'	2 SECTIONS 18"	4 SECTIONS 21"
10'-3"	1 SECTION 18"	5 SECTIONS 21"
10'-6"	6 SECTIONS 21"	-
10'-9"	6 SECTIONS 18"	1 SECTION 21"
11'	5 SECTIONS 18"	2 SECTIONS 21"
11'-3"	4 SECTIONS 18"	3 SECTIONS 21"
11'-6"	3 SECTIONS 18"	4 SECTIONS 21"
11'-9"	2 SECTIONS 18"	5 SECTIONS 21"
12'	1 SECTIONS 18"	6 SECTIONS 21"
12'-3"	7 SECTIONS 21"	-
12'-6"	6 SECTIONS 18"	2 SECTIONS 21"
12'-9"	5 SECTIONS 18"	3 SECTIONS 21"
13'	4 SECTIONS 18"	4 SECTIONS 21"
13'-3"	3 SECTIONS 18"	5 SECTIONS 21"
13'-6"	2 SECTIONS 18"	6 SECTIONS 21"
13'-9"	1 SECTION 18"	7 SECTIONS 21"
14'	8 SECTIONS 21"	-
14'-3"	6 SECTIONS 18"	3 SECTIONS 21"
14'-6"	5 SECTIONS 18"	4 SECTIONS 21"
14'-9"	4 SECTIONS 18"	5 SECTIONS 21"
15'	3 SECTIONS 18"	6 SECTIONS 21"
15'-3"	2 SECTIONS 18"	7 SECTIONS 21"
15'-6"	1 SECTION 18"	8 SECTIONS 21"
15'-9"	9 SECTIONS 21"	-
16'	6 SECTIONS 18"	4 SECTIONS 21"

AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978
GARAGE\03-06DAB

SECTIONAL GARAGE DOOR
DAB DOORS INC.
12195 N.W. 98 TH. AVE.
HIALEAH GARDENS, FL. 33018
TEL. (305) 556 - 6624


no.	date	description
A	04.17.04	REV. PER BCCO COMMENTS
B	05.19.04	NO CHANGE THIS SHEET
C	08.11.05	UPDATED FOR 2004 FBC
D	02.28.06	REV. PER BCCO COMMENTS
E	12.24.08	UPDATED FOR 2007 FBC

Engr: DR. HUMAYOON FAROOQ
STRUCTURES
FLA. PE # 16557
C.A.N. 3538

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 09-0324.06
Expiration Date 08/14/2011
By: *[Signature]*
Miami Dade Product Control
Division

FEB 03 2009

date: 09-30-03
scale: 1/2" = 1'-0"
dr. by: HAMID
chk. by:
drawing no.
03-06
sheet 1 of 5

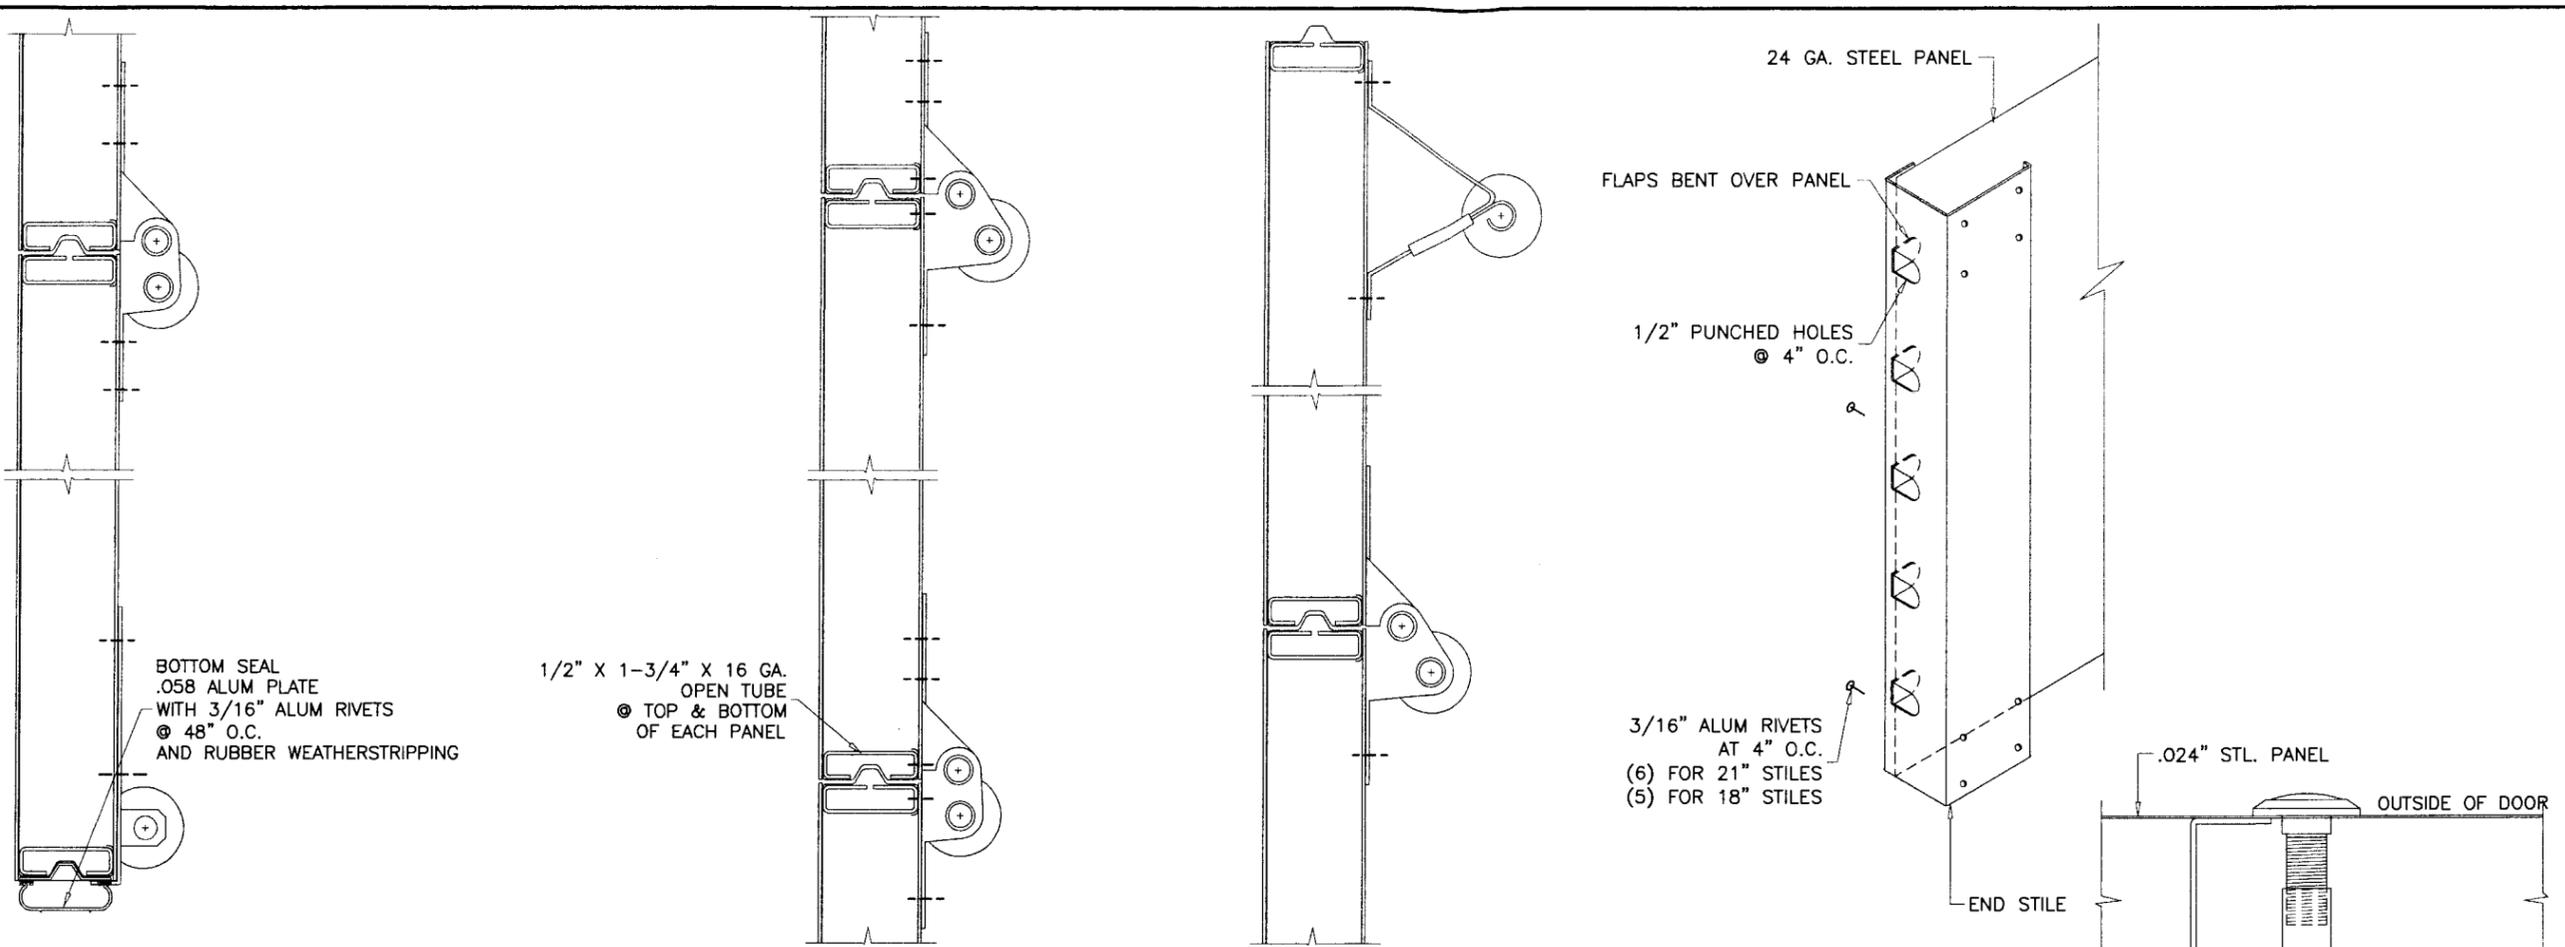

1ST SECTION (BOTTOM)

INTERMEDIATE SECTION

TOP SECTION

FOR CONNECTION OF WOOD BUCK TO MASONRY SEE NOTE ON SHEET 4

STEEL TRACK BRACKET FASTENED TO WOOD JAMB WITH 5/16" X 1-5/8" LAG SCREW (FULLY THREADED) ONE PER BRACKET

OPTIONAL STOP MOULDING BY DOOR INSTALLER

14 X 5/8" SMS 6 PER HINGE

1/2" X 1-3/4" X .058" FORMED STEEL GLUED TO PANEL AND SECURED TO END STILE WITH 3/16" ALUM RIVETS @ 12" O.C.

1-7/8" X 2-5/8" X .049" STEEL CENTER STILE, GLUED AND RIVETED TO PANEL W/ (4) 3/16" ALUM RIVETS

14 X 5/8" S.M.S. ALUM RIVETS 4/ HINGE

3/4" X 2" X 2-1/2" X .049" STEEL END STILE, CONNECT TO PANELS WITH FLAPS AND 3/16" ALUM RIVETS SEE DETAIL ABOVE

1.9" X 2.19" X 3.3" X 12 GA. STEEL TRACK BRACKETS SEE SHEET 3 FOR SPACING

2-1/8" X 1" X .078" GALV. STEEL TRACK FASTENED TO TRACK PLATES W/ 1/4"-20 X 5/8" TRUSS HD. SLOTTED M.S. & LOCK NUT



7/16" PUSHNUT INSTALLED ON ROLLER SHAFT

7-1/2" X .050" GALV. STEEL CENTER HINGE

7-1/2" X .071" END ROLLER HINGE

ANCHOR TYPE A OR B (1) PER BRACKET SEE SHEET 3 FOR BRACKET SPACING

1.82" DIA. X .50" NYLON ROLLERS W/ .44 DIA. X 6" STEM STEEL ROLLERS W/ .44 X 4-7/8" STEM

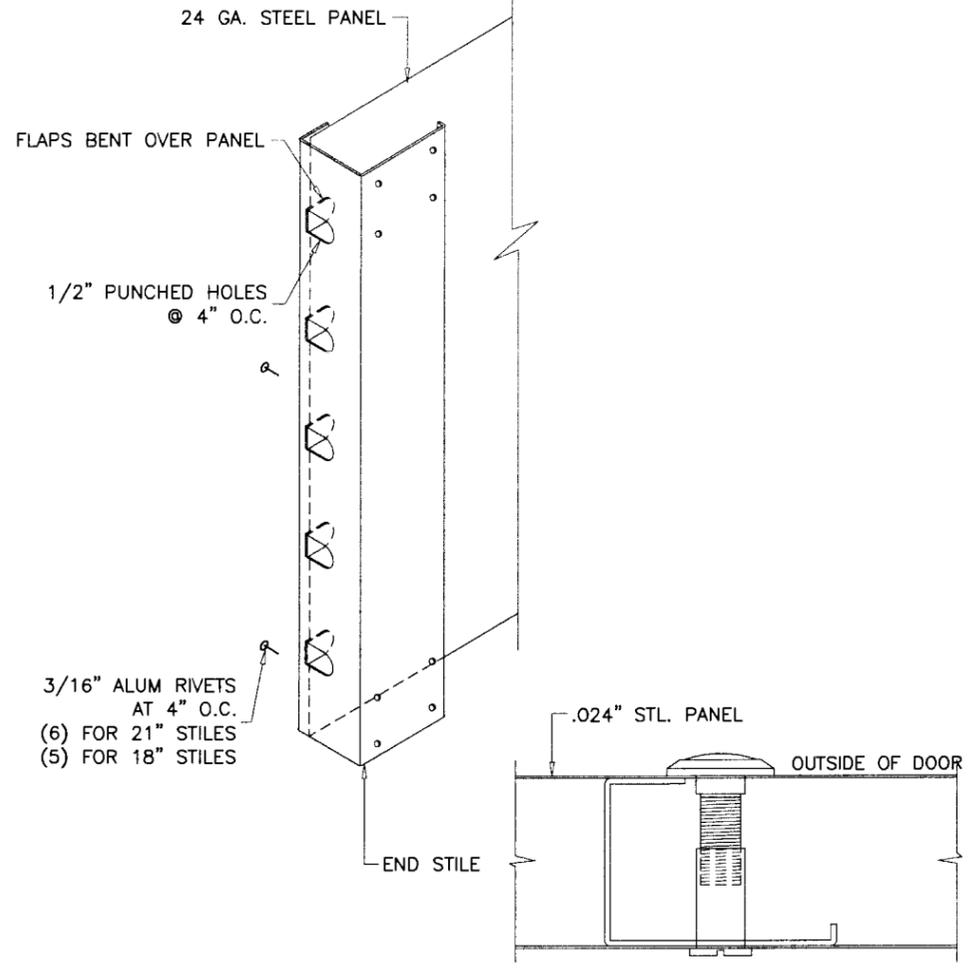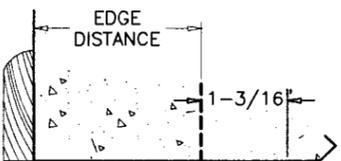

SOLID BRASS DOOR VIEWER

BY 'SCHLAGE SECURITY HARDWARE' INSTALLED IN 9/16" DIA. HOLES IN CENTER STILE POSITIONED AT EYE LEVEL

ANCHORS:

- A) 3/8" DIA. POWER-BOLT BY 'POWERS' 2" MIN. EMBED INTO CONCRETE 1-7/8" MIN. EDGE DISTANCE
- B) 3/8" DIA. HLC SLEEVE BY 'HILTI' 1-1/4" MIN. EMBED INTO CONCRETE OR FILLED BLOCK 1-5/8" MIN. EDGE DISTANCE INTO CONCRETE 4" MIN. EDGE DISTANCE INTO FILLED BLOCK

CONCRETE f'c = 3000 PSI MIN.
C-90 GROUT FILLED BLOCK f'm = 2000 PSI MIN.

Engr: DR. HUMAYOON FAROOQ STRUCTURES FLA. PE # 16557 C.A.N. 3538

PRODUCT REVISED as complying with the Florida Building Code Acceptance No. 09-0324-06 Expiration Date 08/14/2011 By: [Signature] Miami Dade Product Control Division

FEB 03 2009






afC
AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 1235 S.W. 87 AVE
 MIAMI, FLORIDA 33174
 TEL. (305) 264-8100 FAX. (305) 262-6978
 GARAGE\03-06DAB

SECTIONAL GARAGE DOOR
DAB DOORS INC.
 12195 N.W. 98 TH. AVE.
 HIALEAH GARDENS, FL. 33018
 TEL. (305) 556 - 6624

no	date	by	description
A	04.17.04	REV. PER BCCO COMMENTS	
B	05.19.04	NO CHANGE THIS SHEET	
C	08.11.05	ANCHORS REV.	
D	02.28.06	REV. PER BCCO COMMENTS	
E	12.24.08	UPDATED FOR 2007 FBC	



date: 09-30-03
 scale: -
 dr. by: HAMID
 chk. by:

drawing no. 03-06
 sheet 2 of 5

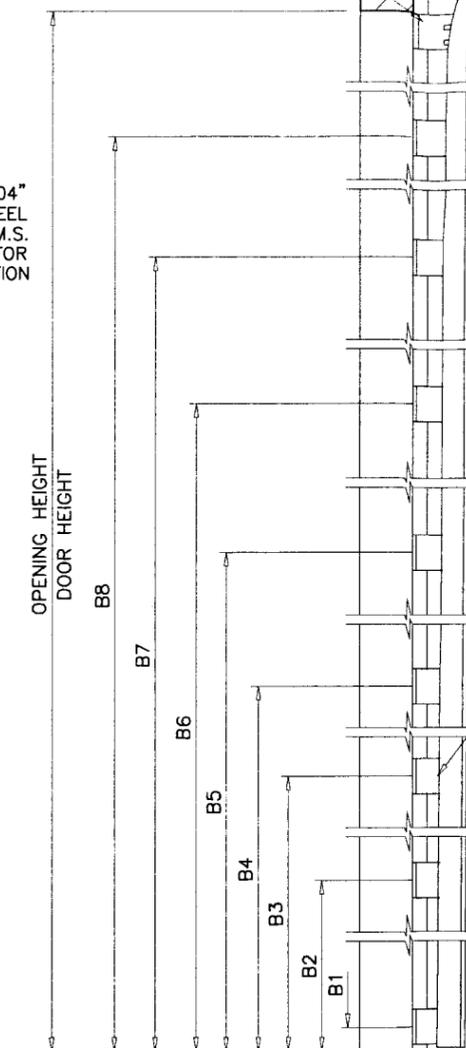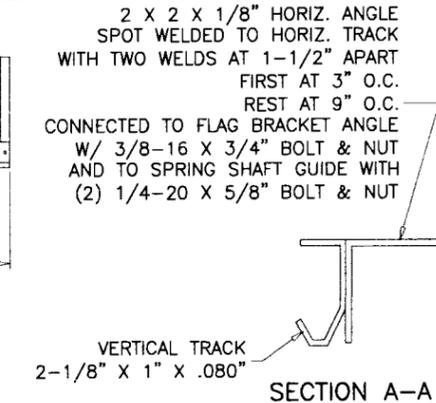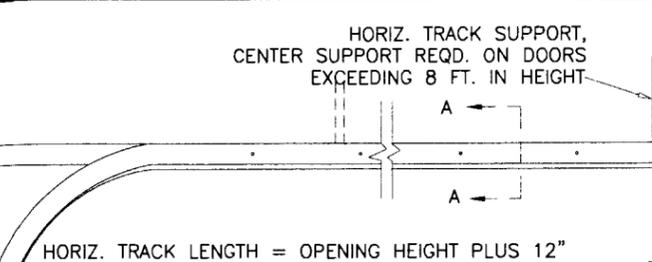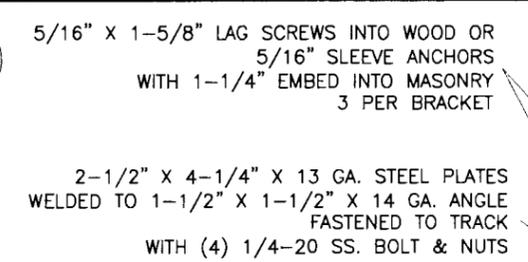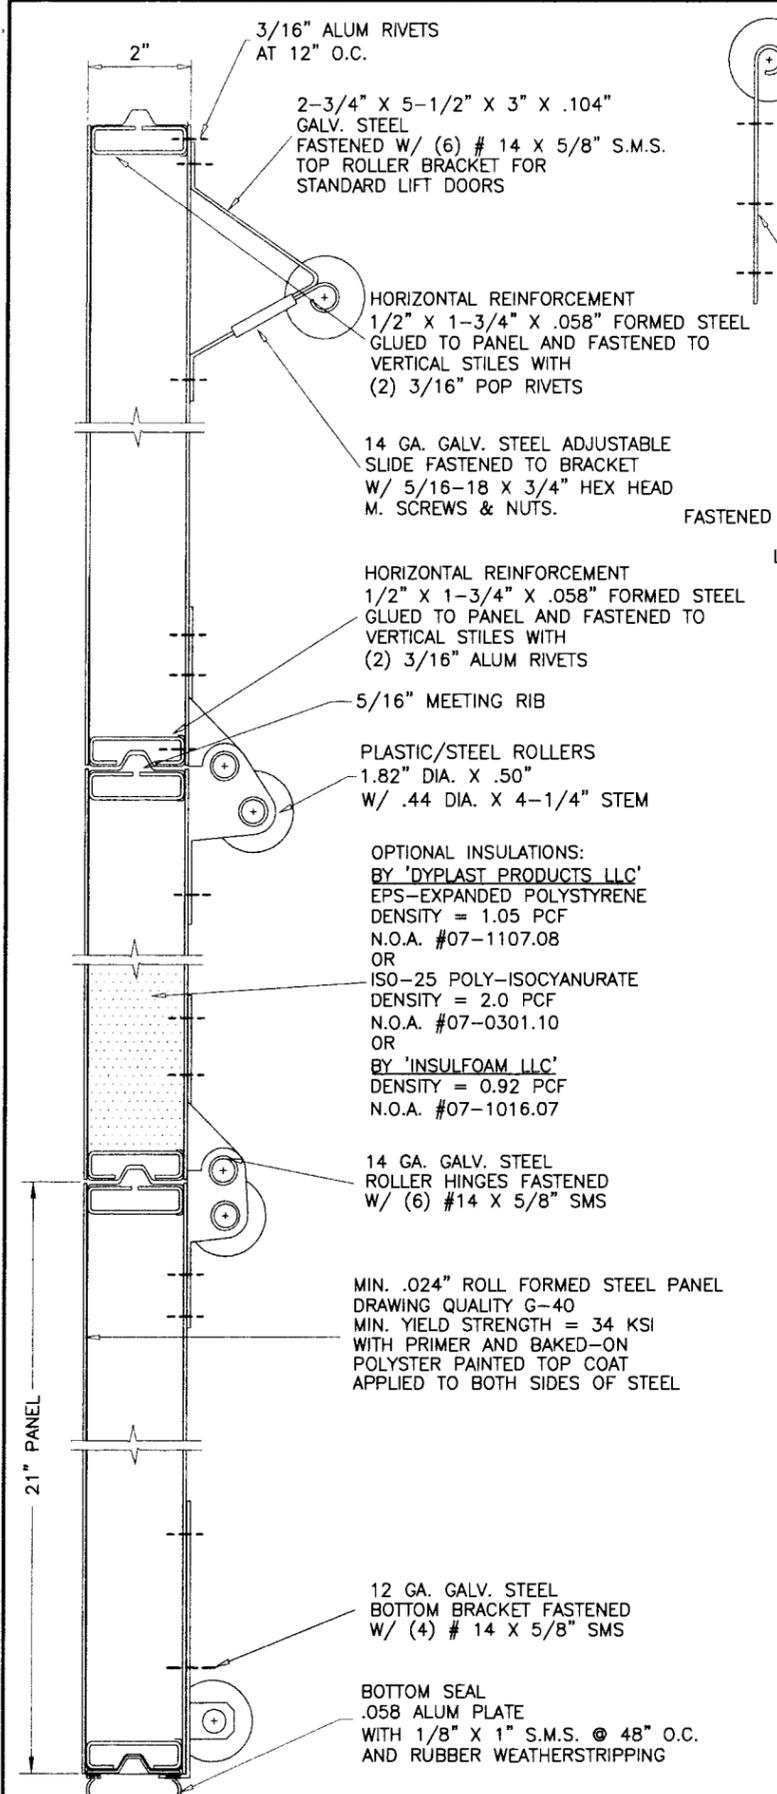

DOOR HEIGHT	* SECTION HEIGHTS					BRACKET PLACEMENTS							
	1ST	2ND	3RD	4TH	5TH	B1	B2	B3	B4	B5	B6	B7	B8
6'-0"	18"	18"	18"	18"	N/A	1"	11-3/4"	23"	34"	45"	56"	67"	-
6'-6"	21"	18"	18"	21"	N/A	1"	11-3/4"	23"	34"	45"	56"	67"	-
7'-0"	21"	21"	21"	21"	N/A	1"	11-3/4"	23"	34"	45"	56"	67"	-
7'-6"	18"	18"	18"	18"	18"	1"	11-3/4"	23"	34"	45"	56"	67"	78-1/4"
8'-0"	21"	18"	18"	18"	21"	1"	11-3/4"	23"	34"	45"	56"	67"	78-1/4"

*-SECTIONS ARE NUMBERED STARTING AT THE BOTTOM FOR DOORS MORE THAN 8 FT. HIGH, USE ADDITIONAL TRACK BRACKETS AT 10" O.C.

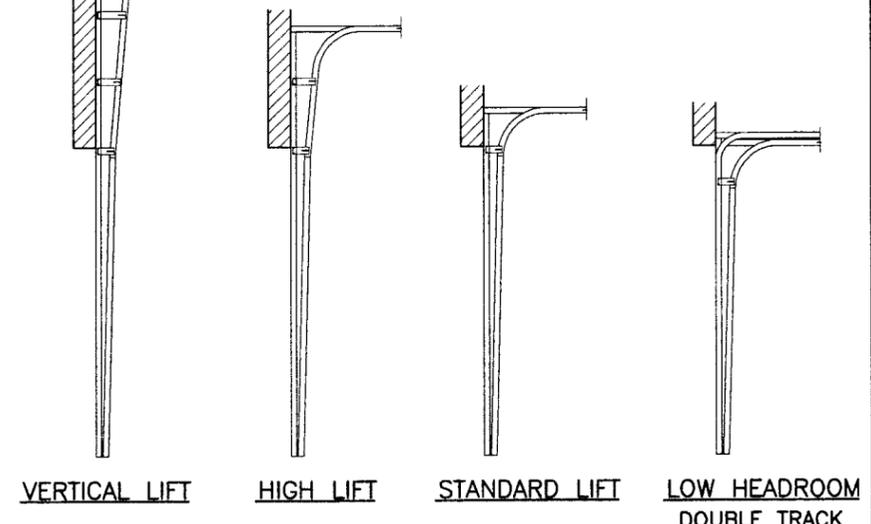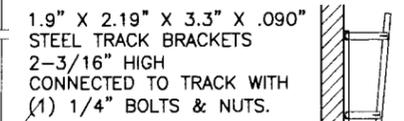

AVAILABLE TRACK OPTIONS

Engr: DR. HUMAYOON FAROOQ
 STRUCTURES
 FLA. PE # 16557
 C.A.N. 3538

PRODUCT REVISED as complying with the Florida Building Code
 Acceptance No 07-0329.06
 Expiration Date 08/14/2011

By *[Signature]*
 Miami Dade Product Control Division

FEB 03 2009

AL-FAROOQ CORPORATION
 ENGINEERS & PRODUCT DEVELOPMENT
 1235 S.W. 87 AVE
 MIAMI, FLORIDA 33174
 TEL. (305) 264-8100 FAX. (305) 262-6978
 GARAGE\03-06DAB

SECTIONAL GARAGE DOOR
DAB DOORS INC.
 12195 N.W. 98 TH. AVE.
 HIALEAH GARDENS, FL. 33018
 TEL. (305) 556 - 6624

revisions:


no	date	by	description
A	04.17.04	REV. PER BCCO COMMENTS	
B	05.19.04	GALV. COATING REV.	
C	08.11.05	ANCHOR SPACING REV.	
D	02.28.06	REV. PER BCCO COMMENTS	
E	12.24.08	UPDATED FOR 2007 FBC	

date: 09-30-03
 scale: -
 dr. by: HAMID
 chk. by:
 drawing no. 03-06
 sheet 3 of 5

SECTION A-A
 SEE SHEET 2 FOR LOCATION OF REINFORCING TRUSSES

ANCHOR SPACING				
ANCHORS	STRUCTURE	EMBED	SPACING	EDGE DIST.
3/8" HLC SLEEVE BY 'HILTI'	CONC.	1-1/4"	8"	1-5/8"
3/8" HLC SLEEVE BY 'HILTI'	FILLED BLOCK	1-1/4"	8"	4"
3/8" DYNABOLT BY 'ITW'	CONC.	1-1/2"	8"	2"
3/8" DYNABOLT BY 'ITW'	FILLED BLOCK	1-1/2"	8"	3-3/4"
3/8" POWER-BOLT BY 'POWERS'	CONC.	2"	8"	1-7/8"
3/8" SLEEVE-ALL BY 'SIMPSONS'	CONC.	1-1/2"	8"	1-7/8"

CONCRETE f'c = 3000 PSI MIN.
 C-90 GROUT FILLED BLOCK f'm = 2000 PSI MIN.

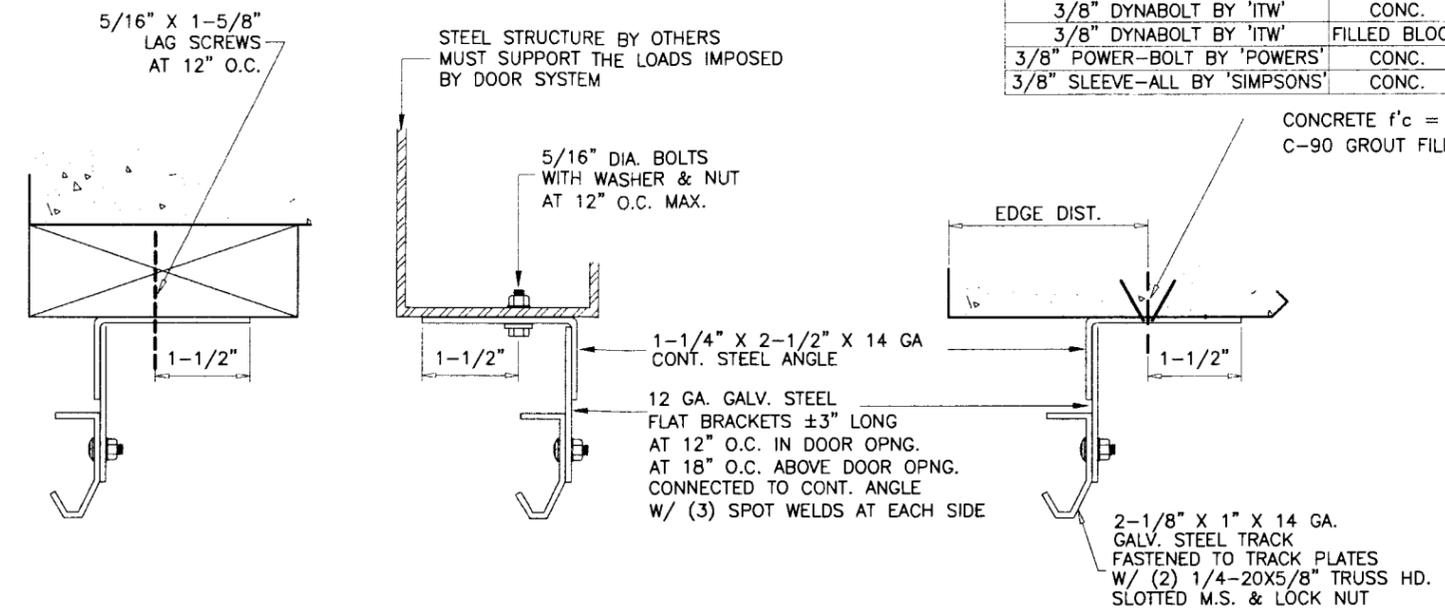

ALTERNATE TRACK INSTALLATION

WOOD FRAME BUILDINGS

STUD WALLS OR DOOR OPENING (NOT BY DAB DOORS) SHALL BE FRAMED SOLID BY NOT LESS THAN (3) 2X6 PRESSURE TREATED GRADE 2 SYP OR BETTER WOOD STUDS.
 STUD WALLS TO BE CONT. FROM FOOTING TO TIE BEAM. ENGINEER OF RECORD TO VERIFY ADEQUACY OF THE SUPPORTING STRUCTURE.

WOOD BUCK CONNECTION TO MASONRY

TRACK SHALL BE SECURED WITH CONT. STEEL ANGLE TO PRESSURE TREATED 2X6 SYP WOOD JAMBS WHICH SHALL BE ANCHORED TO GROUTED REINFORCED MASONRY BLOCK WALL OR CONC. COLUMN WITH

1/4" ULTRACON BY 'ELCO' WITH SPACING OF 17" O.C. INTO BLOCK WALL, WITH 2-1/4" MIN. EMBED
 16" O.C. INTO 3000 PSI CONCRETE, WITH 1-3/4" MIN. EMBED
 2-1/2" MIN. EDGE DISTANCE


1/4" TAPPER BY 'POWERS' WITH SPACING OF 10" O.C. INTO BLOCK WALL, WITH 1-1/2" MIN. EMBED
 12" O.C. INTO 3000 PSI CONCRETE, WITH 1-3/4" MIN. EMBED
 3" MIN. EDGE DISTANCE

3/8" CONFLX BY 'ELCO' OR 3/8" LDT BY 'ITW' WITH SPACING OF 24" O.C. INTO 3000 PSI CONCRETE, WITH 2-1/2" MIN. EMBED
 3" MIN. EDGE DISTANCE

3/8" HLC SLEEVE BY 'HILTI' WITH SPACING OF 7" O.C. INTO BLOCK WALL, WITH 1-1/2" MIN. EMBED, 4" MIN. EDGE DIST.
 16" O.C. INTO 3000 PSI CONCRETE, WITH 1-1/4" MIN. EMBED AND 2-1/2" MIN. EDGE DISTANCE

THE BLOCK WALL CELLS SHALL BE GROUT FILLED AND REINFORCED WITH FOUR # 5 BARS EXTENDING INTO FOOTING AND INTO TIE BEAMS ALL BARS SHALL BE CONTINUOUS FROM TIE BEAMS TO FOOTING.

PREPARATION OF JAMBS BY OTHERS

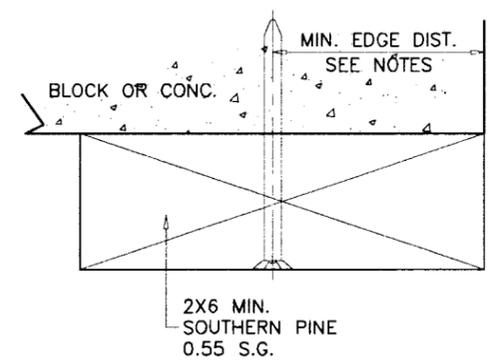

Engr. DR. HUMAYOUN FAROOQ
 STRUCTURES
 FLA. PE # 16557
 C.A.N. 3538

FEB 03 2009

PRODUCT REVISED
 as complying with the Florida Building Code
 Acceptance No. 07-0324.06
 Expiration Date 03/14/2011


By: *[Signature]*
 Miami Dade Product Control Division

revisions:

no	date	by	description
A	04.17.04	REV. PER BCCO	COMMENTS
B	05.19.04	GALV. COATING REV.	
C	08.11.05	ANCHOR SPACING REV.	
D	02.28.06	REV. PER BCCO	COMMENTS
E	12.24.08	UPDATED FOR	2007 FBC




date: 09-30-03
 scale: -
 dr. by: HAMID
 chk. by:

* PLASTIC COMPLIES WITH SECTION 2612 OF FBC 2007 SEE EVIDENCE PAGE

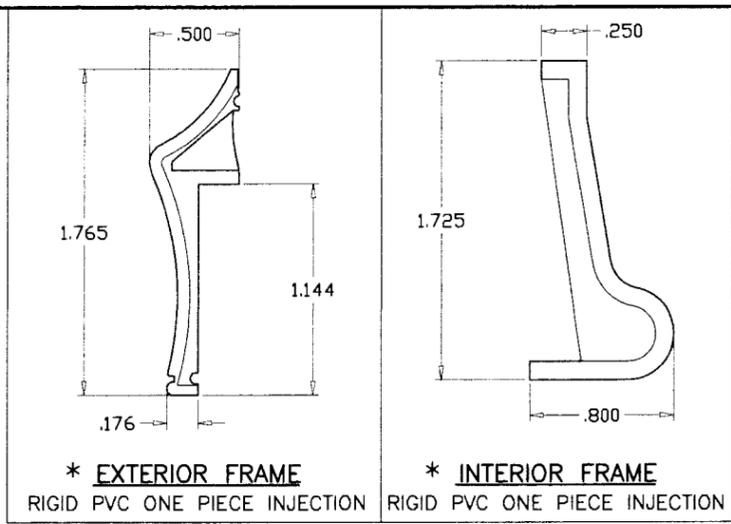


* EXTERIOR FRAME
RIGID PVC ONE PIECE INJECTION

* INTERIOR FRAME
RIGID PVC ONE PIECE INJECTION

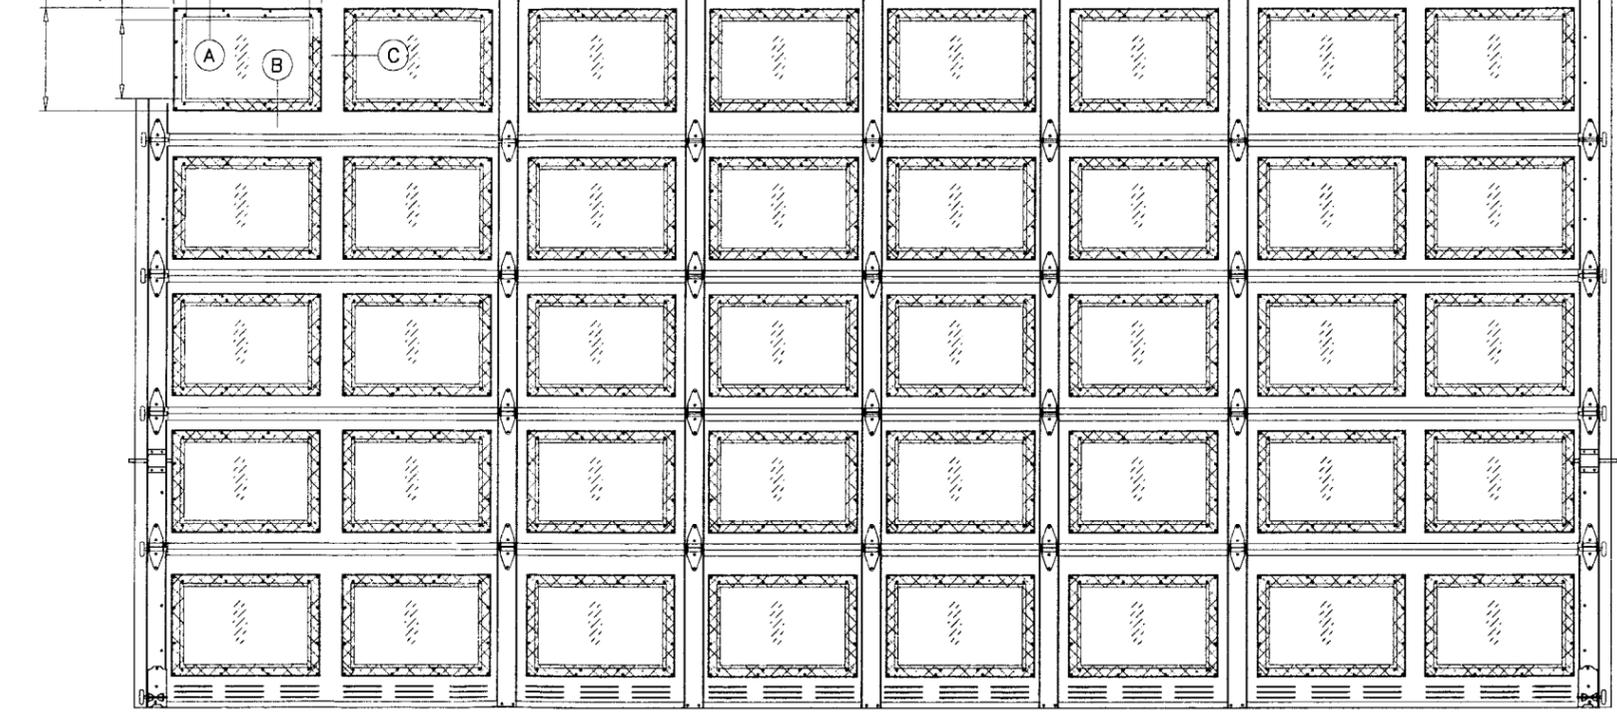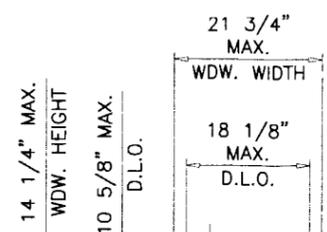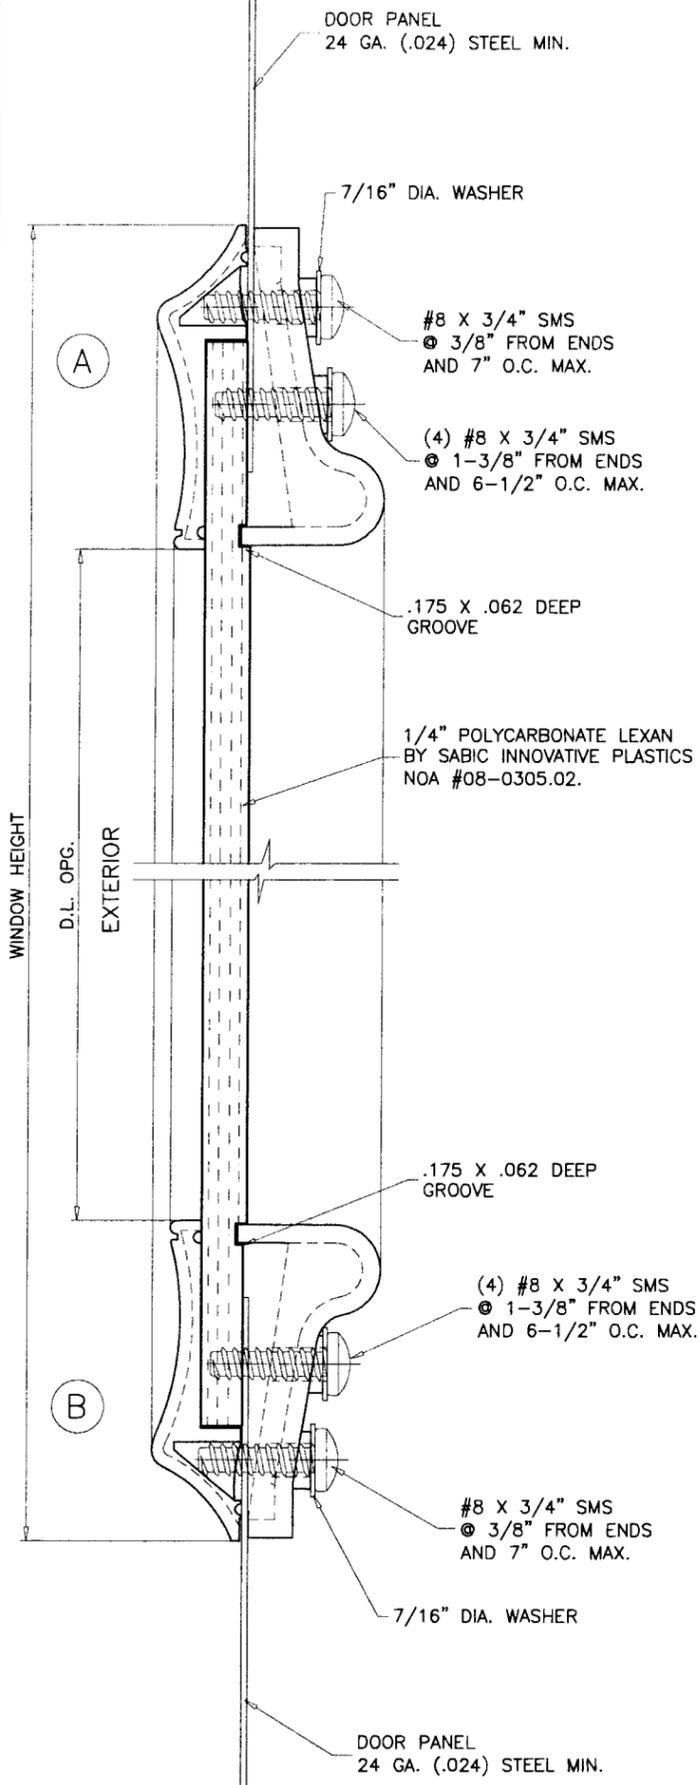

INSIDE ELEVATION
RAISED PANEL EMBOSSED DOOR WITH OPTIONAL WINDOWS

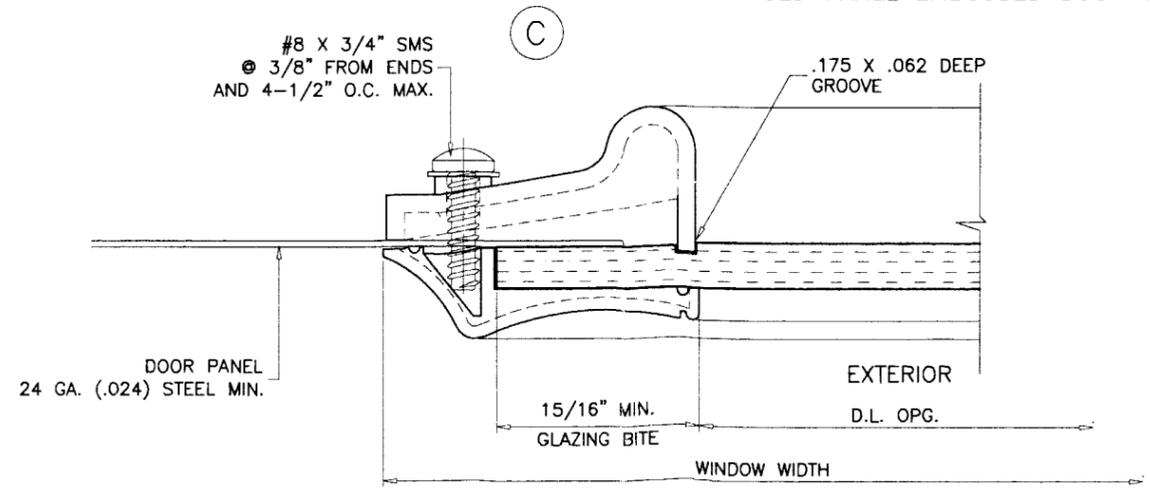

Engr: DR. HUMAYOON FAROOQ
STRUCTURES
FLA. PE # 18557
C.A.N. 3538

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. *07-0324-06*
Expiration Date *08/14/2011*
By *[Signature]*
Miami Dade Product Control
Division

[Signature]
FEB 03 2009

afC
AL-FAROOQ CORPORATION
ENGINEERS & PRODUCT DEVELOPMENT
1235 S.W. 87 AVE
MIAMI, FLORIDA 33174
TEL. (305) 264-8100 FAX. (305) 262-6978
GARAGE 03-06DAB

SECTIONAL GARAGE DOOR
DAB DOORS INC.
12195 N.W. 98 TH. AVE.
HIALEAH GARDENS, FL. 33018
TEL. (305) 556 - 6624

revisions:	no	date	by	description
	C	08.11.05		SHEET ADDED
	D	02.28.06		REV. PER BCCO COMMENTS
	E	12.24.06		UPDATED FOR 2007 FBC

date: 09-30-03
scale: -
dr. by: HAMID
chk. by:

drawing no.
03-06
sheet 5 of 5