



**MIAMI-DADE COUNTY**  
**BUILDING CODE COMPLIANCE OFFICE (BCCO)**  
**PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA**  
**METRO-DADE FLAGLER BUILDING**  
**140 WEST FLAGLER STREET, SUITE 1603**  
**MIAMI, FLORIDA 33130-1563**  
**(305) 375-2901 FAX (305) 372-6339**

**NOTICE OF ACCEPTANCE (NOA)**

[www.miamidade.gov/buildingcode](http://www.miamidade.gov/buildingcode)

**Premix - Marbletite Manufacturing Co. Inc.**  
**1259 NW 21 Street.**  
**Pompano Beach FL 33069**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

**DESCRIPTION: P.M. Concentrate over 1/2" Plywood Sheathing – S.M.I.**

**APPROVAL DOCUMENT:** Drawing 1365, titled "P.M. Concentrate Single Coat Stucco System over 1/2" Plywood Sheathing", sheets 1 through 4 of 4, dated 10/19/05, with revision A1 dated 05/12/10, prepared by W.W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

**MISSILE IMPACT RATING: Small Missile Impact Resistant**

**LABELING:** Each component shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA **renews NOA # 05-0324.04** and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



*[Handwritten Signature]*  
 07/09/10

**NOA No. 10-0518.16**  
**Expiration Date: December 08, 2015**  
**Approval Date: July 28, 2010**  
**Page 1**

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

**A. DRAWINGS**

1. Drawing No. **1365**, titled "P.M. Concentrate Single Coat Stucco System over 1/2" Plywood Sheathing", sheets 1 through 4 of 4, dated 10/19/05, with revision A1 dated 05/12/10, prepared by W.W. Schaefer Engineering & Consulting, P.A., signed and sealed by Warren W. Schaefer, P.E.

**B. TESTS "Submitted under NOA # 05-0324.04"**

1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94  
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94  
3) Water Resistance Test, per FBC, TAS 202-94  
4) Small Missile Impact Test per FBC, TAS 201-94  
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94  
along with marked-up drawings and installation diagram of Stucco Wall Panels Specimens # S1-1, S1-2, S2-1 and S4-1, dated 10/28/04 and Specimens # S2-2, S2-3, S3-1 and S3-2, dated 12/23/04, both prepared by Hurricane Test Laboratory, LLC, Test Report No. **0235-0508-04**, signed and sealed by Vinu J. Abraham, P.E.

**C. CALCULATIONS**

1. None.

**D. QUALITY ASSURANCE**


1. Miami Dade Building Code Compliance Office (BCCO)

**E. MATERIAL CERTIFICATIONS**

1. None.

**F. STATEMENTS**

1. Code compliance with FBC 2007 letter, prepared by W.W. Schaefer Engineering & Consulting, P.A., dated 05/12/10, signed and sealed by Warren W. Schaefer, P.E.
2. No financial interest letter prepared by W. W. Schaefer Engineering & Consulting, P.A., dated 05/12/10, signed and sealed by Warren W. Schaefer, P.E.



07/08/10


Carlos M. Utrera, P.E.

Product Control Examiner

NOA No. 10-0518.16


Expiration Date: December 08, 2015

Approval Date: July 28, 2010

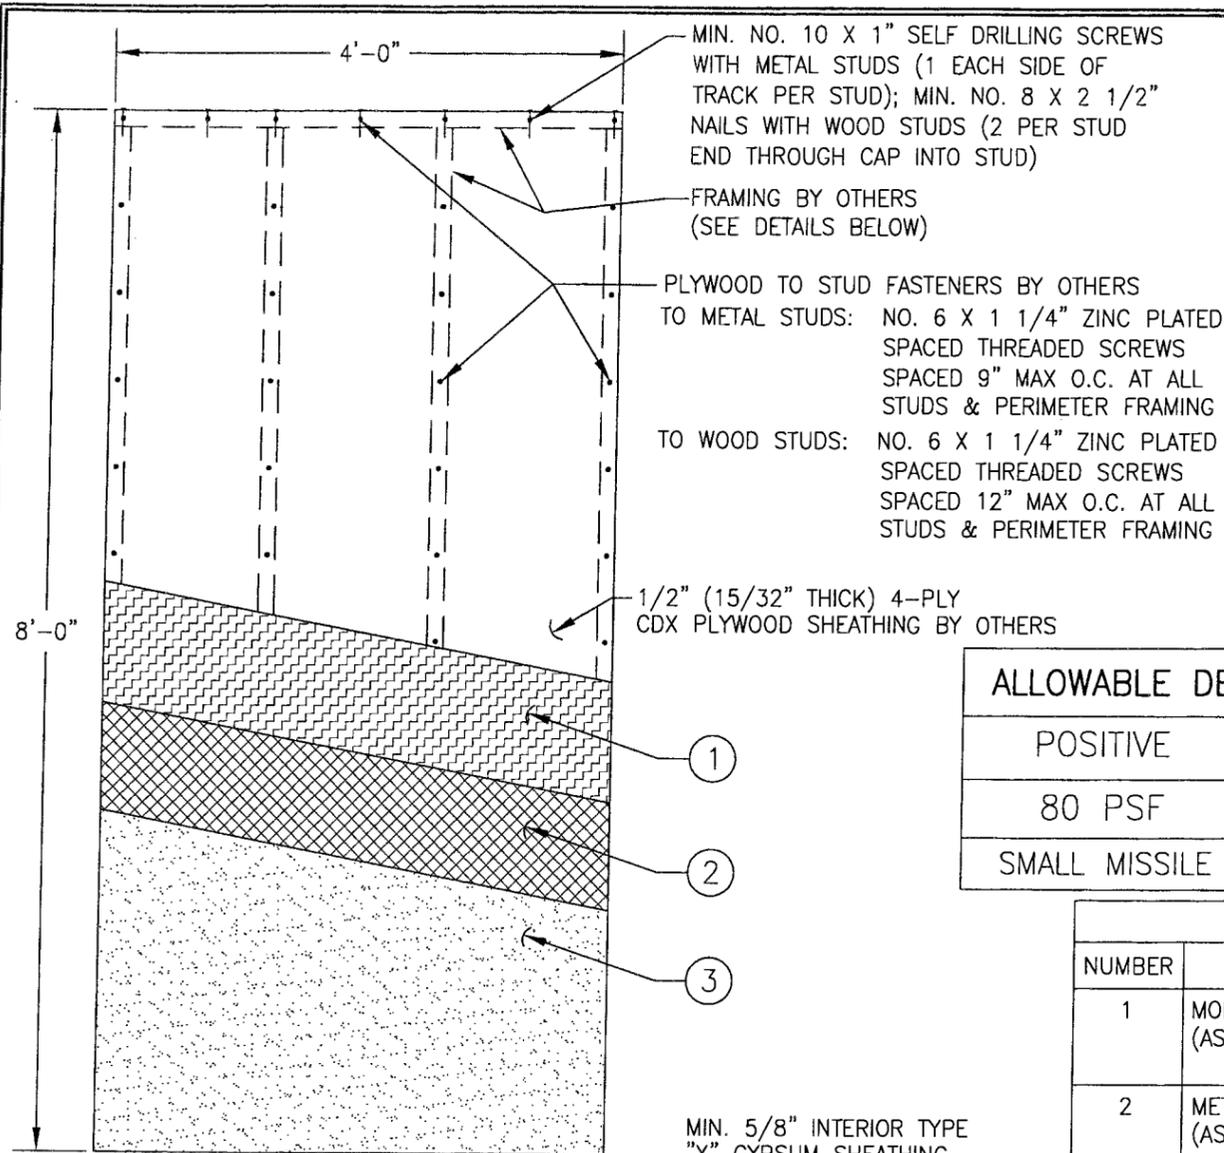

**TYPICAL ELEVATION**

DIMENSIONS SHOWN ARE TESTED DIMENSIONS

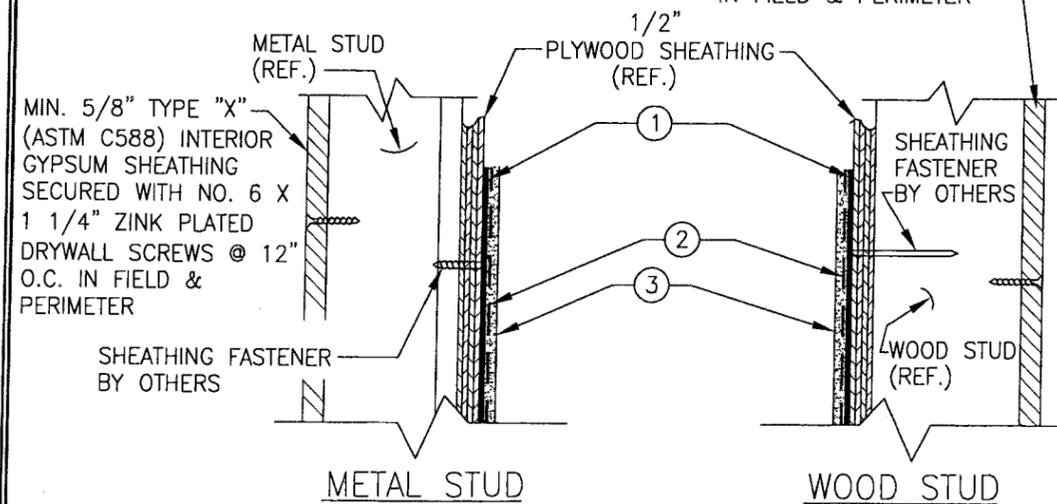

**TYPICAL SECTION**

**PRODUCT RENEWED**  
 as complying with the Florida Building Code  
 Acceptance No. 10-0518.16  
 Expiration Date 12/08/2015  
 By *[Signature]*  
 Miami Dade Product Control Division

ALLOWABLE DESIGN PRESSURE	
POSITIVE	NEGATIVE
80 PSF	80 PSF
SMALL MISSILE IMPACT APPROVED	

**GENERAL NOTES:**

1. THIS SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE (FBC) FOR USE IN HIGH VELOCITY HURRICANE ZONES (HVHZ)
2. THIS SYSTEM HAS BEEN TESTED IN ACCORDANCE WITH PROTOCOLS TAS 201 TAS 202 & TAS 203 FOR SMALL MISSILE IMPACT, AIR, WATER, STRUCTURAL & CYCLIC LOAD TESTING.
3. THIS SYSTEM SHALL BE APPLIED BY A LICENSED PLASTERING CONTRACTOR FOLLOWING THIS NOTICE OF ACCEPTANCE, THE RECOMMENDATIONS OF PREMIX MARBLETITE, AND SECTION 2512 OF THE FLORIDA BUILDING CODE.
4. THE ENGINEER AND/OR ARCHITECT OF RECORD FOR EACH PROJECT USING THIS SYSTEM SHALL DESIGN THE SUPPORTING STUD FRAMING, SHEATHING & THEIR ATTACHMENTS AS REQUIRED TO MEET CODE AND SUPPORT REQUIRED DESIGN PRESSURES AND TO INSURE CONFORMANCE WITH ALL REQUIRED STUD DEFLECTION & STRESS LIMITATIONS AS REQUIRED BY ALL GOVERNING CODES & THIS DOCUMENT.
5. MAXIMUM ALLOWABLE DEFLECTION FOR THIS ASSEMBLY SHALL BE LIMITED BY THE LESSOR OF L/240 OR AS REQUIRED BY CODE.
6. THIS SYSTEM IS A SMALL MISSILE IMPACT APPROVED SYSTEM PROVIDING IT IS INSTALLED OVER THE 7/16" PLYWOOD SHEATHING SPECIFIED.
7. THIS STUCCO SYSTEM SHALL NOT BE CONSIDERED TO OR BE USED FOR TRANSFER OF DIAPHRAM ACTION OF WALL TO STRUCTURE.
8. DETAILS ON SHEETS 2 & 3 ARE TYPICAL AND SHOW INTENT TO PREVENT WATER INFILTRATION INTO AND BEHIND THIS SYSTEM. ALTERNATE DETAILING AND SPECIFIC CONDITIONS NOT COVERED BY THE TYPICAL DETAILS ARE THE RESPONSIBILITY OF THE LICENSED DESIGN PROFESSIONAL IN CONSULTATION WITH PREMIX-MARBLETITE.
9. THIS APPROVAL DOES NOT INCLUDE HORIZONTAL USE OF THIS SYSTEM. IT ONLY INCLUDES WALL APPLICATION.
10. INCREASE OF STRESSES AND/OR ALLOWABLE ANCHOR LOADS DUE TO WIND PRESSURE HAVE NOT BEEN USED WITH THIS APPROVAL EXCEPT FOR WOOD FASTENERS.

**MATERIAL LIST**

NUMBER	ITEM	SUPPLIER	NOTES
1	MOISTURE BARRIER (ASTM D226)	N/A	STANDARD 15 LB. ASPHALT ROOFING FELT SECURED TO PLYWOOD WITH 1 1/4" STAPLES AT 16" O.C. IN BOTH DIRECTIONS. OVERLAP SHALL BE MINIMUM OF 2".
2	METAL LATH (ASTM C847)	N/A	GALVANIZED 2.5 LB/SQ. YD. METAL LATH IN ACCORDANCE WITH FLORIDA BUILDING CODE CHAPTER 25. FASTEN TO SHEATHING & METAL STUDS WITH #8 X 1 1/4" ZINC PLATED SPACE THREADED SCREWS AND TO SHEATHING AND WOOD STUDS WITH 1 1/4" STAPLES. FASTENERS SHALL BE PLACED PER CODE BUT NOT TO EXCEED 6" O.C. ALONG EACH STUD & PERIMETER FRAMING MEMBER.
3	MIN. 1/2" THICK P.M. CONCENTRATE FIBER REINFORCED STUCCO APPLIED WITH TROWEL	PREMIX MARBLETITE	STUCCO IN ACCORDANCE WITH FLORIDA BUILDING CODE CHAPTER 25 & ASTM C926 PREMIXED & FACTORY BLENDED COMPOUND WITH CHOPPED TYPE "E" GLASS OR POLYPROPYLENE FIBERS. COMPOUND IS MIXED WITH WATER & SAND ON THE JOB SITE AT A RATIO OF ONE(1) 80 LB. BAG OF COMPOUND TO 240 LBS OF SAND AND 5 TO 6 GALLONS OF WATER.

**FRAMING NOTES:**

1. WOOD STUD FRAMING SHALL BE MIN. 2X4 GRADE 2 SOUTHERN YELLOW PINE WITH SPECIFIC GRAVITY OF 0.55 OR GREATER.
2. STEEL STUD (ASTM C955) FRAMING SHALL BE MIN. 3 5/8" X 20 GA. STUDS WITH 1 1/2" FLANGES AND 1/2" RETURNS (Fy = 33 KSI MIN.).
3. ALL STEEL TRACK (ASTM C955) SHALL BE MIN. 3 5/8" X 20 GA. (Fy = 33 KSI MIN.) WITH MIN. 1 1/4" FLANGES.
4. ALL STUD FRAMING SHALL BE AT MAX. 16" O.C.

DRAWN BY: W.R.M.	CHECKED BY: W.W.S.
PLOT: 1=16	DATE: 10/19/05
DATE 05/12/10	
BY WWS	
REVISION DESCRIPTION UPDATE TO PRESENT STANDARDS	
NO. A1	

**DRAWING TITLE**  
 P.M. CONCENTRATE SINGLE COAT STUCCO SYSTEM OVER 1/2" PLYWOOD SHEATHING

**MANUFACTURER**  
 PREMIX MARBLETITE MFG. CO  
 ARCHITECTURAL FINISHING SYSTEMS  
 1259 N.W. 21ST STREET  
 POMPANO BEACH, FL 33069  
 800-432-5097


**CONSULTANTS**  
 W. W. SCHAEFER ENGINEERING & CONSULTING, P.A.  
 7480 150TH COURT NORTH  
 PALM BEACH GARDENS, FL 33418  
 PHONE: 561-744-3424

**DRAWING NO.**  
1365


**REV.**  
A

**SHEET NO.**  
1 OF 4


**PERSONAL SEAL**  
 WARREN W. SCHAEFER  
 LICENSE No. 44135  
 P.E.  
 MAY 19 2006

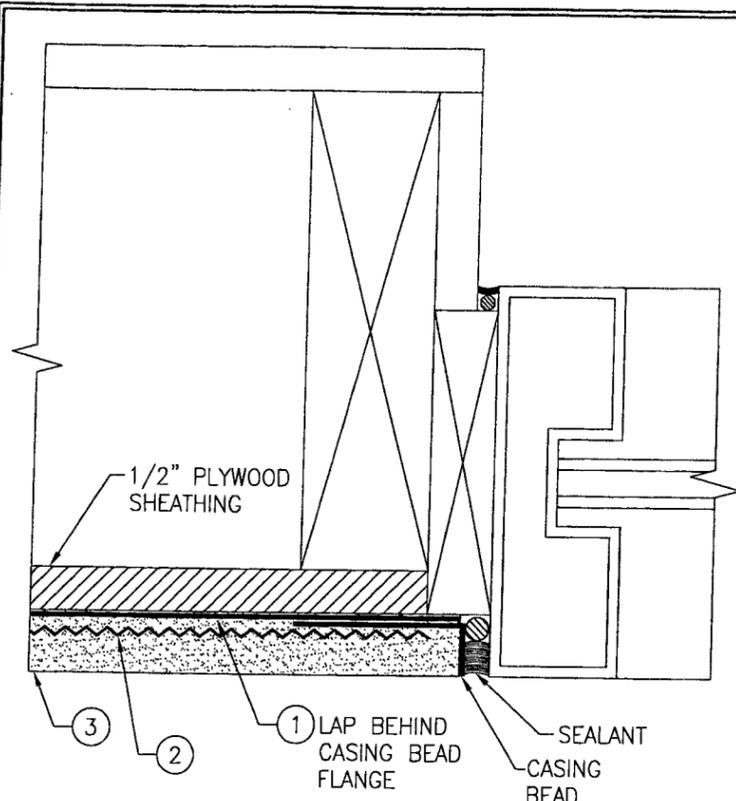


TYPICAL WINDOW/DOOR JAMB & SILL FLUSH MOUNT DETAIL WITHOUT NAIL FIN

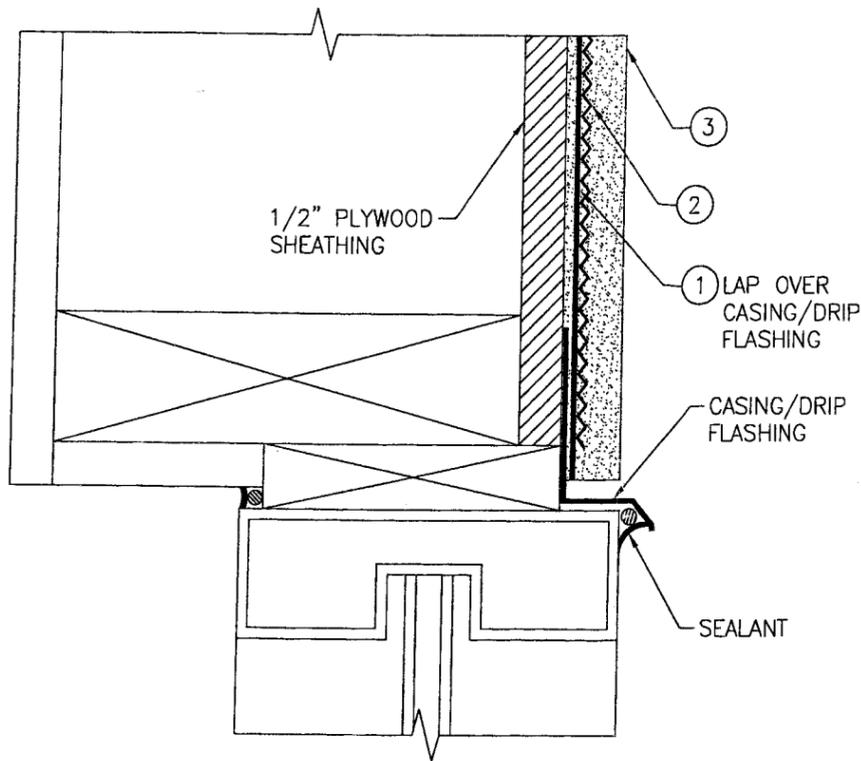

TYPICAL WINDOW/DOOR HEAD FLUSH MOUNT DETAIL WITHOUT NAIL FIN

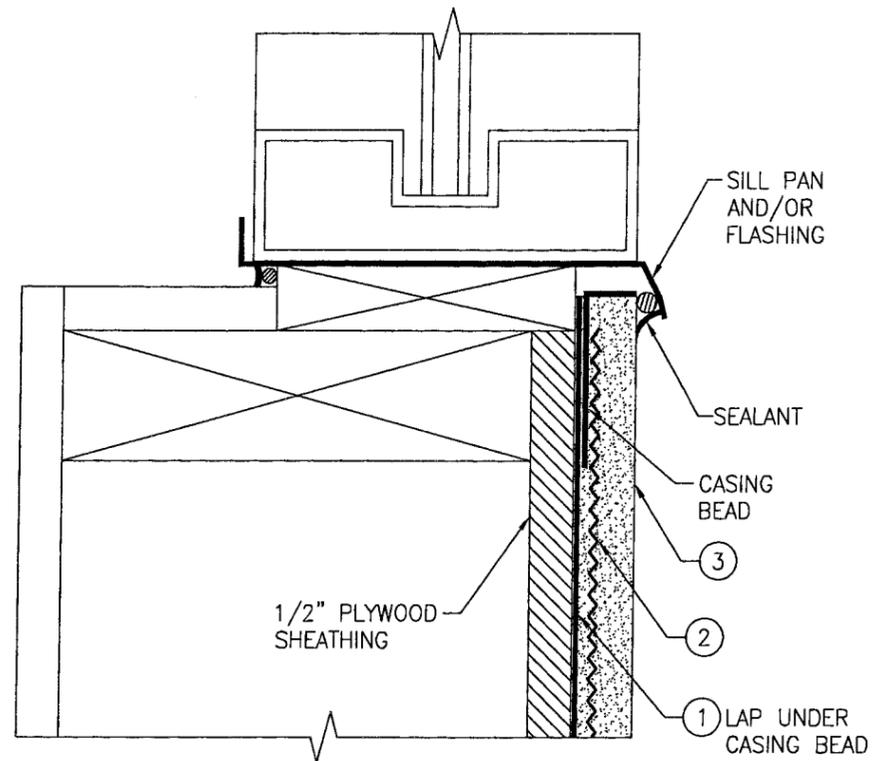


TYPICAL WINDOW/DOOR SILL FLUSH MOUNT DETAIL WITHOUT NAIL FIN

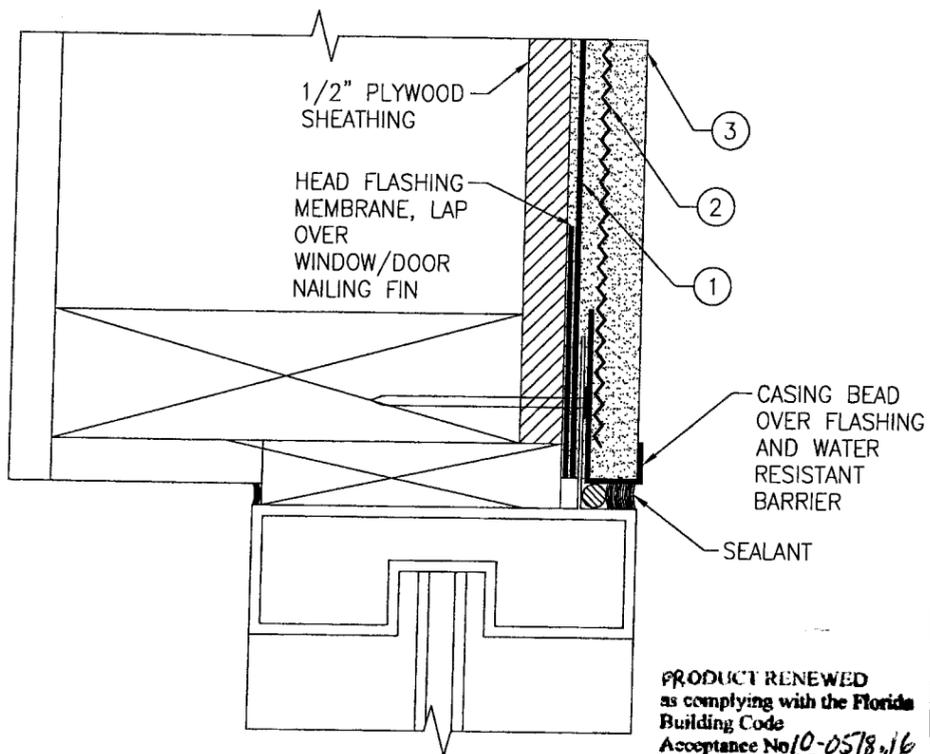


TYPICAL WINDOW/DOOR HEAD & JAMB FLUSH MOUNT DETAIL WITH NAIL FIN

PRODUCT RENEWED as complying with the Florida Building Code  
 Acceptance No 10-0578.16  
 Expiration Date 12/06/2015  
 By *[Signature]*  
 Miami Trade Product Control Division

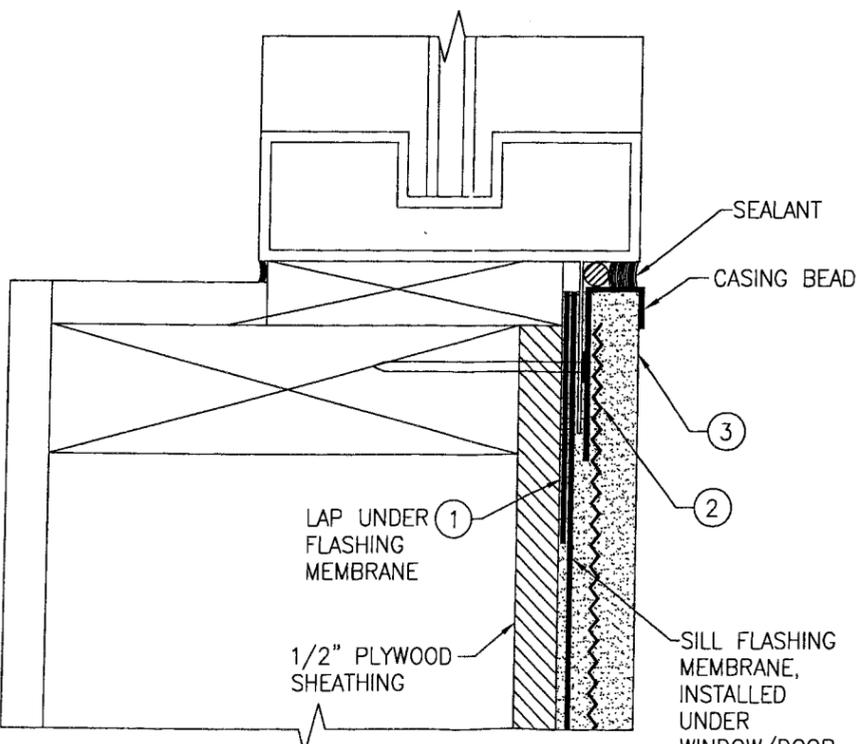


TYPICAL WINDOW/DOOR SILL FLUSH MOUNT DETAIL WITH NAIL FIN

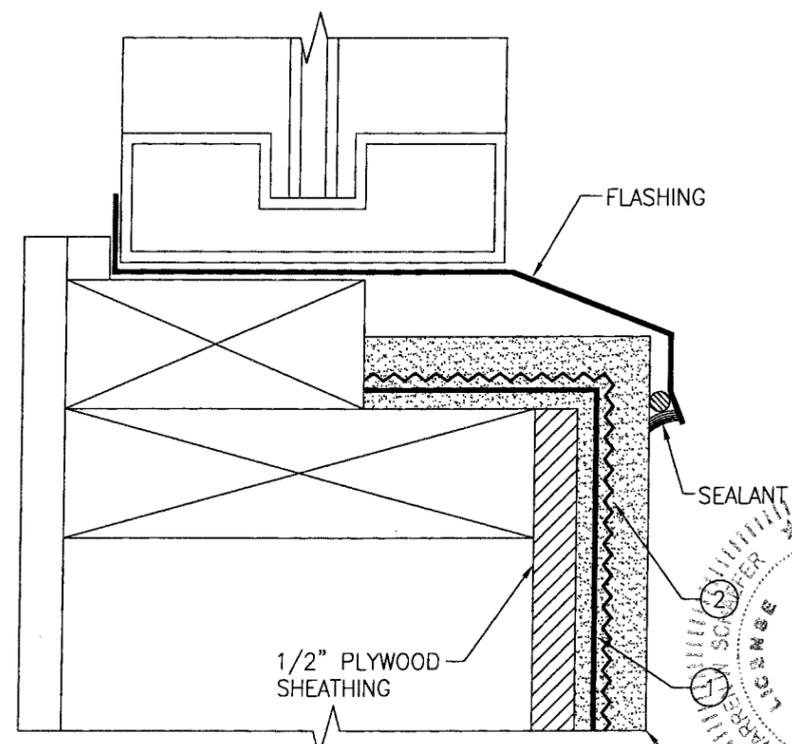


TYPICAL WINDOW/DOOR SILL RECESSED MOUNT DETAIL WITHOUT NAIL FIN

DRAWN BY: W.R.M.	CHECKED BY: W.W.S.
PLOT: 1=2	DATE: 10/19/05
NO.	REVISION DESCRIPTION
DATE	BY
DRAWING TITLE <b>P.M. CONCENTRATE SINGLE COAT STUCCO SYSTEM OVER 1/2" PLYWOOD SHEATHING</b>	
MANUFACTURER <b>PREMIX MARBLETTITE MFG. CO</b> <b>ARCHITECTURAL FINISHING SYSTEMS</b> 1259 N.W. 21ST STREET POMPANO BEACH, FL 33069 800-432-5097	
CONSULTANTS <b>W. W. SCHAEFER ENGINEERING &amp; CONSULTING, P.A.</b> 7480 150TH COURT NORTH PALM BEACH GARDENS, FL 33418 PHONE: 561-744-3424	
PROFESSIONAL SEAL W. W. SCHAEFER, P.E. LICENSE NO. 1136	
DRAWING NO.:	REV.:
1365	A
SHEET NO.	
2 OF 4	

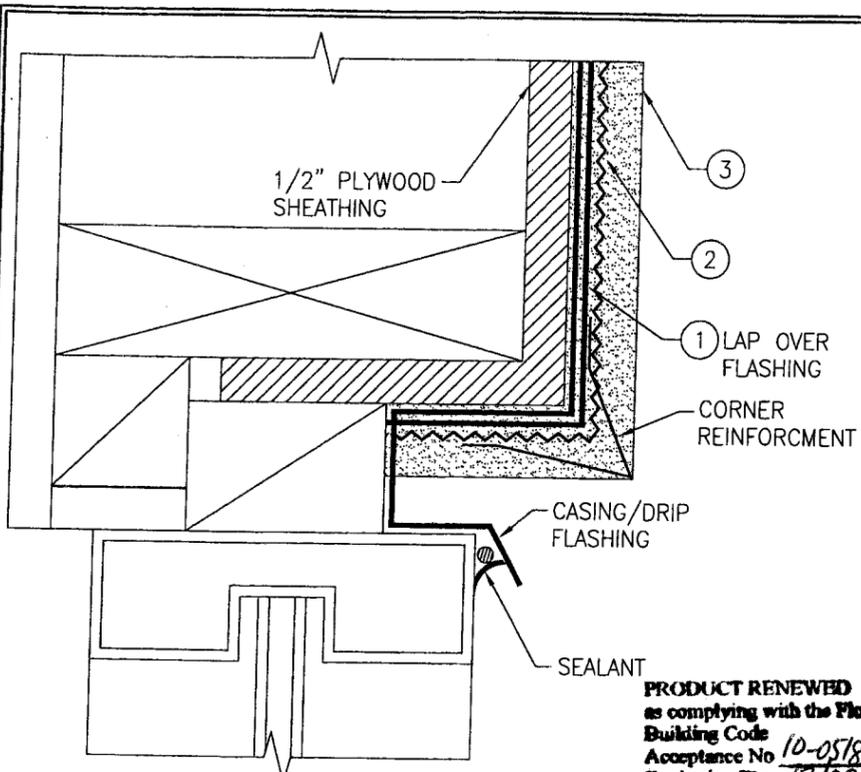


TYPICAL WINDOW/DOOR HEAD & JAMB RECESSED MOUNT DETAIL WITHOUT NAIL FIN


PRODUCT RENEWED as complying with the Florida Building Code Acceptance No 10-0518.16 Expiration Date 12/08/2015 By *[Signature]* Miami Dade Product Control Division

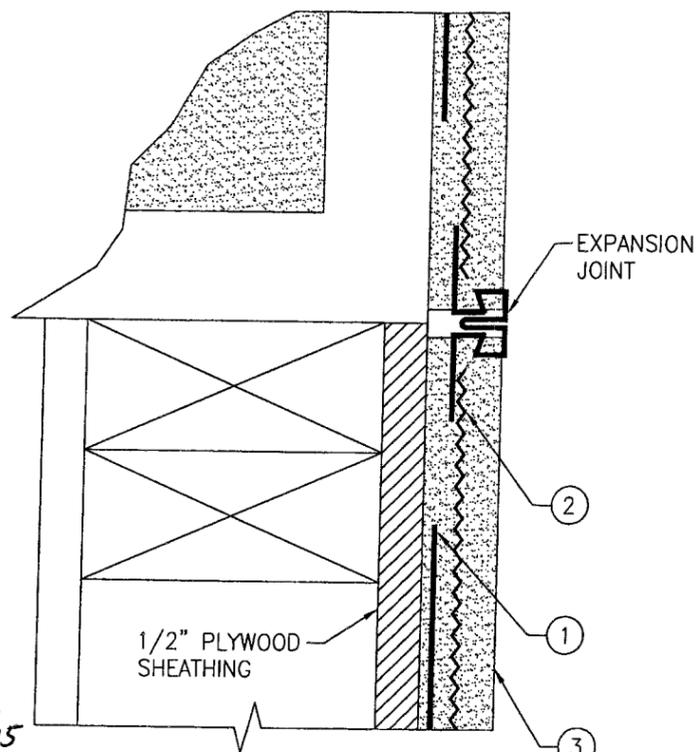


TYPICAL VERTICAL EXPANSION JOINT

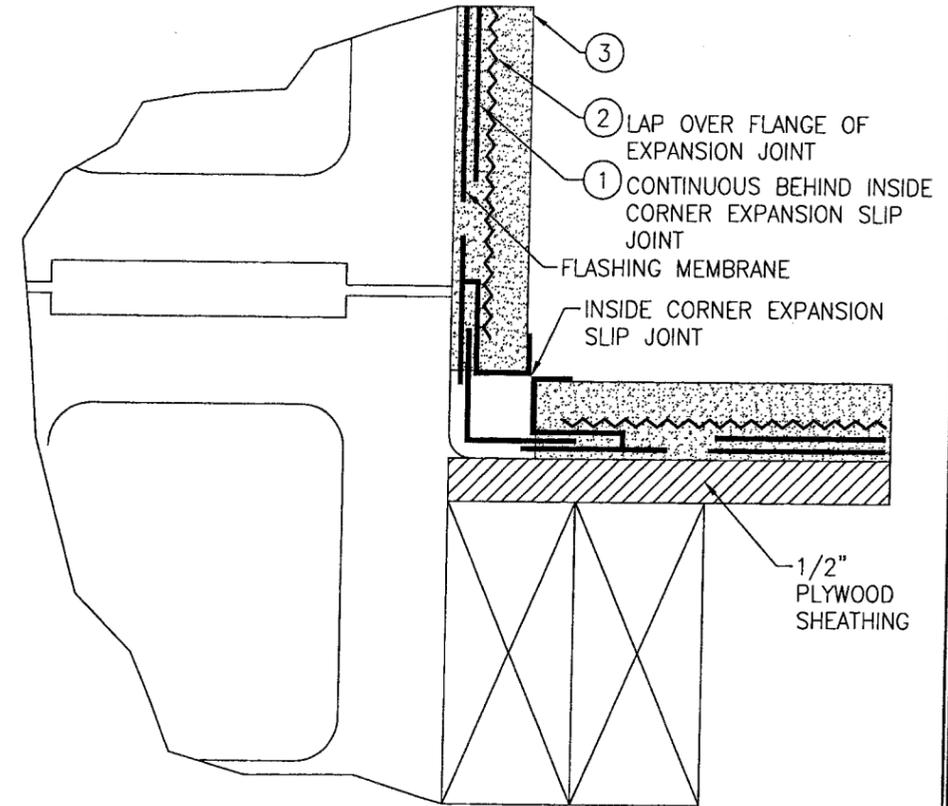


TYPICAL INSIDE CORNER EXPANSION JOINT DETAIL 1

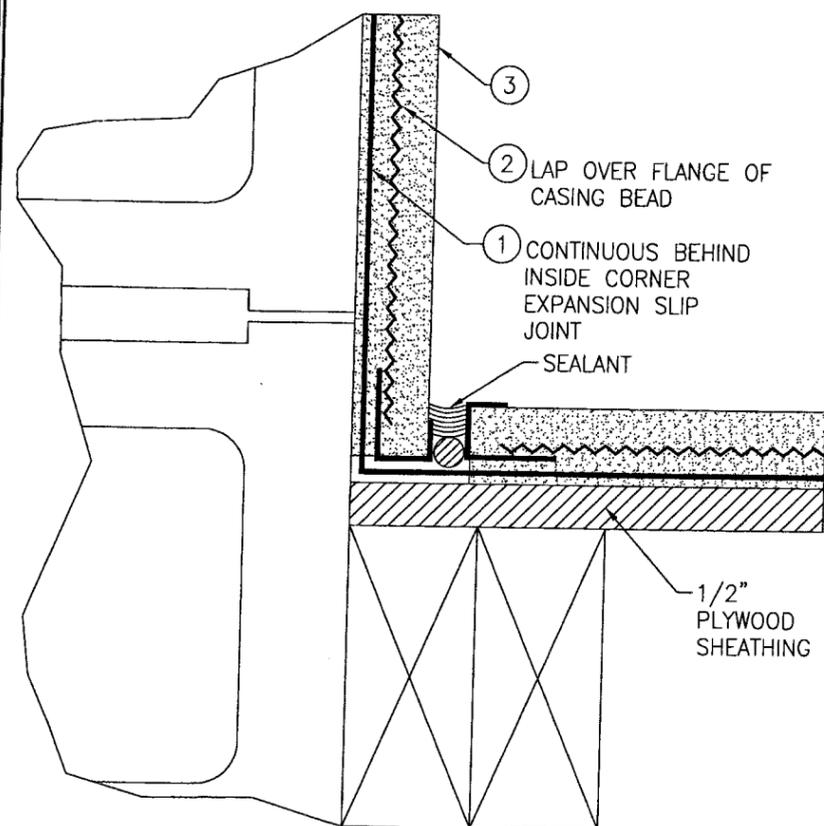

TYPICAL INSIDE CORNER EXPANSION JOINT DETAIL 2

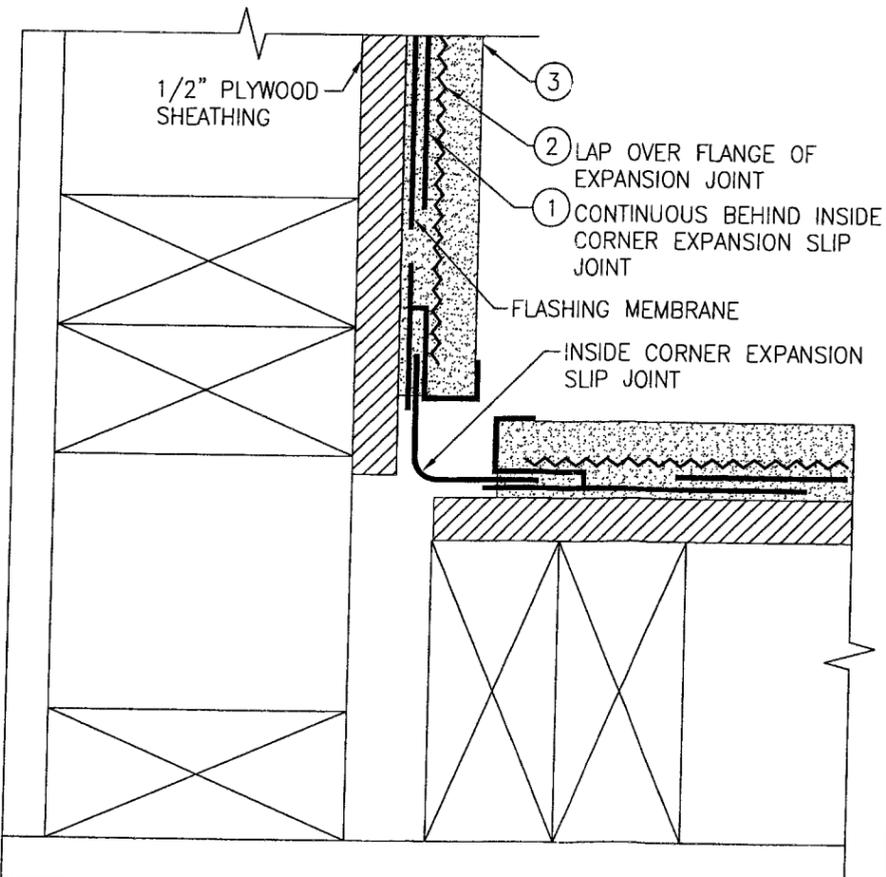


TYPICAL INSIDE CORNER EXPANSION JOINT DETAIL 3

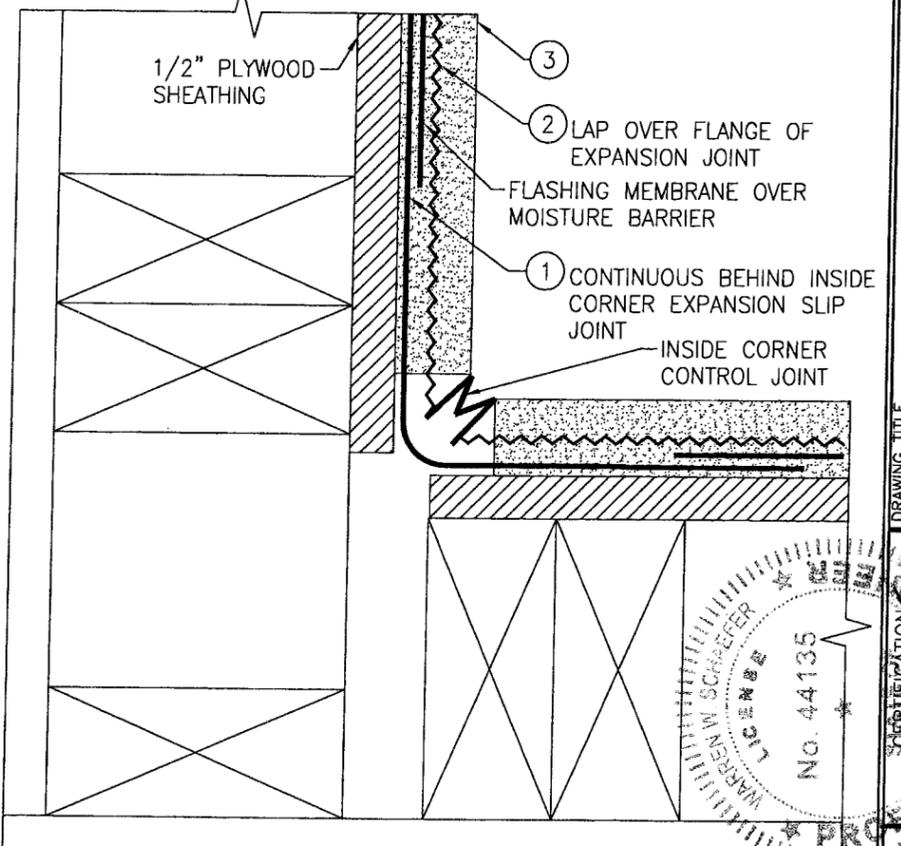


TYPICAL INSIDE CORNER CONTROL JOINT


DRAWN BY: W.R.M.		CHECKED BY: W.W.S.	
PLOT: 1-2		DATE: 10/19/05	
NO.	REVISION DESCRIPTION	DATE	BY
DRAWING TITLE: P.M. CONCENTRATE SINGLE COAT STUCCO SYSTEM OVER 1/2" PLYWOOD SHEATHING			
MANUFACTURER: PREMIX MARLETTE MFG. CO ARCHITECTURAL FINISHING SYSTEMS 1259 N.W. 21ST STREET POMPANO BEACH, FL 33069 800-432-5097			
CONSULTANTS: W. W. SCHAEFER ENGINEERING & CONSULTING, P.A. 7480 150TH COURT NORTH PALM BEACH GARDENS, FL 33418 PHONE: 561-744-3424			
DRAWING NO. 1365		REV. A	
SHEET NO. 3 OF 4			

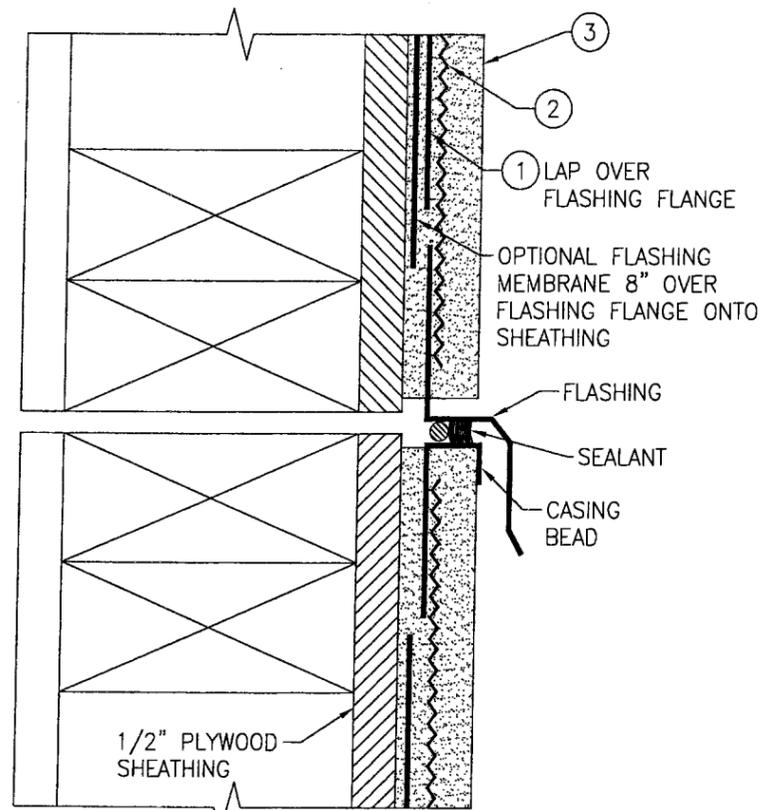


TYPICAL HORIZONTAL EXPANSION JOINT

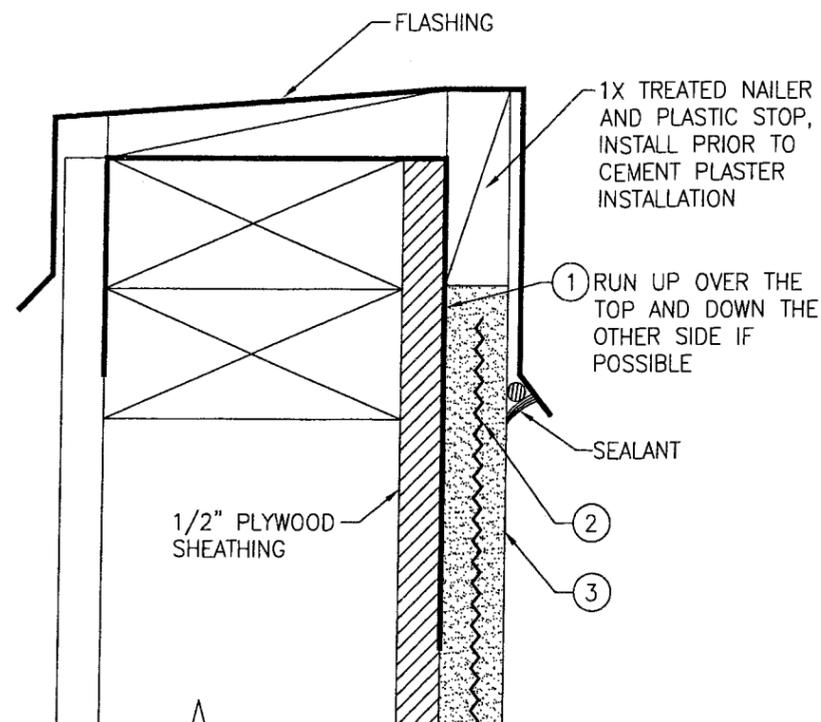


TYPICAL PARAPET COPING DETAIL

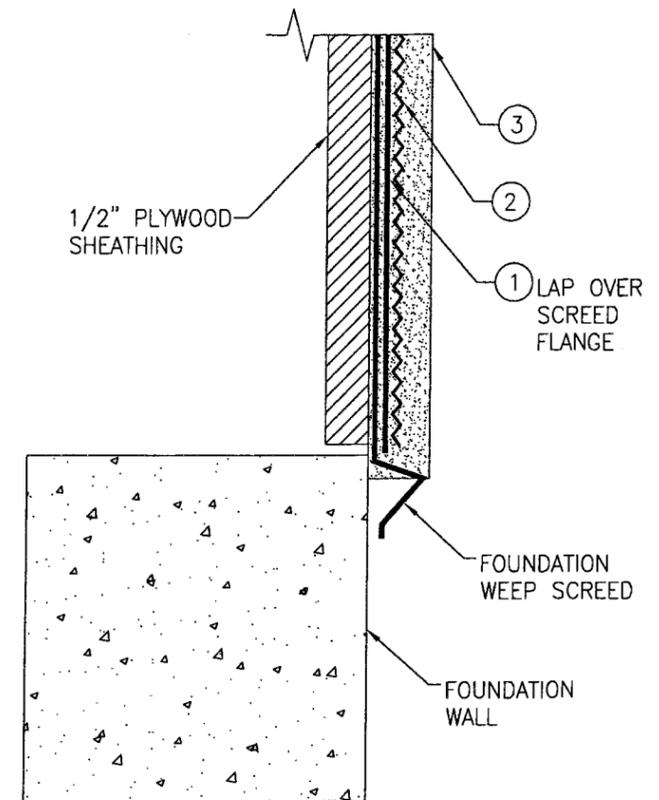

TYPICAL WEEP SCREED FOUNDATION AT CONCRETE

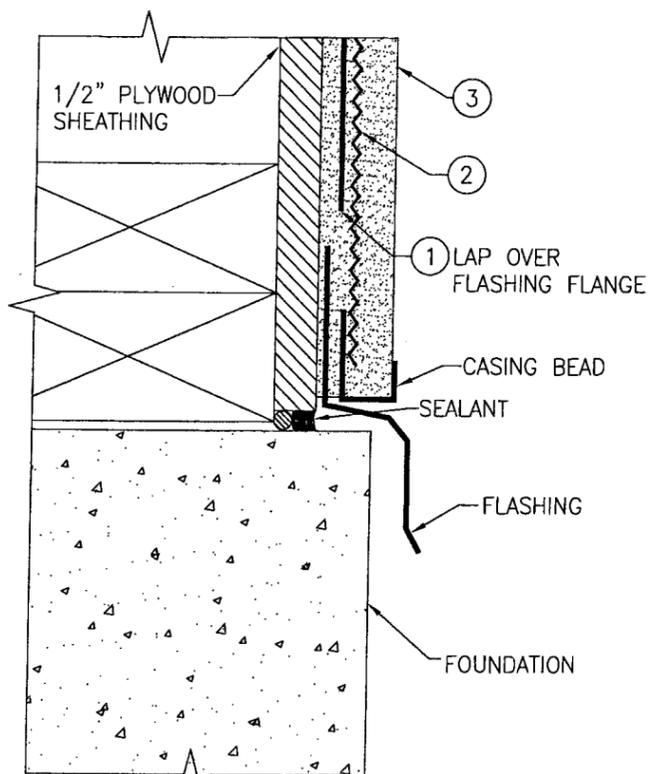


TYPICAL TERMINATION AT FOUNDATION

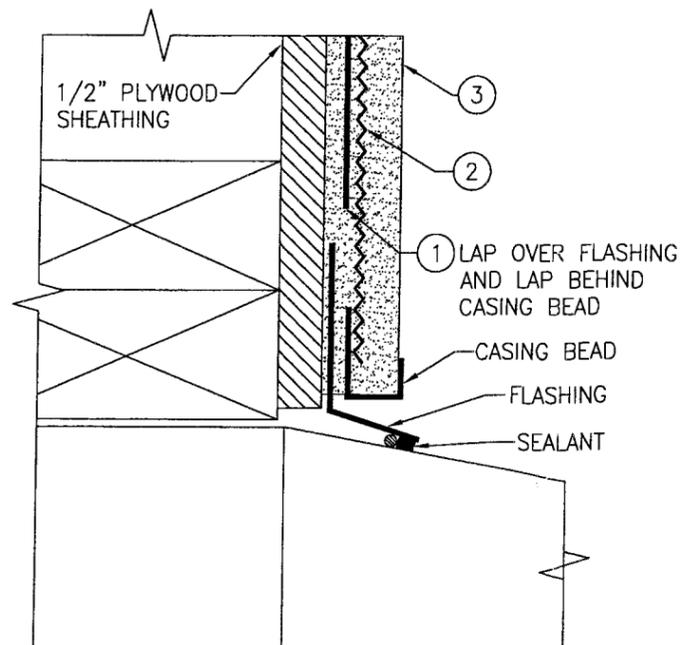

TYPICAL TERMINATION AT SLAB/SIDEWALK

PRODUCT RENEWED  
 as complying with the Florida  
 Building Code  
 Acceptance No 10-0518-16  
 Expiration Date 12/05/2015  
 By *[Signature]*  
 Miami Dade Product Control  
 Division

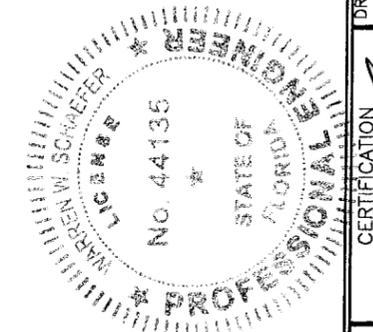

DRAWN BY: W.R.M.		CHECKED BY: W.W.S.	
PLOT: 1-2		DATE: 10/19/05	
NO.	REVISION DESCRIPTION	DATE	BY
DRAWING TITLE P.M. CONCENTRATE SINGLE COAT STUCCO SYSTEM OVER 1/2" PLYWOOD SHEATHING			
CONSULTANTS W. W. SCHAEFFER ENGINEERING & CONSULTING, P.A. 7480 150TH COURT NORTH PALM BEACH GARDENS, FL 33418 PHONE: 561-744-3424			
MANUFACTURER PREMIER MARBLETITE MFG. CO ARCHITECTURAL FINISHING SYSTEMS 1259 N.W. 21ST STREET POMPANO BEACH, FL 33069 800-432-5097			
CERTIFICATION MAY 18 2010		WARREN W. SCHAEFFER, P.E. P.E. NO. 44135	
DRAWING NO. 1365	REV. A	SHEET NO. 4 OF 4	