MIAMI-DADE COUNTY
BUILDING AND NEIGHBORHOOD COMPLIANCE DEPARTMENT (BNC)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/building

NOTICE OF ACCEPTANCE (NOA)

Kaycan
1 Memorial Drive.
Richford, VT 05476

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County BNC -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BNC reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: 10" Vented Vinyl Soffit

APPROVAL DOCUMENT: Drawing No. **KBP-DC-103**, titled "10" Vented Vinyl Soffit", sheet 1 of 1, dated 12/04/05, with no revisions, prepared by Kaycan Building Products, signed and sealed by Allen N. Reeves, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, City, State, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA # 05-0804.03** and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**

MIAMI-DADE COUNTY APPROVED

05/18/11

NOA No. 11-0316.02
Expiration Date: April 20, 2016
Approval Date: May 26, 2011

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **KBP-DC-103**, titled "10" Vented Vinyl Soffit", sheet 1 of 1, dated 12/04/05, with no revisions, prepared by Kaycan Building Products, signed and sealed by Allen N. Reeves, P.E.

B. TESTS *"Submitted under NOA # 05-0804.03"*

	Test Report No.	Standard	Date	Signature
1.	AT-55983.01-106-18	ASTM D3679	01/03/06	Joseph A. Reed, P.E.
2.	AT-55983.01-106-18	ASTM G155	01/03/06	Joseph A. Reed, P.E.
3.	AT-55983.01-106-18	ASTM D638	01/03/06	Joseph A. Reed, P.E
4.	AT-55983.01-106-18	ASTM D2843	01/03/06	Joseph A. Reed, P.E.
5.	AT-55983.01-106-18	ASTM D1929	01/03/06	Joseph A. Reed, P.E
6.	AT-55983.01-106-18	ASTM D635	01/03/06	Joseph A. Reed, P.E
7.	AT-55981.02-122-18	PA 202 & 203	07/15/05	S. A. Urich, P.E.

C. CALCULATIONS *"Submitted under NOA # 05-0804.03"*

1. Fastener Installation Analysis, sheets 1 through 3, dated 07/27/05, Project No. 05020010 signed and sealed by Allen N. Reeves, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Building and Neighborhood Compliance Department (BNC)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance with FBC 2007 issued by HR Engineering, Inc., dated 05/09/11, signed and sealed by Allen N. Reeves, P.E.
2. Distributor agreement dated 04/25/11.

"Submitted under NOA # 05-0803.01"

3. Code compliance letters issued by H. R. Engineering, Inc. dated 08/02/05, signed and sealed by Allen N. Reeves, P.E.
4. No financial interest letter issued by H. R. Engineering Inc, dated 07/21/05 signed by Allen N. Reeves, P.E. and notarized by C. R. King.
5. Test compliance letter issued by Architectural Testing on 07/27/05, signed and sealed by S. M. Urich, P.E.

05/18/11

Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 11-0316.02
Expiration Date: April 20, 2016
Approval Date: May 26, 2011

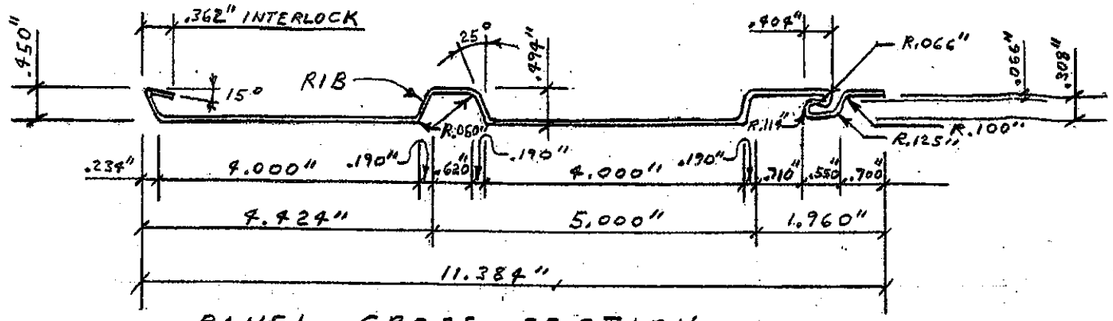

PANEL CROSS SECTION
NOT TO SCALE

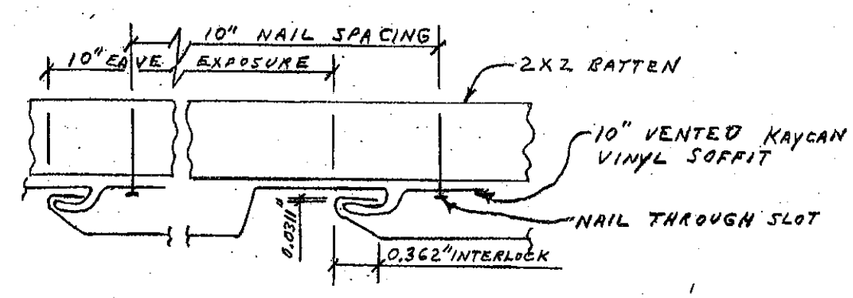

INSTALLATION DETAIL SECTION B-B
NOT TO SCALE

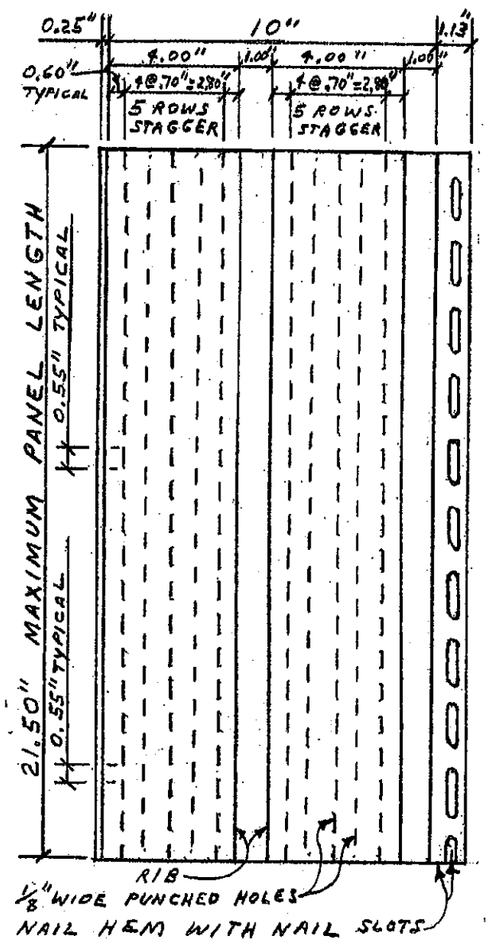

PANEL DETAILS
NOT TO SCALE

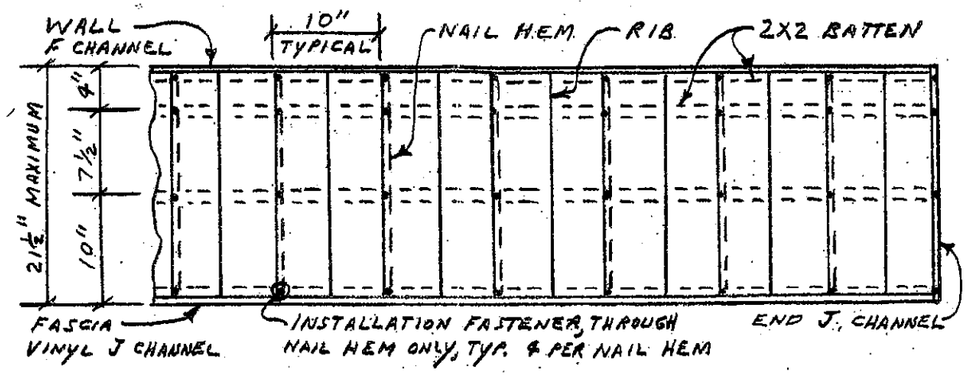

INSTALLATION PLAN, LOOKING UP A-A
NOT TO SCALE

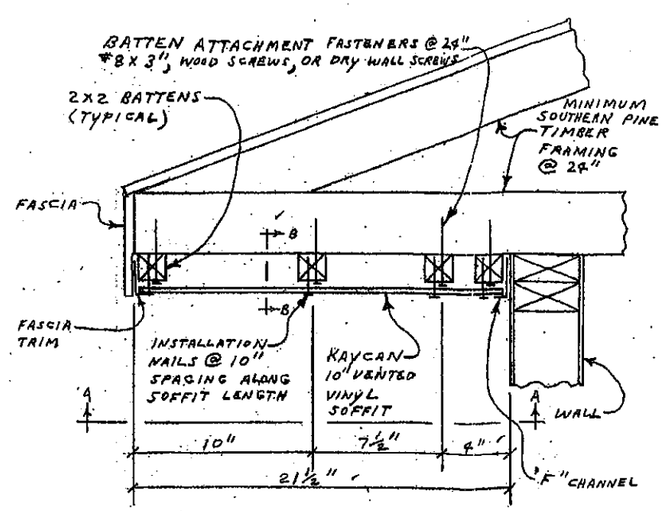

VINYL SOFFIT INSTALLATION - 10" VENTED
NOT TO SCALE

GENERAL NOTES

1. THE ABOVE INSTALLATION HAS ALLOWABLE DESIGN WIND PRESSURES OF +55.0 & -35.0 PSF.
2. SOFFIT MATERIAL:
   KAYCAN VINYL SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679.
3. INSTALLATION FASTENERS ARE GALVANIZED STEEL ROOFING NAILS 1 ½" LONG WITH 1/8" DIAMETER SHANKS AND 3/8" DIAMETER HEADS.
4. THIS PRODUCT IS DESIGNED TO MEET THE FLORIDA BUILDING CODE. WOOD/CBS OVERHANG CONSTRUCTION BY OTHERS, MUST BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE STRUCTURE.
5. FASTENERS SHALL BE LISTED AND SPACED AS SHOWN ON DETAILS. FASTENERS EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING.
6. OVERHANG RECEIVING VINYL SOFFIT SHALL BE CHECKED FOR STRUCTURAL INADEQUACY, CRACKS OR DEFECTS THAT SHALL BE ELIMINATED.
7. OVERHANG WHERE VINYL SOFFIT SHALL BE INSTALLED MUST BE DESIGNED BY A PROFESSIONAL PER THE FLORIDA BUILDING CODE.
8. INSTALLATION OF SOFFIT ACCESSORIES AND ACCESSORIES SUCH AS CORNER POSTS, STARTER STRIPS, AND TRIM AROUND OPENINOS SHALL BE DONE IN ACCORDANCE WITH THE FLORIDA BUILDING CODE AND THE MANUFACTURER'S INSTRUCTIONS.

PRODUCT RENEWED
as complying with the Florida Building Code
Acceptance No 11-0316.02
Expiration Date 04/20/2016
By
Miami Dade Product Control

D5 SOFFIT 10"
SOLID AND VENTED
PRODUCT CALIPER – .044 ± .003
UNDEVELOPED LENGTH – 14.000"

Approved as complying with the Florida Building Code
Date 04/20/06
NOA# 05-0804.03
Miami Dade Product Control Division
By

Allen N. Reeves
21 MARCH 2006

KAYCAN BUILDING PRODUCTS

This Drawing and/or Design is the property of Kaycan Building Products and is not to be copied or used by others without the expressed written consent of Kaycan Building Products.

Drawn By	Date 12/4/2005	10" VENTED VINYL SOFFIT
Checked By	Date	
Approved By	Date	
Scale FULL	Reference	Sheet 1 of 1
		Drawing Number KBP-DC-103