



**BUILDING CODE COMPLIANCE OFFICE (BCCO)  
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908**

**NOTICE OF ACCEPTANCE (NOA)**

**Benjamin Obdyke, Inc.  
199 Precision Drive  
Horsham, PA 19044**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone.

**DESCRIPTION:** Benjamin Obdyke, Inc. Roll Vent Ridge Vent

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA #03-0708.03 and consists of pages 1 through 4.  
The submitted documentation was reviewed by Frank Zuloaga, RRC



**NOA No 04-0109.01  
Expiration Date: 11/09/08  
Approval Date: 02/05/04  
Page 1 of 4**

## ROOFING COMPONENT APPROVAL

**Category:** Roofing  
**Sub-Category:** 07720 Roof Vents

**Materials:** Plastic

### TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
Roll Vent	0.9" x 10.25" x 20"	PA 100	Plastic low profile attic ridge vent consisting of a two layer composite consisting of a nylon-polyester, for installation in shingle roof systems.
Ridge Vent			

### EVIDENCE SUBMITTED

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Center for Applied Engineering, Inc.	PA 100 Wind Driven Rain	CAE 96167	10/01/96

### GENERAL LIMITATIONS:

1. Refer to applicable Building Code for required ventilation.
2. Roll Vent shall not be installed in conjunction with Gable vents.
3. Roll Vent shall not be installed on roof hips.
4. Roll Vent shall not be connected at ridge intersection, nor within 12" of any side wall or roof protrusion, with a ventilation slot clearance of 12" from such obstructions.
5. Roll Vent shall not be installed on roof mean heights greater than 33 ft.
6. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 9B-72 of the Florida Administrative Code.




NOA No 04-0109.01  
Expiration Date: 11/09/08  
Approval Date: 02/05/04  
Page 2 of 4

## APPROVED APPLICATIONS

- Tradename:** Roll Vent
- System Type C:** Mechanical attachment of ridge vent under composition ridge shingle.
- Slot:** Cut a minimum 3 ½" slot along the apex of the roof by cutting 1-¾" on each side of the ridge. The slot shall terminate approximately 18" from the rake edge.
- Installation:**
- Install exterior Aluminum diverter along entire length of ridge at location that will maintain a minimum space of 7/8" between diverter and ridge cap shingle after complete installation. Apply roof cement/sealant at diverter and roof deck interface along entire ridge line.
- Loosen about 3 inches of black nylon matrix from black fabric and cut out with snips. Fold ends to create an end cap, fasten and roll out (fabric side down). Center Roll Vent over ventilation slot. Apply approximately a ¼" continuous bead of roofing cement between fabric bottom of vent and roof deck.
- To splice (if necessary), remove approximately 4 inches of black nylon matrix from one section and 4 inches of black fabric from the other section. Overlap the fabric with the matrix and from a splice.
- Optionally, Roll Vent can be installed right to the gable ends using integral end cap. To create integral end cap, loosen about 6 inches of matrix from fabric and cut out with snips. Fold bottom fabric in toward center of product so that it covers the end on vent. Start and end vent installation 1" from gable ends.
- Ridge Shingle:** Install pre-manufactured or field cut ridge shingles over the ridge vent in compliance with the shingle manufacturers Notice of Acceptance (NOA) and the installation instructions using 2½" annular ring shank galvanized nails.
- Ventilation Calculations:** Refer to manufacturers published literature



# DETAIL A

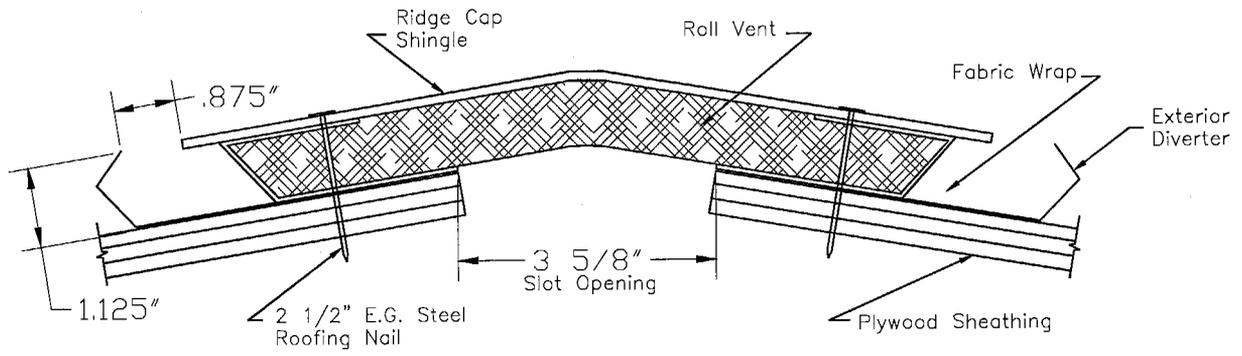

**END OF THIS ACCEPTANCE**



**NOA No 04-0109.01**  
**Expiration Date: 11/09/08**  
**Approval Date: 02/05/04**  
**Page 4 of 4**