



DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY
AFFAIRS (PERA)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208

Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/building

NOTICE OF ACCEPTANCE (NOA)

Thybar Corporation
913 South Kay Avenue
Addison, IL 60101

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BNC reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: TC-5 Series Steel Roof-Curb for Aeon Rooftop Units

APPROVAL DOCUMENT: Drawing No. RC11545.idw, titled "Roofcurb by Thybar Corporation", sheets 1 through 5 of 5, prepared by Paul Selman, P.E., dated September 22, 2011, signed and sealed by Paul Selman, P.E., on October 11, 2011, bearing the Miami-Dade County Product Control Approval stamp with the Notice of Acceptance number and the approval date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Each roof-curb shall bear a permanent label with the manufacturer's name or logo, Addison, IL; Farmers Branch, TX; Akron, OH; Louisville, KY; or McCarran, NV and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of this page 1, evidence submitted page E-1 as well as approval document mentioned above. The submitted documentation was reviewed by **Helmy A. Makar, P.E., M.S.**

MIAMIDADE COUNTY
APPROVED

Helmy A. Makar
12/15/2011

NOA No. 11-1018.01
Expiration Date: 12/15/2016
Approval Date: 12/15/2011
Page 1

Thybar Corporation

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. *Drawing No. RC11545.idw, titled "Roofcurb by Thybar Corporation", sheets 1 through 5 of 5, prepared by Paul Selman, P.E., dated September 22, 2011, signed and sealed by Paul Selman, P.E., on October 11, 2011.*

B. TESTS

1. *None.*

C. CALCULATIONS


1. *Calculation titled "146 MPH Wind Load Calculation", dated September 16, 2011, 1 sheet, signed and sealed by Paul J. Selman, P.E., on October 11, 2011.*

D. QUALITY ASSURANCE


1. *By Miami-Dade County Department of Permitting, Environment, and Regulatory Affairs (PERA).*

E. MATERIAL CERTIFICATIONS

1. *None.*



Helmy A. Makar, P.E., M.S.
PERA, Product Control Unit Supervisor
NOA No. 11-1018.01
Expiration Date: 12/15/2016
Approval Date: 12/15/2011

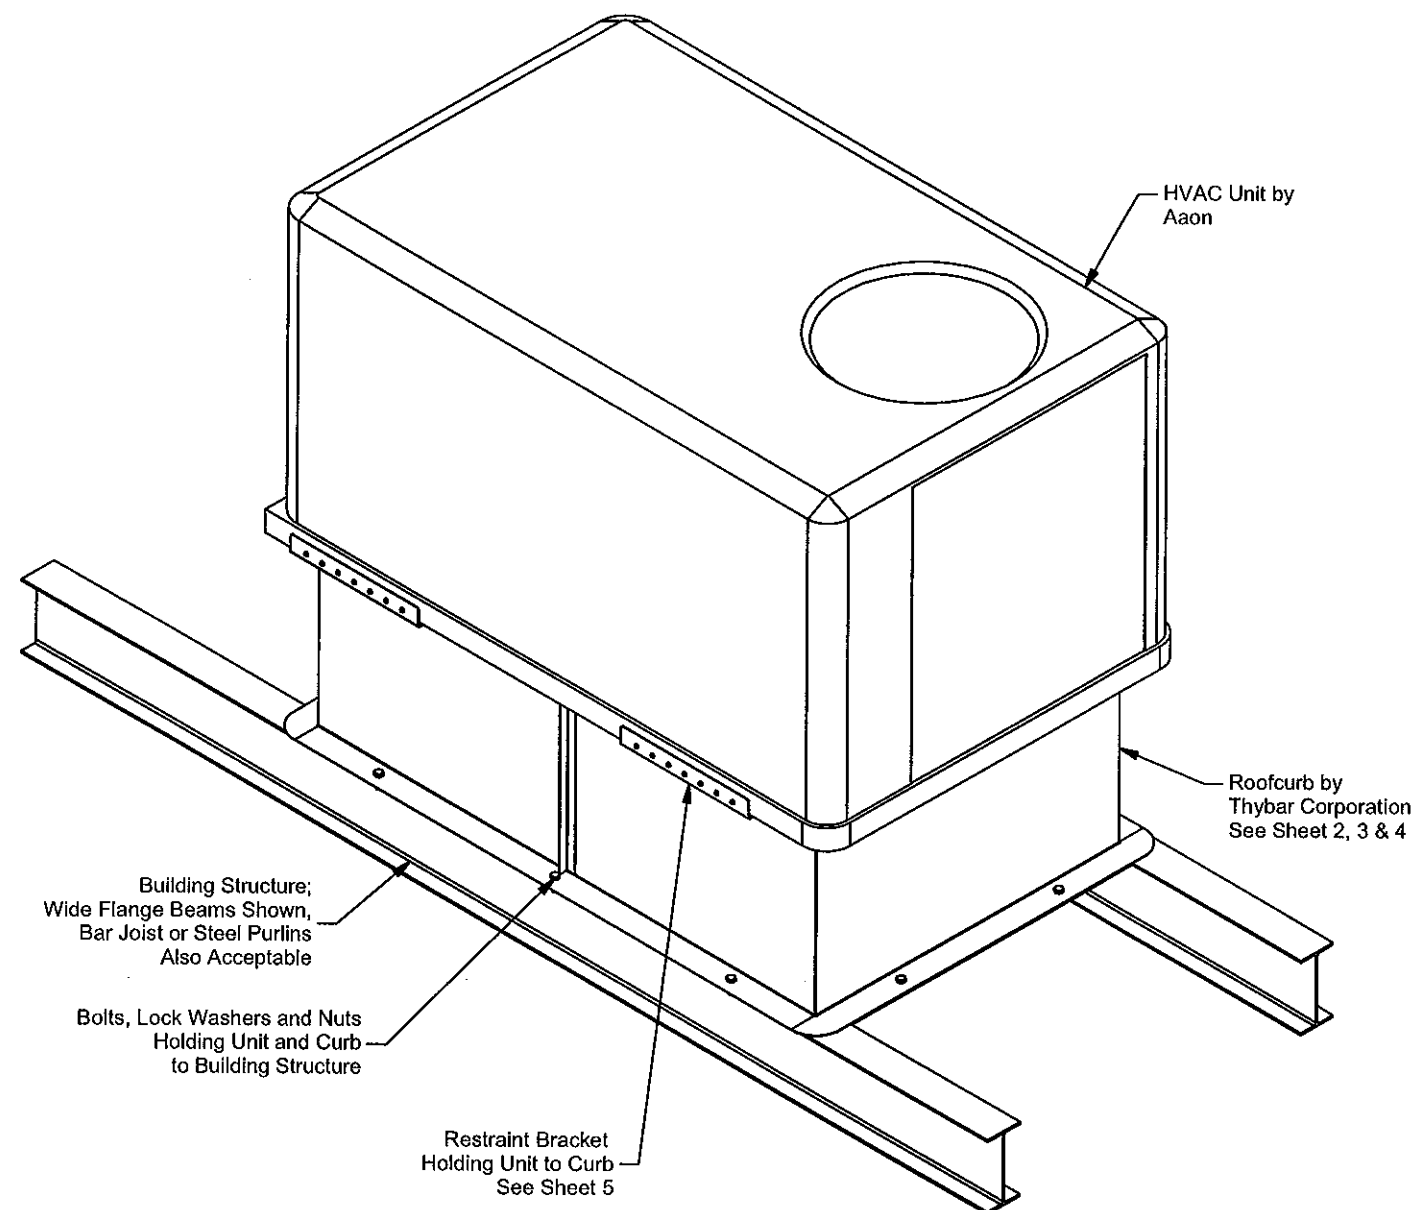

This Notice of Acceptance application is limited to the attachment of the HVAC unit to the roof curb, the roof curb itself and the attachment of the roof curb to the roof structure. Therefore, the restraint system shown in these drawings will be acceptable for all Aeon units with the following model numbers:

RQ 001-006
RN 006-025

General Notes:

- 1) These drawings provide a method of attachment so that a Aeon manufactured HVAC unit will be able to resist the force generated by a 146MPH wind when the unit is installed on a Thybar Corporation manufactured roofcurb as required by the latest version of the Florida Building Code (FBC).
- 2) The following analysis is being submitted to the Miami-Dade County Product Control Division for review and consideration in assigning a Notice of Acceptance (NOA) for Aeon units installed on Thybar Corporation roofcurbs and restraint brackets.

Analysis:

1) The design wind load for a rooftop-mounted HVAC unit was determined following the requirements of FBC2007 Section 1609.1.1 and Section 6.5.15 of The American Society of Civil Engineers Standard 7 (ASCE7-05).

2) Static analysis was used to ensure that all components between the rooftop-mounted HVAC unit and the building structure are of sufficient strength.

a) The load path from the rooftop equipment to the building structure is of sufficient strength to keep the equipment in place while resisting the tension, shear, moment and uplift forces generated by the wind force acting on the rooftop equipment.


b) The rooftop unit restraints, the roofcurb wall and the curb attachments to the building structure were all designed and manufactured with the ability to safely transfer the wind-generated force into the building structure.

c) The restraint bracket quantity shown is conceptual only. Quantity of restraint brackets required is to be determined by project specific calculations using bracket capacities shown on sheet 5.

Approved as complying with the
Florida Building Code
Date 12/15/2011
NOA# 11-1018-01
Miami Dade Product Control
By *[Signature]*

Paul Selman Florida P.E. 65313
913 S Kay Avenue
Addison IL 60101

HVAC Unit by Aeon

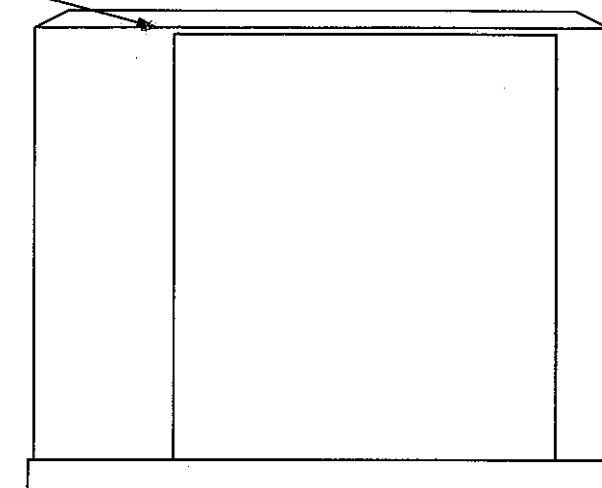

Restraint Bracket Holding Unit to Curb See Sheet 5
Minimum 4 Per Unit See Note 2-C.

TEK Screws Holding Curb to Bracket

TEK Screws Holding Unit to Bracket

Roofcurb by Thybar Corporation See Sheet 2, 3 & 4

Sealing of roofing material to roof curb nailer is not part of this application. Roofing material should be addressed by approved NOA for each project.

Bolts Holding Unit And Curb to Building Structure


Nuts & Lock Washers Holding Unit And Curb to Building Structure


Building Structure; Wide Flange Beams Shown, Bar Joist or Steel Purlins Also Acceptable

Exploded End View

Thybar Corporation


Qty:	Job # :	Tag:
Dwg. RC11545.idw	By: T Ambrosini	Date: 9/22/2011
D:\Inventor\Thybar Vault\Drawings\Logged Drawings\RC-Roof Curb\RC11501-RC11750\RC11545\RC11545.idw		



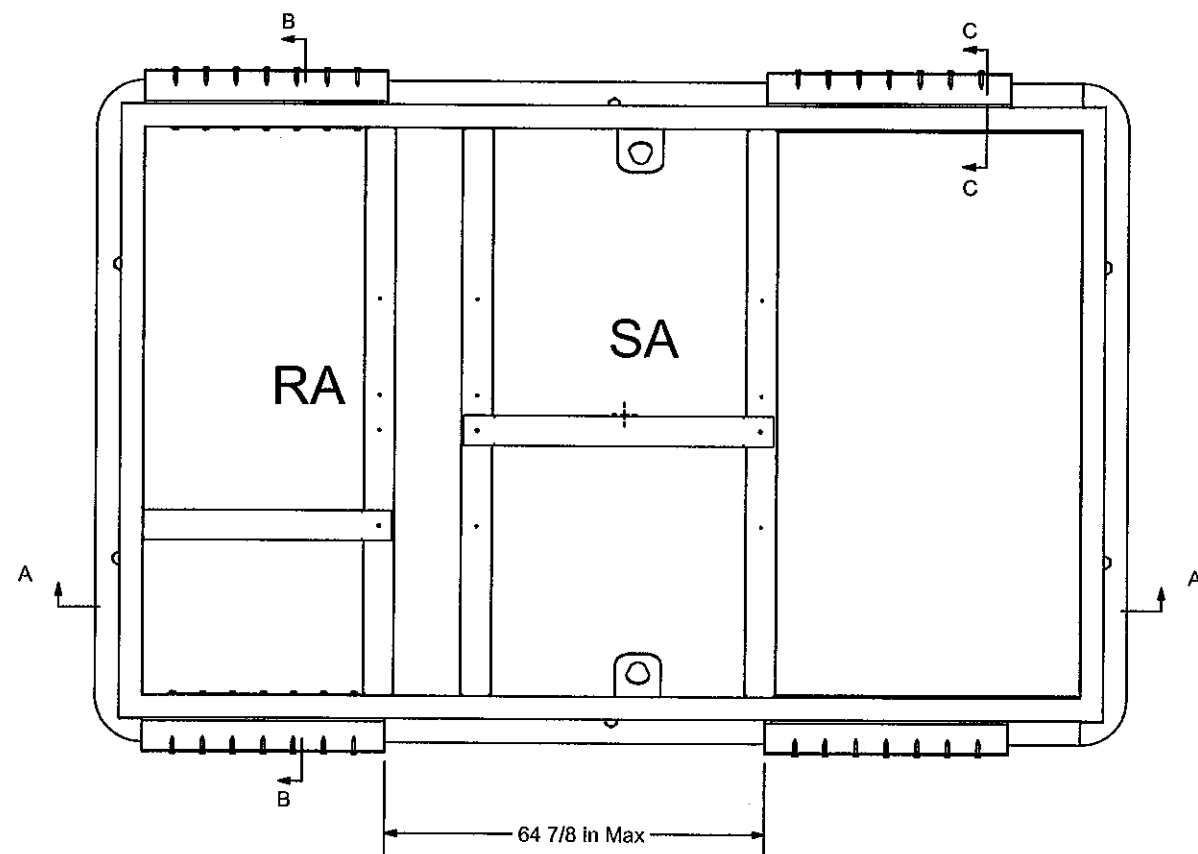


Plan view


Varies according to model number on page 1.

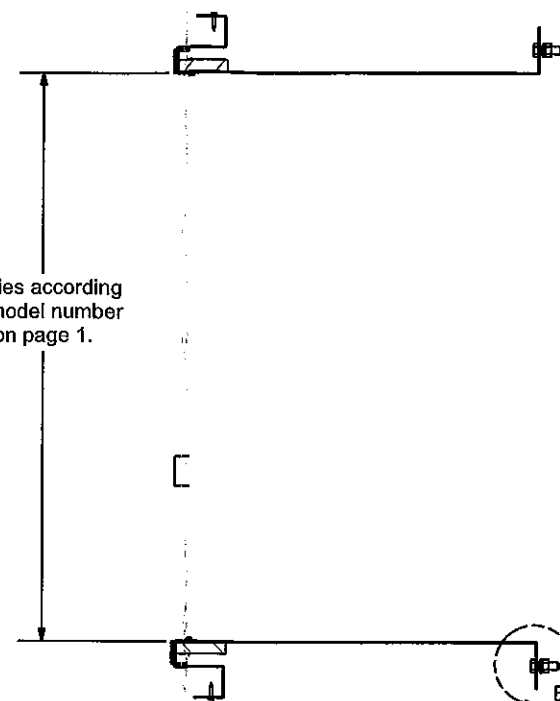

SECTION B-B

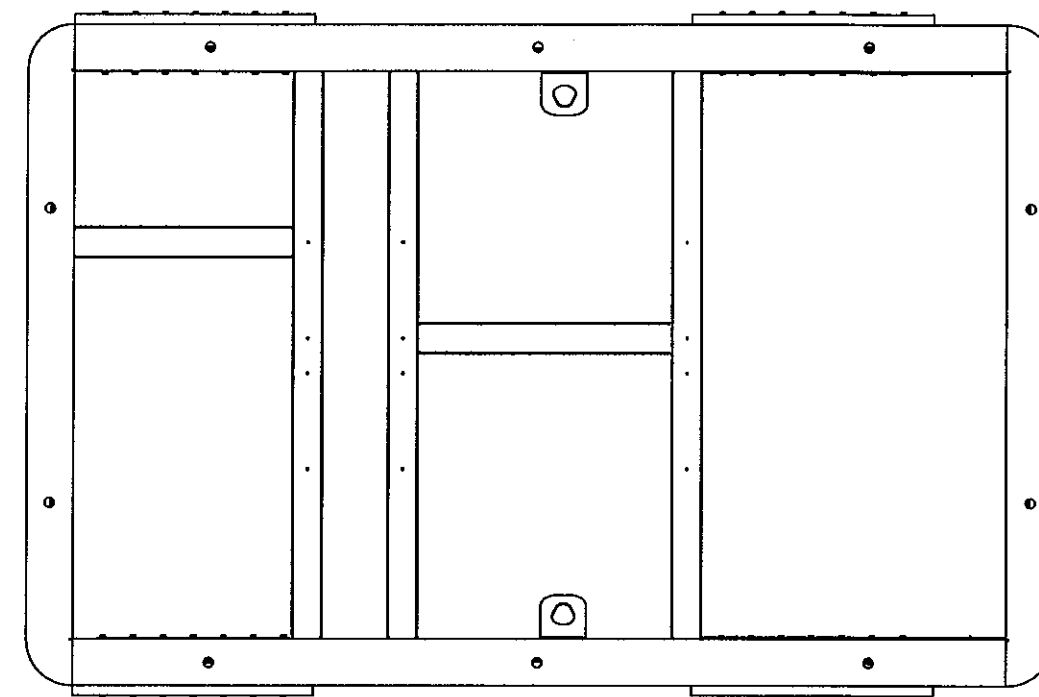

Bottom View

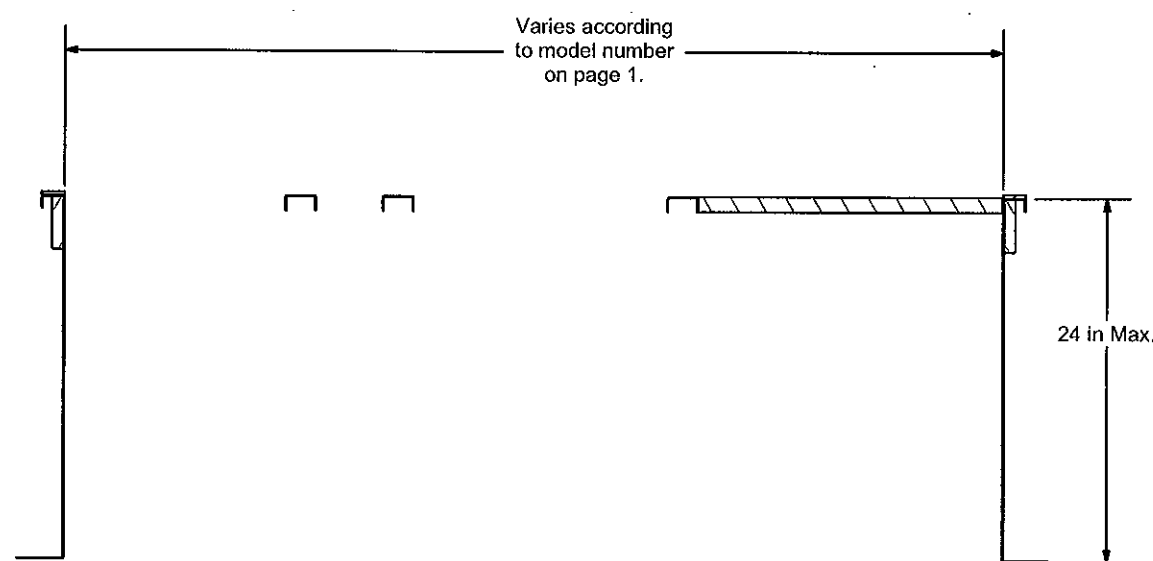

SECTION A-A

Approved as complying with the
Florida Building Code
Date 12/15/2011
NOA# 11-1018-01
Miami Dade Product Control
By *[Signature]*

(7) #10 TEK Screws
Per Restraint Bracket.
2" O.C. Spacing
Holding Restraint Bracket
to Roof Curb

HAVC Unit
Baseraill


(7) #10 TEK Screws
Per Restraint Bracket.
2" O.C. Spacing
Holding HVAC Unit
to Restraint Bracket

DETAIL D

(10) 1/2"Ø A307 through
bolts per curb, (3) on
each curb long side and (2) on
each curb short side,
holding roof curb to
building structure.

Structural steel (Typ)
Provided By Others

DETAIL E

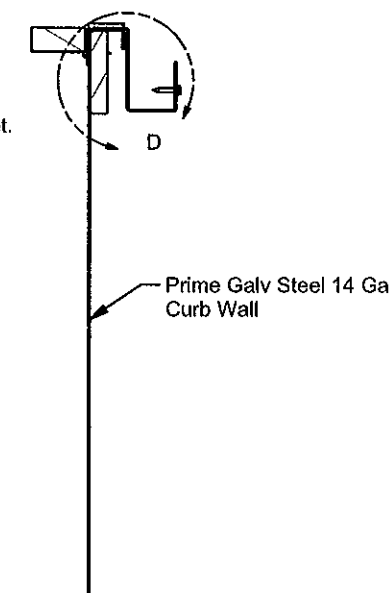

SECTION C-C

Send 25 ft. of 1/4 x 1 1/2 Gasketing/Curb

Florida DWS 146mph FBC Roof Curb Uninsulated


[Signature]
Paul Selman Florida P.E. 65313
913 S. Kay Avenue
Addison IL 60101

Thybar Corporation

Qty:	Job #:	Tag:
Dwg. RC11545.idw	By: T Ambrosini	Date: 9/22/2011
D:\Inventor\Thybar Vault\Drawings\Logged Drawings\RC-Roof Curb\RC11501-RC11750\RC11545\RC11545.idw		

ThyCurb
Sheet 2 of 5

Part	Description	Material
w01a	end nailer	1X4 Wood Nailer
w02a	side nailer	1X4 Wood Nailer
09a	(4) #10 Tex screws per lifting plate	Prime Galv Steel 12 Ga.
01a	curb wall 1	Prime Galv Steel 14 Ga.
02a	curb wall 2	Prime Galv Steel 14 Ga.
03a	curb wall 3	Prime Galv Steel 14 Ga.
04a	curb wall 4	Prime Galv Steel 14 Ga.
06a	angle stiffener 2	Prime Galv Steel 14 Ga.
08a	angle stiffener 4	Prime Galv Steel 14 Ga.
bracket	Restraint Bracket	Prime Galv Steel 14 Ga.
10-16x1 self drilling	Hex washer Head Zinc 10-16x1 self drilling	Screw

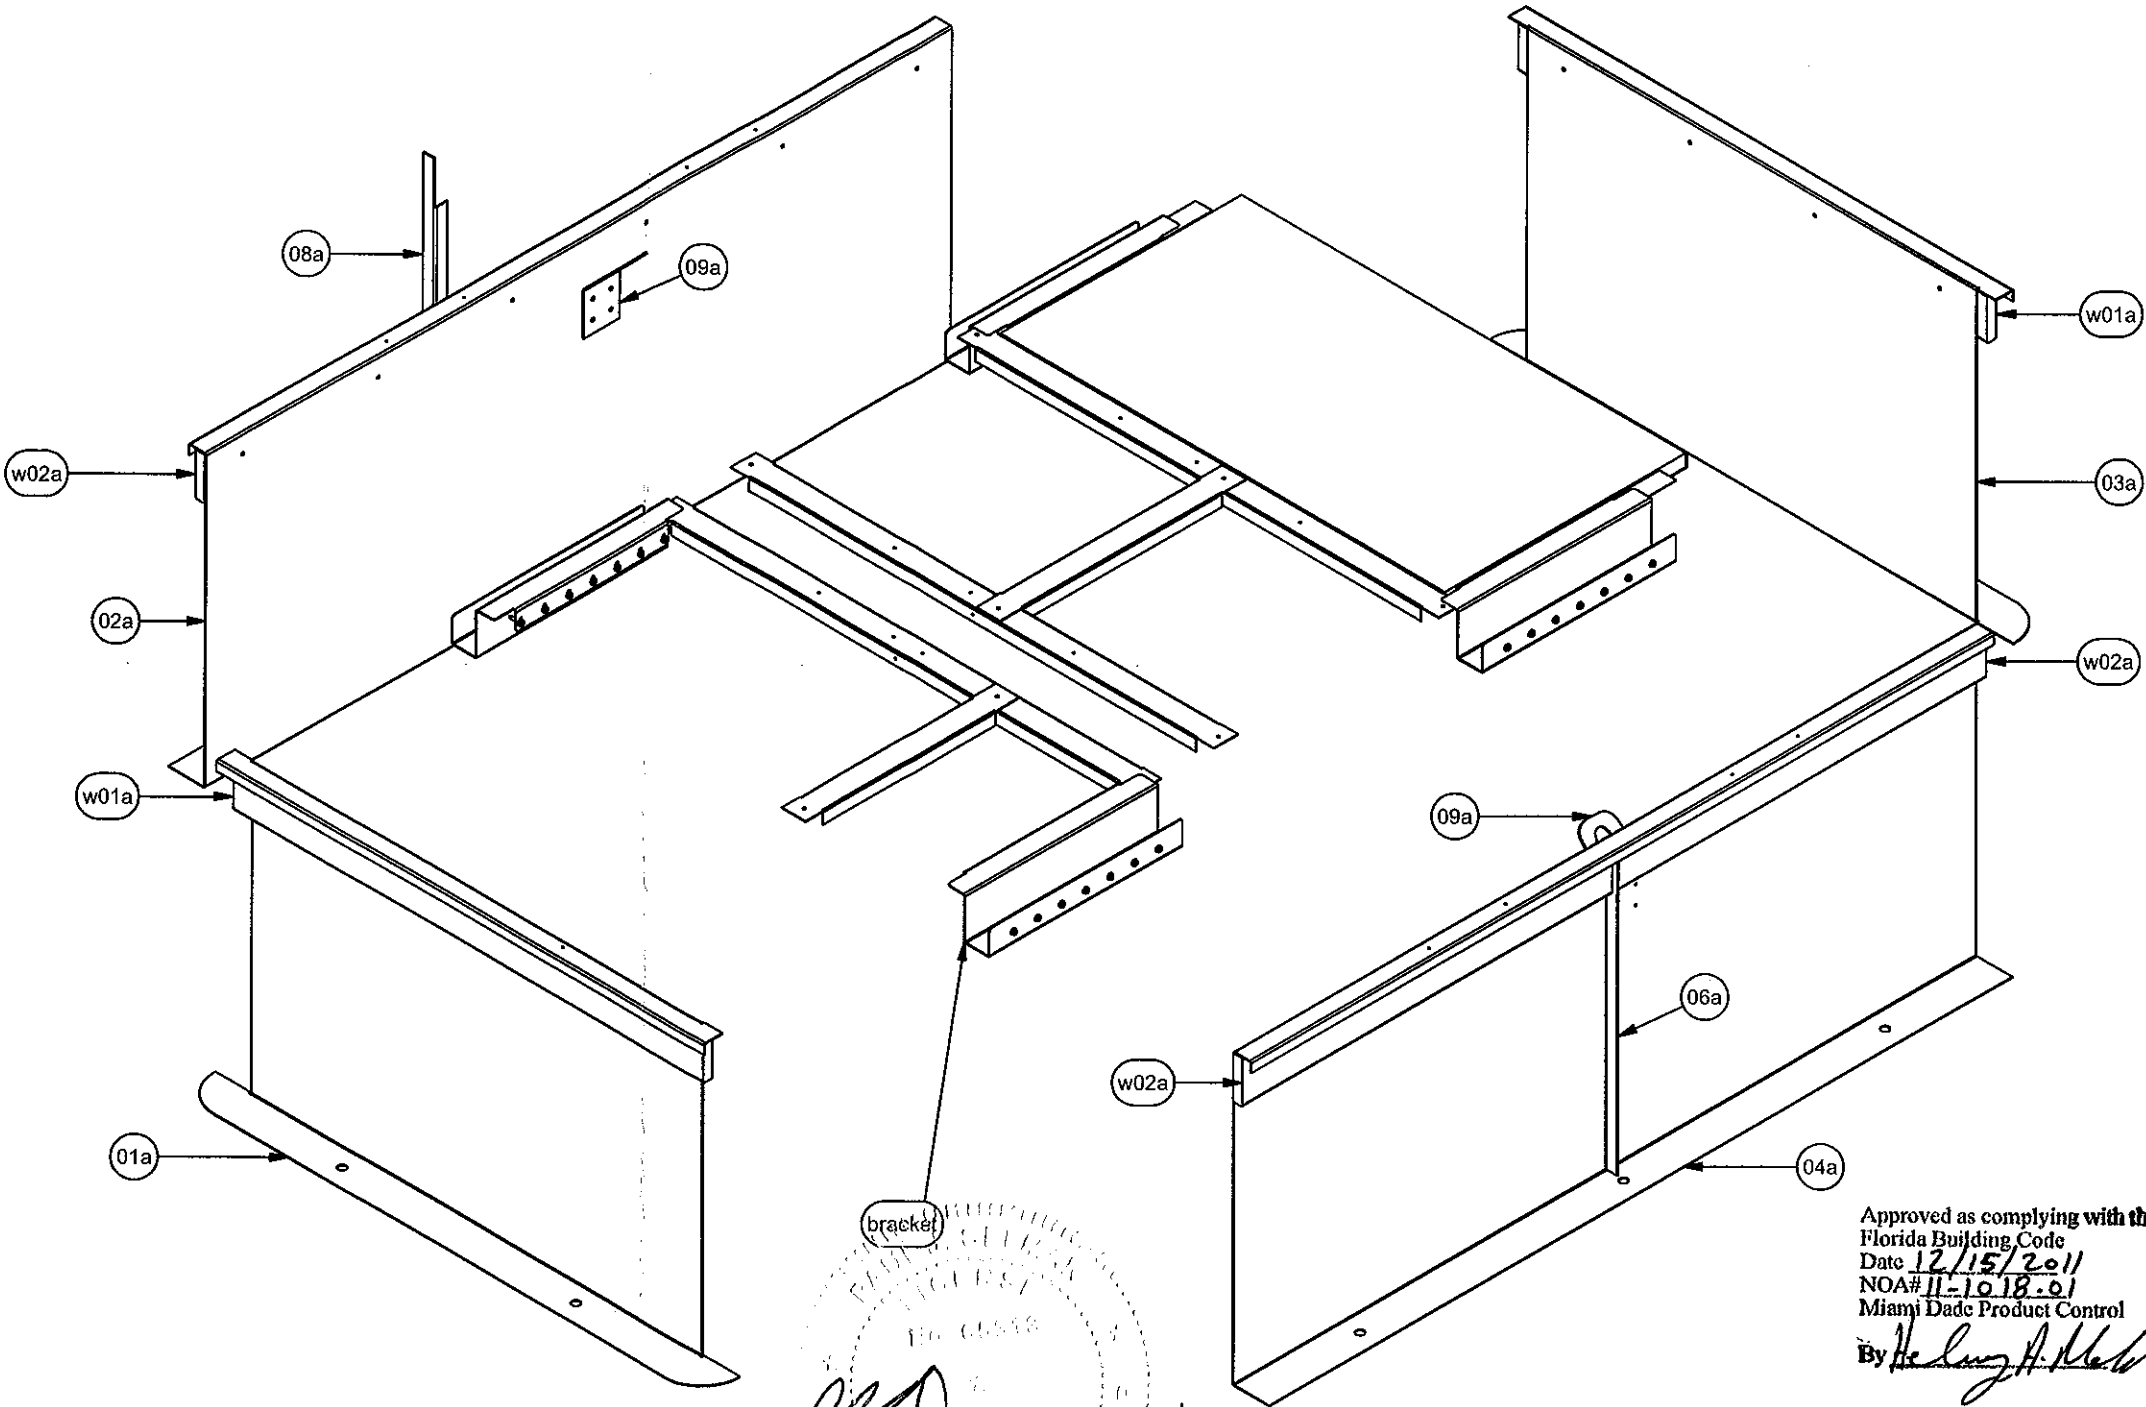

Approved as complying with the
 Florida Building Code
 Date 12/15/2011
 NOA# 11-1018-01
 Miami Dade Product Control
 By *[Signature]*


Florida DWS 146mph FBC Roof Curb Uninsulated

[Signature] 10/11/11
 Paul Selman, Florida P.E. 65313
 913 S. Kay Avenue
 Addison IL 60101


Thybar Corporation			
Qty:	Job # :	Tag:	
Dwg. RC11545.idw		By: T.Ambrosini	Date: 9/22/2011
D:\Inventor\Thybar Vault\Drawings\Logged Drawings\RC-Roof Curb\RC11501-RC11750\RC11545\RC11545.idw			

ThyCurb


Sheet 3 of 5

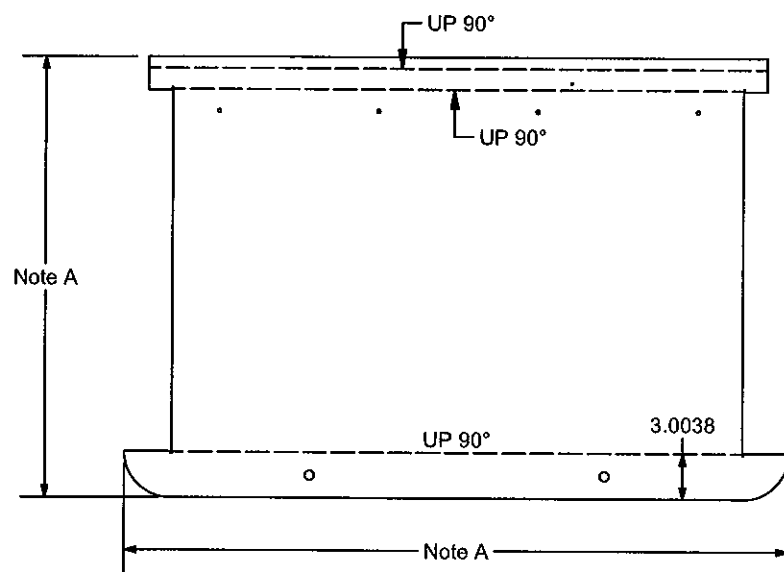


01a - 1

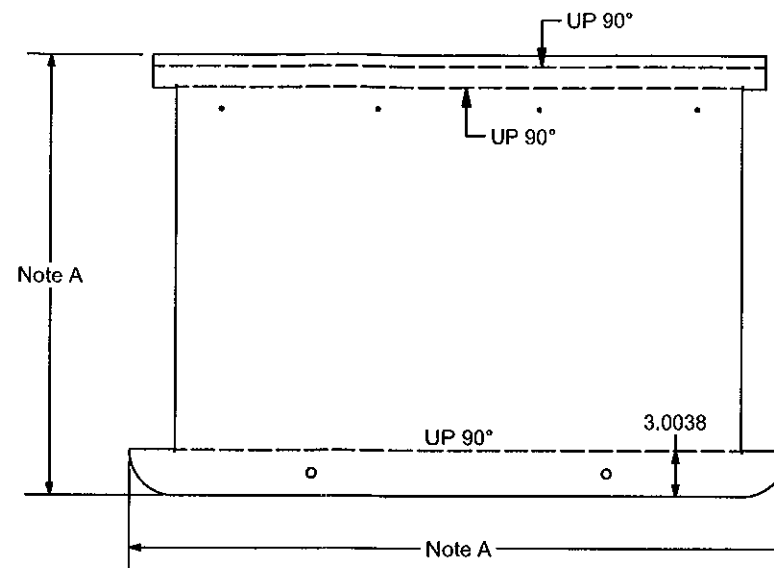

03a - 1

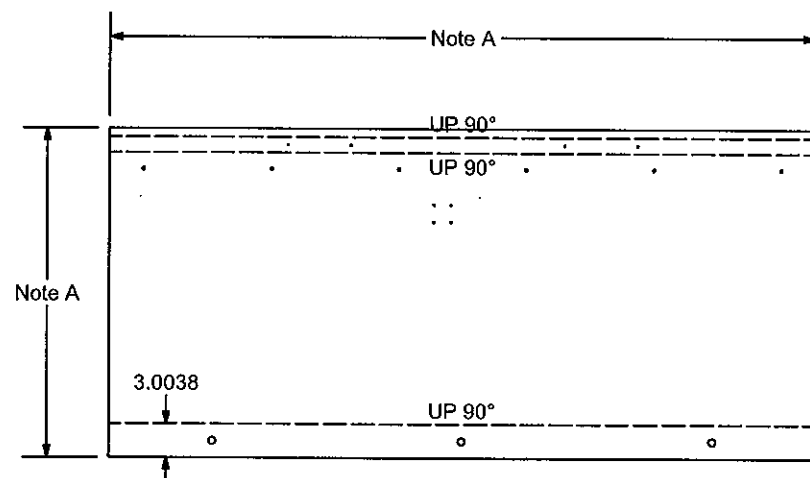


02a - 1

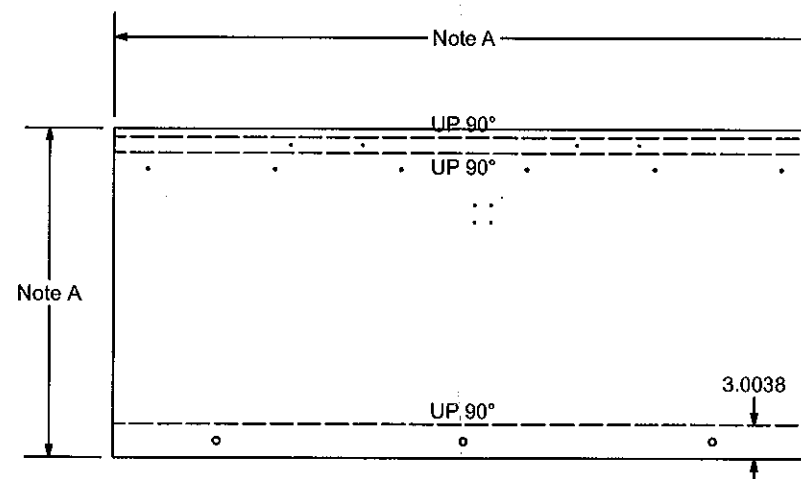


04a - 1


Note A
Varies according to
model number on page 1.

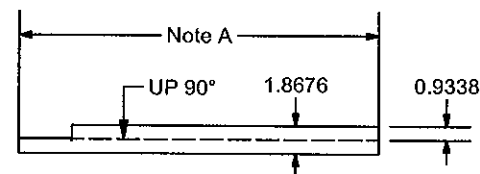

06a - 1

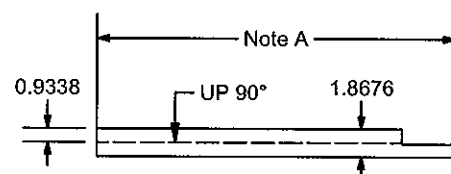

08a - 1

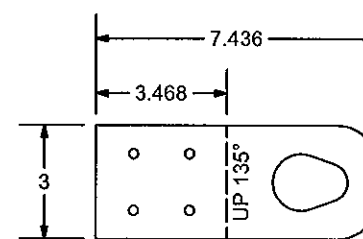

09a - 2

Florida DWS 146mph FBC Roof Curb Uninsulated

Paul Selman
Paul Selman, Florida P.E. 65313
913 S Kay Avenue
Addison IL 60101


Approved as complying with the
Florida Building Code
Date 12/15/2011
NOA# 11-1018-a
Miami Dade Product Control
By *Heather A. Hester*

Thybar Corporation			
Qty:	Job # :	Tag:	
Dwg. RC11545.idw		By: T Ambrosini	Date: 9/22/2011
D:\Inventor\Thybar Vault\Drawings\Logged Drawings\RC-Roof Curb\RC11501-RC11750\RC11545\RC11545.idw			


ThyCurb

Sheet 4 of 5


ThyCurb
Sheet 4 of 5

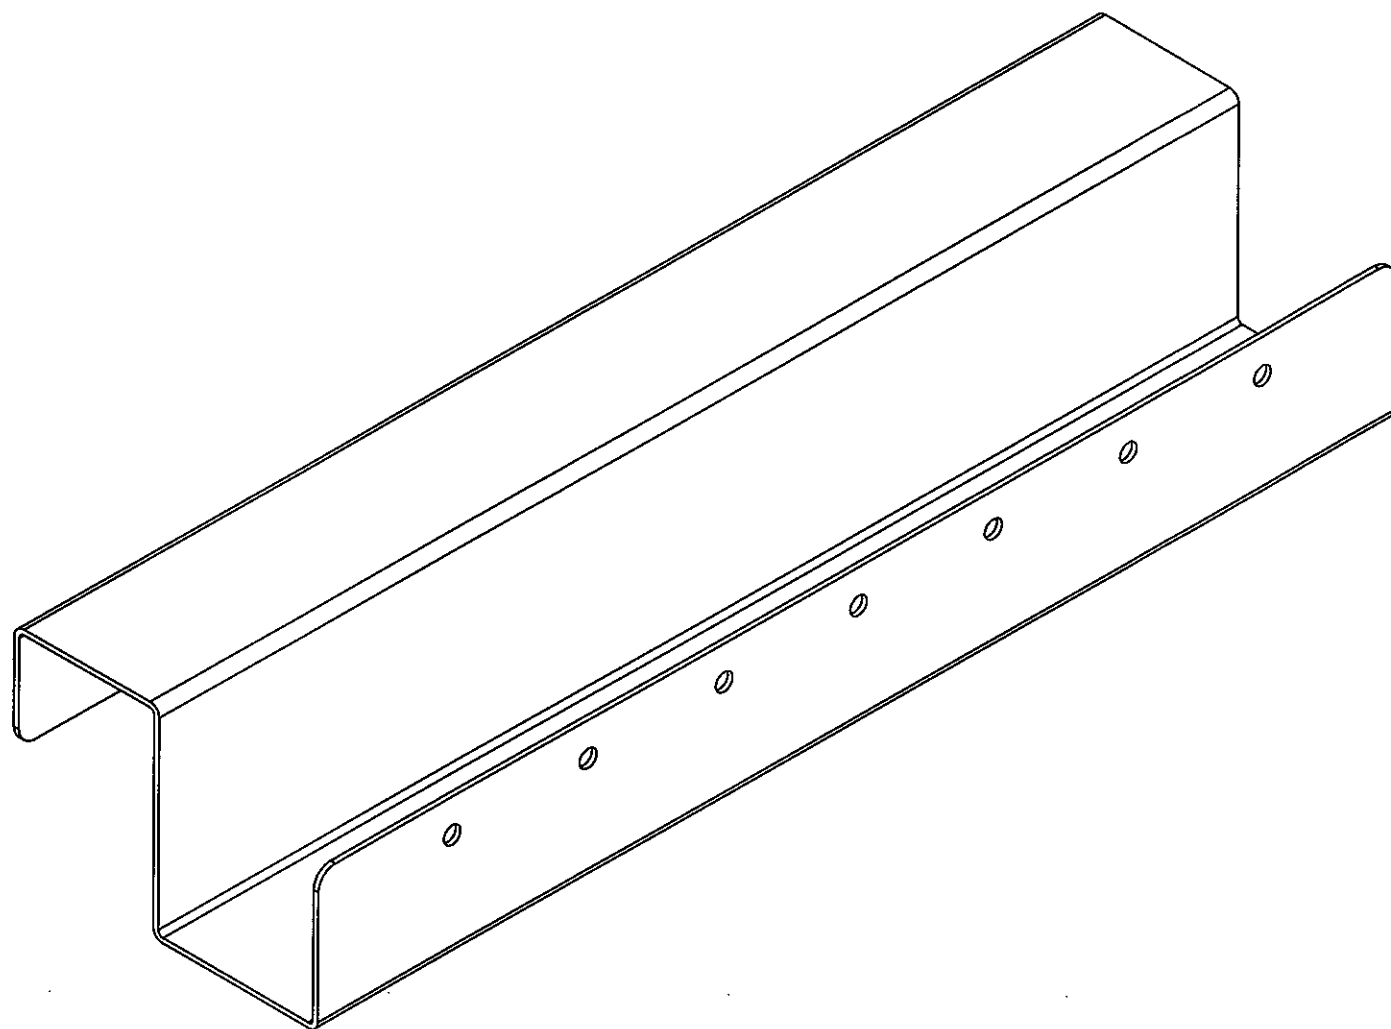

Isometric View

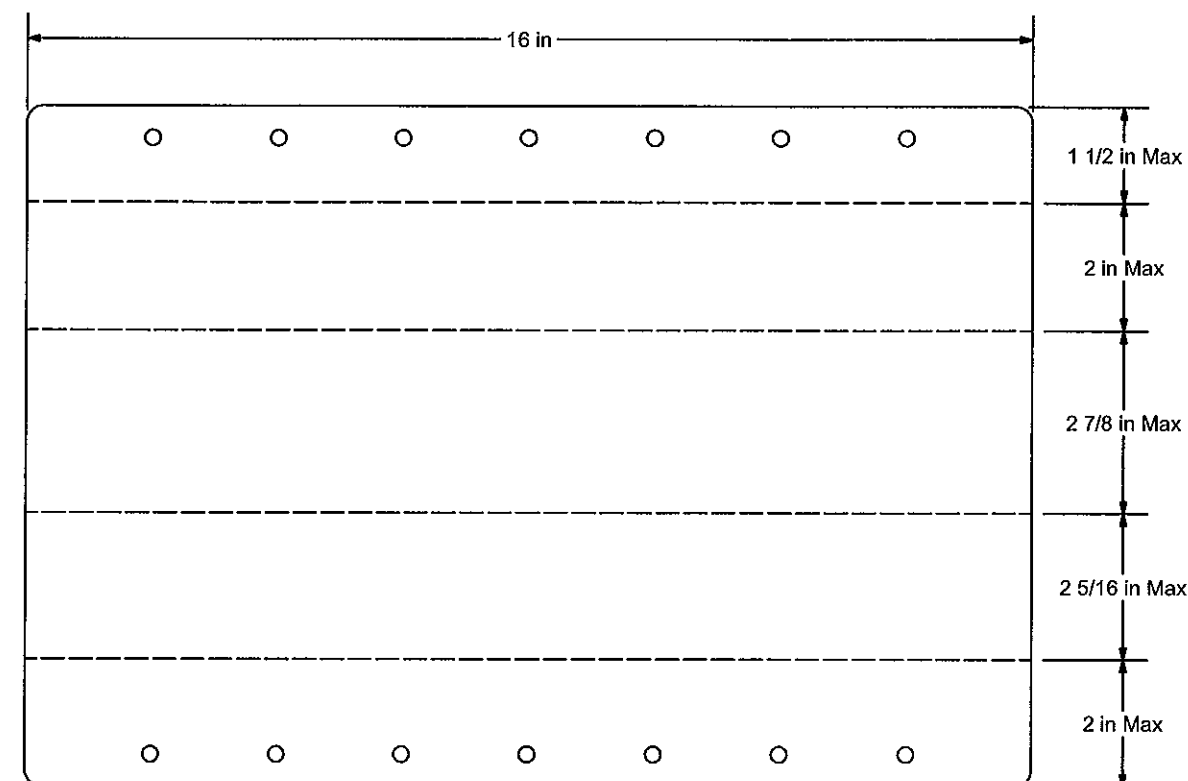

Flat Pattern

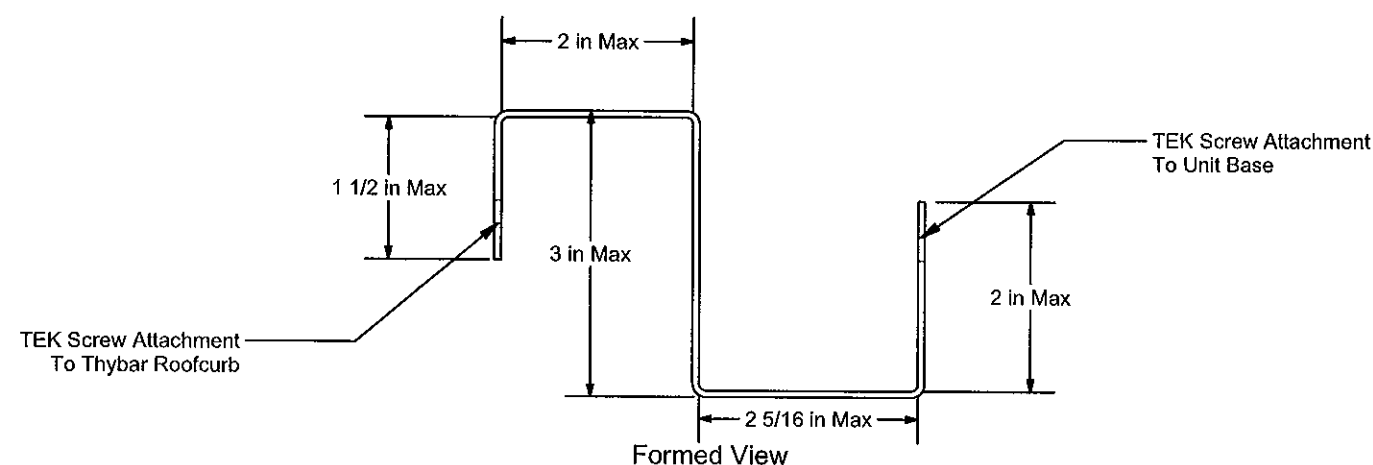

Formed View

Florida DWS 146mph FBC Roof Curb Uninsulated

Restraint bracket capacity

Bracket capacity is the minimum of bracket shear and tensile capacities with a factor of safety = 2.0.
 5,270=minimum of 8,445 and 5,270
 5,270 / 2 Factor of Safety = 2,635 lb


Restraint bracket quantity

Restraint bracket quantity is determined by project specific calculations that consider the unique combination of unit, curb and location. 4 brackets (min.) per curb.

Approved as complying with the
 Florida Building Code
 Date 12/15/2011
 NOA# 11-1018-01
 Miami Dade Product Control

By *[Signature]*

[Signature] 10/11/11
 Paul Selman, Florida P.E. 65313
 913 S. Kay Avenue
 Addison IL 60101

Thybar Corporation				 ThyCurb Sheet 5 of 5
Qty:	Job # :	Tag:		
Dwg. RC11545.idw		By: T Ambrosini	Date: 9/22/2011	
D:\Inventor\Thybar Vault\Drawings\Logged Drawings\RC-Roof Curb\RC11501-RC11750\RC11545\RC11545.idw				

ThyCurb

 Sheet 5 of 5