



MIAMI-DADE COUNTY
 DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY
 AFFAIRS (PERA)
 BOARD AND CODE ADMINISTRATION DIVISION
NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
 11805 SW 26 Street, Room 208
 Miami, Florida 33175-2474
 T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/pera/

Cornell Iron Works, Inc.
 24 Elmwood Avenue
 Mountaintop, PA 18707

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. PERA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Insulated Steel Roll-up Door up to 25'-5" Wide

APPROVAL DOCUMENT: Drawing No. **ES16-29**, titled "Dade County Approved 25'-5" wide 60 psf Insulated Rolling Steel Door", Sheets 1 and 2 of 2, dated 05/23/2007, with revision B dated 10/26/2010, prepared by Cornell Iron Works, Inc, signed and sealed by Joseph H. Dixon, Jr., P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: A permanent label with the manufacturer's name or logo, manufacturing address, model number, the positive and negative design pressure rating, indicate impact rated if applicable, installation instruction drawing reference number, approval number (NOA), the applicable test standards, and the statement reading 'Miami-Dade County Product Control Approved' is to be located on the door's side track, bottom angle, or inner surface of a panel.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews **NOA # 10-1112.07** and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**




[Handwritten Signature]
 10/03/2012




NOA No. 12-0209.01
Expiration Date: July 5, 2013
Approval Date: May 10, 2012
 Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

- A. DRAWINGS** *"Submitted under NOA # 10-1112.07"*
1. Drawing No. **ES16-29**, titled "Dade County Approved 25'-5" wide 60 psf Insulated Rolling Steel Door", Sheets 1 and 2 of 2, dated 05/23/2007, with revision B dated 10/26/2010, prepared by Cornell Iron Works, Inc, signed and sealed by Joseph Dixon, Jr., P.E.
- B. TESTS** *"Submitted under NOA # 10-1112.07"*
1. Test reports on 1000 hours of Salt Spray per ASTM B117 of G-90 and G-40 painted samples, prepared by Intertek, Test Report No. **G100075502**, dated 05/26/2010, signed and sealed by Rick Curkeet, P.E.
"Submitted under NOA # 07-0108.02"
 2. Test report on Uniform Static Air Pressure Test (Structural) per FBC, TAS 202-94, Large Missile Impact Test per FBC, TAS 201-94 and Cyclic Wind Pressure Loading per FBC, TAS 203-94, of a Galvanized Steel Roll-up Door, prepared by Certified Testing Laboratories, Report No. **CTLA-1600W-1**, dated 11/28/2006, signed and sealed by Ramesh Patel, P.E.
 3. Test report on Tensile Test per ASTM E8, of Galvanized Steel, prepared by Certified Testing Laboratories, Report No. **CTLA-1600W** and **1600W-1**, dated 12/04/2006, signed and sealed by Ramesh Patel, P.E.
 4. Test Report on Ignition Temperature per ASTM D1929 and Flame Spread/ Smoke Density per ASTM E84, prepared by ETC Laboratories, Repot # **ETC-07-1071-18738.0**, dated 03/26/2007, signed and sealed by Joseph L. Doldan, P.E.
- C. CALCULATIONS** *"Submitted under NOA # 10-1112.07"*
1. Between-jamb guide anchoring calculations and structural analysis, dated 10/25/2010, prepared, signed and sealed by Joseph H. Dixon, Jr., P.E.
"Submitted under NOA # 09-0127.06"
 2. Structural calculations prepared by Joseph H. Dixon, Jr., PE, dated 01/12/2009, 18 pages, signed and sealed by Joseph H. Dixon, Jr., P.E.
- D. QUALITY ASSURANCE**
1. Miami-Dade Department of Permitting, Environment, and Regulatory Affairs (PERA)
- E. MATERIAL CERTIFICATIONS**
1. None.
- F. STATEMENTS**
1. Statement letter of code conformance to 2010 FBC, dated 01/27/2012, signed and sealed by Joseph H. Dixon, Jr., P.E.
 2. Test proposal issued by Architectural Testing, Inc., dated 04/16/2012 and authorized by Trevor Errington.
"Submitted under NOA # 10-1112.07"
 3. Statement letter of no financial interest, dated 11/05/2010, signed and sealed by Joseph H. Dixon, Jr., P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 12-0209.01
Expiration Date: July 5, 2013
Approval Date: May 10, 2012

REV	REVISION	DATE	BY	E.C.O.
*	ORIGINAL ISSUE	05/23/2007	R.M.	*
A	REVISED NOTES FOR 2007 BUILDING CODE	12/03/2008	R.M.	*
B	REVISED CURTAIN TO G40 GALVANIZED	10/26/2010	R.M.	*

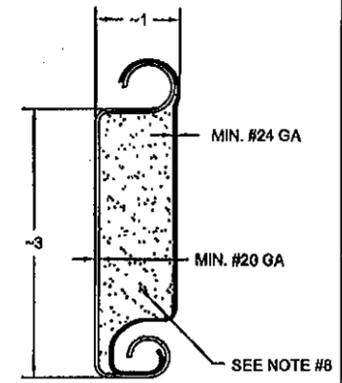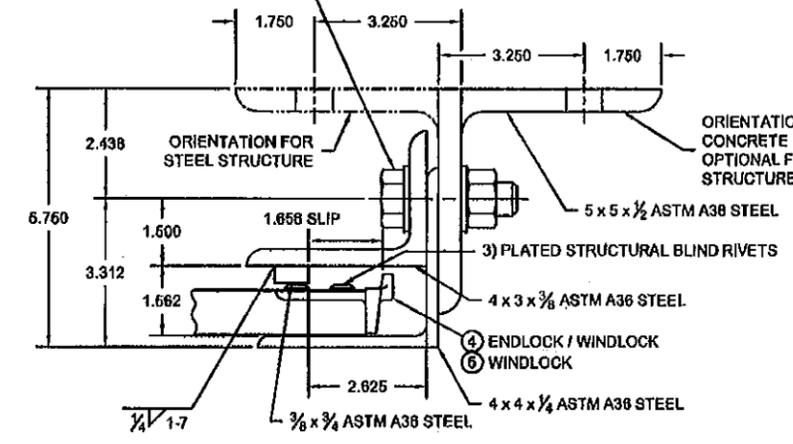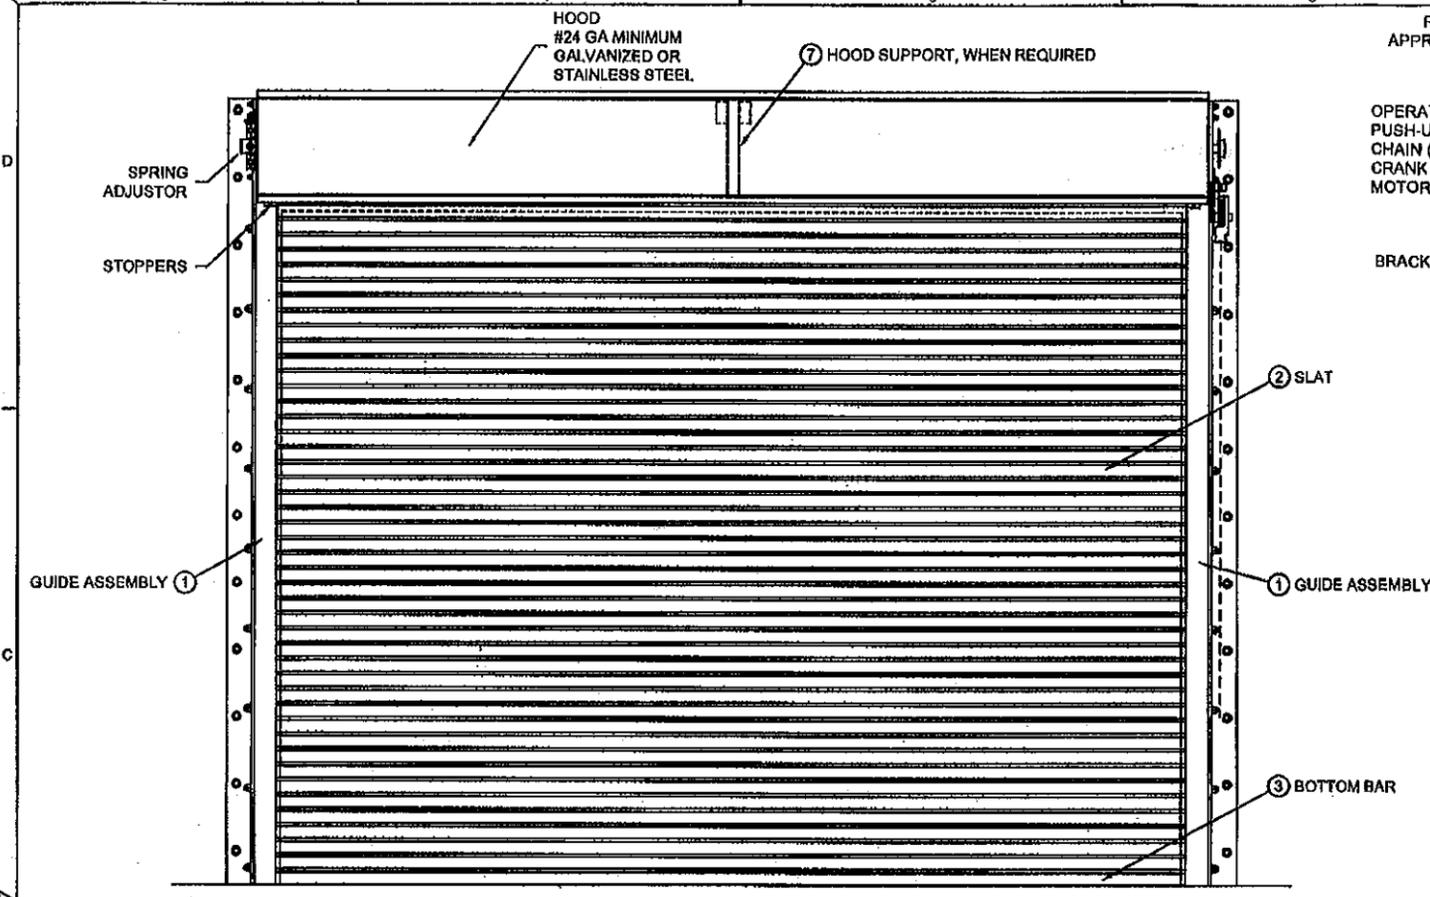

PRODUCT REVISED as complying with the Florida Building Code Acceptance No 10-1112,07 Expiration Date 07/05/2012






By *[Signature]* Miami Dade Product Control

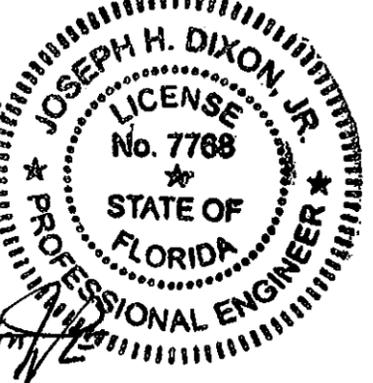

PRODUCT RENEWED as complying with the Florida Building Code Acceptance No 12-0209,01 Expiration Date 07/05/2013

By *[Signature]* Miami Dade Product Control

- NOTES:
- THIS ROLL-UP DOOR SYSTEM IS DESIGNED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE, LATEST EDITION, AS A LARGE MISSILE IMPACT RESISTANT SYSTEM.
 - POSITIVE AND NEGATIVE DESIGN PRESSURE CALCULATIONS SHALL BE PERFORMED FOR SPECIFIC JOBS IN ACCORDANCE WITH ASCE 7 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES. WIND LOADS DETERMINED FOR OPENINGS SHALL BE LESS THAN OR EQUAL TO DOOR DESIGN PRESSURES NOTED BELOW.
 - THE DETAILS AND SPECIFICATIONS SHOWN HEREIN REPRESENT THE PRODUCTS TESTED FOR UNIFORM STATIC AIR PRESSURE IN CONFORMANCE WITH DADE COUNTY PROTOCOLS TAS 201, 202 AND 203.
POSITIVE DESIGN LOAD = 60 PSF
NEGATIVE DESIGN LOAD = 60 PSF
 - TESTING PERFORMED BY CERTIFIED TESTING LABORATORIES (ORLANDO, FL.) TEST REPORT No. OTLA 1600W-1.
 - SUPERIMPOSED LOADS ON THE JAMBS FROM THIS DOOR ARE DESIGNATED AS F1, F2, AND F3 HEREIN. CONTRACTORS SHALL HAVE FLORIDA REGISTERED PROFESSIONAL ENGINEER VERIFY ADEQUACY OF BUILDING STRUCTURE TO RESIST SUPERIMPOSED LOADS F1, F2, AND F3.
 - ALL WELDING SHALL BE PERFORMED BY QUALIFIED WELDERS IN ACCORDANCE WITH AWS SPECIFICATIONS, LATEST EDITION. ALL WELDING ELECTRODES SHALL CONFORM TO AWS A5.1, GRADE E-70. MINIMUM WELDING PROCESS SHALL BE ARC WELDING AWS E7014 OR MIG WELDING AWS E706-6.
 - ANCHOR NOTES:
A. EMBEDMENT DEPTH DOES NOT INCLUDE STUCCO FINISH.
B. ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS SPECIFICATIONS.
 - FOAMED IN PLACE INSULATION, TESTED IN ACCORDANCE WITH ASTM E-84 AND D 1699 OR MINERAL WOOL INSULATION
 - DOOR MAY BE INSTALLED ON THE INSIDE OR OUTSIDE OF A WALL.
 - A 33% INCREASE IN ALLOWABLE STRESS HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT.

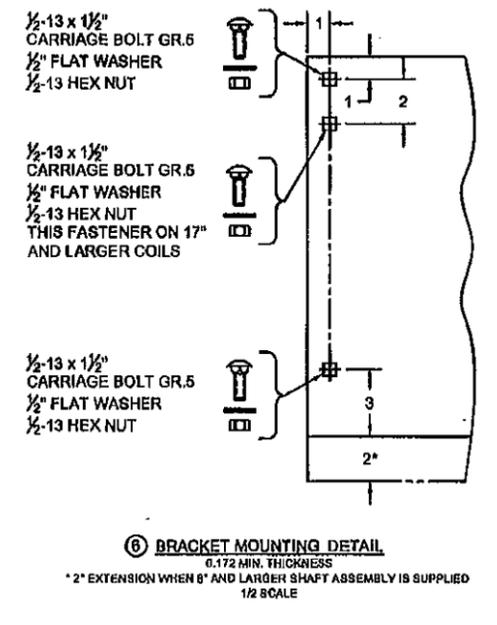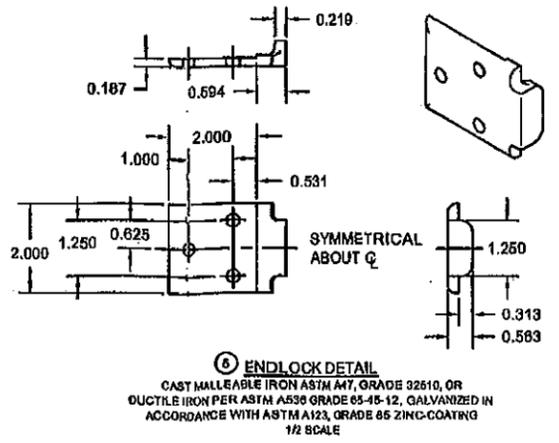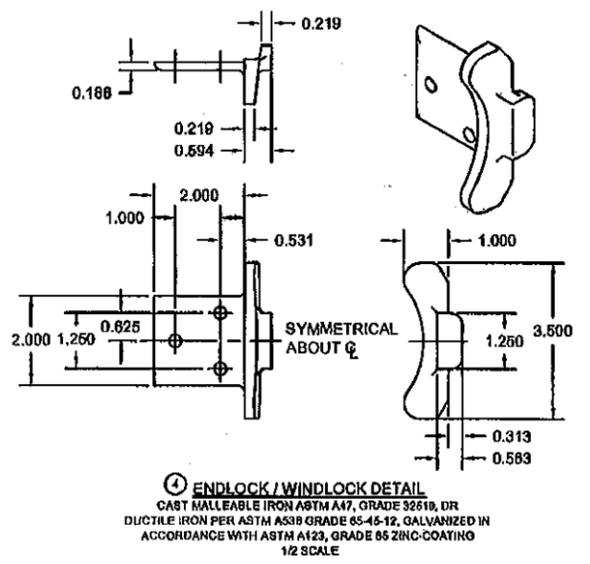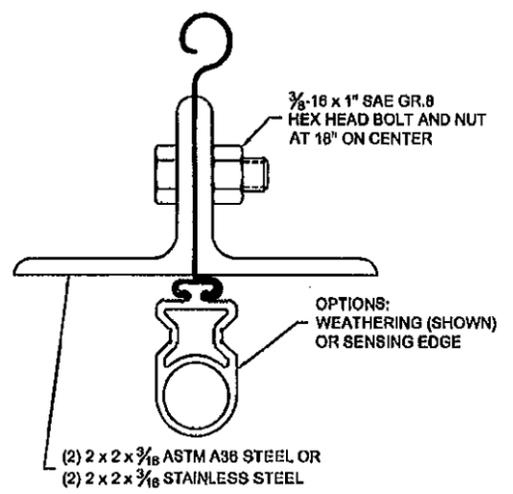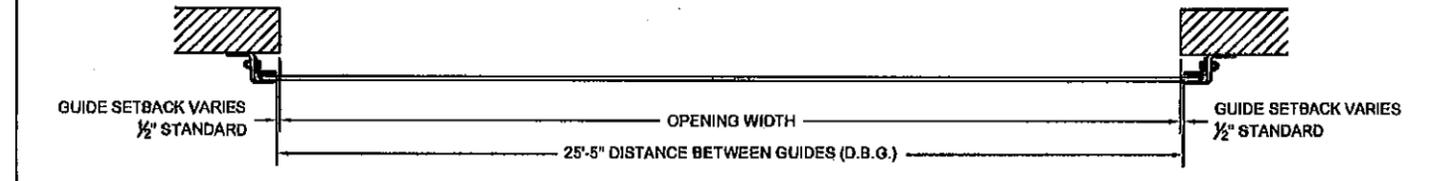

CORNELL 100 ELMWOOD AVENUE
CRESTWOOD INDUSTRIAL PARK
MOUNTAINTOP, PA 18707

TITLE: DADE COUNTY APPROVED
25'-5" WIDE 60 PSF INSULATED
ROLLING STEEL DOOR

SCALE: 1:16 & AS NOTED

REV: B






ES16-29-01

R. MAGGIO


1 OF 2

LTR	REVISION	DATE	BY	E.C.O.
*	ORIGINAL ISSUE	06/23/2007	R.M.	****
A	REVISED FOR 2007 FLORIDA BUILDING CODE	12/03/2008	R.M.	****
B	ADDED OPTIONAL BETWEEN JAMBS GUIDE MOUNTING TO STEEL	10/28/2010	R.M.	****


CONCRETE STRENGTH (psi)	MAXIMUM FASTENER SPACING (in.)	
	HILTI	SIMPSON
3000	7 1/2	8
4000	11	9 1/2

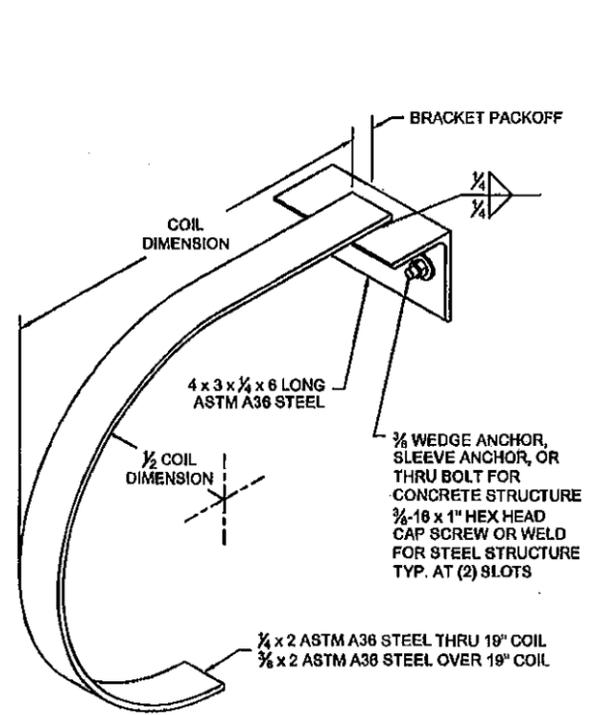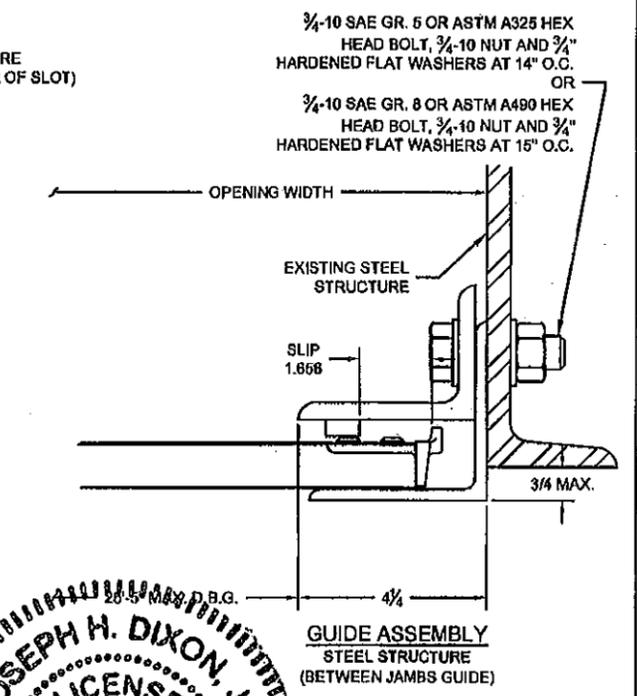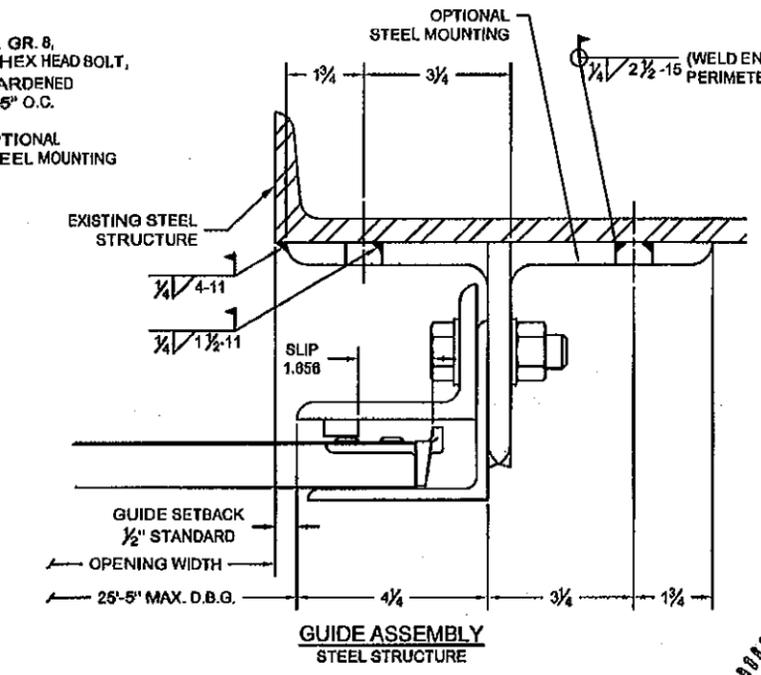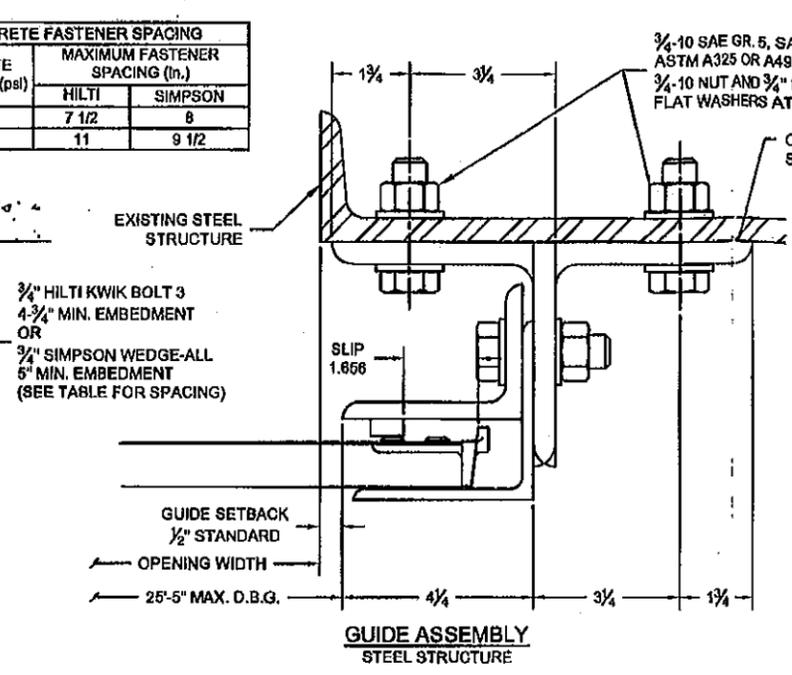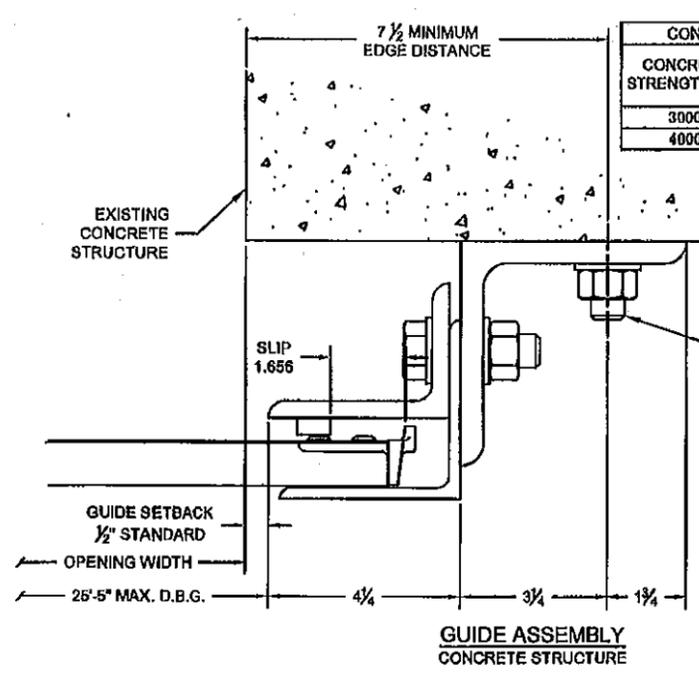

① MID-HOOD SUPPORT (WHEN REQUIRED)
 "O" SHAPE DEPICTED, SQUARE STYLE ALSO AVAILABLE
 SCALE: NTS

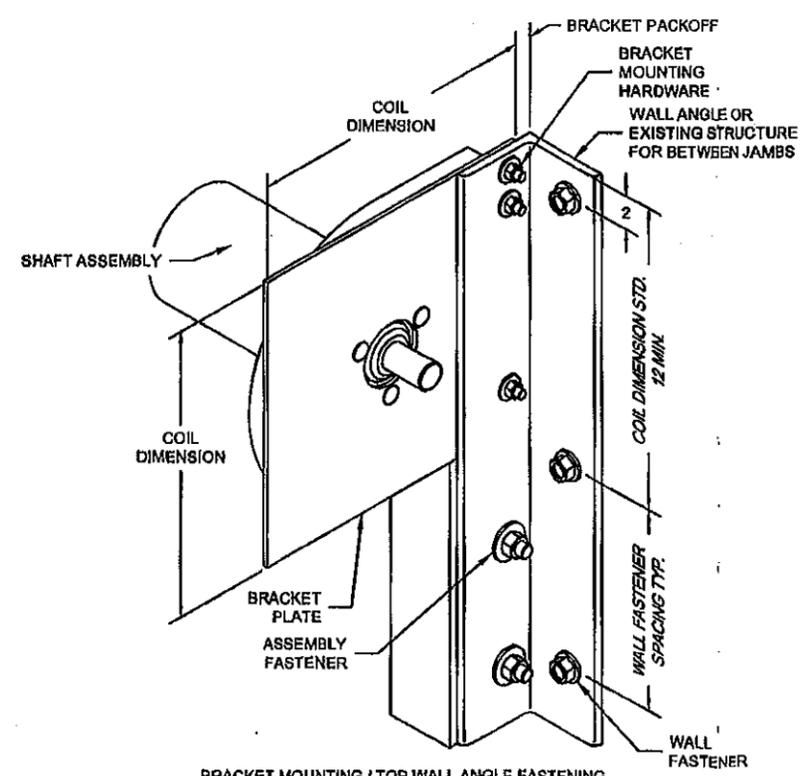


BRACKET MOUNTING / TOP WALL ANGLE FASTENING
 BRACKET MOUNTING PER DETAIL & DEPICTED,
 OTHER BRACKET MOUNTINGS ARE AVAILABLE
 SCALE: NTS

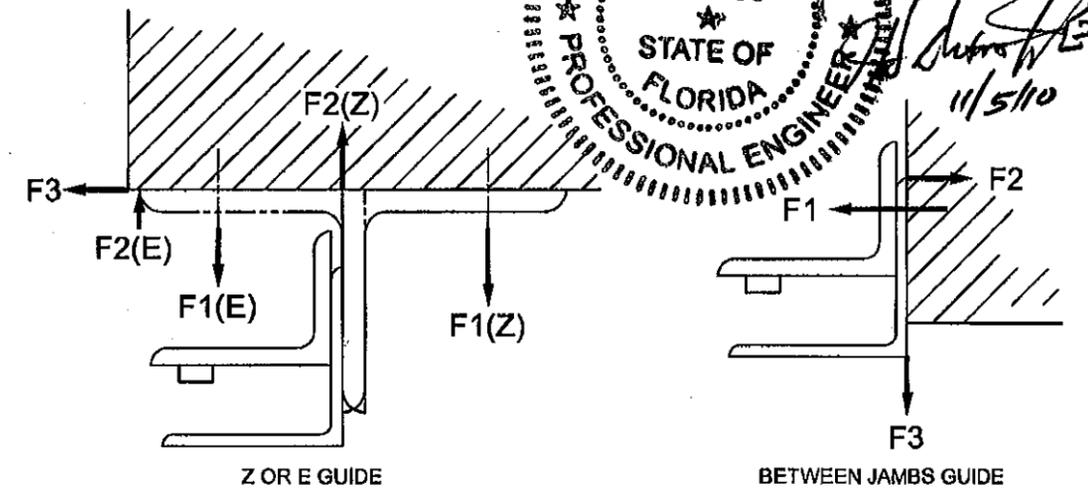

Z-GUIDE			E-GUIDE			BETWEEN JAMBS GUIDE											
POSITIVE	NEGATIVE		POSITIVE	NEGATIVE		POSITIVE	NEGATIVE										
F1	F2	F3	F1	F2	F3	F1	F2	F3									
2294	1632	2624	4199	4962	2624	8222	5459	2624	5838	6601	2624	4727	2114	762	16364	13751	762

BUILDING DESIGNER NOTE:
 STRUCTURE MUST BE DESIGNED TO SUPPORT F1, F2, AND F3 FORCES (LBS./FT. OF OPENING HEIGHT) AT EACH JAMB.

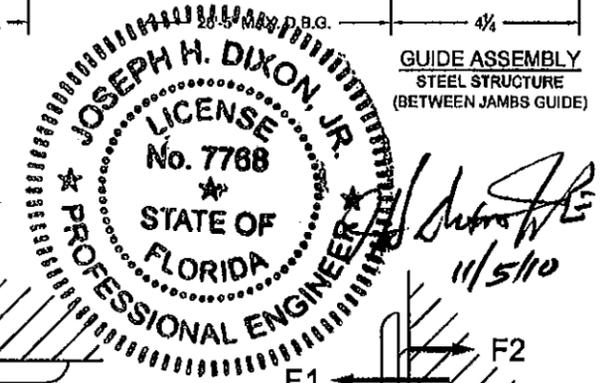

PRODUCT RENEWED
 as complying with the Florida Building Code
 Acceptance No 12-0209.01
 Expiration Date 07/05/2013
 By *[Signature]*
 Miami Dade Product Control

PRODUCT REVISED
 as complying with the Florida Building Code
 Acceptance No 10-1112.07
 Expiration Date 07/05/2012
 By *[Signature]*
 Miami Dade Product Control

CORNELL 100 ELMWOOD AVENUE
 CRESTWOOD INDUSTRIAL PARK
 MOUNTAINTOP, PA 16707

TITLE: DADE COUNTY APPROVED
 25'-5" WIDE 60 PSF INSULATED
 ROLLING STEEL DOOR

SIZE: DRAWN DWG NO: REV
 D R. MAGGIO ES16-29-02 B
 SCALE: 1/2" & AS NOTED SHEET 2 OF 2