



DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY
AFFAIRS (PERA)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/pera

NOTICE OF ACCEPTANCE (NOA)

Atrium Companies, Inc.
9001 Ambassador Row
Dallas, TX 75247

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. PERA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "MPRW" Aluminum Horizontal Rolling Window – L.M.I.

APPROVAL DOCUMENT: Drawing No. ATR042, titled "MRPW Horizontal Rolling Window", sheets 1 through 9 of 9, dated 01/25/12, prepared by Building Drops, Inc., signed and sealed by Alexis Spyrou, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA revises NOA# 08-0822.18 and consists of this page 1 and evidence pages E-1 and E-2, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.



MP
6/28/12

NOA No. 12-0313.05
Expiration Date: October 09, 2013
Approval Date: July 05, 2012
Page 1

Atrium Companies, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Manufacturer's die drawings and sections.
2. Drawing No. **ATR042**, titled "**MPRW Horizontal Rolling Window**", sheets 1 through 9 of 9, dated 01/25/12, prepared by Building Drops, Inc., signed and sealed by Alexis Spyrou, P.E.

B. TESTS

1. Test reports on:
 - 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
 - 6) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94along with marked-up drawings and installation diagram of an aluminum horizontal rolling window, prepared by Certified Testing Laboratories, Test Report No. **CTLA-1048W**, dated 04/30/03, signed and sealed by Ramesh Patel, P.E.
(Submitted under previous NOA#03-0609.03)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with FBC-2007 and FBC-2010, prepared by Building Drops, Inc., dated 01/26/12, signed and sealed by Alexis Spyrou, P.E.
2. Glazing complies with ASTM E1300-04

D. QUALITY ASSURANCE

1. Miami-Dade Department of Permitting, Environment, and Regulatory Affairs (PERA)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **08-0206.01** issued to **Solutia, Inc.** for their "**Saflex HP Glass Interlayer**" dated 04/17/08, expiring on 04/14/13.
2. Notice of Acceptance No. **11-0325.05** issued to **Solutia, Inc.** for their "**Saflex and Vanceva clear and color interlayers**" dated 05/05/11, expiring on 05/21/16.
3. Notice of Acceptance No. **11-0624.01** issued to **E.I. DuPont DeNemours & Co., Inc.** for their "**DuPont Butacite® PVB Interlayer**" dated 09/08/11, expiring on 12/11/16.


Manuel Perez, P.E.
Product Control Examiner

NOA No. 12-0313.05

Expiration Date: October 09, 2013

Approval Date: July 05, 2012

Atrium Companies, Inc.


NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

F. STATEMENTS

1. Statement letter of conformance and compliance with the FBC-2007 and FBC-2010, and of no financial interest, dated February 01, 2012, signed and sealed by Alexis Spyrou, P.E.
2. Asset purchase agreement dated 12/30/09, signed by Mr. Kevin P. O'Meara and Mr. Phil Ragona.
(Submitted under previous NOA# 11-0330.02)

G. OTHER

1. Notice of Acceptance No. **08-0822.18**, issued to Atrium Florida, Inc. for their Series "MPRW" Aluminum Horizontal Rolling Window - L.M.I.", approved on 11/13/08 and expiring on 10/09/13.

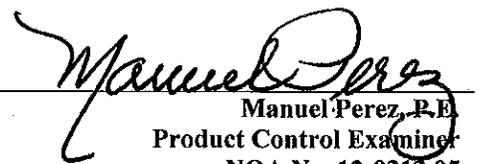

Manuel Perez, P.E.
Product Control Examiner

NOA No. 12-0313.05

Expiration Date: October 09, 2013

Approval Date: July 05, 2012

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH BASED ON QUANTITIES IN DP CHARTS NOT TO EXCEED THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT
- SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- FLANGE:** FOR INSTALLATION INTO WOOD FRAMING USE #12 WOOD SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
- FLANGE:** FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/MASONRY, USE 1/4 INCH DIAMETER ITW TAPCONS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT.
- FLANGE:** FOR INSTALLATION INTO METAL STUD OR APPROVED MULLION USE 12-14 ITW TEK SELECT OR SAE GR. 5 SELF DRILLING SCREWS OF SUFFICIENT LENGTH TO ACHIEVE A MINIMUM OF 3 THREADS PENETRATION BEYOND METAL FRAME SUBSTRATE.
- FIN:** FOR INSTALLATION INTO WOOD FRAMING USE #10 WOOD SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
- FIN:** FOR INSTALLATION INTO METAL STUD OR APPROVED MULLION USE #10 ITW TEK SELECT OR #10 SAE GR. 5 SELF DRILLING SCREWS OF SUFFICIENT LENGTH TO ACHIEVE A MINIMUM OF 3 THREADS PENETRATION BEYOND METAL FRAME SUBSTRATE.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:
 - WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.
 - CONCRETE -MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.
 - GROUT-FILLED CMU- UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 1924 PSI AND GROUT CONFORMS TO ASTM C 476, MINIMUM GROUT COMPRESSIVE STRENGTH OF 2000 PSI.
 - HOLLOW BLOCK CMU - UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 1924 PSI.
 - STEEL - MINIMUM YIELD STRENGTH OF 36 KSI. MINIMUM WALL THICKNESS OF 59.8 MIL (0.0598" or 16 GAUGE). MIN. 1/2" EDGE DISTANCE.
 - ALUMINUM - MINIMUM ALLOY 6063-T5. MINIMUM WALL THICKNESS OF 1/8" (0.125"). MIN. 1/2" EDGE DISTANCE

ATRIUM COMPANIES, INC.

MPRW HORIZONTAL ROLLING WINDOW (IMPACT)



9001 AMBASSADOR ROW
DALLAS, TEXAS 75247
PH: (214) 637-2696 FX: (214) 424-6734

GENERAL NOTES:

- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE 2010 FLORIDA BUILDING CODE (FBC), INCLUDING HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - TAS 201-94
 - TAS 202-94
 - TAS 203-94
- ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT IN NON-HVHZ AREAS. IN HVHZ AREAS, ONE TIME PRODUCT APPROVAL TO BE OBTAINED FROM MIAMI-DADE PERA.
- APPROVED IMPACT PROTECTIVE SYSTEM IS **NOT REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
 - FOR INSTALLATION ABOVE 30 FT. ABOVE GRADE IN AREAS REQUIRING IMPACT RESISTANCE, ALL UNITS MUST BE SAFETY GLAZED OR COVERED BY AN IMPACT PROTECTIVE SYSTEM PER FBC SECTION 2411.3.3.7.
- WINDOW FRAME MATERIAL: ALUMINUM 6063-T6
- IN ACCORDANCE WITH THE 2010 FBC SEC. 2003.8.4 DISSIMILAR METALS INCLUDING FASTENERS THAT MAY COME INTO CONTACT WITH ALUMINUM UNIT FRAMING SHALL BE PROTECTED AS DEFINED IN SEC 2003.8.4.2.
- GLASS MEETS THE REQUIREMENTS OF ASTM E 1300-04 GLASS CHARTS. SEE SHEET 6 FOR GLAZING DETAILS.
- ALL UNITS UNDER THIS APPROVAL SHALL USE SETTING BLOCKS IN COMPLIANCE WITH FBC SECTION 2411.3.3.1

TABLE OF CONTENTS		
SHEET	REVISION	SHEET DESCRIPTION
1	-	INSTALLATION & GENERAL NOTES
2	-	ELEVATIONS & ANCHOR LAYOUTS
3	-	VERTICAL SECTIONS
4	-	HORIZONTAL SECTIONS
5	-	DESIGN LOAD CAPACITY TABLES
6	-	GLAZING DETAILS
7	-	COMPONENTS & BILL OF MATERIALS
8	-	COMPONENTS
9	-	CORNER SECTION ASSEMBLIES

MISSILE IMPACT RATING


LARGE & SMALL MISSILE IMPACT

*PER GENERAL NOTE 5 ON THIS SHEET

TITLE: MPRW HORIZONTAL ROLLING WINDOW
GENERAL AND INSTALLATION NOTES


PREPARED BY:
BUILDING DROPS
127 W. FAIRBANKS AVE., STE. 438
WINTER PARK, FL 32789
PH: (407) 644-6957 FX: (407) 644-2366

NO.	DESCRIPTION	REVISIONS	
		BY	DATE

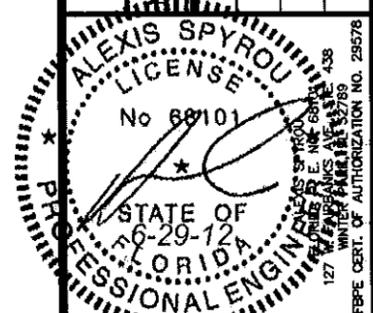


PRODUCT REVISED as complying with the Florida Building Code
Acceptance No 12-0313.05
Expiration Date 02.9.2013
By *Manuel Sosa*
Miami Dade Product Control

DATE: 01.25.12
DWN BY: JLA
CHK BY: HFN
SCALE: NTS
DWG #: ATR042
SHEET: 1 OF 9

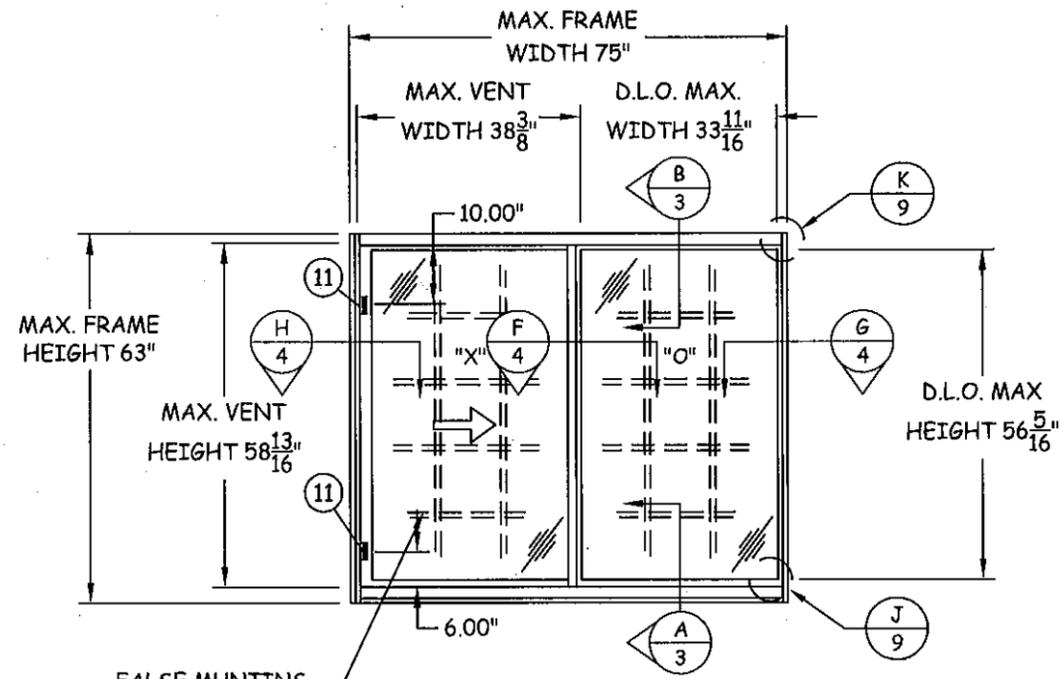


TYPICAL ELEVATION
(XO OR OX) FLANGE FRAME

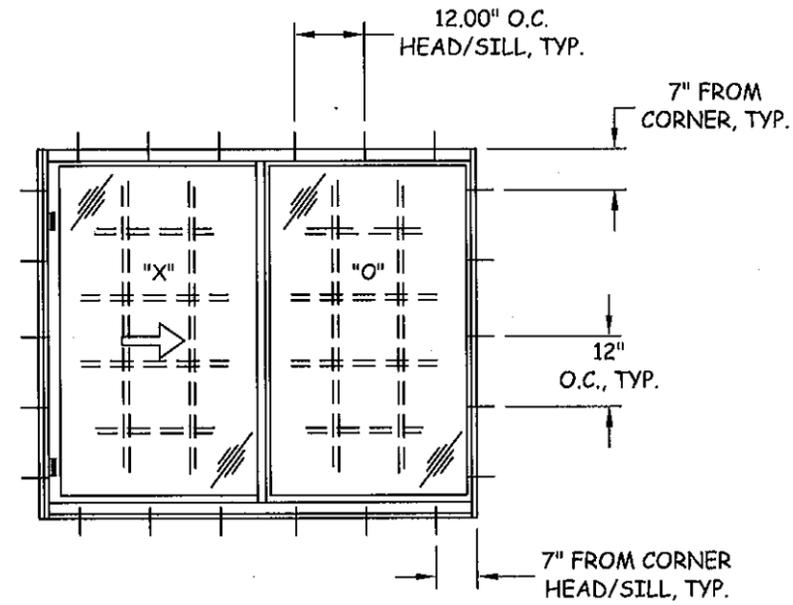


ANCHOR LAYOUT
(XO OR OX) FLANGE FRAME

NOTE: ANCHOR QUANTITY & SPACING SHOWN BELOW IS FOR LARGEST UNITS. REFER TO DP TABLES FOR REQUIRED ANCHOR QUANTITIES BASED ON UNIT SIZE WITH SPACING NOT TO EXCEED AS SHOWN.

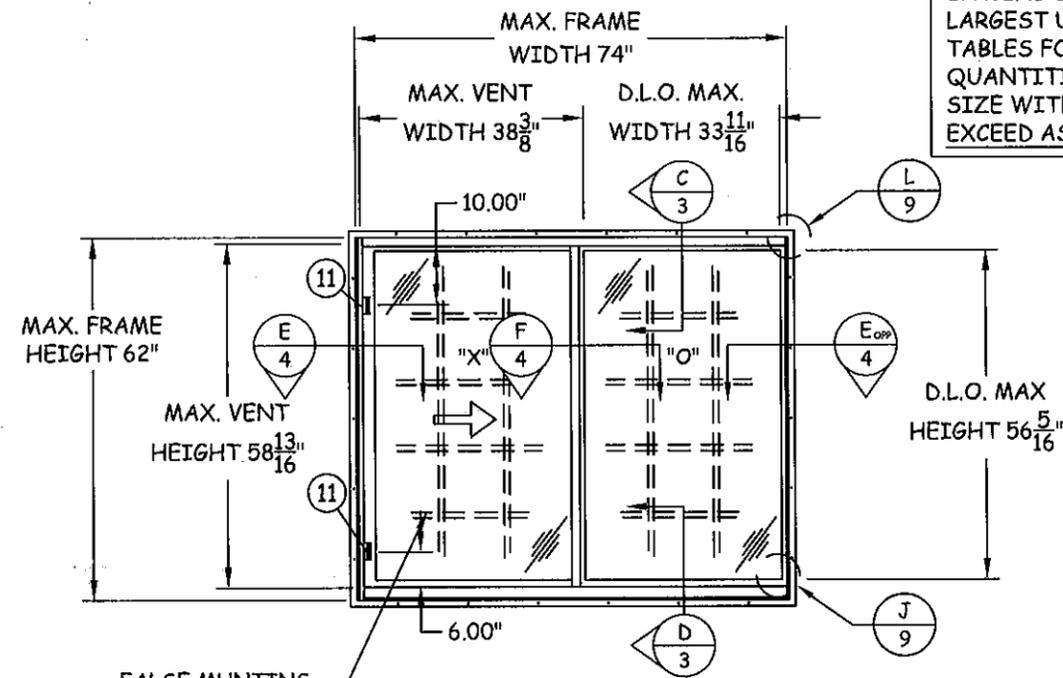

TYPICAL ELEVATION
(XO OR OX) FIN FRAME

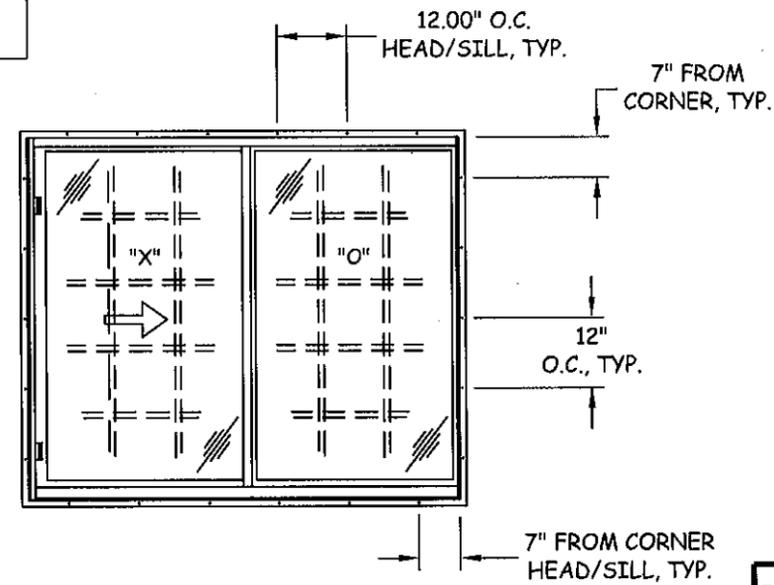


ANCHOR LAYOUT
(XO OR OX) FIN FRAME

TITLE: MPRW HORIZONTAL ROLLING WINDOW ELEVATIONS & ANCHOR LAYOUTS

PREPARED BY:
BUILDING DROPS
127 W. FAIRBANKS AVE., STE. 438
WINTER PARK, FL 32789
PH: (407) 644-6957 FX: (407) 644-2366

REVISIONS

NO.	DESCRIPTION	BY	DATE

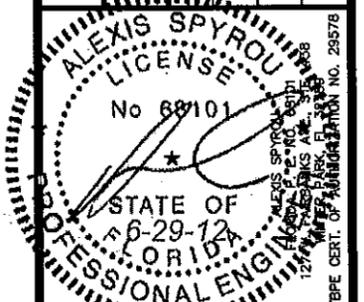


PRODUCT REVISED
is complying with the Florida
Building Code
Acceptance No. 12-0313.05
Expiration Date Oct. 9, 2013
By *Manuel Jery*
Miami Made Product Control


DATE: 01.25.12
DWN BY: JLA
CHK BY: HFN
SCALE: NTS

DWG #: **ATRO42**
SHEET: **2 OF 9**


TITLE: MPRW HORIZONTAL ROLLING WINDOW VERTICAL SECTIONS
PREPARED BY: BUILDING DROPS
127 W. FAIRBANKS AVE., STE. 438
WINTER PARK, FL 32789
PH: (407) 644-6957 FX: (407) 644-2366

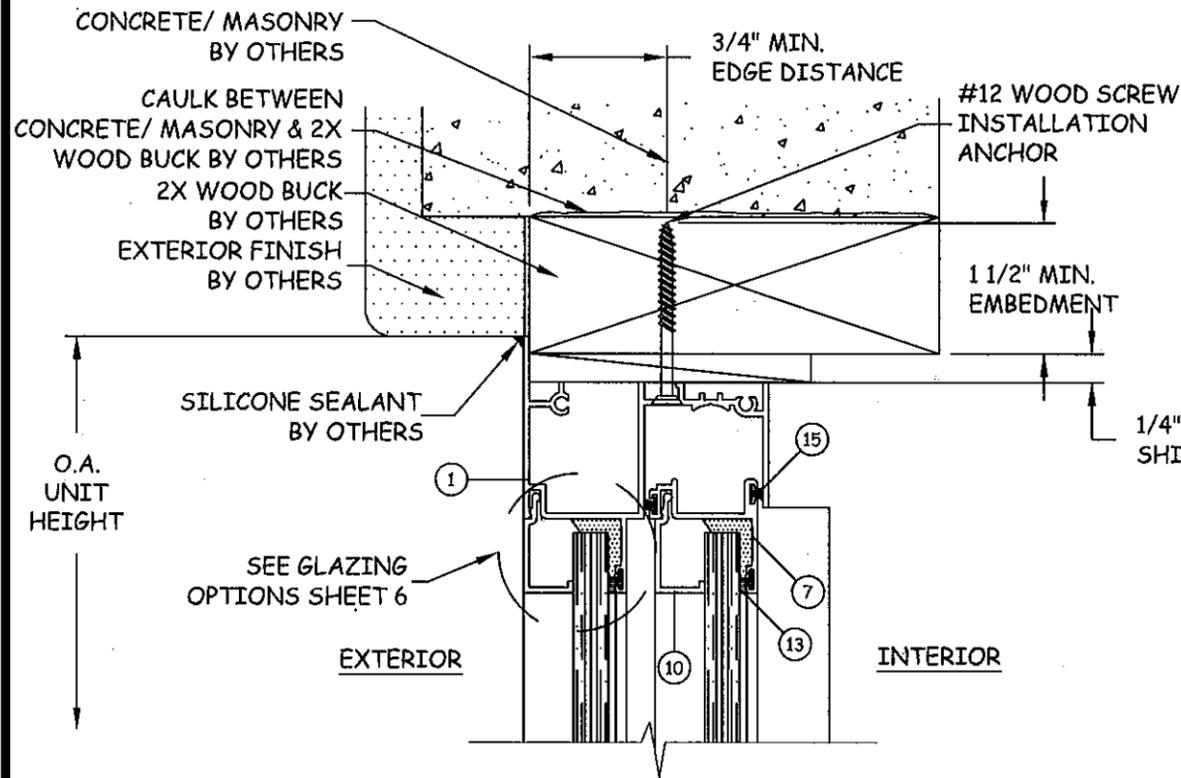


B
3 VERTICAL SECTION
HEAD - 2X WOOD BUCK
FLANGE FRAME INSTALLATION

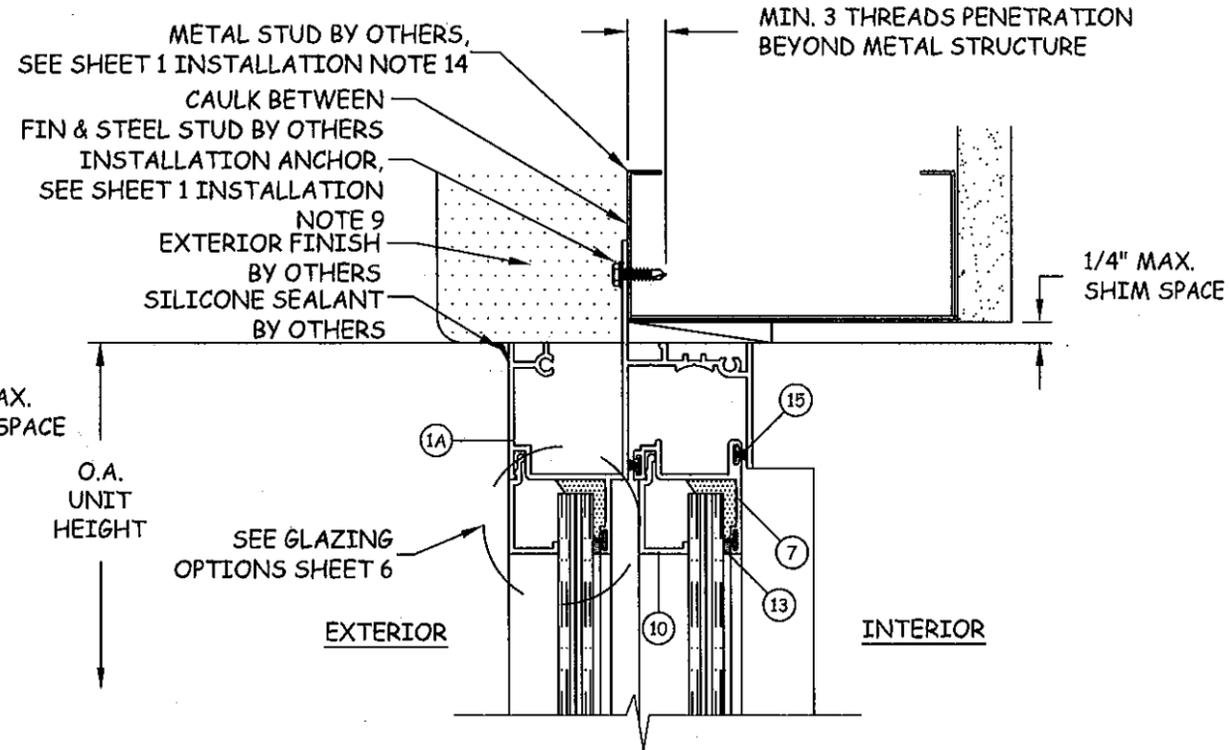

C
3 VERTICAL SECTION
HEAD - METAL STUD
FIN FRAME INSTALLATION

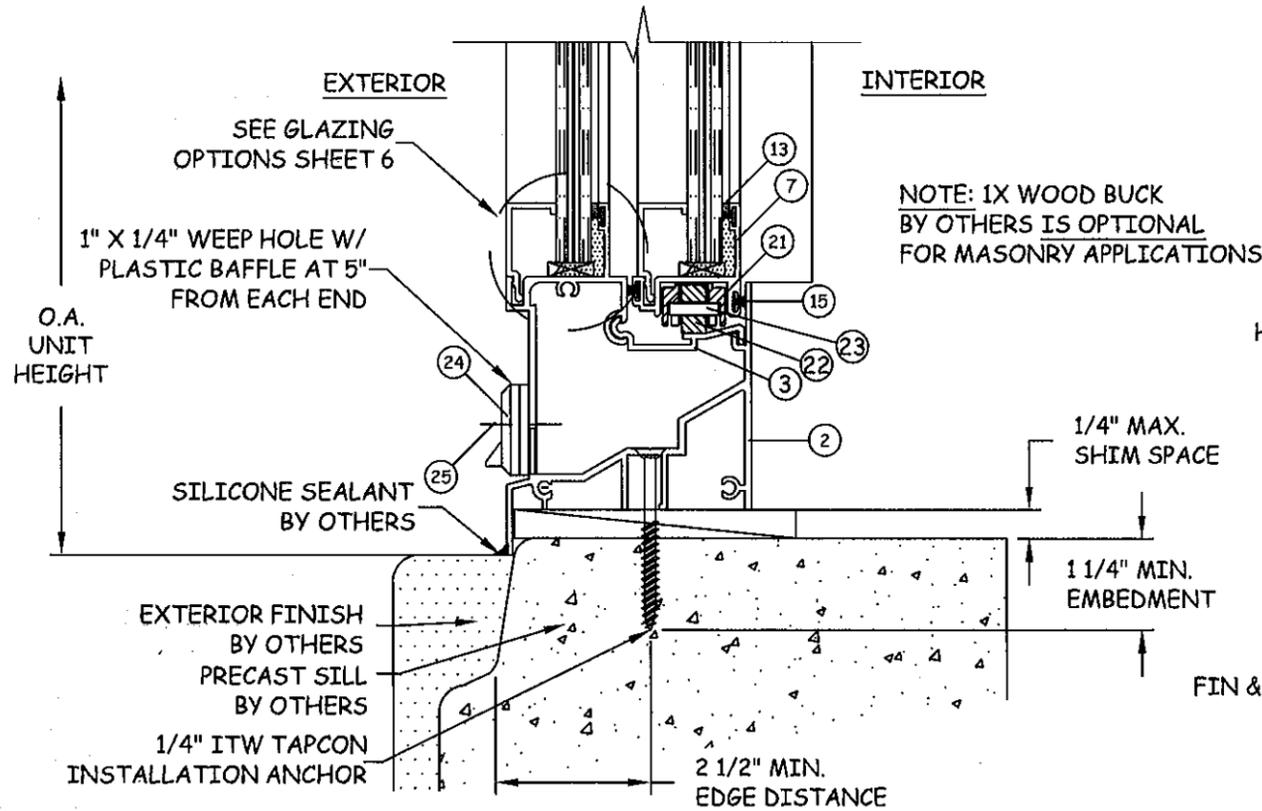


A
3 VERTICAL SECTION
SILL - CONCRETE/MASONRY
FLANGE FRAME INSTALLATION

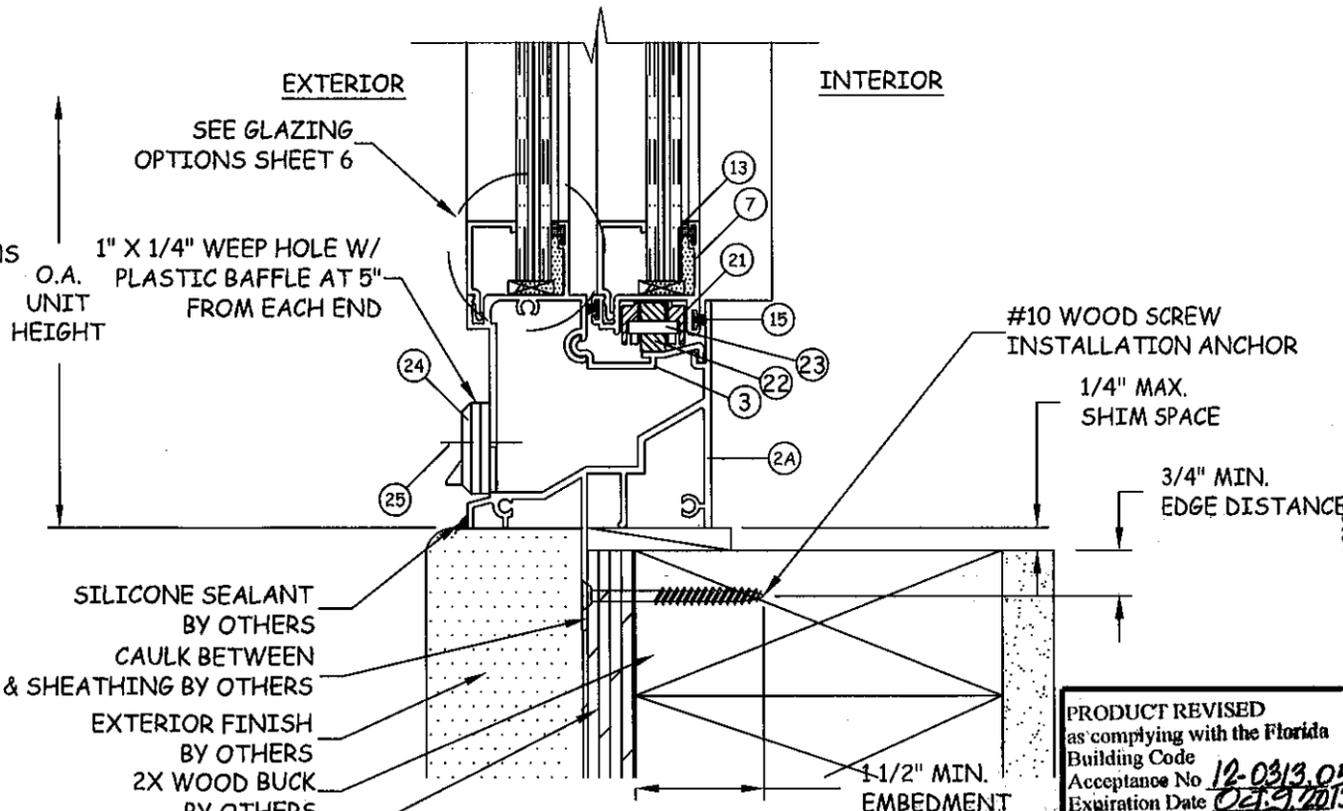

D
3 VERTICAL SECTION
SILL - 2X WOOD FRAME
FIN FRAME INSTALLATION




REVISIONS	DESCRIPTION	BY DATE	
		BY	DATE

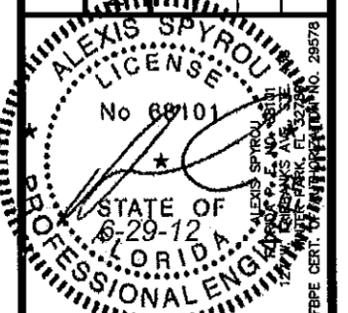

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 12-0313.05
Expiration Date 02-9-2013
By *Manuel Perez*
Miami Dade Product Control


DATE: 01.25.12
DWN BY: JLA
CHK BY: HFN
SCALE: NTS
DWG #: ATR042
SHEET: 3 OF 9

TITLE: MPRW HORIZONTAL ROLLING WINDOW HORIZONTAL SECTIONS
PREPARED BY: BUILDING DROPS
127 W. FAIRBANKS AVE., STE. 438
WINTER PARK, FL 32789
PH: (407) 644-6957 FX: (407) 644-2366

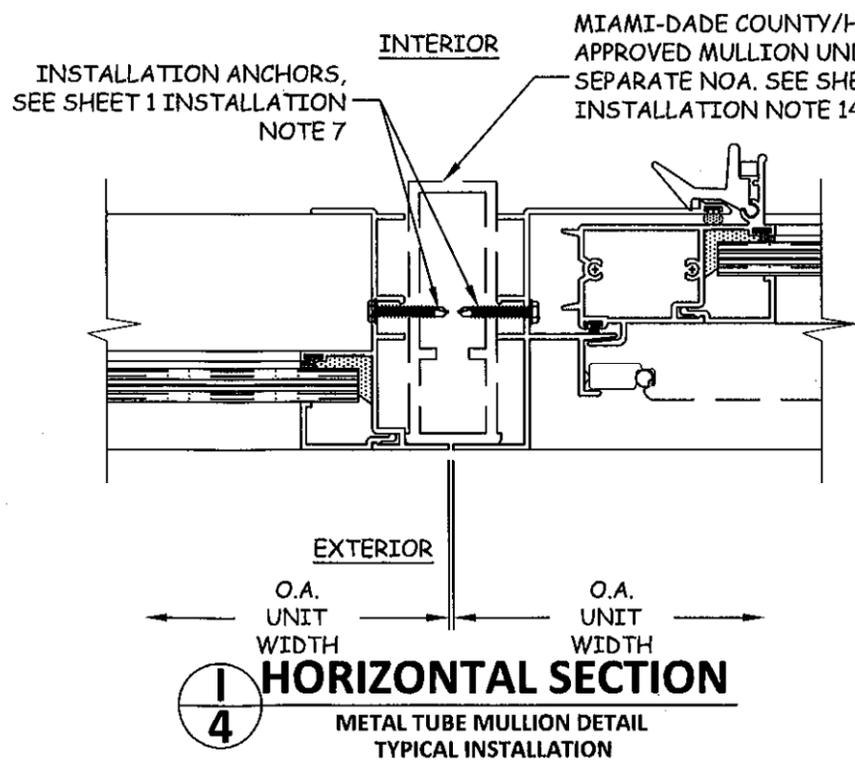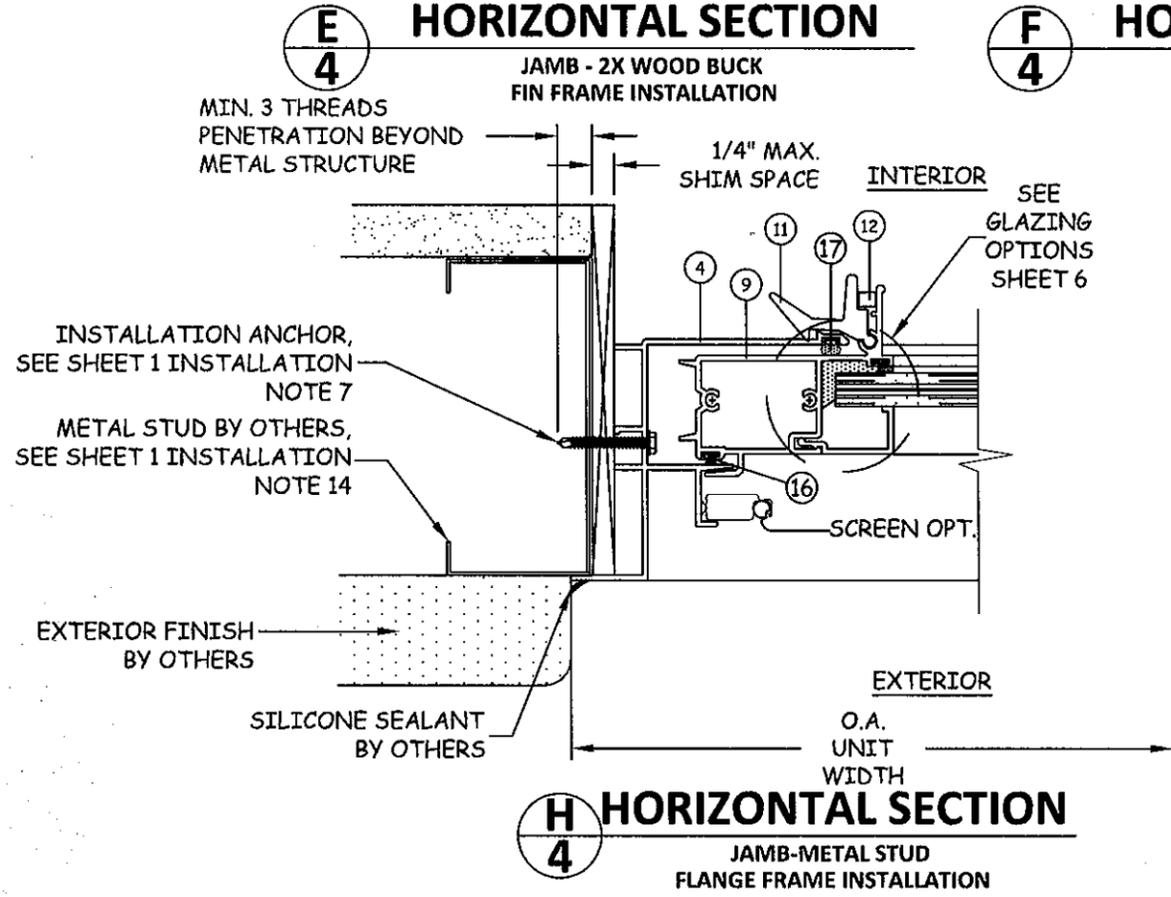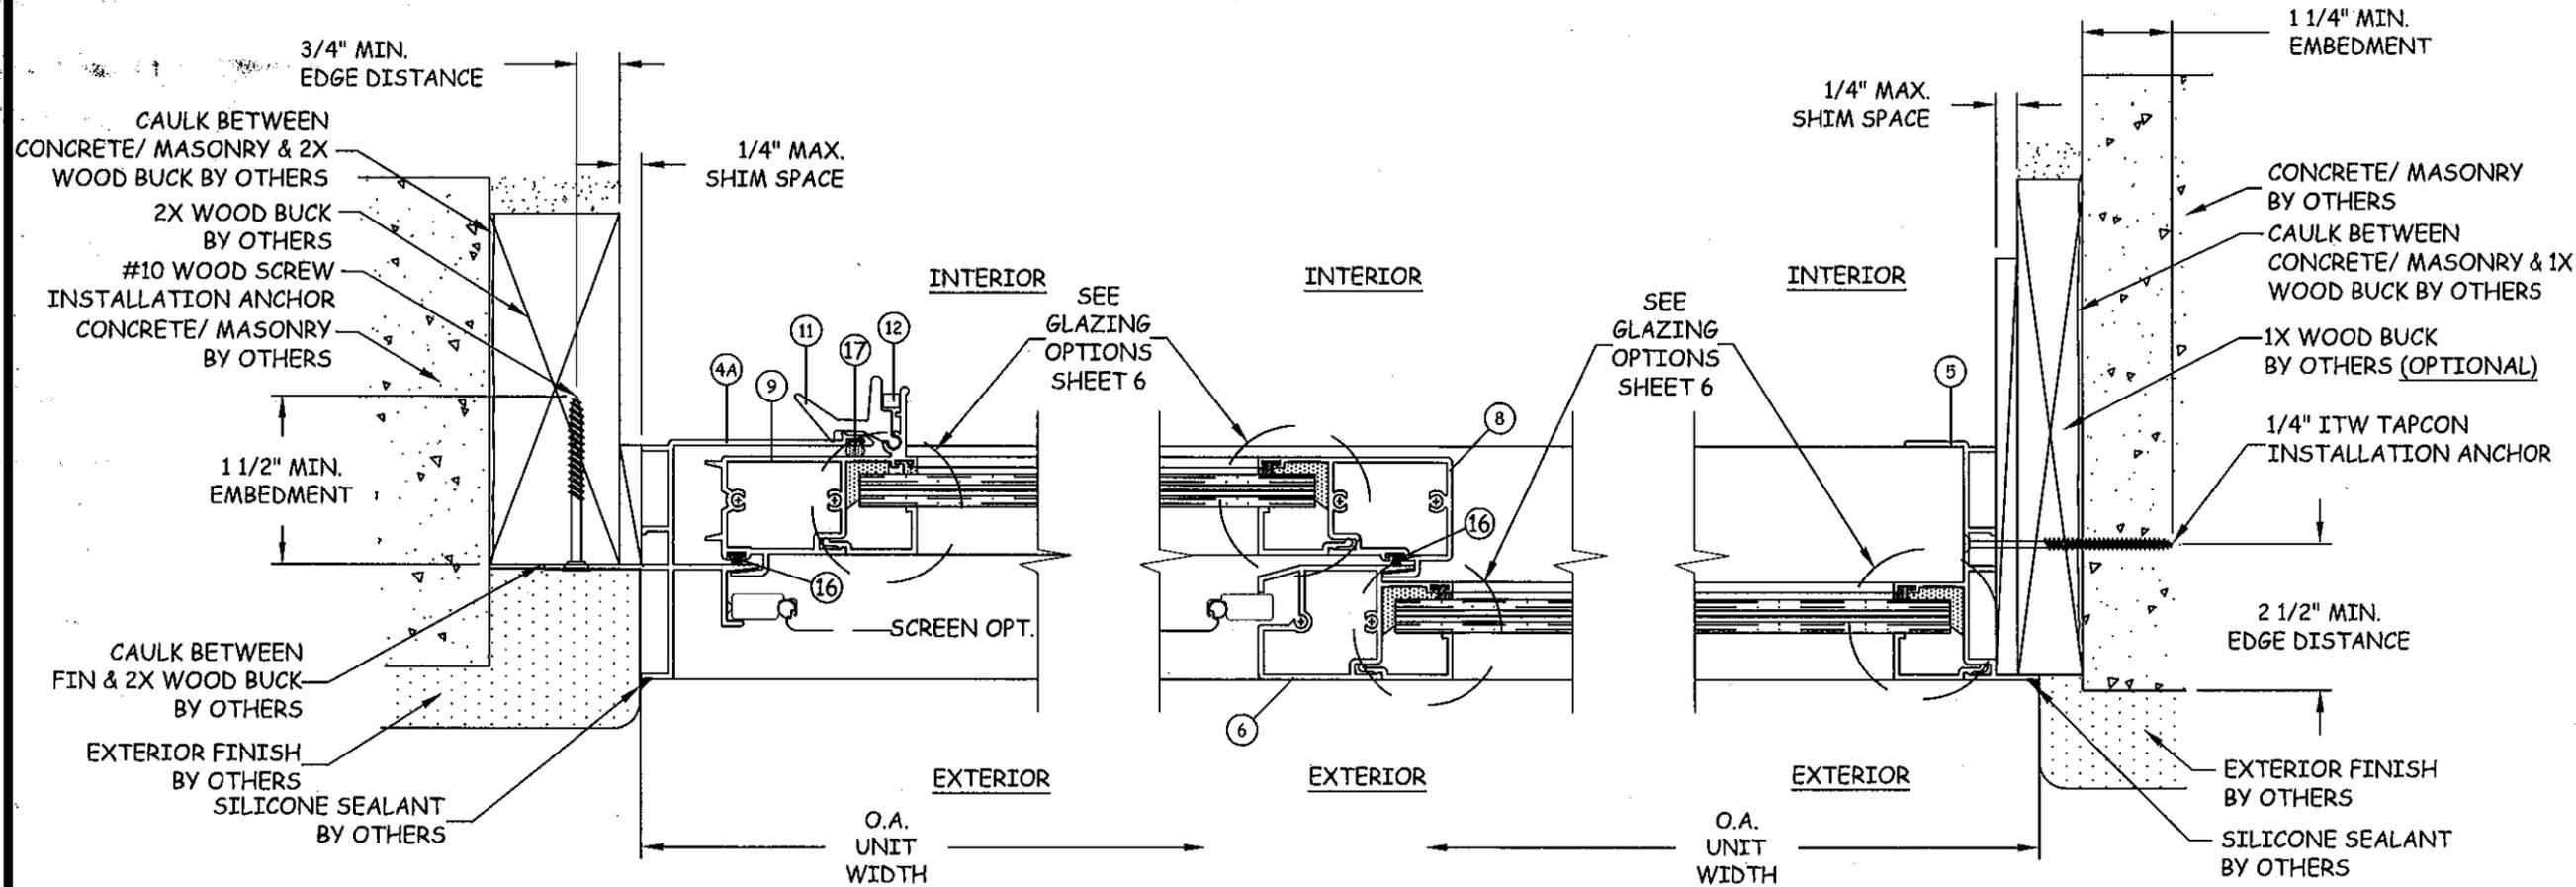


NOTE: THE LOWER DESIGN PRESSURE OF MULLION APPROVAL OR WINDOW UNIT OF INSTALLATION WILL GOVERN.

REVISIONS	DESCRIPTION	BY	DATE

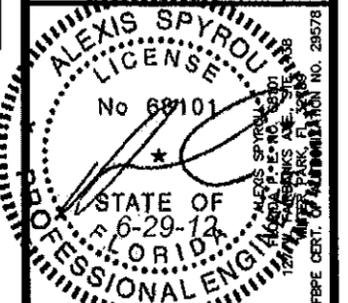


PRODUCT REVISED as complying with the Florida Building Code Acceptance No 12-0313.05 Expiration Date Oct. 9, 2013
By *Manuel Perez*
Miami Dade Product Control

DATE: 01.25.12	DWN BY: JLA	CHK BY: HFN	SCALE: NTS
DWG #: ATR042			
SHEET: 4 OF 9			

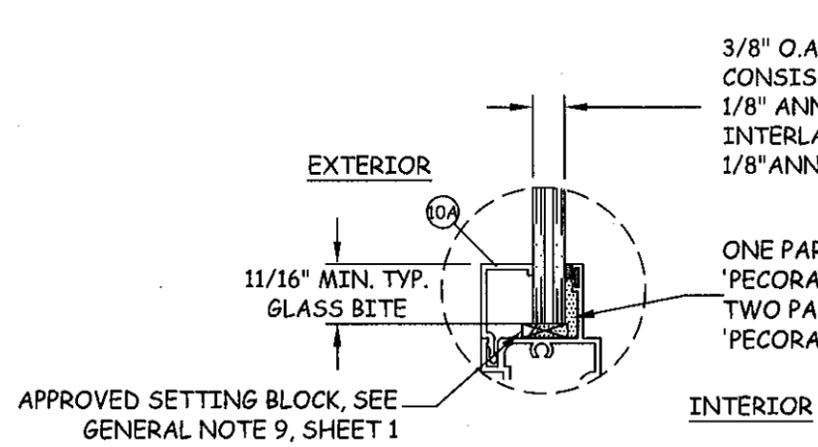


GLAZING DETAIL A-1

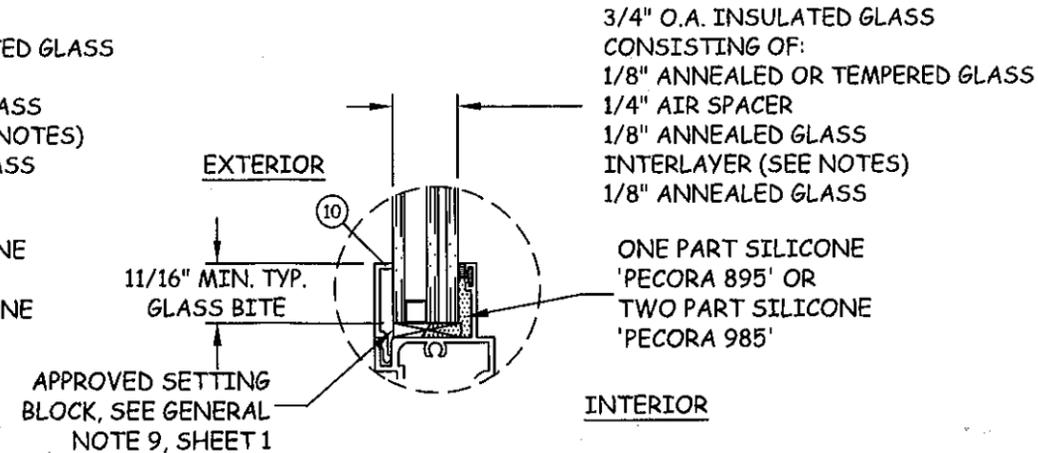


GLAZING DETAIL A-2

- AVAILABLE INTERLAYERS**
- 0.100" SOLUTIA HP
 - 0.090" SOLUTIA SAFLEX PVB
 - 0.090" DUPONT BUTACITE PVB

FOR INSTALLATION ABOVE 30 FT. ABOVE GRADE IN AREAS REQUIRING IMPACT RESISTANCE, ALL UNITS MUST BE SAFETY GLAZED OR COVERED BY AN IMPACT PROTECTIVE SYSTEM PER FBC SECTION 2411.3.3.7.

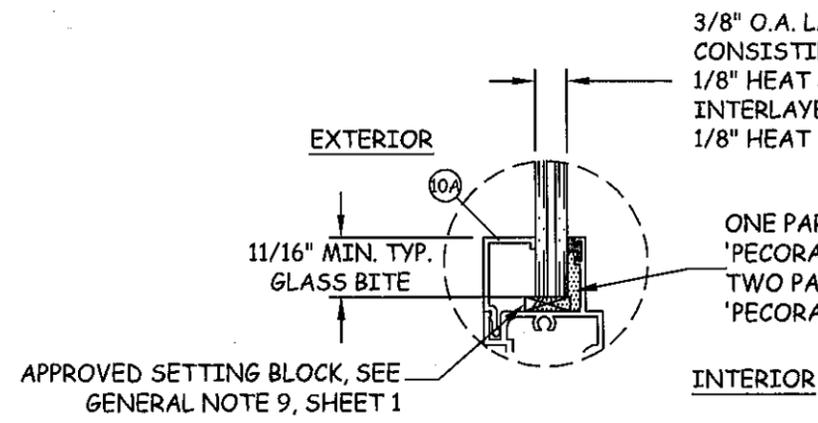

GLAZING DETAIL B-1

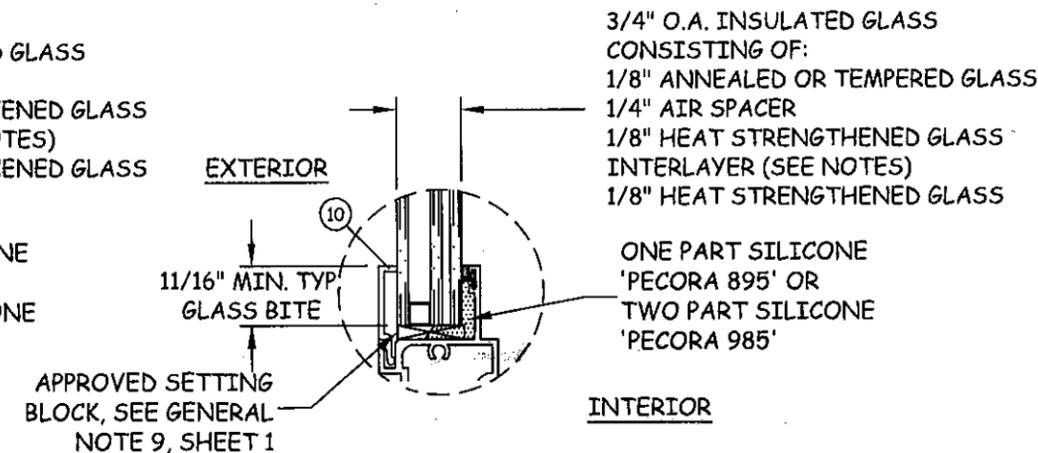


GLAZING DETAIL B-2

NOTE: GLASS CAPACITIES ON THIS SHEET ARE BASED ON ASTM E1300-04 (3 SEC. GUSTS) AND FLORIDA BUILDING COMMISSION DECLARATORY STATEMENT DCA05-DEC-219

TITLE: MPRW HORIZONTAL ROLLING WINDOW GLAZING DETAILS
PREPARED BY: BUILDING DROPS 127 W. FAIRBANKS AVE., STE. 438 WINTER PARK, FL 32789 PH: (407) 644-6957 FX: (407) 644-2366

REVISIONS	DESCRIPTION	BY	DATE

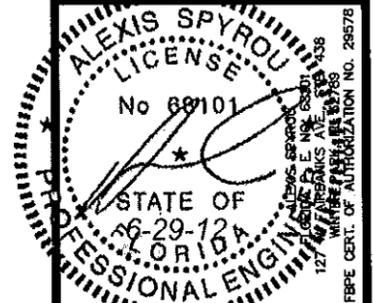


PRODUCT REVISED as complying with the Florida Building Code Acceptance No. 12-0313.05 Expiration Date Oct 9, 2013
By *Manuel Jerez* Miami/Dade Product Control

DATE: 01.25.12
DWN BY: JLA
CHK BY: HFN
SCALE: NTS
DWG #: ATR042
SHEET: 6 OF 9

BILL OF MATERIALS

ITEM NO.	PART NO.	DESCRIPTION	MATERIAL	MANUFACTURER
1	KCO-2043	FRAME HEAD - FLANGE	6063-T6	-
1A	KCO-2053	FRAME HEAD - FIN	6063-T6	-
2	KCO-271	FRAME SILL - FLANGE	6063-T6	-
2A	KCO-272	FRAME SILL - FIN	6063-T6	-
3	KCO-273	SILL TRACK	6063-T6	-
4	KCO-2042	FRAME JAMB - VENT - FLANGE	6063-T6	-
4A	KCO-2052	FRAME JAMB - VENT - FIN	6063-T6	-
5	KCO-241	FRAME JAMB - FIXED - FLANGE	6063-T6	-
5A	KCO-2051	FRAME JAMB - FIXED - FIN	6063-T6	-
6	KCO-2044	FIXED MTG. STILE	6063-T6	-
7	KCO-2047	VENT TOP & BOTT. RAIL	6063-T6	-
8	KCO-2045	VENT INTERLOCK	6063-T6	-
9	KCO-2046	VENT JAMB STILE	6063-T6	-
10	RP-800	GLAZING BEAD 7/8"	RIGID PVC	-
10A	RP-801	GLAZING BEAD 3/8"	RIGID PVC	-
11	L-049	SNAP LATCH, 2-5/8" LONG	NYLON	AT 6" & 48" FROM BOTTOM
12	-	LEAF SPRING	ST. STEEL	-
13	VTF-2009	GLASS SPACER	DELRIN	DUAL DUROMETER
15	E23151NG	FIN SEAL WEATHERSTIP	EPDM	ULTRAFAB 0.187" X 0.150" OR EQUIV.
16	W23171NG	FIN SEAL WEATHERSTIP	-	ULTRAFAB 0.187" X 0.170" OR EQUIV.
17	U-4333	BULB WEATHERSTRIPPING	-	OLON 0.190" X 0.300"
18	-	ASSY SCREWS	-	#8 X 1" PHSMS
19	-	FIXED RAIL SCREW-SILL	-	#8 X 3" PHSMS
21	-	ROLLER HOUSING & GUIDE	DELRIN	-
22	-	ROLLER	BRASS	AT EACH VENT END
23	-	ROLLER SHAFT	ST. STEEL	-
24	-	BAFFLE	NYLON	-
25	-	BAFFLE SCREWS	-	#6 X 1/2" SMS

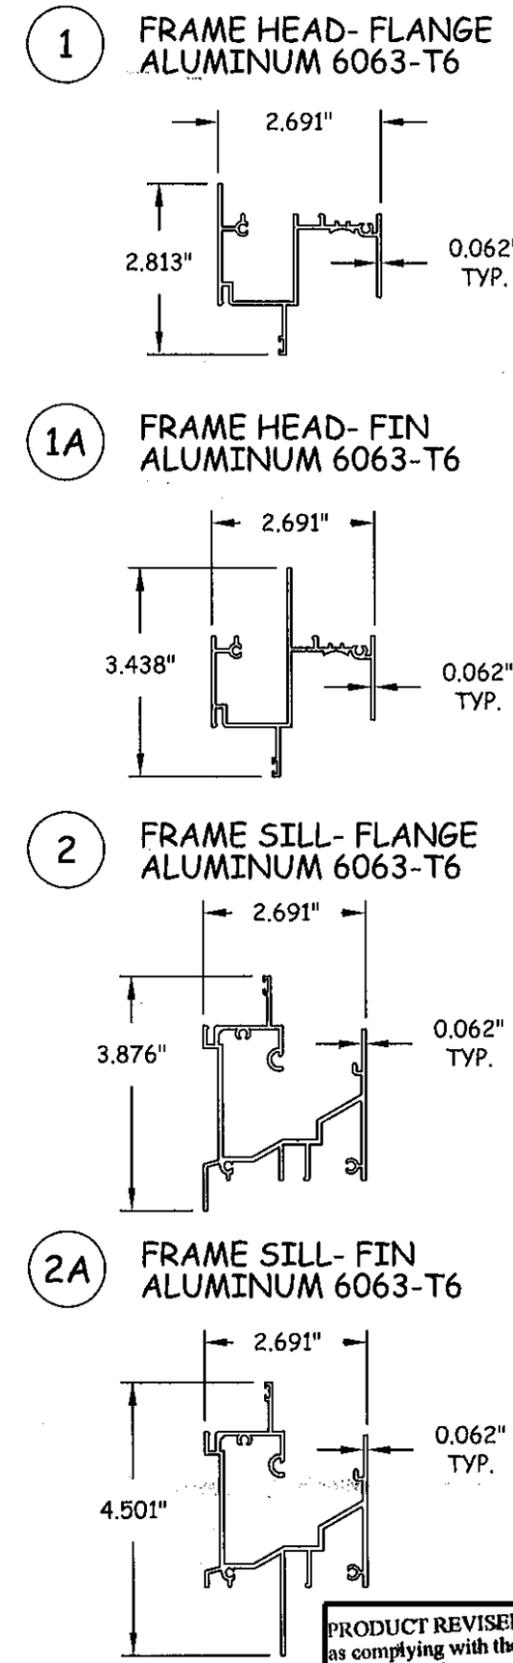


9001 AMBASSADOR ROW
DALLAS, TEXAS 75247
PH: (214) 637-2696 FX: (214) 424-6734

TITLE: MPRW HORIZONTAL ROLLING WINDOW COMPONENTS & BILL OF MATERIALS

PREPARED BY: BUILDING DROPS
127 W. FAIRBANKS AVE., STE. 438
WINTER PARK, FL 32789
PH: (407) 644-6957 FX: (407) 644-2366

REVISIONS	NO.	DESCRIPTION	BY	DATE

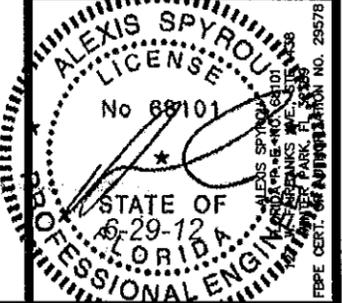

PRODUCT REVISED as complying with the Florida Building Code
Acceptance No. 12-0313.05
Expiration Date Oct. 9, 2013
By *Manuel Perez*
Miami Dade Product Control


DATE: 01.25.12
DWN BY: JLA
CHK BY: HFN
SCALE: NTS

DWG #: **ATRO42**
SHEET: **7 OF 9**


TITLE: MPRW HORIZONTAL
ROLLING WINDOW
COMPONENTS

PREPARED BY:
BUILDING DROPS
127 W. FAIRBANKS AVE., STE. 438
WINTER PARK, FL 32789
PH: (407) 644-6987 FX: (407) 644-2366


3 SILL TRACK
ALUMINUM 6063-T6

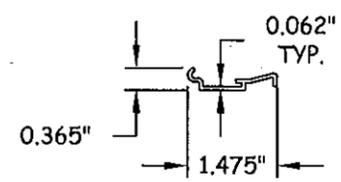


4 FRAME JAMB (VENT)- FLANGE
ALUMINUM 6063-T6

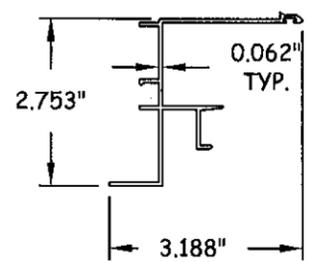


4A FRAME JAMB (VENT)- FIN
ALUMINUM 6063-T6

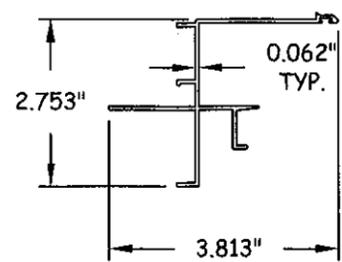


5 FRAME JAMB (FIXED)- FLANGE
ALUMINUM 6063-T6

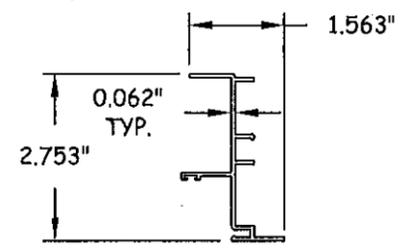


5A FRAME JAMB (FIXED)- FIN
ALUMINUM 6063-T6

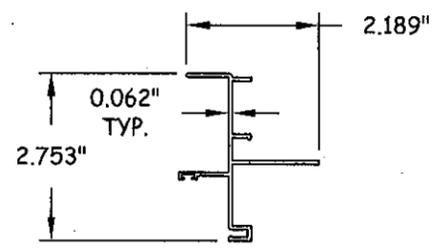


6 FIXED MEETING STILE
ALUMINUM 6063-T6

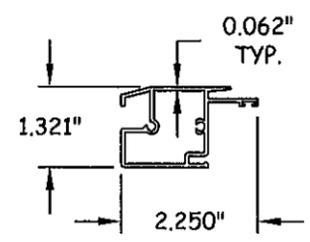


7 VENT RAIL
ALUMINUM 6063-T6

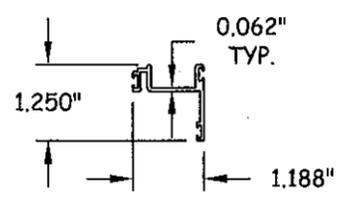


8 VENT INTERLOCK
ALUMINUM 6063-T6

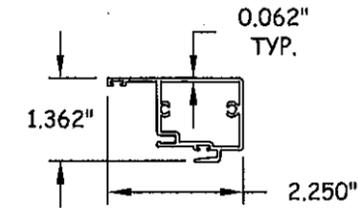


9 VENT JAMB STILE
ALUMINUM 6063-T6

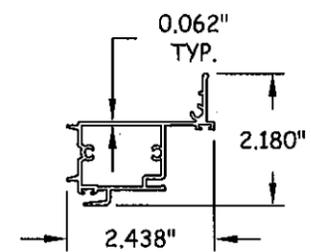


10 GLAZING BEAD-7/8"
RIGID PVC

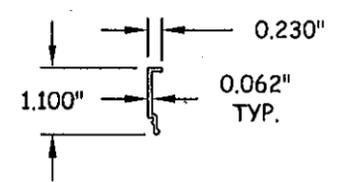


10A GLAZING BEAD-3/8"
RIGID PVC

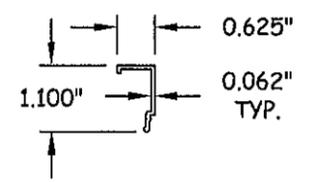

11 SNAP LATCH
NYLON

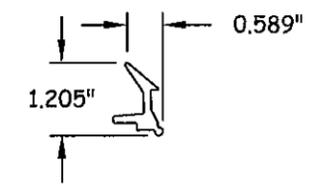


13 GLASS SPACER
DELTRIN

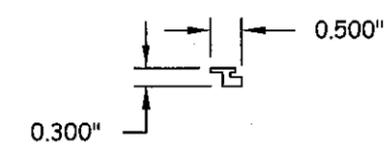

REVISIONS







NO.	DESCRIPTION	BY	DATE

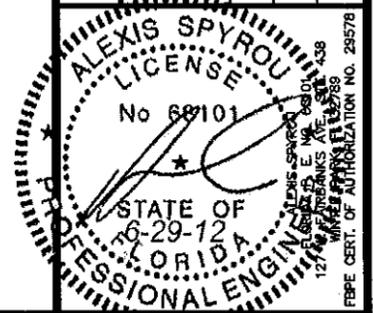

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 12-0313.05
Expiration Date Oct 9, 2013
By *Manuel Perez*
Miami Dade Product Control

DATE: 01.25.12
DWN BY: JLA
CHK BY: HFN
SCALE: NTS
DWG #: ATR042
SHEET: 8 OF 9

TITLE: MPRW HORIZONTAL ROLLING WINDOW CORNER SECTION ASSEMBLIES
PREPARED BY: BUILDING DROPS 127 W. FAIRBANKS AVE., STE. 438 WINTER PARK, FL 32789
PH: (407) 644-6957 FX: (407) 644-2366

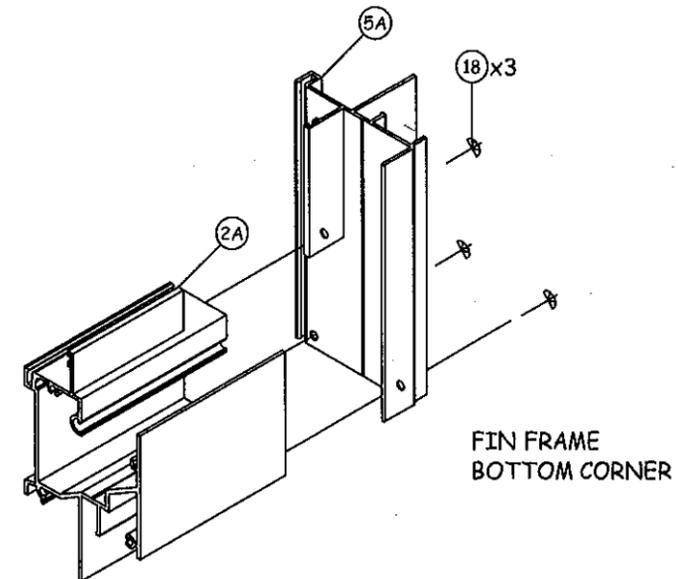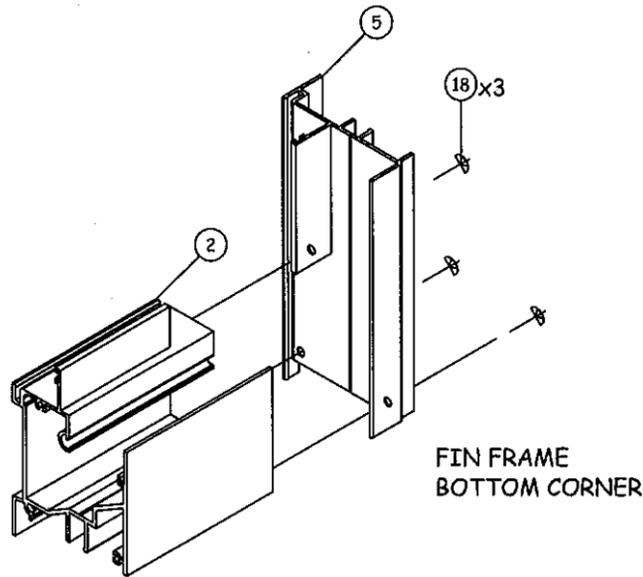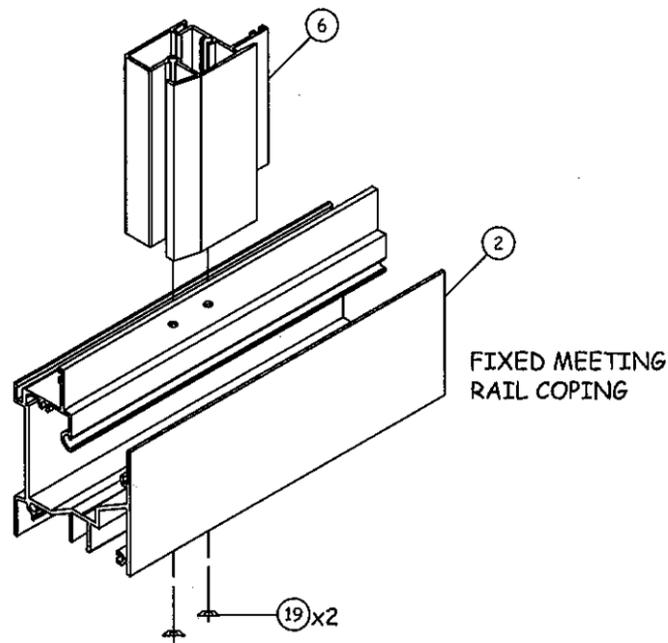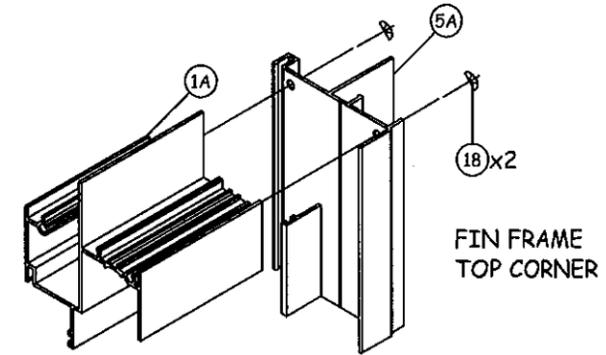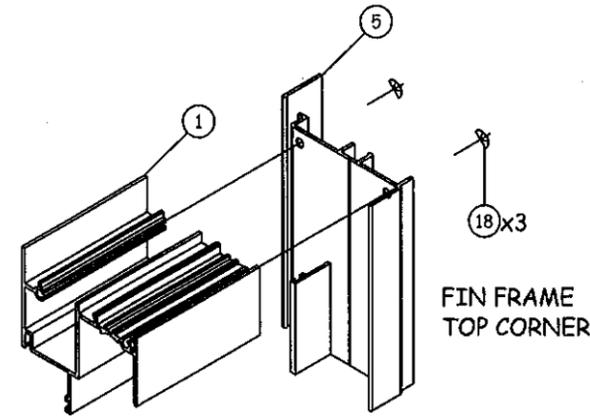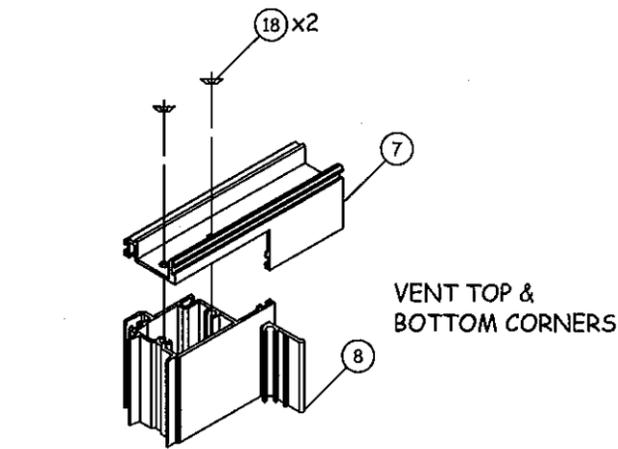

J
9 CORNER SECTION
VENT CORNER ASSEMBLY
TYPICAL

K
9 CORNER SECTION
FLANGE FRAME ASSEMBLY
TYPICAL

L
9 CORNER SECTION
FIN FRAME ASSEMBLY
TYPICAL

REVISIONS	NO.	DESCRIPTION	BY	DATE



PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 12-0313.05
Expiration Date Oct 9 2013
By *Maurel Perez*
Miami Dade Product Control

DATE: 01.25.12
DWN BY: JLA
CHK BY: HFN
SCALE: NTS
DWG #: ATR042
SHEET: 9 OF 9