



DEPARTMENT OF PERMITTING, ENVIRONMENT, AND REGULATORY AFFAIRS (PERA)  
BOARD AND CODE ADMINISTRATION DIVISION

**MIAMI-DADE COUNTY  
PRODUCT CONTROL SECTION**

11805 SW 26 Street, Room 208  
Miami, Florida 33175-2474  
T (786) 315-2590 F (786) 315-2599

[www.miamidade.gov/pera](http://www.miamidade.gov/pera)

## **NOTICE OF ACCEPTANCE (NOA)**

**King of Fans, Inc.**  
**1951 N.W. 22nd Street**  
**Ft. Lauderdale, FL 33311-2959**

### **SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County PERA - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. PERA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

### **DESCRIPTION: 1000 CFM Solar-Powered Roof Ventilator Fan**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This renews NOA# 07-0424.05 and consists of pages 1 through 4.  
The submitted documentation was reviewed by Alex Tigera.



**NOA No.: 12-0618.03**  
**Expiration Date: 09/20/17**  
**Approval Date: 08/09/12**  
**Page 1 of 4**

## ROOFING COMPONENT APPROVAL

**Category:** Roofing  
**Sub-Category:** Ventilation  
**Material:** Galvanized Steel

## TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT

<u>Product</u>	<u>Dimensions</u>	<u>Test Specification</u>	<u>Product Description</u>
1000 CFM Solar-Powered Roof Ventilator Fan	CompleteUnit: Ht. 9" Base: 24" x 24" Dome: 24" diameter	TAS 100	Solar powered roof vent with fan and thermostat with a galvanized steel hood.

## MANUFACTURING LOCATION

1. Zhong Shan, Guandong, China

## EVIDENCE SUBMITTED

<u>Test Agency/Identifier</u>	<u>Name</u>	<u>Report</u>	<u>Date</u>
Architectural Testing, Inc.	TAS 100(A)	63845.01-122-18	09/15/06
	ASTM D1929	70323.01-106-18	03/13/07
	ASTM D635	70323.01-106-18	03/13/07
	ASTM D2843	70323.01-106-18	03/13/07



NOA No.: 12-0618.03  
Expiration Date: 09/20/17  
Approval Date: 08/09/12  
Page 2 of 4

## APPROVED APPLICATIONS

**Tradename:** Aluminum Ridge Vent

**System Type:** Mechanical attachment of ridge vent.

**Cutout:** Vent must be located 18" from ridgeline. At chosen location and centered between two roof rafters, cut a 14.5" diameter hole through shingles and sheathing boards.

Using marked position as center point; scribe a circle that is the same diameter as the vent throat opening. Starting with the drill hole cut vent hole.

**Installation:** Vents should be evenly spaced on the rear slope of the roof.

Remove roofing nails from top row of shingles so the flashing of the roof vent will slide under shingles. Cut out an extra 1" circle into the shingles on the top half of the hole only. Apply approved roof cement around the edge of the hole. Carefully slide base of vent under shingles with arrow facing up. Make sure the throat of the vent is centered over vent hole. Fasten the base to roof decking at corners, and approx. 4" o.c. 1" from the outside edge of the flange and 1" from stack with approved roofing nails, keeping heads of nails under shingles where possible. Use a minimum of 32 nails that shall be of sufficient length to penetrate through roof sheathing a minimum of 1/2". Seal all seams and nails and shingles with roofing cement.

The solar panel should be placed with a southern exposure in areas with minimal shade. Fasten the solar panel to roof decking at corners, and approx. 4" o.c. 1" from the outside edge of the flange with approved roofing nails, keeping heads of nails under shingles where possible. Seal all nails with roofing cement. Run the wiring in compliance with applicable Building Codes.


**Ventilation Calculations:** Refer to manufacturer's published literature



## LIMITATIONS:

1. Refer to applicable Building Code required ventilation.
2. 1000 CFM Solar-Powered Roof Ventilator Fan, thermostat, solar panel and wiring shall be installed in compliance with King of Fans, Inc. published instructions, and in accordance with applicable Building Codes.
3. This acceptance is for installations over asphaltic shingle roofs only.
4. 1000 CFM Solar-Powered Roof Ventilator Fan, shall not be installed on roof mean heights greater than 33 feet.

## DETAIL A

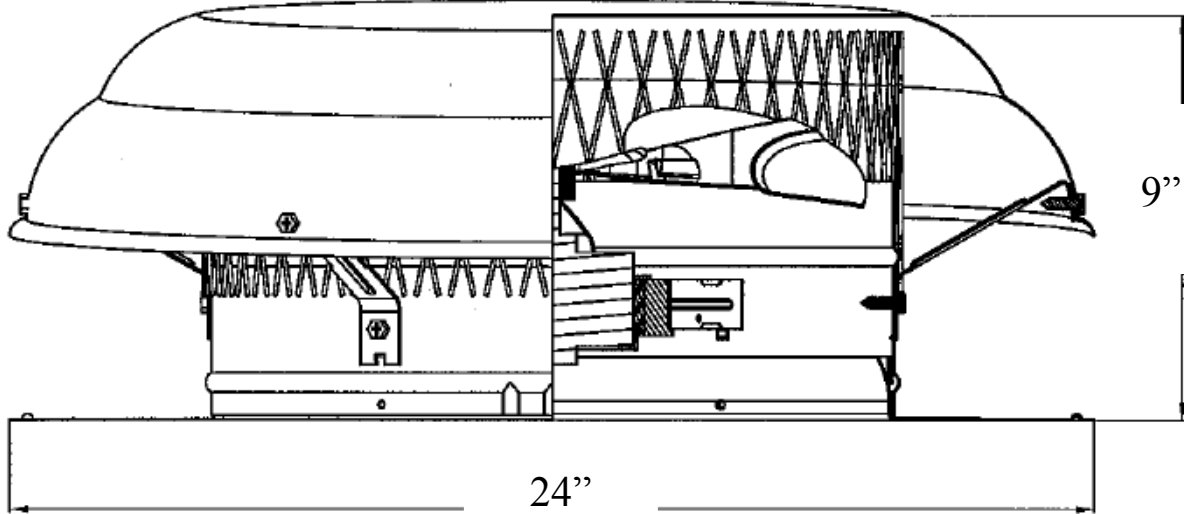

**END OF THIS ACCEPTANCE**