

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

NCI Group, Inc. 14031 West Hardy Houston, TX 77060

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER- Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: 'R-Panels" 22 ga. & 24 ga. Structural Galvalume Steel 1-1/4" x 36" Roof Panels

APPROVAL DOCUMENT: Drawing # R95, titled "PBR Panel Flashing Detail", sheets 100 through 110, prepared by NCI Group, Inc., dated July 02, 2012, signed and sealed by Mark Detwiler, P.E., on July 02, 2012, bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each panel shall bear a permanent label with the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises & renews NOA # 11-0810.07 and consists of this page 1, evidence submitted pages E-1, E-2, E-3 & E-4 as well as approval document mentioned above.

The submitted documentation was reviewed by Helmy A. Makar, P.E., M.S.

MIAMI-DADE COUNTY
APPROVED

Hely A. M. M. 12/13/2012

NOA No. 12-0730.02 Expiration Date: 02/27/2018 Approval Date: 12/13/2012

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 96-0529.03

A. DRAWINGS

1. Title:

"R-Panel" Roof Panel

Number:

R95, sheets 100 through 110

Signature:

Terrence E. Wolfe, P.E.

Date:

05/23/96

Revision Date:

01/30/97

B. TESTS

1. Laboratory

Farabaugh Engineering and testing, Inc.

Number

T103-96, dated 01/18/96.

Type:

Uniform static air pressure loading, per ASTM 1592 (22 ga R-

Panel)

Signature:

Daniel G. Farabaugh, P.E.

2. Laboratory

Farabaugh Engineering and testing, Inc.

Number

T102-96, dated 01/11/96

Type:

Uniform static air pressure loading, per ASTM 1592 (24 ga R-

Panel)

Signature:

Daniel G. Farabaugh, P.E.

3. Laboratory

Farabaugh Engineering and testing, Inc.

Number

T104-96, dated 01/05/96

Type:

Large missile impacts, per PA 201-94 (24 ga R-Panel)

Signature:

Daniel G. Farabaugh, P.E.

4. Laboratory

Farabaugh Engineering and testing, Inc.

Number

T118-96, dated 04/26/96

Type:

Susceptibility to leakage for class 1 metal roof panel, per "FM

4471-G" (24 ga R-Panel)

Signature:

Daniel G. Farabaugh, P.E.

5. Laboratory:

West Penn Testing Laboratories, Inc.

Number:

WP-9048 (Report # 034), dated 01/31/96

Type:

Tensile Strength (22 ga R-Panel)

Signature:

Todd A. Ault

6. Laboratory:

West Penn Testing Laboratories, Inc.

Number:

WP-9048 (Report # 034), dated 01/31/96

Type:

Tensile Strength (22 ga and 24 ga R-Panels)

Signature:

Todd A. Ault

Helmy A. Makar, P.E., M.S. Product Control Unit Supervisor

oduct Control Unit Supervisor NOA No. 12-0730.02

Expiration Date: 02/27/2018 Approval Date: 12/13/2012

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

7. Laboratory:

Center For Applied Engineering, Inc.

Number:

MTS No. 257558, dated 03/27/96

Type:

Wind Driven Rain Test per PA 100-95 (24 ga R-Panels)

Signature:

R. G. Miller, P.E.

C. CALCULATIONS

1. Title:

22 gage and 24 gage R-Panel

Signature:

Terrence E. Wolfe, P.E.

Date:

05/23/96

2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 99-0823.04

A. DRAWINGS

1. None.

- B. TESTS
 - 1. None.
- C. CALCULATIONS
 - 1. None.
- D. MATERIAL CERTIFICATIONS
 - 1. None.
- E. STATEMENTS
 - 1. Letter requesting renewal of NOA No. 96-0529.03 and stating that the product has not changed, dated August 12, 1999, signed by Brian N. Jaks.
- 3. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 02-1016.04
- A. DRAWINGS
 - 1. None.
- B. TESTS
 - 1. None.
- C. CALCULATIONS
 - 1. None.

Helmy A. Makar, P.E., M.S.

Product Control Unit Supervisor NOA No. 12-0730.02

Expiration Date: 02/27/2018

Approval Date: 12/13/2012

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

D. MATERIAL CERTIFICATIONS

1. None.

4. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 08-0212.06

A. DRAWINGS

1. None.

B. TESTS

- 1. Test report on Large Missile Impact Test, Cyclic Wind Pressure Test, and Uniform Static Air Pressure Test on R-Panel 24 ga. X 36" wide, prepared by Farabaugh Engineering and Testing Inc., Report No. T216-07, dated 06/15/2007, signed and sealed by Patrick J. Farabaugh, P.E. and Daniel G. Farabaugh, P.E.
- 2. Test report on Uniform Static Air Pressure Test on PRB-Panel 22 ga. X 36" wide, per ASTM 1592-01, prepared by Force Engineering & Testing Inc., Report No. 07-0004T-08A, B, dated 01/28/2008, signed and sealed by Terrence E. Wolfe, P.E.
- 3. Test report on Uniform Static Air Pressure Test on PRB-Panel 22 ga. X 36" wide, per ASTM 1592-01, prepared by Force Engineering & Testing Inc., Report No. 07-0004T-08C, dated 01/28/2008, signed and sealed by Terrence E. Wolfe, P.E.
- 4. Test report on Uniform Static Air Pressure Test on PRB-Panel 24 ga. X 36" wide, per ASTM 1592-01, prepared by Force Engineering & Testing Inc., Report No. 07-0004T-08D, E, dated 01/28/2008, signed and sealed by Terrence E. Wolfe, P.E.
- 5. Test report on Uniform Static Air Pressure Test on PRB-Panel 24 ga. X 36" wide, per ASTM 1592-01, prepared by Force Engineering & Testing Inc., Report No. 07-0004T-08F, dated 01/28/2008, signed and sealed by Terrence E. Wolfe, P.E.
- 6. Test procedure for wind and wind driven rain resistance of discontinuous roof systems performance for R-Panel Steel Roof 36" wide x 24 ga. Per TAS 100-95, test report # T351-07, dated 12/20/07, signed and sealed by Daniel G. Farabaugh, P.E.

C. CALCULATIONS

None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Building Code Compliance Office.

E. MATERIAL CERTIFICATIONS

- 1. Tensile Test foe 22 ga. From test # 07-0004T-08A, B.
- 2. Tensile Test foe 24 ga. From test # 07-0004T-08A, B.

Hemy A. Makar, P.E., M.S. Product Control Unit Supervisor NOA No. 12-0730.02

Expiration Date: 02/27/2018
Approval Date: 12/13/2012

E - 3

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

5. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 11-0810.07

A. DRAWINGS

1. Drawing with no number, titled "PBR Panel Flashing Detail", sheets 1 through 11, prepared by NCI Group, Inc., dated July 27, 2011, signed and sealed by Mark Detwiler, P.E., on July 27, 2011.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Permitting, Environment, and Regulatory Affairs.

E. MATERIAL CERTIFICATIONS

1. None.

F. OTHERS

1. Bill of Sale, assignment and Assumption Agreement.

6. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing # R95, titled "PBR Panel Flashing Detail", sheets 100 through 110, prepared by NCI Group, Inc., dated July 02, 2012, signed and sealed by Mark Detwiler, P.E., on July 02, 2012.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATIONS


1. None.

Helmy A. Makar, P.E., M.S. Product Control Unit Supervisor


NOA No. 12-0730.02

Expiration Date: 02/27/2018 Approval Date: 12/13/2012


TYPICAL DETAILS OF EAVE TRIM

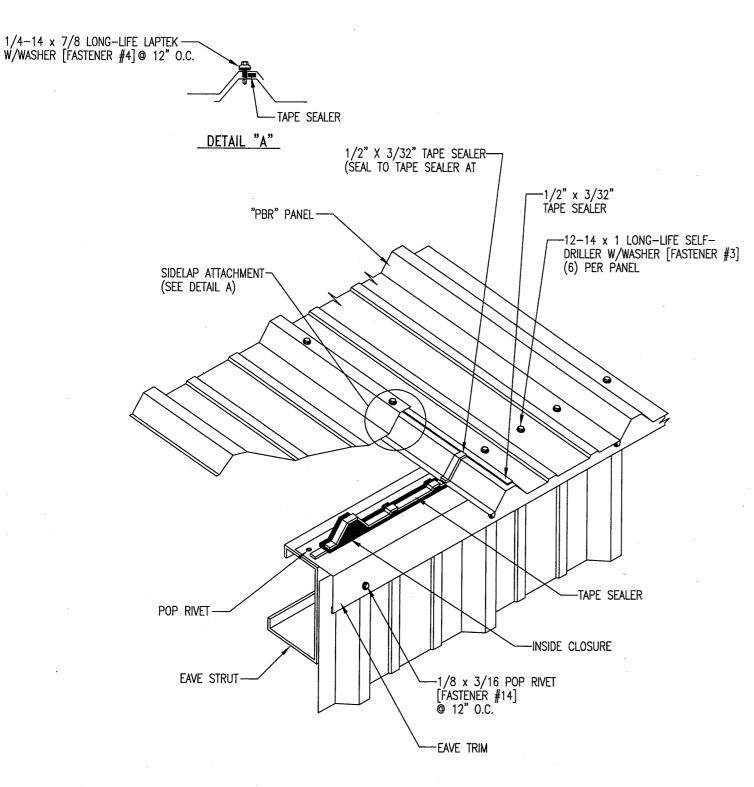

ISOMETRIC VIEW OF EAVE TRIM

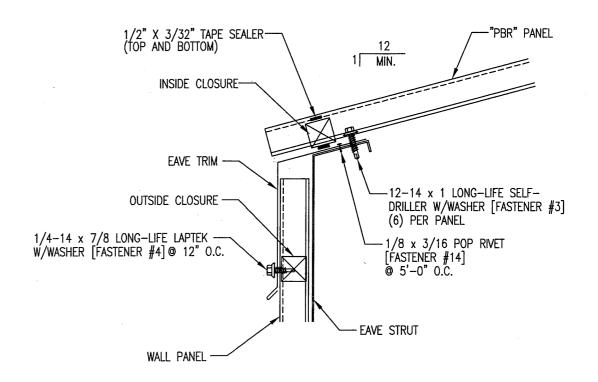

CROSS SECTION OF EAVE TRIM




Scale: NOT Drawn by: EH


NOT TO SCALE

ATE DEFICES 1730 FARVEN DE HASTIN TA. 7004 (880) 777-5978
MAILING 1-DE EX (ACCO HASTIN TA. 7024-0220

Project Nome and Location:
DADE CDUNTY PRODUCT APPROL
DADE CDUNTY, FLURIDA

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 2 - 073 0.02
Expiration Date 02 127 7 0 18



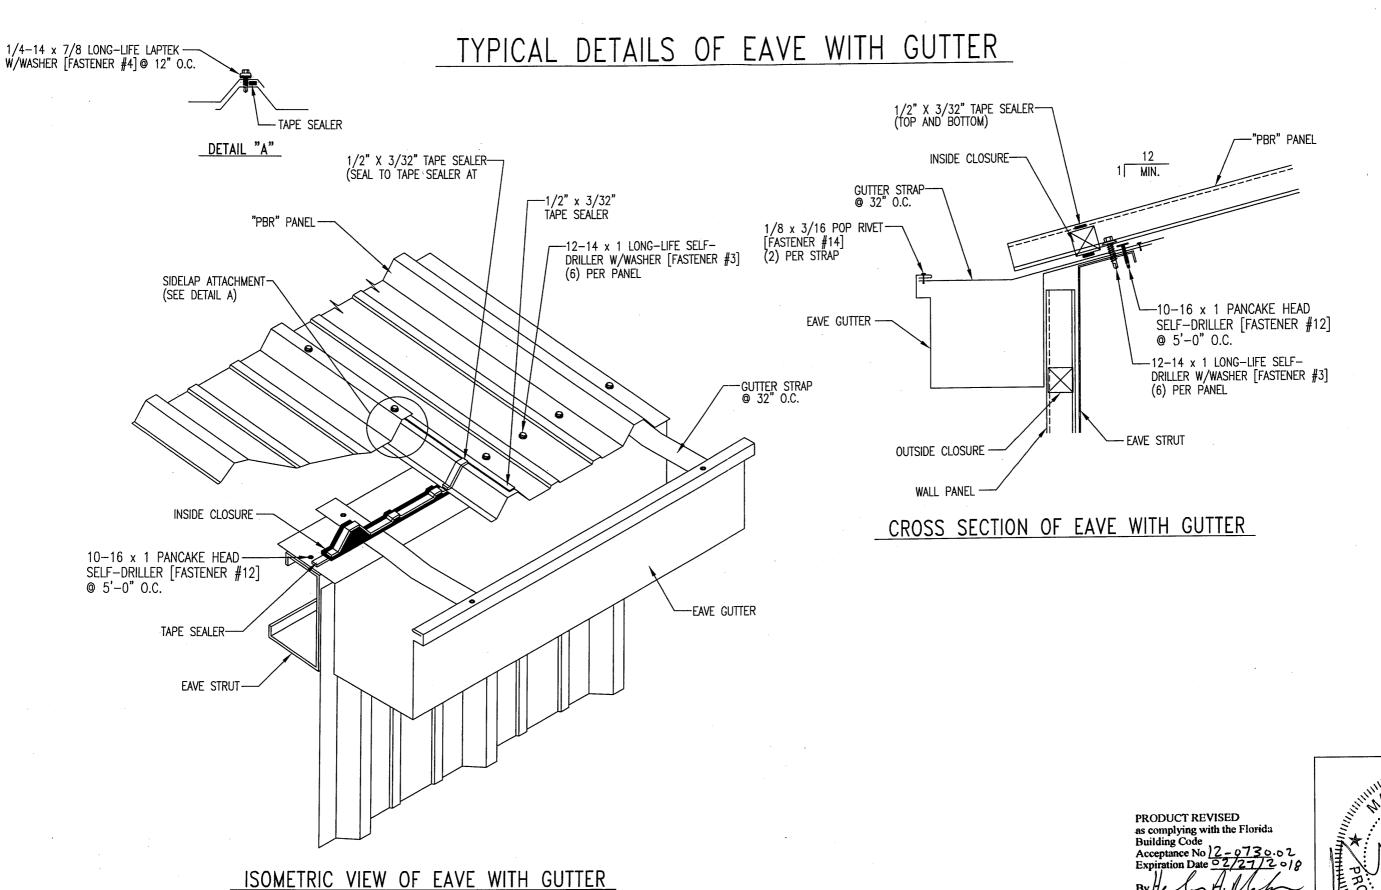

IT DE PRICES 1730 FARVIEW DE HONTON TX 77041 (60 MALING 1911 BEX 40230 HONTON TX 77041-0230 Project Norme and 1 Project Norme and 1 DADE COUNTY PROJECT DATE COUNTY PR FLASHING

Scale: NOT TO SCALE


Drawn by: EH Checked by: JA

Job Number: 96-0529-03

THESE DRAVINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP,
INC. — 7301 FAIRVIEW DR. HOUSTIN TX
77041. THE ENGINEER WHOSE SEAL
APPEARS HEREON IS EMPLOYED BY NCI
GROUP OR ANOTHER DIVISION OR
AFFILIATE OF NCI GROUP, INC. AND IS
NOT THE ENGINEER OF RECORD FOR
THIS PROJECT, THESE DRAVINGS MUST
BE REVIEWED FOR PROJECT
COMPLIANCE BY THE ENGINEER OF
RECORD.

STATE OF STA

TYPICAL DETAILS OF HIP

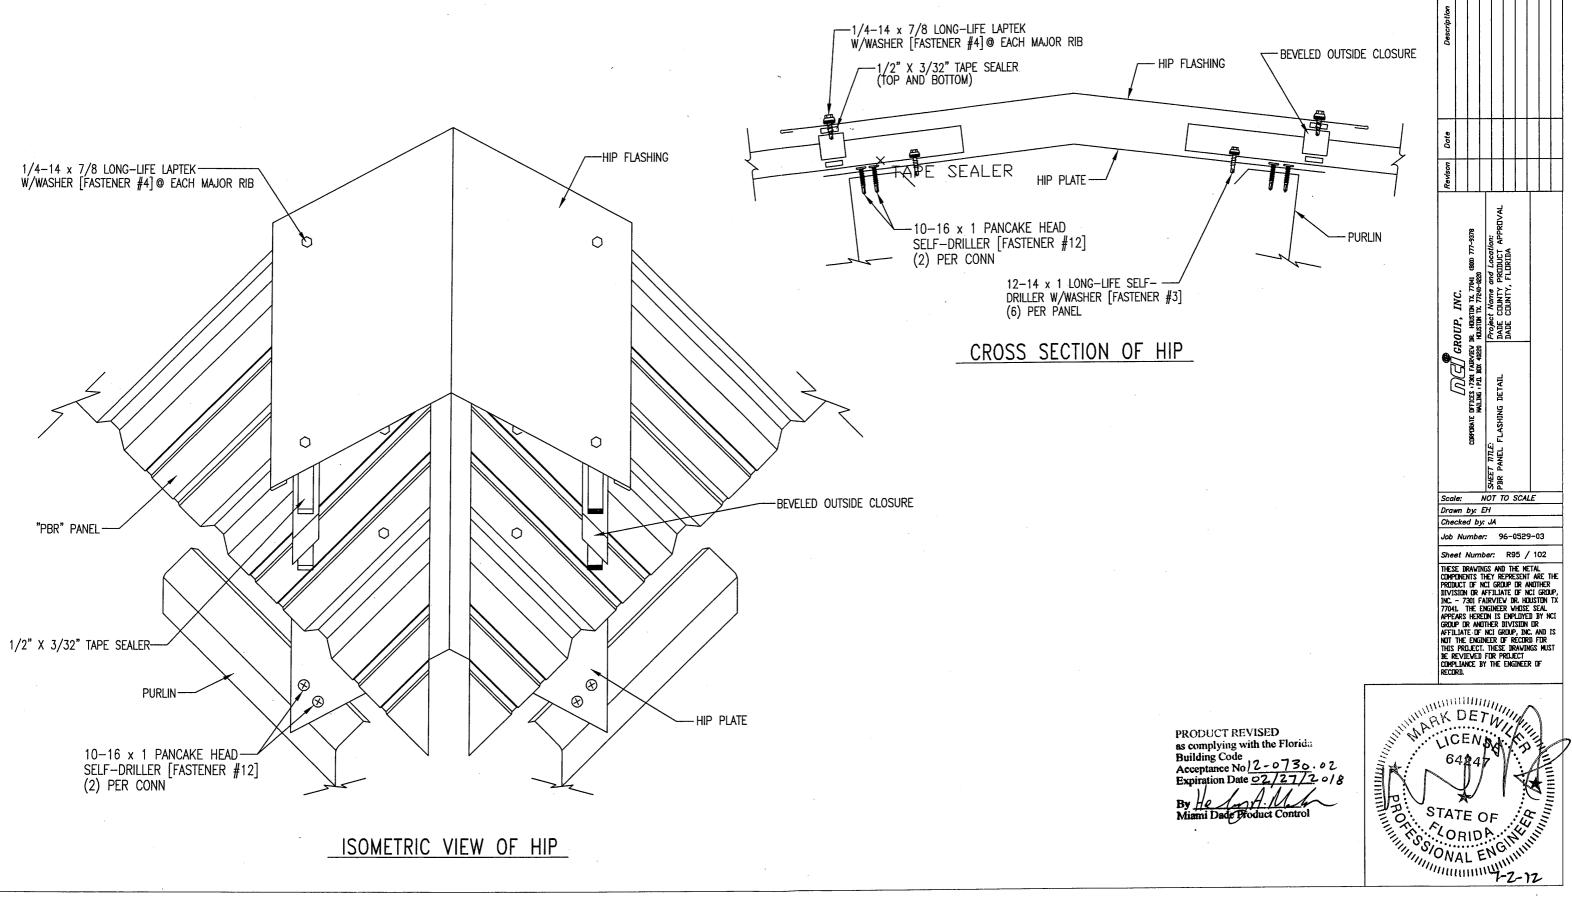

ISOMETRIC VIEW OF HIP

CERPENTE OFFICES 1280 FARMEND INC.

CERPENTE 1780 FARMEND IN TRUE 1880 777-937

MALING 1-PL BOX 4020 HOUSTON IX, 77841-9220


777.E: PROPERTY PRODUCT APPLIANCE DETAIL


DADE COUNTY PRODUCT APPLIANCE Scale: NOT TO SCALE Drawn by: EH Checked by: JA Job Number: 96-0529-03

THESE DRAVINGS AND THE METAL
COMPINENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP,
INC. - 7301 FAIRVIEW OR HOUSTON TO
77041. THE ENGINEER VHOSE SEAL
APPEARS HEREON IS EMPLOYED BY NCI
GROUP OR ANOTHER DIVISION OR
AFFILIATE OF NCI GROUP, INC. AND IS
NOT THE ENGINEER OF RECORD FOR
THIS PROJECT. THESE DRAVINGS MUST
BE REVIEWED FOR PROJECT
COMPLIANCE BY THE ENGINEER OF
RECORD.



TYPICAL DETAILS OF PANEL LAPS

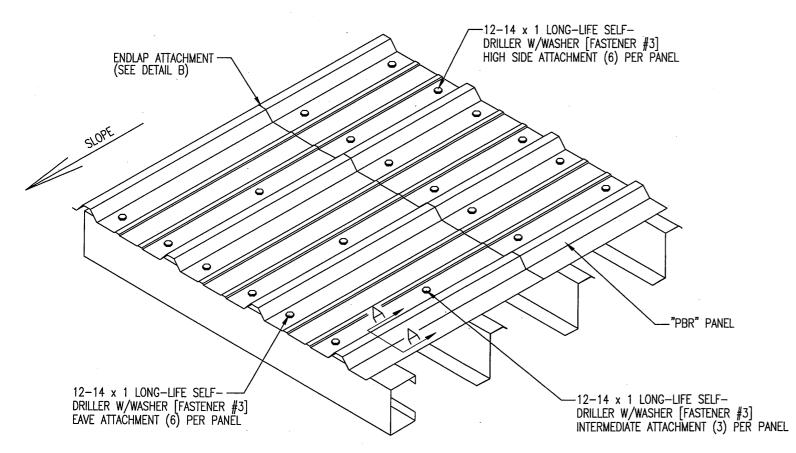

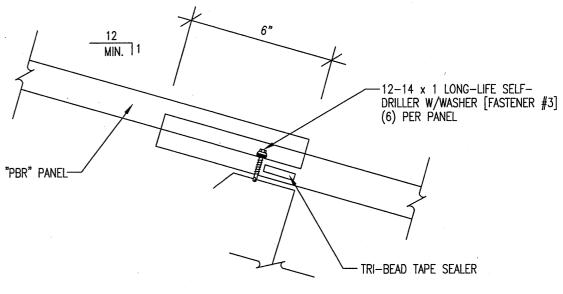


DETAIL "B"

1/4-14 x 7/8 LONG-LIFE LAPTEK — W/WASHER [FASTENER #4] @ 12" O.C. -TAPE SEALER DETAIL "A"

ISOMETRIC VIEW OF "PBR" PANEL ROOF

PRODUCT REVISED as complying with the Florida
Building Code
Acceptance No 12-0730

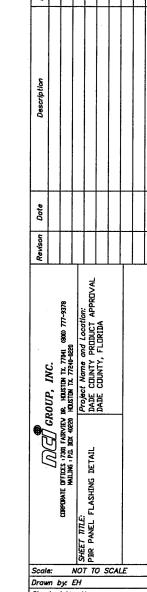



Checked by: JA


Job Number: 96-0529-03

Sheet Number: R95 / 103

Sheet Number: R95 / 103
THESE DRAVINGS AND THE METAL
COMPINENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP,
INC. - 7301 FAIRVIEW DR. HOUSTON TX
77041. THE ENGINEER VHOSE SEAL
APPEARS HEREON IS EMPLOYED BY NCI
GROUP OR ANOTHER DIVISION OR
AFFILIATE OF NCI GROUP, INC. AND IS
NOT THE ENGINEER OF RECORD FOR
THIS PROJECT. THESE DRAVINGS MUST
BE REVIEWED FOR PROJECT
COMPLIANCE BY THE ENGINEER OF
RECORD.



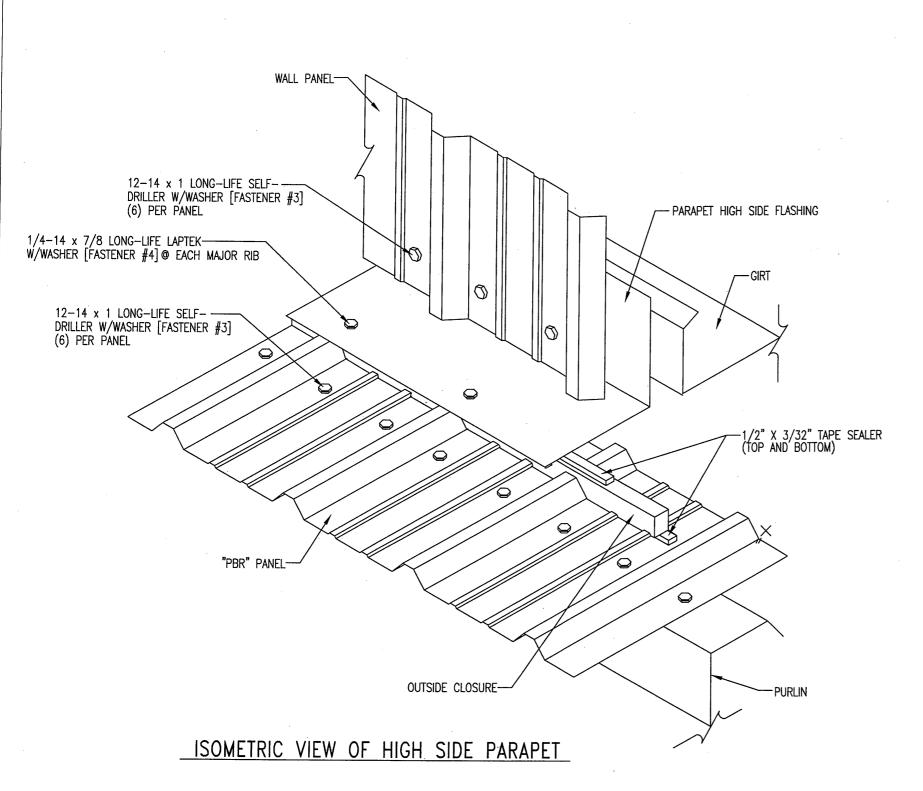

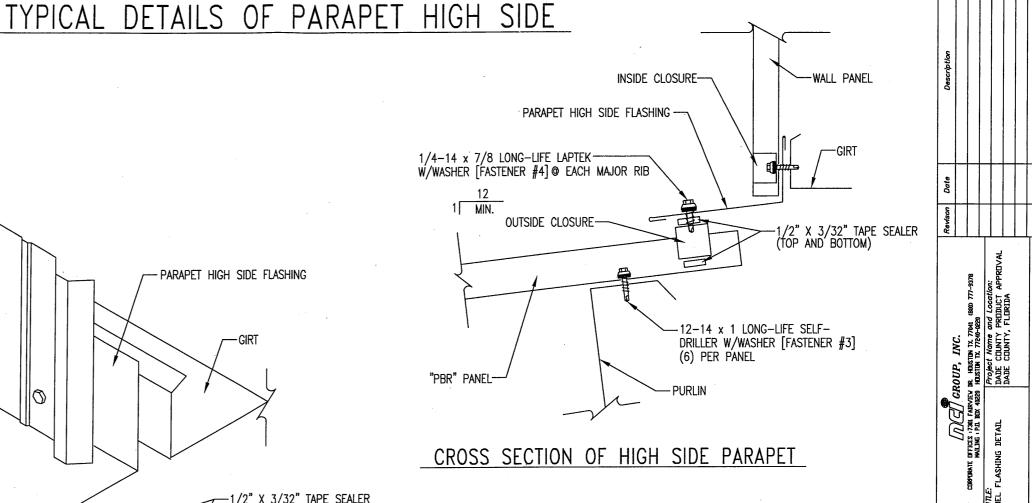

CROSS SECTION OF HIGH SIDE PARAPET


PRODUCT REVISED
as complying with the Florida **Building Code** Acceptance No 12-0730.02 Expiration Date 02/29/2016

APPLIANCE OF NO.1 GROUP, INC. AND IS.
NOT THE ENGINEER OF RECORD FOR
THIS PROJECT. THESE DRAWINGS MUST
BE REVIEWED FOR PROJECT
COMPLIANCE BY THE ENGINEER OF
RECORD. STATE OF CORIDA CHAMILIANS SONAL ENGINEERS


Scale: NOT TO SCALE Drawn by: EH Checked by: JA

THESE DRAVINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP,
INC. — 7301 FAIRVIEW DR. HOUSTON TX
77041. THE ENGINEER VHOSE SEAL
APPEARS HEREIN IS EMPLOYED BY NCI
GROUP OR ANOTHER DIVISION OR
AFFILIATE OF NCI GROUP, INC. AND IS
AFFILIATE OF NCI GROUP, INC. AND IS
NUT THE EXCITAGED DE OPCODE TO

TYPICAL DETAILS OF HIGH SIDE EAVE

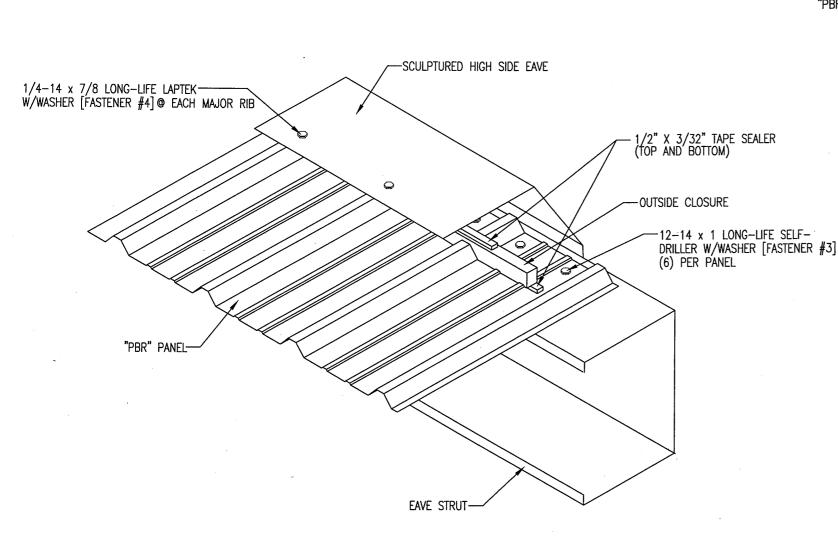


ISOMETRIC VIEW OF HIGH SIDE EAVE

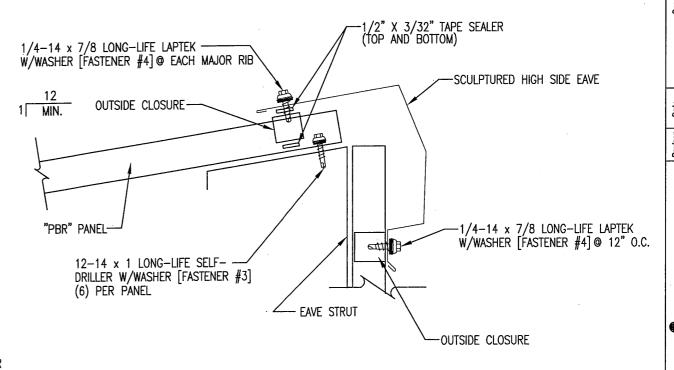

CROSS SECTION OF HIGH SIDE EAVE

PRODUCT REVISED as complying with the Florida **Building Code**

Mismi Dade Product Control

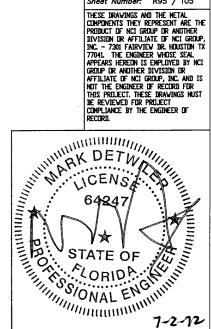

Scale: NOT TO SCALE


Job Number: 96-0529-03 Sheet Number: R95 / 105

Drawn by: EH

Checked by: JA

Acceptance No 12-0730.02 Expiration Date 02/27/2018

TYPICAL DETAILS OF RAKE

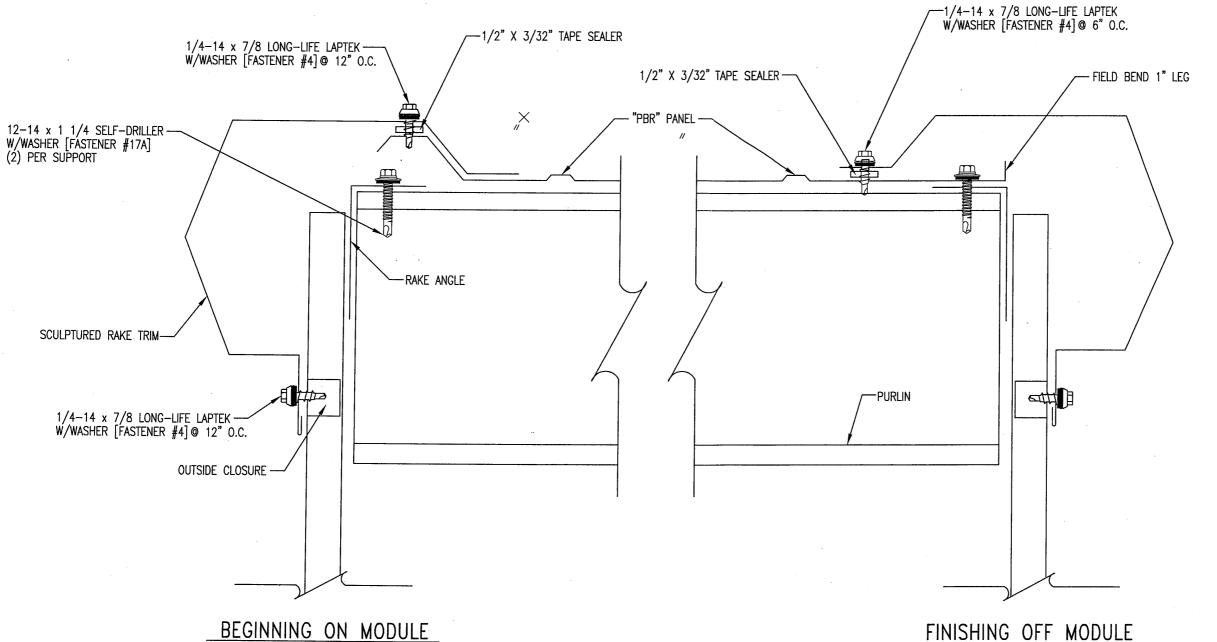

FINISHING OFF MODULE


PRODUCT REVISED as complying with the Florida Building Code Acceptance No 12-0730.02

Scale: NOT TO SCALE Drawn by: EH Checked by: JA


Job Number: 96-0529-03


Sheet Number: R95 / 106 Sheet Number: R95 / 106

THESE DRAWINGS AND THE METAL
COMPIDENTS THEY REPPESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP,
INC. - 7301 FAIRVIEW OR HOUSTON TX
77041. THE ENGINEER VHOSE SEAL
APPEARS HEREON IS EMPLOYED BY NCI
GROUP OR ANOTHER DIVISION OR
AFFILIATE OF NCI GROUP, INC. AND IS
NOT THE ENGINEER OF RECORD FOR
THIS PROJECT. THESE DRAWINGS MUST
BE REVIEWED FOR PROJECT
COMPLIANCE BY THE ENGINEER OF
RECORD.




TYPICAL DETAILS OF PARAPET RAKE

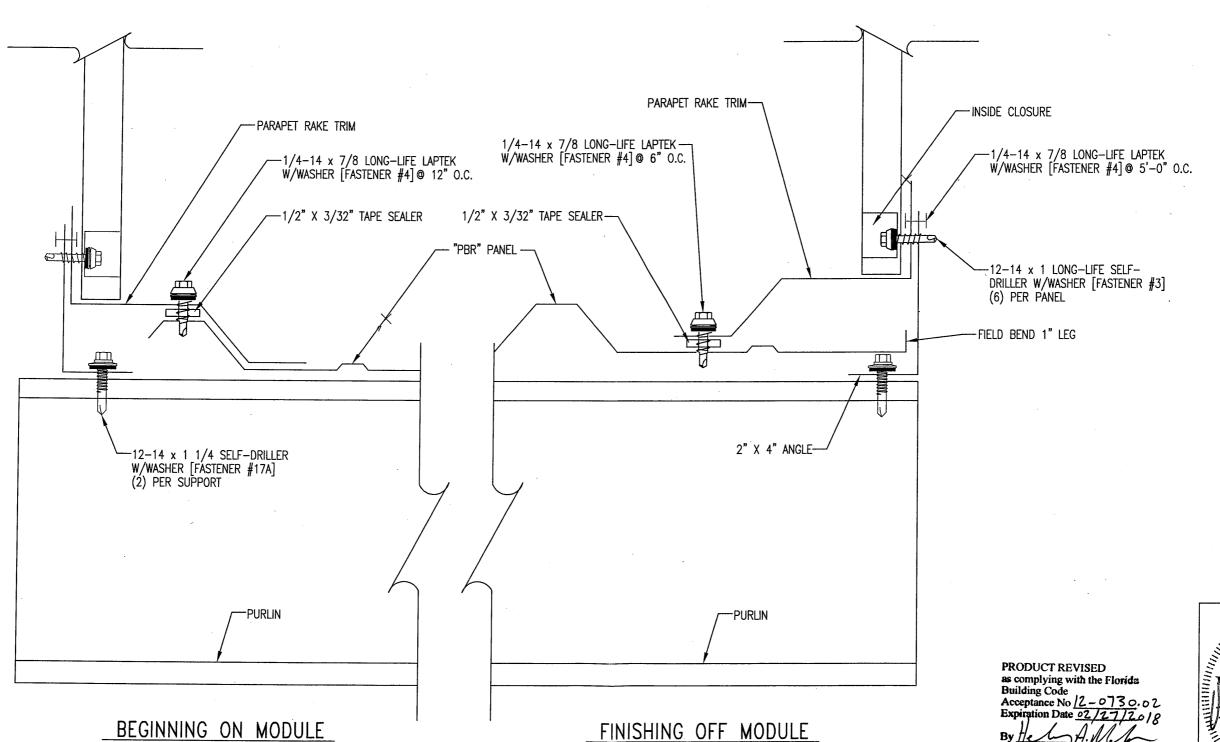


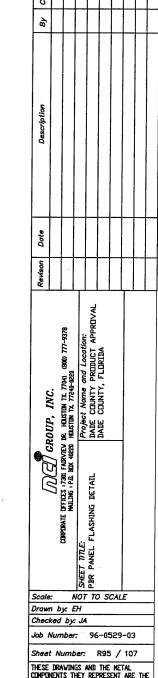


THESE DRAVINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP,
INC. - 7301 FAIRVIEW DR. HOUSTON TX
77041. THE ENGINEER VHOSE SEAL
APPEARS HEREON IS EMPLOYED BY NCI
GROUP OR ANOTHER DIVISION OR
AFFILIATE OF NCI GROUP, INC. AND IS
NOT THE ENGINEER OF RECORD FOR
THIS PROLECT. THESE DRAVINGS MUST
BE REVIEWED FOR PROLECT
COMPLIANCE BY THE ENGINEER OF
RECORD.



TYPICAL DETAILS OF RIDGE

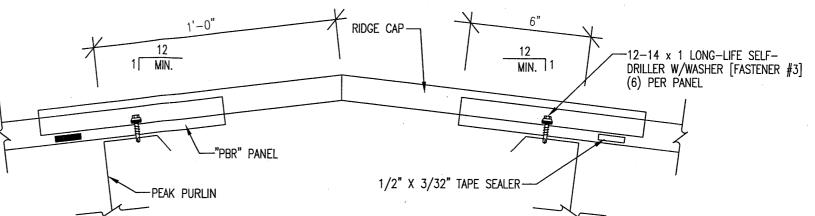

CROSS SECTION OF RIDGE

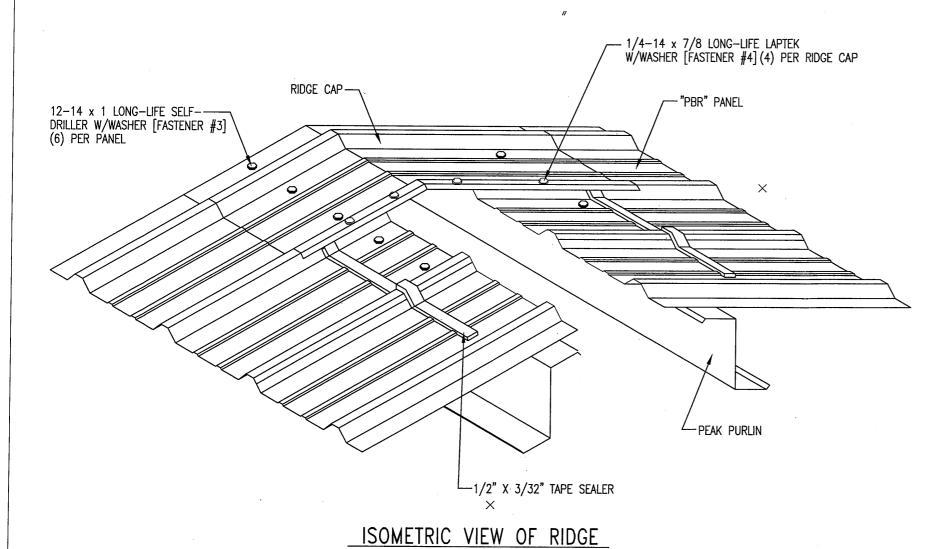

PRODUCT REVISED as complying with the Florida Building Code Acceptance No 12


NOT TO SCALE

Checked by: JA


Drawn by: EH

Sheet Number: R95 / 108


Sheet Number: R95 / 108
THESE DRAWINGS AND THE METAL
COMPINIONIS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP,
INC. - 7301 FAIRVIEW DR. HOUSTON TX
77041. THE ENGINEER WHOSE SEAL
APPEARS HEREON IS EMPLOYED BY NCI
GROUP OR ANOTHER DIVISION OR
AFFILIATE OF NCI GROUP, INC. AND IS
NOT THE ENGINEER OF RECORD FOR
THIS PROLECT. THESE DRAWINGS MUST
BE REVIEWED FOR PROLECT
COMPLIANCE BY THE ENGINEER OF
RECORD.



TYPICAL DETAILS OF VALLEY

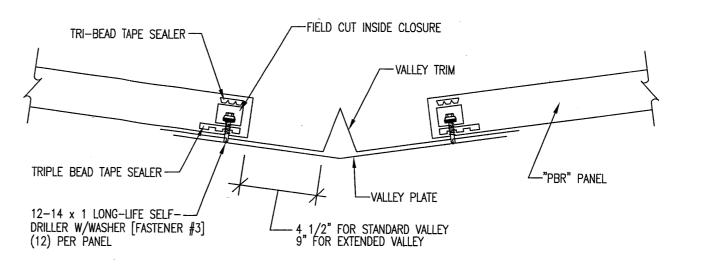



CROSS SECTION OF VALLEY

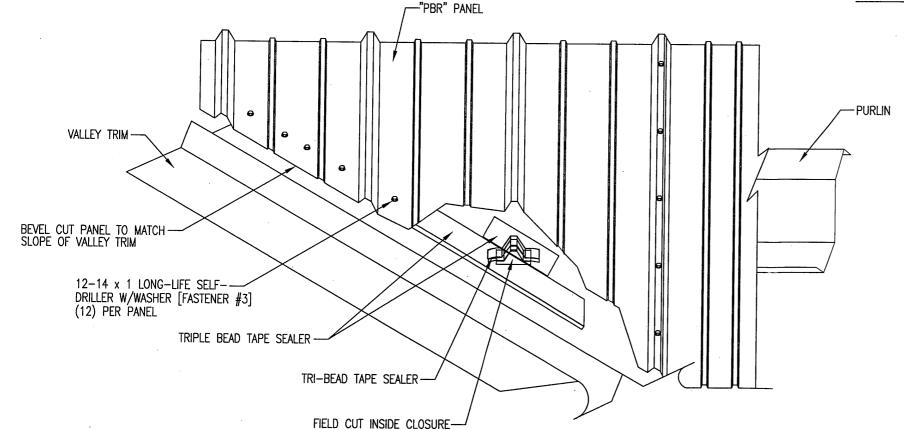



ISOMETRIC VIEW OF VALLEY

PRODUCT REVISED as complying with the Florida Building Code
Acceptance No 12-0730.0 Z
Expiration Date 02/27/20/8

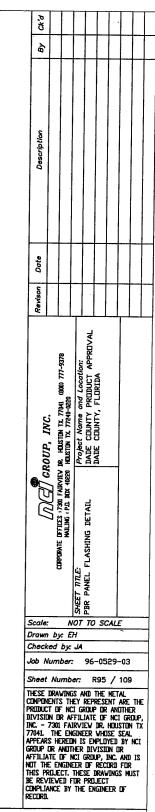



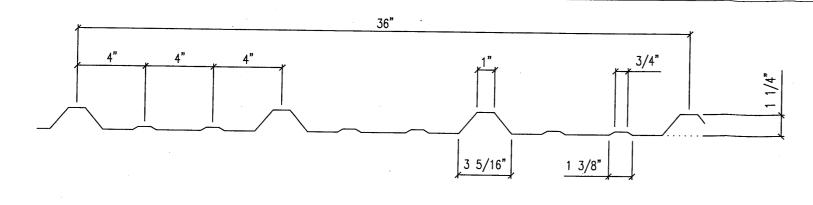

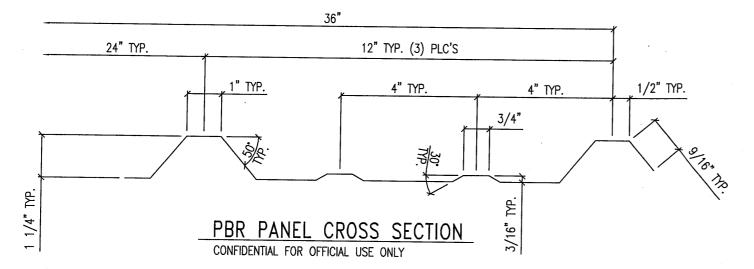

| PANEL PROPERTIES | | | | | | | | | | | |
|------------------|--------------------|-------------------|---------------------|------------|-----------|------------------|----------------|--|--|--|--|
| PANEL GAUGE | PANEL THICKNESS | YIELD STRENGTH | TENSILE STRENGTH | ELONGATION | HARDNESS | STEEL CŪATING | PAINT COATINGS | | | | |
| 24 | .024 MIN. | 50 KSI | 55-70 KSI | 20-36% | 50-65 HRB | AZ 55 | SIG 300 KYNAR | | | | |
| 22 | .029 MIN. | 50 KSI | 55-70 KSI | 20-36% | 50-65 HRB | AZ 55 | SIG 300 KYNAR | | | | |

PANEL ACCESSORIES

1/2 X 3/32

TRIPLE BEAD

CONSTRUCTION FASTENERS INC.
SPRING STREET AND VAN REED ROAD
P.O. BOX 6326, WYOMISSING PA 19610


#14 X 7/8' LAP TEK W/BOND SEAL WASHER

#12 X 1 SDS W/EPDM WASHER

#12 X 1 TEK 2 W/BOND SEAL WASHER

#14 X 7/8" LAP TEK W/EPDM WASHER

WG-7 INSIDE/OUTSIDE CLOSED CELL POYETHYLENE FOAM



GULF-SEAL SPECIALTIES, INC. P.D. BOX 508

SOUTH HOUSTON, TX 77587

TAPE SEALER MB-10A (POLYISUBUTYLENE-ISOPLENE)


TRI-BEAD


TAPE SEALER MB-10A (POLYISOBUTYLENE-ISOPLENE)

TAPE SEALER MB-10A (POLYISOBUTYLENE-ISOPLENE)

SCHNEE-MOREHEAD, INC. 111 NORTH NURSERY ROAD IRVING, TX 75060

PERMATHANE URETHANE CAULK

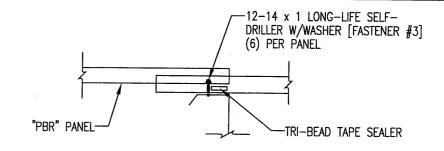

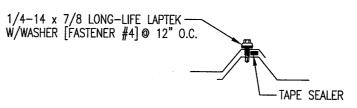

NOTES:

 THE 22 GAGE OR 24 GAGE PBR PANELS SHALL BE USED FOR ROOF CONSTRUCTION ONLY. THE ACTUAL ROOF PROJECT SHALL BE CONSTRUCTED USING THE SAME DETAILS SHOWN ON THESE DRAWINGS INCLUDING:

A. DETAILS OF ALL PANEL MATERIAL CHARACTERISTICS AND SECTIONS WITH DIMENSIONS AND THICKNESS

B. ASSEMBLY DETAILS INCLUDING ALL CONNECTIONS FASTENERS DIAGRAM WITH SIZE AND LOCATION.

C. PANEL MAXIMUM SPAN AND PRESSURE FOR THE FIELD PERIMETERS AND CORNERS SHOWN.

2. THE MAXIMUM ALLOWABLE SPANS AND PRESSURES FOR THE 24 GAGE STEEL FOR PANEL ARE AS FOLLOWS:

| | MAX | MUM PA | <u>NEL</u> | <u>SPAN</u> | Ĺ | <u>MA)</u> | (IMUM | PRE: | SSUR | E (psf) | |
|-------------------|----------|--------|------------|-------------|------|------------|-------|------|-------|---------|---|
| FIELD ZONE | | 4'-0" | , | | | | 49. | 40 | | | |
| PERIMETER ZONE * | | 2'-0" | | | | | 14 | 7.00 | | | |
| CORNER ZONE * | | 1'-0" | | | | | | 2.00 | | | |
| * ONE (1)-#14 TEK | FASTENER | PLACED | ON | ONE | SIDE | 0F | EACH | RIB | (i.e. | 1-#14 | 0 |
| 12") | | | | | | | | | • | " | |

3. THE MAXIMUM ALLOWABLE SPANS AND PRESSURES FOR THE 22 GAGE STEEL FOR PANEL ARE AS FOLLOWS:

| | | MAXIN | MUM PAN | EL S | SPAN | <u>M</u> | AXIN | IUM PI | RESS | URE | (psf) | |
|----------------|-----|----------|---------|------|------|----------|------|--------|------|-------|-------|---|
| FIELD ZONE * | * | | 4'-0" | | | | | 53.00 |) | | | |
| PERIMETER ZONE | ** | | 2'-0" | | | | | 169.0 | 00 | | | |
| CORNER ZONE ** | | | 1'-0" | | , | | | 238.0 | | | | |
| ** ONE (1)-#14 | TEK | FASTENER | PLACED | ON | EACH | SIDE | OF | EACH | RIB | (i.e. | 2-#14 | @ |
| 12") | | | | | | | | | | ` | " | |

4. THIS STRUCTURAL ROOF PANEL SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH 2010 FLORIDA BUILDING CODE (FBC). FOR USE WITH 2010 FBC, THE DESIGN PRESSURES AS DETERMINED FROM SECTION 1620 AND ASCE 7-10 MUST BE MULTIPLIED BY 0.6.

CCT GROUP, INC.

Stiff EXPLINE, TX, 77841 (800) 777-51

DEC 4020 HISTIN TX, 7784-0220

Project Name and Location

Project Name and Location

Dade County Product

Dade County, Florida Scale: NOT TO SCALE Drawn by: EH Checked by: JA Job Number: 96-0529-03 Sheet Number: R95 / 110 THESE DRAVINGS AND THE METAL COMPONENTS THEY REPRESENT ARE THE PRODUCT OF MCI GROUP OR ANOTHER DIVISION OR AFFILIATE OF MCI GROUP, INC. - 7301 FAIRVIEW OR HOUSTON TO THE ENGINEER WHOSE SEAL APPEARS HEREON IS EMPLOYED BY MCI GROUP OR ANOTHER DIVISION OR AFFILIATE OF MCI GROUP, INC. AND IS MOT THE ENGINEER OF RECORD FOR THIS PROJECT. THESE DRAVINGS MUST BE REVIEWED FOR PROJECT COMPLIANCE BY THE ENGINEER OF RECORD TO COMPLIANCE BY THE ENGINEER OF RECORD TO COMPLIANCE BY THE ENGINEER OF RECORD.

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 2-0730.02
Expiration Date 02/27/20/8
By

