MIAMI-DADE COUNTY
DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

PGT Industries
1070 Technology Drive
North Venice, FL 34275

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "CA–740F Fixed Casement" Aluminum Fixed Window – L.M.I.

APPROVAL DOCUMENT: Drawing No. **MD-CA740F-LM**, titled "Fixed Casement Window Details – LM", sheets 1 through 11 of 11, dated 08/08/12, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E., bearing the Miami–Dade County Product Control Approval stamp with the Notice of Acceptance number and approval date by the Miami–Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by **Manuel Perez, P.E.**

MIAMI-DADE COUNTY APPROVED

4/4/13

PGT Industries

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Manufacturer's die drawings and sections.
2. Drawing No. **MD-CA740F-LM**, titled "Fixed Casement Window Details – LM", sheets 1 through 11 of 11, dated 08/08/12, signed and sealed by Anthony Lynn Miller, P.E.

B. TESTS

1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
   2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
   3) Water Resistance Test, per FBC, TAS 202-94
   4) Large Missile Impact Test per FBC, TAS 201-94
   5) Cyclic Wind Pressure Loading per FBC, TAS 203-94

   along with marked-up drawings and installation diagram of a series CA740F aluminum fixed window, prepared by Fenestration Testing Laboratory, Inc. Test Report No. **FTL-7063**, dated 09/17/12, signed and sealed by Marlin D. Brinson, P.E.

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with FBC-2010, dated 12/07/12, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
2. Glazing complies with ASTM E1300-04

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **11–0624.01** issued to **E.I. DuPont DeNemours & Co., Inc.** for their **"DuPont Butacite® PVB Interlayer"** dated 09/08/11, expiring on 12/11/16.
2. Notice of Acceptance No. **11–0624.02** issued to **E.I. DuPont DeNemours & Co.**, Inc. for their "**DuPont SentryGlas® Interlayer**" dated 08/25/11, expiring on 01/14/17.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC–2010**, dated December 10, 2012, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
2. Statement letter of no financial interest, dated December 10, 2012, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
3. Proposal No. **12–1499** issued by Product Control, dated July 31, 2012, signed by Manuel Perez, P.E.

G. OTHER

1. None.

Manuel Perez, P.E.
Product Control Examiner
NOA No. 12-1218.11
Expiration Date: April 11, 2018
Approval Date: April 11, 2013

GENERAL NOTES: SERIES 740
IMPACT-RESISTANT FIXED CASEMENT WINDOW

1) THIS PRODUCT HAS BEEN DESIGNED & TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).

2) SHUTTERS ARE NOT REQUIRED WHEN USED IN WIND-BORNE DEBRIS REGIONS. FOR INSULATED GLASS INSTALLATIONS ABOVE 30' IN THE HVHZ, THE OUTBOARD LITE (CAP) MUST TEMPERED.

3) FOR MASONRY APPLICATIONS IN MIAMI-DADE COUNTY, USE ONLY MIAMI-DADE COUNTY APPROVED MASONRY ANCHORS. MATERIALS USED FOR ANCHOR EVALUATIONS WERE SOUTHERN PINE, ASTM C90 CONCRETE MASONRY UNITS AND CONCRETE WITH MIN. KSI PER ANCHOR TYPE, SEE TABLE 3, SHEET 4.

4) ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD.

5) ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO. USE ANCHORS OF SUFFICIENT EMBEDMENT AS SPECIFIED ON TABLE 3, SHEET 4. NARROW JOINT SEALANT IS USED ON ALL FOUR CORNERS OF THE FRAME. INSTALLATION ANCHORS SHOULD BE SEALED. OVERALL SEALING/FLASHING STRATEGY FOR WATER RESISTANCE OF INSTALLATION SHALL BE DONE BY OTHERS AND IS BEYOND THE SCOPE OF THESE INSTRUCTIONS.

6) SHIMS ARE REQUIRED AT EACH ANCHOR LOCATION WHERE THE PRODUCT IS NOT FLUSH TO THE SUBSTRATE. USE SHIMS CAPABLE OF TRANSFERRING APPLIED LOADS. WOOD BUCKS, BY OTHERS, MUST BE SUFFICIENTLY ANCHORED TO RESIST LOADS IMPOSED ON THEM BY THE WINDOW.

7) DESIGN PRESSURES:
A. NEGATIVE DESIGN LOADS BASED ON STRUCTURAL TEST PRESSURE, FRAME ANALYSIS AND GLASS PER ASTM E1300.
B. POSITIVE DESIGN LOADS BASED ON WATER TEST PRESSURE, STRUCTURAL TEST PRESSURE, FRAME ANALYSIS AND GLASS PER ASTM E1300.

8) THE ANCHORAGE METHODS SHOWN HAVE BEEN DESIGNED TO RESIST THE WINDLOADS CORRESPONDING TO THE REQUIRED DESIGN PRESSURE. THE 33-1/3% STRESS INCREASE HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT. THE 1.6 LOAD DURATION FACTOR WAS USED FOR THE EVALUATION OF ANCHORS INTO WOOD. ANCHORS THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FLORIDA BUILDING CODE FOR CORROSION RESISTANCE.

9) REFERENCES: TEST REPORTS FTL-7063, 3579, 3580, 3724; ELCO ULTRACON NOA; ELCO CRETEFLEX NOA; ANSI/AF&PA NDS FOR WOOD CONSTRUCTION AND ADM ALUMINUM DESIGN MANUAL.

DESIGN PRESSURE RATING	IMPACT RATING
VARIES, SEE SHEETS 6-10	RATED FOR LARGE & SMALL MISSILE IMPACT RESISTANCE

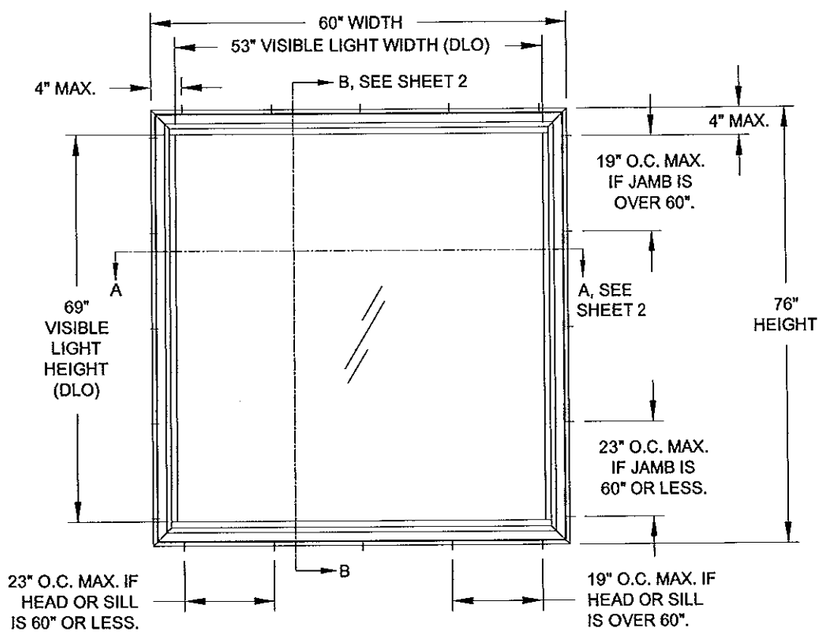

TYP. ELEVATION OF FIXED CASEMENT WINDOW

TABLE 1:

	Glass Types	Sheet #
1	5/16" Lami (1/8 An - .090" PVB - 1/8 An)	6
2	7/16" Lami (3/16 An - .090" SGP - 3/16 An)	8
3	7/16" Lami (3/16 HS - .090" SGP - 3/16 HS)	9
4	7/8" Lami. IG (1/8" An - 7/16" Air - 1/8" An - .090" PVB - 1/8" An	10
5	7/8" Lami. IG (1/8" T - 7/16" Air - 1/8" An - .090" PVB - 1/8" An	7
6	7/8" Lami. IG (3/16" An - 1/4" Air - 3/16" An - .090" SGP - 3/16" An	8
7	7/8" Lami. IG (3/16" An - 1/4" Air - 3/16" HS - .090" SGP - 3/16" HS	9
8	7/8" Lami. IG (3/16" T - 1/4" Air - 3/16" An - .090" SGP - 3/16" An	8
9	7/8" Lami. IG (3/16" T - 1/4" Air - 3/16" HS - .090" SGP - 3/16" HS	9

GENERAL NOTES..... 1
ELEVATION..... 1
GLAZING DETAILS..... 1
INSTALLATION..... 2
ASSEMBLY TUBE DETAILS..... 3
ANCHOR SPECIFICATIONS..... 4
ANCHOR QUANTITIES..... 4-5
DESIGN PRESSURES..... 6-10
ASSEMBLY DETAILS/BOM..... 11

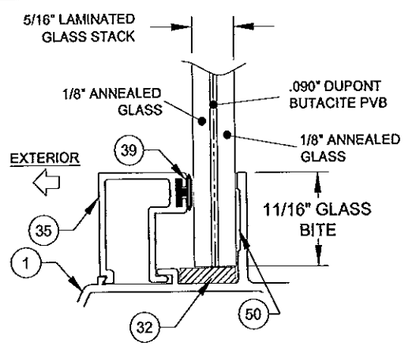

GLASS TYPE 1

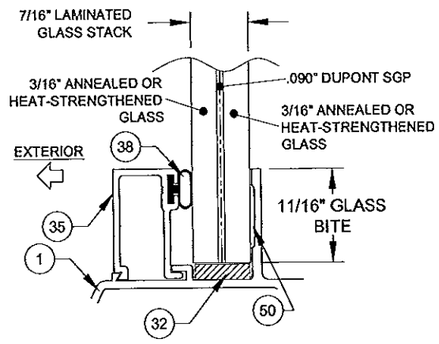

GLASS TYPES 2 & 3

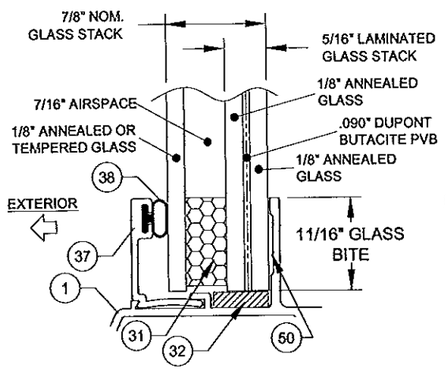

GLASS TYPES 4 & 5

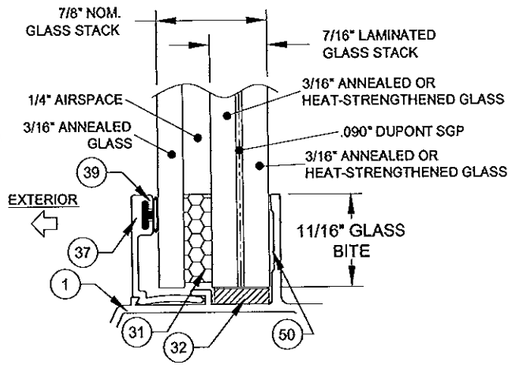

GLASS TYPES 6 & 7

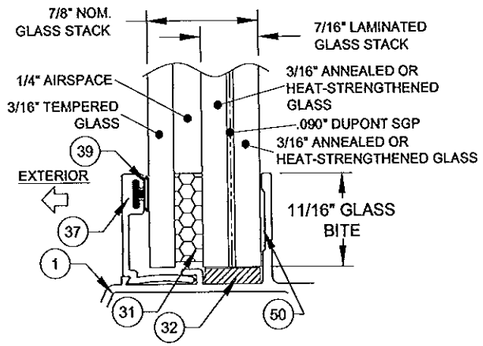

GLASS TYPES 8 & 9

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/18/13
STATE OF FLORIDA
PROFESSIONAL ENGINEER
A. LYNN MILLER, P.E.
P.E.# 58705

PGT®
1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

Approved as complying with the Florida Buiding Code
Date Apr 11, 2013
NOA# 12-1212.11
Miami Dade Product Control
By Manuel Perez

Revised By:	Date:	Revision:
Revised By:	Date:	Revision:

Description: GENERAL NOTES & ELEVATION
Drawn By: J ROSOWSKI
Title: FIXED CASEMENT WINDOW DETAILS - LM
Date: 08/08/12
Series/Model: CA-740
Scale: NTS
Sheet: 1 OF 11
Drawing No. MD-CA740F-LM
Rev:

INSTALLATION OPTION 1

INSTALLATION ANCHORS INTO 2X WOOD.

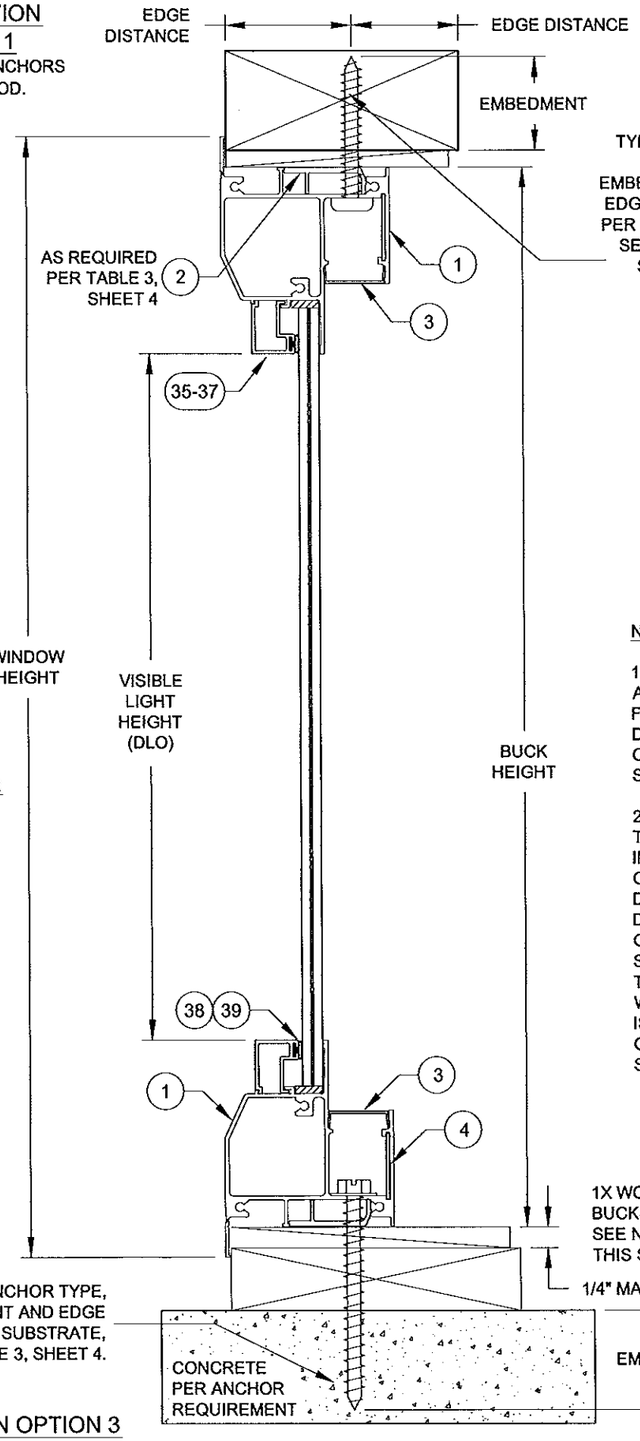

INSTALLATION OPTION 3

INSTALLATION ANCHORS THROUGH 1X BUCKSTRIP INTO MASONRY.

VERTICAL SECTION B-B

INSTALLATION OPTION 2

INSTALLATION ANCHORS DIRECTLY INTO MASONRY.

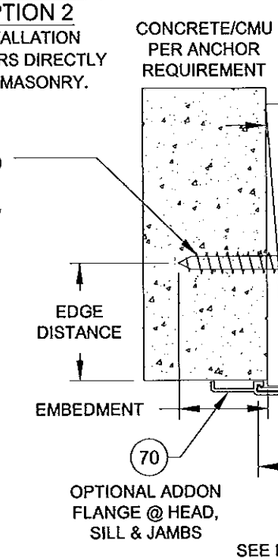

INSTALLATION OPTION 4

INSTALLATION ANCHORS DIRECTLY INTO METAL.

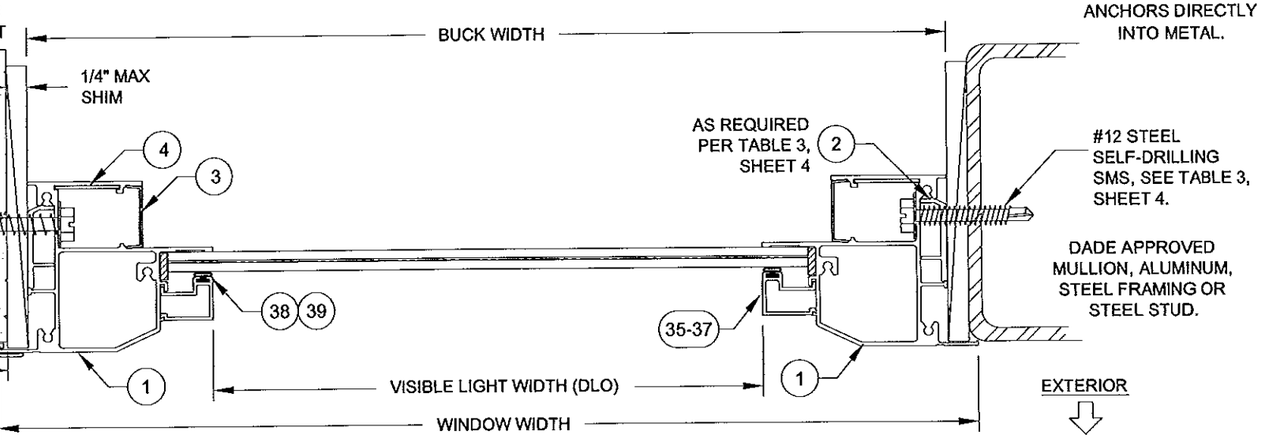

HORIZONTAL SECTION A-A

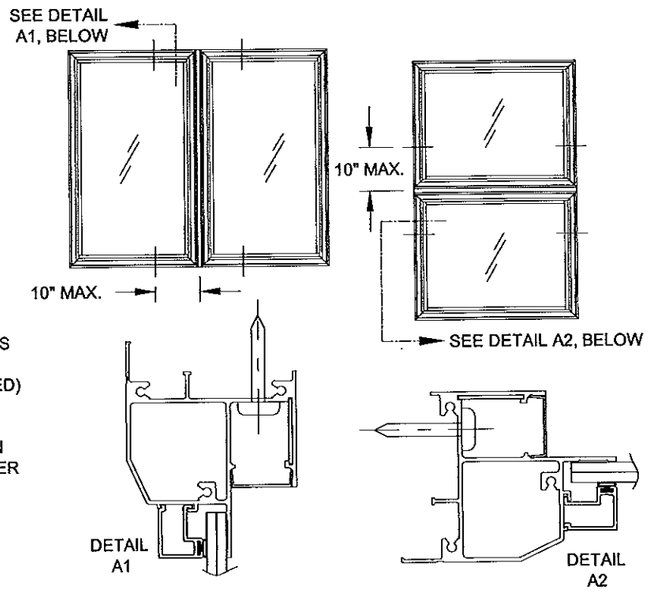

NOTES:

1) USE ONLY SUBSTRATE-APPROPRIATE ANCHORS LISTED ON TABLE 3, SHEET 4. FOLLOW EMBEDMENT AND EDGE DISTANCE LIMITS. ANY INSTALLATION OPTION SHOWN MAY BE USED ON ANY SIDE OF THE WINDOW.

2) ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL. UNIT MAY BE INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD. MAXIMUM SHIM THICKNESS TO BE 1/4".

NOTES:

1) WHEN INSTALLING COMBINATION UNITS, ADDITIONAL INSTALLATION ANCHORS MAY NEED TO BE INSTALLED THROUGH THE WINDOW FRAMES AT 10" MAX. FROM EACH SIDE OF THE FRAME ASSEMBLY TUBE CENTERLINE. SEE TABLE BELOW:

Additional Anchors Required on each Side of the Frame Assembly Tube (FAT)			
Vertical FAT	Window Width	Anchor Type A	Anchor Type B, C & D
	17" - 22.9"	0	0
	23" - 25.9"	0	1
	26"+	1	1
Horizontal FAT	Window Height	Anchor Type A	Anchor Type B, C & D
	17" - 22.9"	0	0
	23" - 25.9"	0	1
	26"+	1	1

VISIBLE LIGHT FORMULAS
WIDTH: WINDOW WIDTH - 7
HEIGHT: WINDOW HEIGHT - 7

ANTHONY LYNN MILLER LICENSE No. 58705 STATE OF FLORIDA PROFESSIONAL ENGINEER
3/18/13
A. LYNN MILLER, P.E.
P.E.# 58705

PGT®
1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

Approved as complying with the Florida Building Code
Date APRIL 11, 2013
NOA# 10.1218.11
Miami Dade Product Control
By Manuel Perez

Revised By:	Date:	Revision:
Revised By:	Date:	Revision:

Description: GENERAL NOTES & ELEVATION
Drawn By: J ROSOWSKI
Title: FIXED CASEMENT WINDOW DETAILS - LM
Date: 08/08/12
Series/Model: CA-740
Scale: NTS
Sheet: 2 OF 11
Drawing No. MD-CA740F-LM
Rev:

FIXED CASEMENT (O)

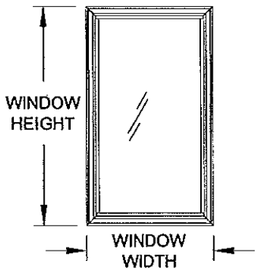

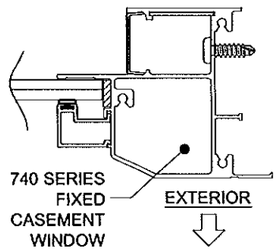

FOR SINGLE UNITS:

1) DETERMINE YOUR WINDOW SIZE AND GLASS.

2) KNOWING YOUR ANCHOR TYPE AND SUBSTRATE, DETERMINE YOUR ANCHOR GROUP FROM TABLE 3, SHEET 4.

3) FROM SHEETS 6-10, FIND THE SHEET FOR YOUR GLASS TYPE. FIND THE PRODUCT'S DESIGN PRESSURE FROM THE TABLE LABELED *"DESIGN PRESSURE (PSF) FOR SINGLE WINDOWS, ALL ANCHOR GROUPS"*.

4) DIMENSIONS SHOWN ARE TIP-TO-TIP. FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE WIDTH OR HEIGHT DIMENSION SHOWN ON THE TABLES.

5) USING THE TABLES LABELED *"WINDOW ANCHORS REQUIRED"* (TABLES 2A & 2B, SHEETS 4 & 5), DETERMINE THE NUMBER OF ANCHORS NEEDED IN THE HEAD, SILL AND JAMBS OF YOUR WINDOW.

6) INSTALL AS PER THE INSTRUCTIONS ON SHEET 2.

FIXED CASEMENT / CASEMENT (OX)

FIGURE 1:

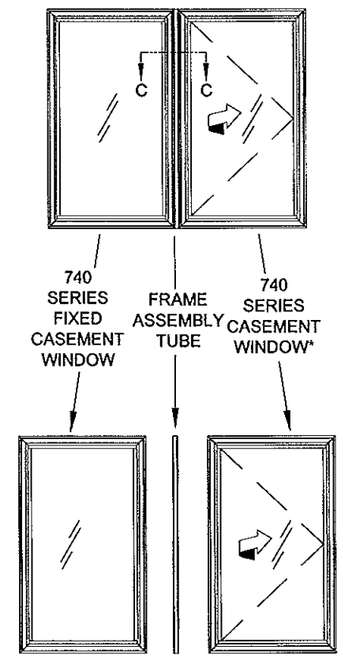

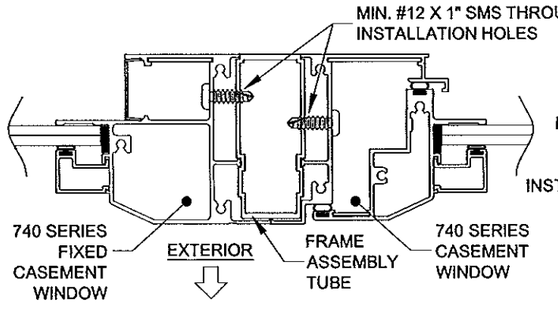

HORIZONTAL SECTION C-C

AWNING / CASEMENT / FIXED CASEMENT (XXO)

FIGURE 2:

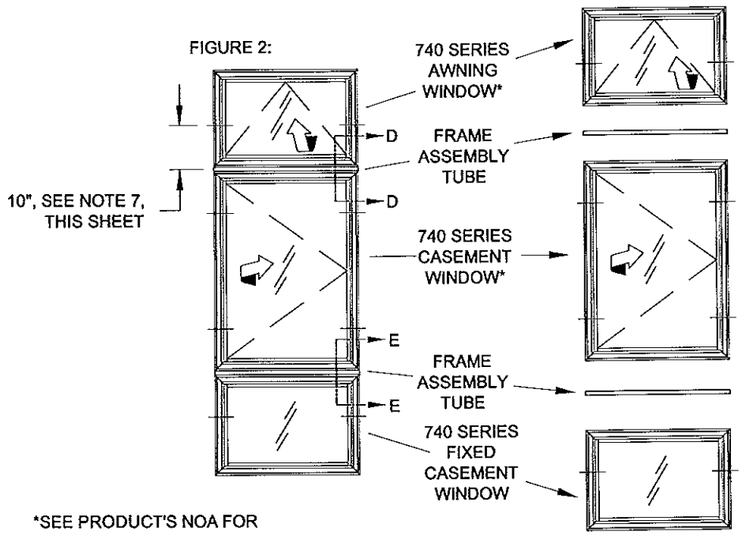

*SEE PRODUCT'S NOA FOR INSTALLATION SPECS

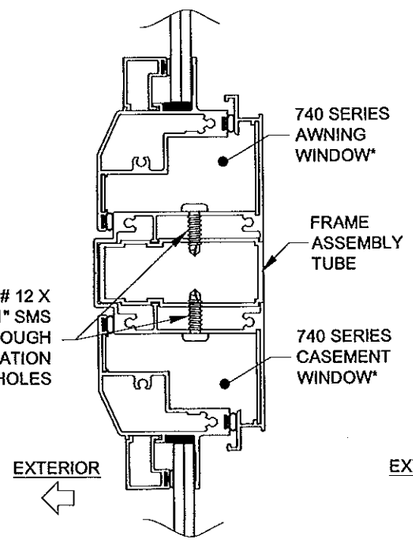

VERTICAL SECTION D-D

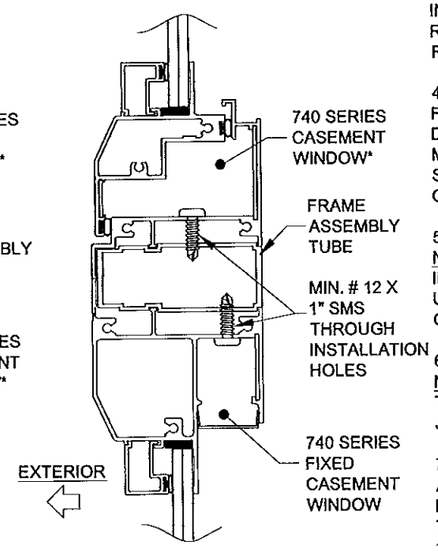

VERTICAL SECTION E-E

FOR EACH WINDOW IN A COMBINED ASSEMBLY:

1) DETERMINE EACH INDIVIDUAL WINDOW TYPE, SIZE AND GLASS MAKEUP, SEE FIGURES 1 & 2, THIS SHEET. DETERMINE YOUR ANCHOR GROUP FROM TABLE 3, SHEET 4.

2) FROM SHEETS 6-10, FIND THE SHEET FOR YOUR GLASS TYPE.

3) FIND THE DESIGN PRESSURE FROM THE TABLES LABELED *"WINDOW ANCHORS REQUIRED"* (TABLES 2A & 2B, SHEETS 4 & 5). THIS MUST BE DONE FOR EACH WINDOW IN THE ASSEMBLY, AND THE LOWEST DESIGN PRESSURE APPLIES TO THE ENTIRE ASSEMBLY. DIMENSIONS SHOWN ARE TIP-TO-TIP. FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE WIDTH OR HEIGHT DIMENSION SHOWN ON THE TABLES.

4) USING THE TABLE LABELED *"WINDOW ANCHORS REQUIRED"* (TABLES 2A & 2B, SHEETS 4 & 5), DETERMINE THE NUMBER OF ANCHORS NEEDED IN THE HEAD, SILL AND JAMBS OF YOUR WINDOW.

5) INSTALL AS PER THE INSTRUCTIONS ON SHEETS 2-3. NOTE THAT ADDITIONAL ANCHORS THROUGH THE WINDOW FRAME INTO THE SUBSTRATE MAY BE REQUIRED (SEE SHEET 2), AND THAT MIN. # 12 X 1" ANCHORS ARE TO BE USED THROUGH THE FRAME INTO THE FRAME ASSEMBLY TUBE (SEE DETAILS ON THIS SHEET).

Approved as complying with the Florida Building Code
Date Apr 11, 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

FRAME ASSEMBLY TUBE NOTES:

1) DIMENSIONS SHOWN ARE TIP-TO-TIP DIMENSIONS FOR EACH INDIVIDUAL WINDOW. FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE WIDTH OR HEIGHT DIMENSION SHOWN ON THE TABLES.

2) ANY 740-SERIES PRODUCT (CASEMENT, AWNING OR FIXED CASEMENT) MAY BE ATTACHED TO THE FRAME ASSEMBLY TUBE. FOR ALL WINDOWS, USE THE WINDOW'S NOA FOR ANCHORAGE, SIZE AND DESIGN PRESSURE LIMITATIONS.

3) ALL WINDOWS IN THE COMBINATION UNIT MUST BE ABLE TO INDIVIDUALLY COMPLY WITH THE REQUIREMENTS OF THEIR RESPECTIVE NOA.

4) FRAME ASSEMBLY TUBE TO BE FASTENED TO WINDOW, AS SHOW IN DETAILS, WITH MIN. #12 X 1" SHEET METAL SCREWS. USE THE SAME SPACING AND QUANTITY AS THE OPPOSITE FRAME MEMBER.

5) THE FRAME ASSEMBLY TUBE MAY NOT EXCEED 62" IN LENGTH (AS USED IN A 63" FLANGED WINDOW) OR BE USED IN TEE OR CROSS CONFIGURATIONS.

6) THE FRAME ASSEMBLY TUBE IS NOT REQUIRED TO BE CLIPPED TO THE SUBSTRATE. ALL EXTERIOR JOINTS TO BE SEALED BY INSTALLER.

7) FOR ALL COMBINATION UNITS, ADDITIONAL INSTALLATION ANCHORS MAY NEED TO BE INSTALLED THROUGH THE WINDOW FRAMES AT 10" MAX. FROM EACH SIDE OF THE FRAME ASSEMBLY TUBE CENTERLINE. SEE TABLE BELOW:

Additional Anchors Required on each Side of the Frame Assembly Tube (FAT)			
Vertical FAT	Window Width	Anchor Type	
		A	B, C & D
	17" - 22.9"	0	0
	23" - 25.9"	0	1
	26"+	1	1
Horizontal FAT	Window Height	Anchor Type	
		A	B, C & D
	17" - 22.9"	0	0
	23" - 25.9"	0	1
	26"+	1	1

Revised By:
Revision:
Date:
Drawn By: J ROSOWSKI
Date: 08/08/12
Description: FRAME ASSEMBLY TUBE DETAILS
Scale: NTS
Sheet: 3 OF 11
Title: FIXED CASEMENT WINDOW DETAILS - LM
Series/Model: CA-740
Drawing No. MD-CA740F-LM
Rev:

PGT®
1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/18/13
STATE OF FLORIDA
PROFESSIONAL ENGINEER
A. LYNN MILLER, P.E.
P.E.# 58705

TABLE 2A:

Window Anchors Required (37" and Less on Short Side Dimension)

Long Side		Anchor Type → / Short Side	under 23"				25-15/16"				27-3/4				29"				31-1/2"				33-1/2"				34"				37"			
			A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D	A	B	C	D
under 23"		Long Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
25-15/16"		Long Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
35"		Long Side	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
37"		Long Side	3	3	3	3	3	3	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
44"		Long Side	3	4	3	3	3	4	3	3	4	4	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
44-1/4"		Long Side	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	6	3	3	4	6	3	3	5	6	3	3
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
53-1/8"		Long Side	4	5	3	3	4	5	3	3	5	6	3	3	5	6	3	3	5	6	4	3	5	6	4	3	5	6	4	3	5	7	4	3
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
58"		Long Side	4	6	4	4	5	6	4	4	5	6	4	4	5	6	4	4	5	7	4	4	6	7	4	4	6	7	4	4	6	7	4	4
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
63"		Long Side	5	6	4	4	5	7	4	4	6	7	4	4	6	7	4	4	6	8	4	4	6	8	4	4	6	8	5	4	7	8	5	4
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
66-13/16"		Long Side	5	7	5	5	6	7	5	5	6	7	5	5	6	8	5	5	6	8	5	5	7	8	5	5	7	9	5	5	7	9	5	5
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
67-1/2"		Long Side	5	7	5	5	6	7	5	5	6	8	5	5	6	8	5	5	7	8	5	5	7	9	5	5	7	9	5	5	7	9	5	5
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
68"		Long Side	5	7	5	5	6	7	5	5	6	8	5	5	6	8	5	5	7	8	5	5	7	9	5	5	7	9	5	5	7	9	5	5
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
70"		Long Side	6	7	5	5	6	8	5	5	6	8	5	5	6	8	5	5	7	9	5	5	7	9	5	5	7	9	5	5	8	10	5	5
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
72"		Long Side	6	7	5	5	6	8	5	5	7	8	5	5	7	8	5	5	7	9	5	5	7	9	5	5	7	9	5	5	8	10	6	5
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
74"		Long Side	6	7	5	5	6	8	5	5	7	8	5	5	7	9	5	5	7	9	5	5	8	10	5	5	8	10	5	5	8	10	6	5
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
76"		Long Side	6	8	5	5	7	8	5	5	7	9	5	5	7	9	5	5	8	9	5	5	8	10	6	5	8	10	6	5	8	11	6	5
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
84"		Long Side	7	8	5	5	7	9	5	5	8	10	5	5	8	10	6	5	8	11	6	5	9	11	6	6	9	11	6	6	10	12	7	6
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
114"		Long Side	9	12	7	7	10	13	7	7	11	14	8	7	11	14	8	7	12	15	8	8	13	16	9	8	13	16	9	8	14	17	10	9
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3	3	4	3	3
134"		Long Side	11	14	8	8	12	15	9	8	13	16	9	8	13	17	9	9	14	18	10	9	15	19	11	10	15	19	11	10				
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3	3	3	3	3	3	3				
145"		Long Side	12	15	9	9	13	17	9	9	14	18	10	9	15	18	10	9	16	20	11	10												
		Short Side	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3												

1) USE THIS TABLE FOR ALL WINDOWS PER THE ELEVATIONS ON SHEET 1. DIMENSIONS SHOWN ARE TIP-TO-TIP.

2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG SIDE DIMENSION SHOWN ON THE TABLE.

3) THE WINDOW'S SHORT AND LONG SIDE MAY BE INVERTED.

4) SEE NEXT SHEET FOR ADDITIONAL INFORMATION.

SAMPLE CONFIGURATIONS:

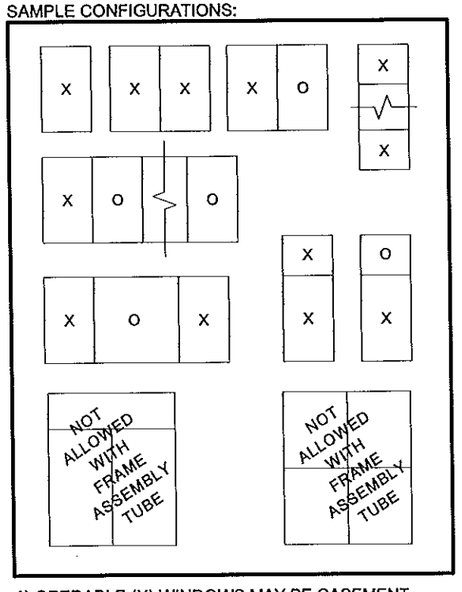

1) OPERABLE (X) WINDOWS MAY BE CASEMENT WINDOWS OR AWNING WINDOWS OF THE SAME SERIES.

TABLE 3:

Group	Anchor	Substrate	Min. Edge Distance	Min. O.C. Distance	Min. Embedment	Anchor Plate Required?
A	1/4" steel Ultracon	Hollow Block	1"	6"	1-1/4"	No
	#14, steel SMS (G5) or #14, 410 SS SMS	S. Pine	5/8"	1"	1-3/8"	No
		6063-T5 Alum.	3/8"	5/8"	0.050	No
		A36 Steel	3/8"	5/8"	0.050	No
		A653 Stud, Gr. 33	3/8"	5/8"	.035", 20 Ga.	No
B	#12, steel SMS (G5) or #12, 410 SS SMS	S. Pine	5/8"	1"	1-3/8"	No
		6063-T5 Alum.	3/8"	5/8"	.050"	No
		A36 Steel	3/8"	5/8"	.050"	No
		A653 Stud, Gr. 33	3/8"	5/8"	.035", 20 Ga.	No
C	1/4" steel Ultracon	2.85k Concrete	2-1/2"	4"	1-3/8"	No
		2.85k Concrete	1"	4"	1-3/4"	No
		Hollow Block	2-1/2"	5"	1-1/4"	No
	#12, steel SMS (G5) or #12, 410 SS SMS	S. Pine	5/8"	1"	1-3/8"	Yes
		6063-T5 Alum.	3/8"	5/8"	1/16"	Yes
		A36 Steel	3/8"	5/8"	.050"	Yes
		A653 Stud, Gr. 33	3/8"	5/8"	.045", 18 Ga.	Yes

TABLE 3: (cont.)

Group	Anchor	Substrate	Min. Edge Distance	Min. O.C. Distance	Min. Embedment	Anchor Plate Required?
D	#14, steel SMS (G5) or #14, 410 SS SMS	S. Pine	5/8"	1"	1-3/8"	Yes
		6063-T5 Alum.	3/8"	5/8"	1/16"	Yes
		A36 Steel	3/8"	5/8"	.050"	Yes
		A653 Stud, Gr. 33	3/8"	5/8"	.045", 18 Ga.	Yes
	1/4" steel Ultracon	2.85k Concrete	1"	4"	1-3/4"	Yes
		2.85k Concrete	2-1/2"	4"	1-3/8"	Yes
		Hollow Block	2-1/2"	5"	1-1/4"	Yes
		Filled Block	2-1/2"	4"	1-3/4"	Yes
	1/4" 410 SS CreteFlex	3.35k Concrete	1"	5"	1-3/4"	No
		Hollow Block	2-1/2"	5"	1-1/4"	No
	5/16" steel Ultracon	3.5k Concrete	1-1/4"	5"	1-3/4"	No
		Hollow Block	3-1/8"	5"	1-1/4"	No
		Filled Block	2-1/2"	5"	1-3/4"	No

1) ANCHOR MUST EXTEND A MIMIMUM OF 3 THREADS BEYOND ANY METAL SUBSTRATE.
2) ANCHORS MAY BE HEXHEAD, PANHEAD OR FLATHEAD.

Approved as complying with the Florida Building Code
Date April 11, 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

Revised By:
Revision:
Date:

Drawn By: J ROSOWSKI
Date: 08/08/12

Description: ANCHOR TYPE AND QUANTITY

Title: FIXED CASEMENT WINDOW DETAILS - LM

Series/Model: CA-740

Scale: NTS

Sheet: 4 OF 11

Drawing No. MD-CA740F-LM

Revi:

1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274

CERT. OF AUTH. #29296

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/18/13
STATE OF FLORIDA
PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.
P.E.# 58705

TABLE 2B:

Window Anchors Required (Over 37" on Short Side Dimension)

Long Side	Anchor Type		Short Side 40" A	B	C	D	44" A	B	C	D	48-1/4" A	B	C	D	53-1/8" A	B	C	D	54" A	B	C	D	58" A	B	C	D	60" A	B	C	D	63" A	B	C	D	67-1/2" A	B	C	D
under 23"	Long Side		2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	Short Side		3	4	3	3	3	4	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	6	4	4	5	6	4	4	5	6	4	4	5	7	5	5
25-15/16"	Long Side		2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	Short Side		3	4	3	3	3	4	3	3	4	5	3	3	4	5	3	3	4	6	3	3	5	6	4	4	5	6	4	4	5	7	4	4	6	7	5	5
35"	Long Side		3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	5	6	4	3	5	7	4	3	6	7	4	4	6	8	4	4	6	8	5	4	7	9	5	5
37"	Long Side		3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3	3	4	3	3
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	5	7	4	3	5	7	4	4	6	7	4	4	6	8	4	4	7	8	5	4	7	9	5	5
44"	Long Side		4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3	4	5	3	3
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	6	8	5	4	7	8	5	4	7	9	5	5	8	10	6	5
44-1/4"	Long Side		5	6	3	3	5	6	3	3	5	6	3	3	5	6	3	3	5	6	3	3	5	6	3	3	5	6	3	3	5	6	3	3	5	6	3	3
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	7	8	5	4	7	9	5	5	7	9	5	5	8	10	6	5
53-1/8"	Long Side		5	7	4	4	6	7	4	4	6	7	4	4	6	7	4	4	6	7	4	4	6	7	4	4	6	7	4	4	6	7	4	4	6	7	4	4
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	7	8	5	4	7	9	5	5	8	10	5	5	8	11	6	5
58"	Long Side		6	8	4	4	6	8	5	4	7	8	5	4	7	8	5	4	7	8	5	4	7	8	5	4	7	8	5	4	7	8	5	4	7	8	5	4
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	7	8	5	4	7	9	5	5	8	10	6	5	8	11	6	5
63"	Long Side		7	9	5	4	7	9	5	5	7	9	5	5	8	10	5	5	8	10	5	5	8	10	6	5	8	10	6	5	8	10	6	5	7	9	5	5
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	7	8	5	4	7	9	5	5	8	10	6	5	8	11	6	5
66-13/16"	Long Side		7	9	5	5	8	10	6	5	8	10	6	5	8	11	6	5	8	11	6	5	8	11	6	5	8	11	6	5	8	11	6	5	8	10	6	5
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	7	8	5	4	7	9	5	5	8	9	5	5	8	11	6	5
67-1/2"	Long Side		8	10	5	5	8	10	6	5	8	10	6	5	8	11	6	5	8	11	6	5	8	11	6	5	8	11	6	5	8	11	6	5	8	11	6	5
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	7	8	5	4	7	9	5	4	7	9	5	5	8	11	6	5
68"	Long Side		8	10	5	5	8	10	6	5	8	11	6	5	9	11	6	5	9	11	6	5	9	11	6	5	9	11	6	5	9	11	6	5				
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	6	8	5	4	7	9	5	4	7	9	5	5				
70"	Long Side		8	10	6	5	8	11	6	5	9	11	6	6	9	11	6	6	9	11	6	6	9	11	6	6	9	11	6	6	9	11	6	6				
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	6	7	4	4	6	7	4	4	6	8	5	4	7	8	5	4	7	9	5	5				
72"	Long Side		8	10	6	5	9	11	6	6	9	11	6	6	9	11	6	6	9	11	6	6	9	11	6	6	9	11	6	6	9	11	6	6				
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	5	7	4	4	6	7	4	4	6	8	4	4	7	8	5	4	7	9	5	5				
74"	Long Side		9	11	6	5	9	11	6	6	9	12	7	6	9	12	7	6	9	12	7	6	9	12	7	6	9	12	7	6								
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	5	7	4	4	6	7	4	4	6	8	4	4	6	8	5	4								
76"	Long Side		9	11	6	6	9	12	7	6	9	12	7	6	9	12	7	6	9	12	7	6	9	12	7	6	9	12	7	6								
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	5	7	4	3	5	7	4	4	6	8	4	4	6	8	5	4								
84"	Long Side		10	13	7	6	10	13	7	7	10	13	7	7	10	13	7	7	10	13	7	7																
	Short Side		3	4	3	3	4	5	3	3	5	6	3	3	5	6	4	3	5	6	4	3																
114"	Long Side		14	18	10	9																																
	Short Side		3	4	3	3																																

1) USE THIS TABLE FOR ALL WINDOWS PER THE ELEVATIONS ON SHEET 1. DIMENSIONS SHOWN ARE TIP-TO-TIP.

2) FOR SIZES NOT SHOWN, ROUND UP TO THE NEXT AVAILABLE SHORT OR LONG SIDE DIMENSION SHOWN ON THE TABLE.

3) THE WINDOW'S SHORT AND LONG SIDE MAY BE INVERTED.

4) SEE NEXT SHEET FOR ADDITIONAL INFORMATION.

Approved as complying with the Florida Building Code
Date Apr. 11, 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

EXAMPLE 1: FOR WINDOW SHOWN BELOW; 7/16" ANNEALED LAMI. GLASS, 1/4" MASONRY ANCHORS INTO CONCRETE, +70/-80 PSF DP REQUIRED, NO ANCHOR PLATE

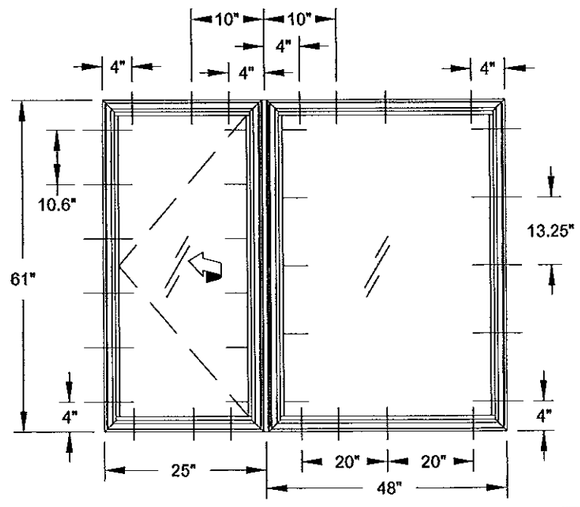

AWNING ANCHORS (**SEE SEPERATE NOA**):
A) FROM TABLE 9, ANCHORS C & D ALLOW A DP OF +70/-90.

B) FOR THE JAMB, FROM TABLE 3, ANCHOR TYPE C HAS THE ANCHOR AND SUBSTRATE DESIRED AND DOES NOT REQUIRE THE ANCHOR PLATE.

C) FROM TABLE 2, 6 ANCHORS ARE REQUIRED IN EACH JAMB.

D) SIMILARLY, 2 ANCHORS ARE REQUIRED IN THE HEAD & SILL.

E) DISTRIBUTE ANCHORS FOLLOWING GUIDELINES FROM ELEVATION ON SHEET 1.

F) PER RULES ON SHEETS 2 & 3, INSTALL 1 ADDITIONAL ANCHOR ON THE FRAME ASSEMBLY TUBE SIDE OF THE AWNING (HEAD & SILL).

FIXED CASEMENT ANCHORS:
A) FROM TABLE 9, ANCHORS C & D ALLOW A DP OF +70/-83.1.

B) FOR THE JAMB, FROM TABLE 3, ANCHOR TYPE C HAS THE ANCHOR AND SUBSTRATE DESIRED AND DOES NOT REQUIRE THE ANCHOR PLATE.

C) FROM TABLE 2B, 5 ANCHORS ARE REQUIRED IN EACH JAMB.

D) SIMILARLY, 3 ANCHORS ARE REQUIRED IN THE HEAD & SILL.

E) DISTRIBUTE ANCHORS FOLLOWING GUIDELINES FROM ELEVATION ON SHEET 1.

F) PER RULES ON SHEET 2, INSTALL 1 ADDITIONAL ANCHOR ON THE FRAME ASSEMBLY TUBE SIDE OF THE FIXED CASEMENT (HEAD & SILL).

Revised By:
Revision:
Date:
Drawn By: J ROSOWSKI
Date: 08/08/12
Description: ANCHOR TYPE AND QUANTITY
Title: FIXED CASEMENT WINDOW DETAILS - LM
Series/Model: CA-740
Scale: NTS
Sheet: 5 OF 11
Drawing No. MD-CA740F-LM
Rev:

1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/18/13
STATE OF FLORIDA
PROFESSIONAL ENGINEER
A. LYNN MILLER, P.E.
P.E.# 58705

8.10.12.14

FOR GLASS TYPES:

1) 5/16" LAMI (1/8 AN - .090" PVB - 1/8 AN)

Approved as complying with the Florida Building Code
Date APR 11 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

TABLE 4:

Long Side \ Short Side	under 23"	25-15/16"	27-3/4"	33-1/2"	37"	44"	48-1/4"	53-1/8"	58"	63"
under 23"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90
25-15/16"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90
37"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84.1	+70/-77	+70/-70.1
44"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84.1	+60/-70	+60/-67.8	+60/-61.3
48-1/4"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84.1	+70/-80.1	+60/-70	+60/-63.2	
53-1/8"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84.1	+60/-70	+60/-70	+60/-67.5		
58"	+70/-90	+70/-90	+70/-90	+70/-83.2	+70/-77	+60/-67.8	+60/-63.2			
63"	+70/-90	+70/-90	+70/-90	+70/-76.5	+70/-70.1	+60/-61.3				
76"	+70/-90	+70/-84.6	+70/-75.7	+/-58.9	+/-55.6					
84"	+70/-90	+70/-80.4	+70/-71.3	+/-54.2						

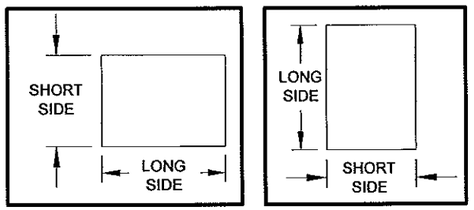

1) SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES.
2) TABLE DIMENSIONS MAY BE ORIENTED VERTICALLY OR HORIZONTALLY AS SHOWN.

TABLE 5:

Design Pressure (psf) for Windows Attached to a Frame Assembly Tube

Window Dimension "B" \ Window Dimension "A"	under 23"	25-15/16"	27-3/4"	33-1/2"		37"		44"			48-1/4"			53-1/8"			58"				63"			
	Anchor Group	Anchor Group	Anchor Group	Anchor Group		Anchor Group		Anchor Group			Anchor Group			Anchor Group			Anchor Group				Anchor Group			
	All	All	All	A, C & D	B	A, C & D	B	A	B	C & D	A	B	C & D	A	B	C & D	A	B	C	D	A	B	C	D
under 23"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-82.1	+70/-90	+70/-74.3	+70/-79.7	+/-62.5	+70/-90	+70/-72.7	+/-56.9	+70/-90	+/-66.1	+/-51.8	+70/-90	+/-60.5	+/-47.4	+70/-87.6	+70/-90	+/-55.7	+/-43.6	+70/-80.7	+70/-89.5
25-15/16"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84	+70/-90	+70/-70.7	+70/-90	+70/-90	+/-64.4	+70/-90	+70/-90	+/-58.6	+70/-90	+70/-90	+/-53.6	+70/-84	+70/-90	+70/-90	+/-49.3	+70/-77.3	+70/-90	+70/-90
37"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-88.4	+70/-90	+70/-84.1	+70/-80.5	+70/-84.1	+70/-77	+70/-73.6	+70/-77	+70/-77	+70/-70.1	+/-67.8	+70/-70.1	+70/-70.1
44"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-81.6	+70/-90	+70/-84.1	+70/-74.4	+70/-84.1	+60/-70	+60/-67.7	+60/-70	+60/-67.8	+60/-61.9	+60/-67.8	+60/-67.8	+60/-61.3	+/-57	+60/-61.3	+60/-61.3
48-1/4"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84.1	+70/-84.1	+70/-84.1	+70/-80.1	+/-67.8	+70/-80.1	+60/-70	+60/-61.7	+60/-70	+60/-63.2	+/-56.4	+60/-63.2	+60/-63.2				
53-1/8"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84.1	+70/-84.1	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-67.5	+60/-67.4	+60/-67.5								
58"	+70/-90	+70/-90	+70/-90	+70/-83.2	+70/-83.2	+70/-77	+70/-77	+60/-67.8	+60/-67.8	+60/-67.8	+60/-63.2	+60/-63.2	+60/-63.2											
63"	+70/-90	+70/-90	+70/-90	+70/-76.5	+70/-76.5	+70/-70.1	+70/-70.1	+60/-61.3	+60/-61.3	+60/-61.3														
76"	+70/-90	+70/-84.6	+70/-75.7	+/-58.9	+/-58.9	+/-55.6	+/-55.6																	
84"	+70/-90	+70/-80.4	+70/-71.3	+/-54.2	+/-54.2																			

1) THE WINDOW'S WIDTH AND HEIGHT MAY BE INVERTED.

FIGURE FOR VERTICAL FRAME ASSEMBLY TUBE

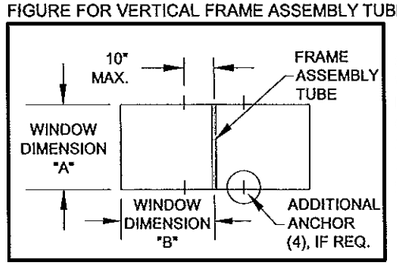

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

FIGURE FOR HORIZONTAL FRAME ASSEMBLY TUBE

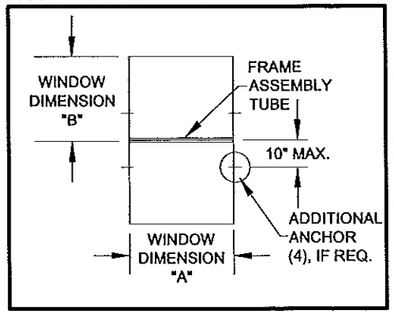

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

SEE SHEET 4 FOR ADDITIONAL SAMPLE CONFIGURATIONS

Revised By:
Revision:
Date:
Drawn By: J ROSOWSKI
Date: 08/08/12
Description: DESIGN PRESSURES PER GLAZING TYPE
Title: FIXED CASEMENT WINDOW DETAILS - LM
Series/Model: CA-740
Scale: NTS
Sheet: 6 OF 11
Drawing No. MD-CA740F-LM
Rev:

PGT
1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/18/13
STATE OF FLORIDA
PROFESSIONAL ENGINEER

A. LYNN MILLER, P.E.
P.E.# 58705

FOR GLASS TYPES:

5) 7/8" LAMI. IG:(1/8" T - 7/16" AIR - 1/8" AN - .090" PVB - 1/8" AN)

Approved as complying with the Florida Building Code
Date Dec 11, 2013
NOA# 12-1218.11
Miami Dade Product Control
By

TABLE 6:

Long Side \ Short Side	under 23"	25-15/16"	27-3/4"	33-1/2"	37"	44"	48-1/4"	53-1/8"	58"	63"
under 23"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90
25-15/16"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90
37"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-87.8	+70/-79.9
44"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90			
48-1/4"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90			
53-1/8"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90					
58"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-87.8					
63"	+70/-90	+70/-90	+70/-90	+70/-87.2	+70/-79.9					
76"	+70/-90	+70/-90	+70/-86.3							
84"	+70/-90	+70/-90	+70/-81.3							

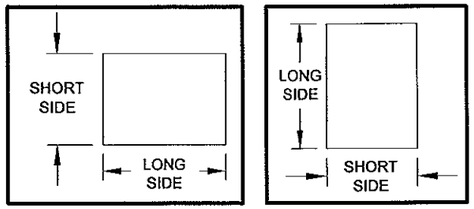

1) SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES.
2) TABLE DIMENSIONS MAY BE ORIENTED VERTICALLY OR HORIZONTALLY AS SHOWN.

TABLE 7:

Design Pressure (psf) for Windows Attached to a Frame Assembly Tube

Window Dimension "B" \ Window Dimension "A"	under 23" Anchor Group All	25-15/16" Anchor Group All	27-3/4" Anchor Group All	33-1/2" Anchor Group A, C & D	33-1/2" Anchor Group B	37" Anchor Group A, C & D	37" Anchor Group B	44" Anchor Group A	44" Anchor Group B	44" Anchor Group C & D	48-1/4" Anchor Group A	48-1/4" Anchor Group B	48-1/4" Anchor Group C & D	53-1/8" Anchor Group A	53-1/8" Anchor Group B	53-1/8" Anchor Group C & D	58" Anchor Group A	58" Anchor Group B	58" Anchor Group C	58" Anchor Group D	63" Anchor Group A	63" Anchor Group B	63" Anchor Group C	63" Anchor Group D
under 23"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-82.1	+70/-90	+70/-74.3	+70/-79.7	+/-62.5	+70/-90	+70/-72.7	+/-56.9	+70/-90	+/-66.1	+/-51.8	+70/-90	+/-60.5	+/-47.4	+70/-87.6	+70/-90	+/-55.7	+/-43.6	+70/-80.7	+70/-89.5
25-15/16"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-84	+70/-90	+70/-70.7	+70/-90	+70/-90	+/-64.4	+70/-90	+70/-90	+/-58.6	+70/-90	+70/-90	+/-53.6	+70/-84	+70/-90	+70/-90	+/-49.3	+70/-77.3	+70/-90	+70/-90
37"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-88.4	+70/-90	+70/-90	+70/-80.5	+70/-90	+70/-87.8	+70/-73.6	+70/-87.8	+70/-87.8	+70/-79.9	+/-67.8	+70/-79.9	+70/-79.9
44"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-81.6	+70/-90	+70/-90	+70/-74.4	+70/-90											
48-1/4"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-89.2	+70/-90	+70/-86.5	+70/-81.3	+70/-90											
53-1/8"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90																	
58"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-87.8	+70/-87.8																	
63"	+70/-90	+70/-90	+70/-90	+70/-87.2	+70/-87.2	+70/-79.9	+70/-79.9																	
76"	+70/-90	+70/-90	+70/-86.3																					
84"	+70/-90	+70/-90	+70/-81.3																					

1) THE WINDOW'S WIDTH AND HEIGHT MAY BE INVERTED.

FIGURE FOR VERTICAL FRAME ASSEMBLY TUBE

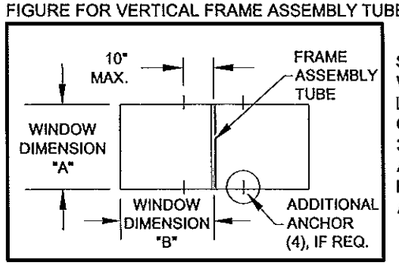

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

FIGURE FOR HORIZONTAL FRAME ASSEMBLY TUBE

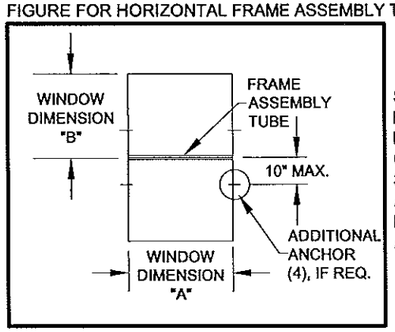

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

SEE SHEET 4 FOR ADDITIONAL SAMPLE CONFIGURATIONS

Revised By:
Revision:
Date:
Date: 08/08/12
Drawn By: J ROSOWSKI
Description: DESIGN PRESSURES PER GLAZING TYPE
Title: FIXED CASEMENT WINDOW DETAILS - LM
Series/Model: CA-740
Scale: NTS
Sheet: 7 OF 11
Drawing No. MD-CA740F-LM
Rev:

PGT®
1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

ANTHONY LYNN MILLER
LICENSE
No. 58705
3/18/13
STATE OF FLORIDA
PROFESSIONAL ENGINEER
A. LYNN MILLER, P.E.
P.E.# 58705

FOR GLASS TYPES:

2) 7/16" LAMI. (3/16" AN - .090" SGP - 3/16" AN)
6) 7/8" LAMI. IG: (3/16" AN - 1/4" AIR - 3/16" AN - .090" SGP - 3/16" AN)
8) 7/8" LAMI. IG: (3/16" T - 1/4" AIR - 3/16" AN - .090" SGP - 3/16" AN)

Approved as complying with the Florida Building Code
Date April 1, 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

TABLE 8:

Long Side \ Short Side	under 23"	25-15/16"	29"	31-1/2"	34"	40"	54"	60"	63"	67-1/2"
	Design Pressure (psf) for Single Windows, All Anchor Groups									
under 23"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
25-15/16"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
63"	+90/-130	+90/-130	+90/-123.1	+90/-116.5	+90/-110.7	+90/-100.7	+/- 89.1	+/- 86.1	+/- 83.1	+/- 78.3
67-1/2"	+90/-130	+90/-130	+90/-120.7	+90/-113.9	+90/-108	+90/-97.6	+/- 84.8	+/- 80.5	+/- 78.3	+/- 75.1
72"	+90/-130	+90/-129.2	+90/-118.7	+90/-111.8	+90/-105.8	+90/-95.1	+/- 81.3	+/- 76.1	+/- 73.8	
76"	+90/-130	+90/-127.8	+90/-117.1	+90/-110.2	+90/-104.1	+90/-93.2	+/- 78	+/- 72.5		
84"	+90/-130	+90/-125.3	+90/-114.5	+90/-107.5	+90/-101.3	+/- 89.9	+/- 70.7			
114"	+90/-130	+90/-119.6	+90/-108.6	+90/-101.4	+90/-95	+/- 73				
134"	+90/-130	+90/-117.3	+90/-106.3	+90/-99	+90/-92.6					
145"	+90/-129.8	+90/-116.4	+90/-105.3	+90/-98						

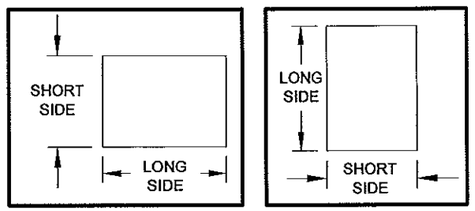

1) SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES.
2) TABLE DIMENSIONS MAY BE ORIENTED VERTICALLY OR HORIZONTALLY AS SHOWN.

TABLE 9:

Window Dimension "B" \ Window Dimension "A"	under 23"	25-15/16"	29"	31-1/2"		34"		40"			54"			60"				63"			
	Design Pressure (psf) for Windows Attached to a Frame Assembly Tube																				
	Anchor Group	Anchor Group	Anchor Group	Anchor Group		Anchor Group		Anchor Group			Anchor Group			Anchor Group				Anchor Group			
	All	All	All	A, C & D	B	A, C & D	B	A	B	C & D	A	B	C & D	A	B	C	D	A	B	C	D
under 23"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-87.4	+70/-90	+70/-80.8	+70/-87.7	+/-68.7	+70/-90	+/-65	+/-50.9	+70/-90	+/-58.5	+/-45.8	+70/-84.7	+70/-90	+/-55.7	+/-43.6	+70/-80.7	+70/-89.5
25-15/16"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-77.7	+70/-90	+70/-90	+/-57.6	+70/-90	+70/-90	+/-51.8	+70/-81.2	+70/-90	+70/-90	+/-49.3	+70/-77.3	+70/-90	+70/-90
63"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-83	+70/-74.3	+70/-89.1	+70/-74.7	+/-66.9	+70/-86.1	+70/-86.1	+70/-71.1	+/-63.7	+70/-83.1	+70/-83.1
67-1/2"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-77.4	+/-69.3	+70/-84.8	+/-69.7	+/-62.4	+70/-80.5	+70/-80.5	+/-66.4	+/-59.4	+70/-78.3	+70/-78.3
72"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-72.6	+70/-73.1	+70/-81.3	+/-65.3	+/-65.8	+70/-76.1	+70/-76.1	+/-62.2	+/-55.7	+70/-73.8	+70/-73.8
76"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-78	+/-69.3	+70/-78	+/-61.9	+/-62.4	+70/-72.5	+70/-72.5				
84"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-89.9	+70/-89.9	+70/-89.9	+70/-70.7	+/-62.7	+70/-70.7								
114"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-73	+70/-73	+70/-73											
134"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90														
145"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90																

1) THE WINDOW'S WIDTH AND HEIGHT MAY BE INVERTED.

FIGURE FOR VERTICAL FRAME ASSEMBLY TUBE

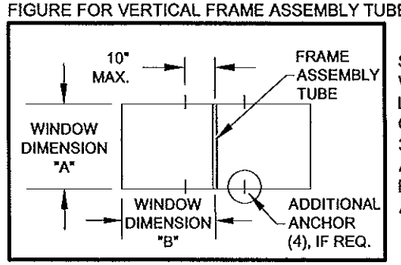

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

FIGURE FOR HORIZONTAL FRAME ASSEMBLY TUBE

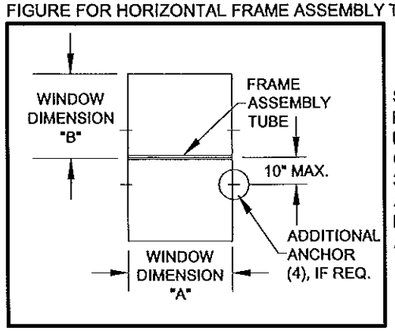

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

SEE SHEET 4 FOR ADDITIONAL SAMPLE CONFIGURATIONS

Revised By:
Date:
Revision:
Drawn By: J ROSOWSKI
Date: 08/08/12
Description: DESIGN PRESSURES PER GLAZING TYPE
Title: FIXED CASEMENT WINDOW DETAILS - LM
Series/Model: CA-740
Scale: NTS
Sheet: 8 OF 11
Drawing No. MD-CA740F-LM
Rev:

1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

ANTHONY LYNN MILLER LICENSE No. 58705 STATE OF FLORIDA PROFESSIONAL ENGINEER
3/18/13
A. LYNN MILLER, P.E.
P.E.# 58705

FOR GLASS TYPES:

3) 7/16" LAMI (3/16 HS - .090" SGP - 3/16 HS)
7) 7/8" LAMI IG: 3/16" AN - 1/4" AIR - 3/16" HS - .090" SGP - 3/16" HS)
9) 7/8" LAMI IG: (3/16" T - 1/4" AIR - 3/16" HS - .090" SGP - 3/16" HS)

Approved as complying with the Florida Building Code
Date Apr 11, 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

TABLE 10:

Long Side \ Short Side	under 23"	25-15/16"	29"	31-1/2"	34"	40"	54"	60"	63"	67-1/2"
under 23"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
25-15/16"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
63"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
67-1/2"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130
72"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	
76"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130		
84"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130			
114"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130				
134"	+90/-130	+90/-130	+90/-130	+90/-130	+90/-130					
145"	+90/-130	+90/-130	+90/-130	+90/-130						

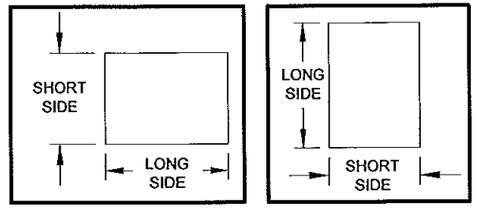

1) SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES.
2) TABLE DIMENSIONS MAY BE ORIENTED VERTICALLY OR HORIZONTALLY AS SHOWN.

TABLE 11:

Design Pressure (psf) for Windows Attached to a Frame Assembly Tube

Window Dimension "B" \ Window Dimension "A"	under 23"	25-15/16"	29"	31-1/2"		34"		40"			54"			60"				63"			
	Anchor Group	Anchor Group	Anchor Group	Anchor Group		Anchor Group		Anchor Group			Anchor Group			Anchor Group				Anchor Group			
	All	All	All	A, C & D	B	A, C & D	B	A	B	C & D	A	B	C & D	A	B	C	D	A	B	C	D
under 23"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-87.4	+70/-90	+70/-80.8	+70/-87.7	+/-68.7	+70/-90	+/-65	+/-50.9	+70/-90	+/-58.5	+/-45.8	+70/-84.7	+70/-90	+/-55.7	+/-43.6	+70/-80.7	+70/-89.5
25-15/16"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-77.7	+70/-90	+70/-90	+/-57.6	+70/-90	+70/-90	+/-51.8	+70/-81.2	+70/-90	+70/-90	+/-49.3	+70/-77.3	+70/-90	+70/-90
63"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-87.6	+70/-90	+70/-90
67-1/2"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-89.1	+70/-90	+70/-90
72"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90
76"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90				
84"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90								
114"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90											
134"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90														
145"	+70/-90	+70/-90	+70/-90	+70/-90	+70/-90																

1) THE WINDOW'S WIDTH AND HEIGHT MAY BE INVERTED.

FIGURE FOR VERTICAL FRAME ASSEMBLY TUBE

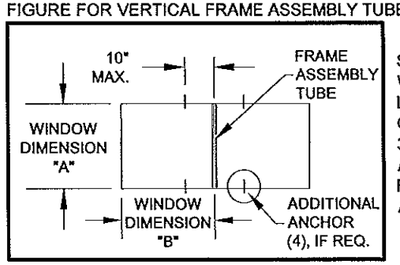

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

FIGURE FOR HORIZONTAL FRAME ASSEMBLY TUBE

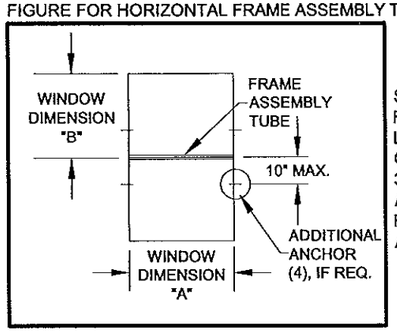

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

SEE SHEET 4 FOR ADDITIONAL SAMPLE CONFIGURATIONS

Revised By:
Drawn By: J ROSOWSKI
Description: DESIGN PRESSURES PER GLAZING TYPE
Title: FIXED CASEMENT WINDOW DETAILS - LM
Series/Model: CA-740
Scale: NTS
Sheet: 9 OF 11
Drawing No. MD-CA740F-LM
Rev:
Revision:
Date: 08/08/12
Date:

PGT®
1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

ANTHONY LYNN MILLER LICENSE No. 58705 STATE OF FLORIDA PROFESSIONAL ENGINEER
3/18/13

A. LYNN MILLER, P.E.
P.E.# 58705

FOR GLASS TYPES:

4) 7/8" LAMI. IG:(1/8" AN - 7/16" AIR - 1/8" AN - .090" PVB - 1/8" AN)

Approved as complying with the Florida Building Code
Date April 11, 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

TABLE 12:

Long Side \ Short Side	under 23"	25-15/16"	27-3/4"	33-1/2"	37"	44"	48-1/4"	53-1/8"	58"	63"
	Design Pressure (psf) for Single Windows, All Anchor Groups									
under 23"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70
25-15/16"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70
37"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70
44"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-69.6	+60/-62.9
48-1/4"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-64.9	
53-1/8"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-69.3		
58"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-69.6	+60/-64.9			
63"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-62.9				
76"	+60/-70	+60/-70	+60/-70	+60/-60.5	+/- 57					
84"	+60/-70	+60/-70	+60/-70	+/- 55.6						

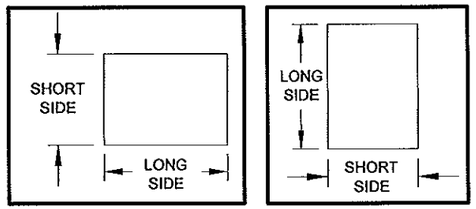

1) SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES.
2) TABLE DIMENSIONS MAY BE ORIENTED VERTICALLY OR HORIZONTALLY AS SHOWN.

TABLE 13:

Window Dimension "B" \ Window Dimension "A"	under 23"	25-15/16"	27-3/4"	33-1/2"	37"	44"		48-1/4"			53-1/8"			58"			63"		
	Design Pressure (psf) for Windows Attached to a Frame Assembly Tube																		
	Window Dimension "A"																		
	Anchor Group	Anchor Group	Anchor Group	Anchor Group	Anchor Group	Anchor Group		Anchor Group			Anchor Group			Anchor Group			Anchor Group		
	All	All	All	All	All	A, C & D	B	A	B	C & D	A	B	C & D	A	B	C & D	A	B	C & D
under 23"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-62.5	+60/-70	+/-56.9	+60/-70	+60/-66.1	+/-51.8	+60/-70	+60/-60.5	+/-47.4	+60/-70	+/-55.7	+/-43.6	+60/-70
25-15/16"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-64.4	+60/-70	+60/-70	+/-58.6	+60/-70	+60/-70	+/-53.6	+60/-70	+60/-70	+/-49.3	+60/-70	+60/-70
37"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-67.8	+60/-70
44"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-67.7	+60/-70	+60/-69.6	+60/-61.9	+60/-69.6	+60/-62.9	+/-57	+60/-62.9
48-1/4"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-67.8	+60/-70	+60/-70	+60/-61.7	+60/-70	+60/-64.9	+/-56.4	+60/-64.9			
53-1/8"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-69.3	+60/-67.4	+60/-69.3						
58"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-69.6	+60/-69.6	+60/-64.9	+60/-64.9	+60/-64.9									
63"	+60/-70	+60/-70	+60/-70	+60/-70	+60/-70	+60/-62.9	+60/-62.9												
76"	+60/-70	+60/-70	+60/-70	+60/-60.5	+/-57														
84"	+60/-70	+60/-70	+60/-70	+/-55.6															

1) THE WINDOW'S WIDTH AND HEIGHT MAY BE INVERTED.

FIGURE FOR VERTICAL FRAME ASSEMBLY TUBE

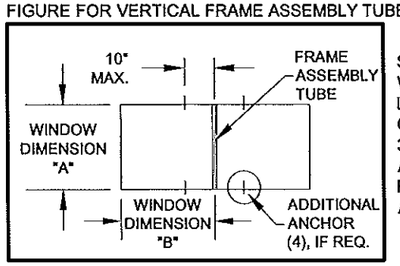

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

FIGURE FOR HORIZONTAL FRAME ASSEMBLY TUBE

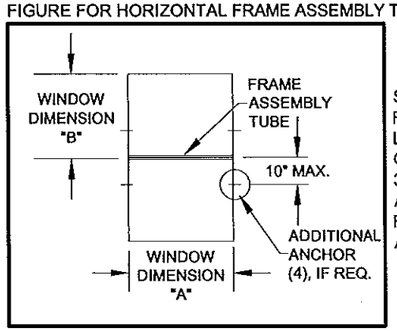

SEE SHEETS 1, 4 & 5 FOR WINDOW ANCHOR LOCATIONS AND QUANTITIES. SEE SHEET 3 FOR ANY ADDITIONAL ANCHORS REQUIRED FOR THE FRAME ASSEMBLY TUBE.

SEE SHEET 4 FOR ADDITIONAL SAMPLE CONFIGURATIONS

Revised By:
Date:
Revision:
Drawn By: J ROSOWSKI
Date: 08/08/12
Description: DESIGN PRESSURES PER GLAZING TYPE
Title: FIXED CASEMENT WINDOW DETAILS - LM
Series/Model: CA-740
Scale: NTS
Sheet: 10 OF 11
Drawing No. MD-CA740F-LM
Rev:

PGT
1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274
CERT. OF AUTH. #29296

ANTHONY LYNN MILLER
LICENSE
No. 58705
STATE OF FLORIDA
PROFESSIONAL ENGINEER
3/18/13

A. LYNN MILLER, P.E.
P.E.# 58705

ASSEMBLY DETAILS

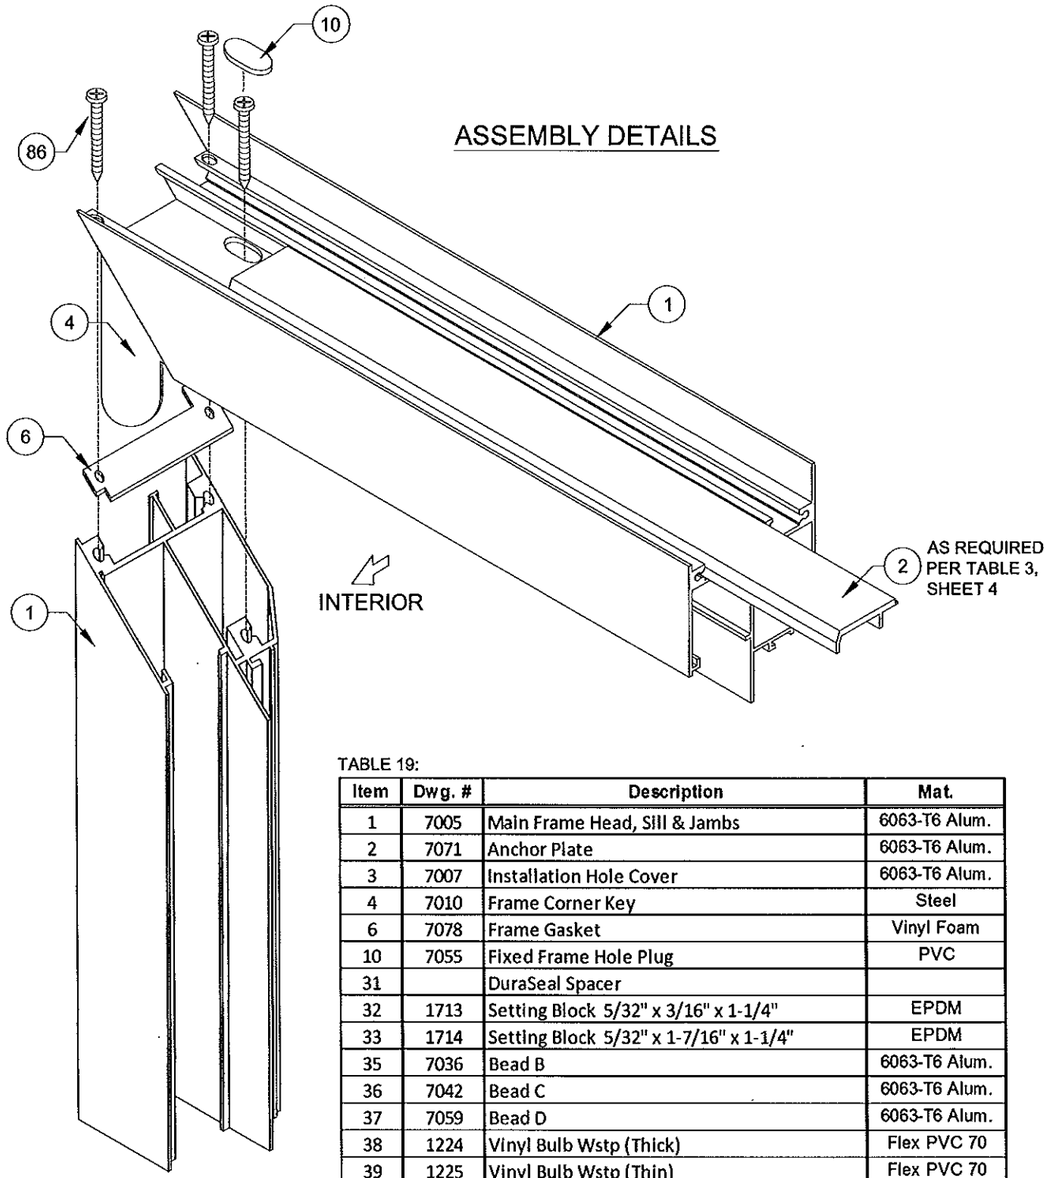

TABLE 19:

Item	Dwg. #	Description	Mat.
1	7005	Main Frame Head, Sill & Jambs	6063-T6 Alum.
2	7071	Anchor Plate	6063-T6 Alum.
3	7007	Installation Hole Cover	6063-T6 Alum.
4	7010	Frame Corner Key	Steel
6	7078	Frame Gasket	Vinyl Foam
10	7055	Fixed Frame Hole Plug	PVC
31		DuraSeal Spacer	
32	1713	Setting Block 5/32" x 3/16" x 1-1/4"	EPDM
33	1714	Setting Block 5/32" x 1-7/16" x 1-1/4"	EPDM
35	7036	Bead B	6063-T6 Alum.
36	7042	Bead C	6063-T6 Alum.
37	7059	Bead D	6063-T6 Alum.
38	1224	Vinyl Bulb Wstp (Thick)	Flex PVC 70
39	1225	Vinyl Bulb Wstp (Thin)	Flex PVC 70
50		Dow 899 Silicon Backbedding	
70	134	Add-on Flange	6063-T6 Alum.
71	7004	Casement Frame Assy Tube	6063-T6 Alum.
86		#8 X 1-1/2" Quad Pn SMS Stainless Steel	Stainless Steel
90		#12 x 1" Ph. Pn. TEK	Stainless Steel

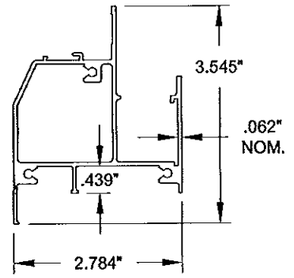

1 FRAME HEAD, SILL & JAMB
#7005, 6063-T6

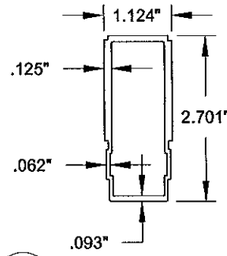

71 FRAME ASSEMBLY TUBE
#7004, 6063-T6

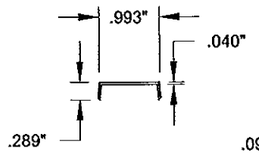

3 INST. HOLE COVER
#7007, 6063-T6



2 ANCHOR PLATE
#7071, 6063-T6

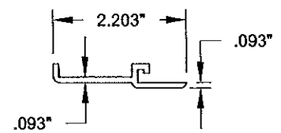

70 ADDON FLANGE
#134, 6063-T6



35 BEAD B
#7036, 6063-T6



36 BEAD C
#7042, 6063-T6



37 BEAD D
#7059, 6063-T6

ANTHONY LYNN MILLER
LICENSE
No. 58705
STATE OF FLORIDA
PROFESSIONAL ENGINEER
A. LYNN MILLER, P.E.
P.E.# 58705

PGT®

1070 TECHNOLOGY DRIVE
N. VENICE, FL 34275
P.O. BOX 1529
NOKOMIS, FL 34274

CERT. OF AUTH. #29296

Approved as complying with the Florida Building Code
Date APR 11, 2013
NOA# 12-1218.11
Miami Dade Product Control
By Manuel Perez

Revised By:	Date:	Revision:
Revised By:	Date:	Revision:

Description: BOM AND EXTRUSIONS

Drawn By: J ROSOWSKI

Title: FIXED CASEMENT WINDOW DETAILS - LM

Date: 08/08/12

Series/Model:	Scale:	Sheet:	Drawing No.	Rev:
CA-740	NTS	11 OF 11	MD-CA740F-LM	