



BUILDING CODE COMPLIANCE OFFICE (BCCO)  
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908

**NOTICE OF ACCEPTANCE (NOA)**

[www.buildingcodeonline.com](http://www.buildingcodeonline.com)

Stanley Access Technologies  
65 Scott Swamp Road  
Farmington, CT 06032

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

**DESCRIPTION:** Series "3000 Dura Glide" Aluminum (MS) Automatic Sliding Glass Door w/ Breakout-NI

**APPROVAL DOCUMENT:** Drawing No. 05-SAT-0026, titled "Dura-Glide series 3000, Automatic Sliding Glass Door", sheets 1 through 4 of 4 prepared by Frank L. Bennardo, P. E. Inc. Consulting Engineers, dated 10-14-2005, signed and sealed by Frank L. Bernando, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

**MISSILE IMPACT RATING:** None. Approved Shutters complying w/FBC, as applicable are required

**Limitation:** Electrical devices are not part of this approval and must be reviewed by corresponding authority.

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises & supersedes NOA # 03-0527.11 and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by Ishaq I. Chanda, P.E.



NOA No 05-0817.16  
Expiration Date: April 21, 2008  
Approval Date: November 03, 2005  
Page 1

10/11/05

**Stanley Access Technologies**

**NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED**

- A. DRAWINGS** (*Transferred from NOA# 03-0527 11/#99-1203.06*)
1. Manufacturers die drawings and sections.
  2. Drawing No. **05-SAT-0026**, titled "Dura-Glide series 3000, Automatic Sliding Glass Door", sheets 1 through 4 of 4 prepared by Frank L. Bennardo, P. E. Inc. Consulting Engineers, dated 10-14-2005, signed and sealed by Frank L. Bernando, P.E.
- B. TESTS** (*Transferred from NOA# 03-0527 11/#99-1203.06*) Original test conducted per SFBC, PA 202 now termed as TAS 202-94
1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94  
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94  
3) Water Resistance Test, per FBC, TAS 202-94 (Not performed)  
4) Forced Entry Test, per FBC 2411 3.2.1 and TAS 202-94
- Along with installation diagram of an automatic aluminum sliding glass door with fixed panels, prepared by Fenestration Testing Laboratory Test Report No. FTL2243 (99098) dated October 12, 1999 signed and sealed by Aldo P. Gonzales, P.E. revised with addendum letter dated 02-29-00 signed and sealed by Aldo P. Gonzales, P.E.)
- C. CALCULATIONS**
1. Anchor Verification Calculations, complying w/ FBC-2004, dated 07-22-2005, prepared, signed and sealed by Frank L. Bennardo, P. E.
  2. Anchor verification calculations, prepared by A.L. Bromily P. E. dated 08/04/99, revised 03-21-00, signed & sealed by William D. Cook, P.E. (*NOA# 03-0527 11*)
  3. Glazing complies with ASTM E-1300-02
- D. QUALITY ASSURANCE**
1. Miami Dade Building Code Compliance Office (BCCO).
- E. MATERIAL CERTIFICATIONS**
1. **None**
  2. Notice of Acceptance No. **03-0916.02** issued to issued to Nebula Glass int'l Inc., for "Glasslam Safety plus laminated glass", expiring on 09/09/2008
- Note: (The application of this glazing is for **Non-Impact** application only, will requires hurricane protection system)
- F. STATEMENTS** (*Transferred from NOA# 03-0527 11/#99-1203.06*)
1. Statement letter of anchor verification compliance to FBC-2004, dated August 12, 2005, signed by Frank L. Bennardo, P. E.
  2. Statement letter of conformance and "no financial interest", dated 08-03-2005, signed and sealed by Frank L. Bennardo, P.E.
  3. Statement letter of compliance part of test report, dated Feb 29, 2000 issued by Fenestration testing laboratory, signed and sealed by Aldo P. Gonzales, P.E
  4. Addendum letter dated 02-29-00 for test report FTL 2243 (99098) issued by Fenestration testing laboratory, signed and sealed by Aldo P. Gonzales, P.E.
- G. OTHER**
1. *This NOA revises & supersedes NOA # 03-0527 11, expiring April 21, 2008*
  2. Notice of Acceptance No. **03-0527 11**, issued to Stanely Access Technology, expiring on 04/21/08.
  3. Previous NOA(s) associated with this file are #03-0527.11 and 99-1203.06.

*Ishaq I. Chanda*  
Ishaq I. Chanda, P.E.

Product Control Examiner  
NOA No 05-0817.16

Expiration Date: April 21, 2008  
Approval Date: November 03, 2005

# DURA-GLIDE 3000

## NON-REINFORCED BI-PART AUTOMATIC SLIDING GLASS DOOR NON-IMPACT RESISTANT

FRANK L. BENNARDO, P.E.  
# PE0046549


10/14/2005

### ANCHOR TYPE


IN CONCRETE: Ø1/4" CONCRETE SCREW EMBEDDED 1 1/2" MIN.  
IN STEEL: 1/4-20 SMS SAE GRADE 5 OR BETTER (NOTE 3/16" STEEL MIN.)  
IN WOOD: #14 WOOD SCREW EMBEDDED 1 1/2" MIN.  
(NOTE: MINIMUM 2X4 WOODBUCK FOR WOOD SCREWS)

### ANCHOR SPACING


SILL: STAGGERED ROW, 3" FROM EACH CORNER WITH REMAINDER SPACED AT 16" O.C.  
HEAD: SINGLE ROW, 4" FROM EACH CORNER WITH REMAINDER SPACED AT 10" O.C.  
JAMBS: SINGLE ROW, 2" FROM BOTTOM CORNER WITH REMAINDER SPACED AT 10" O.C.

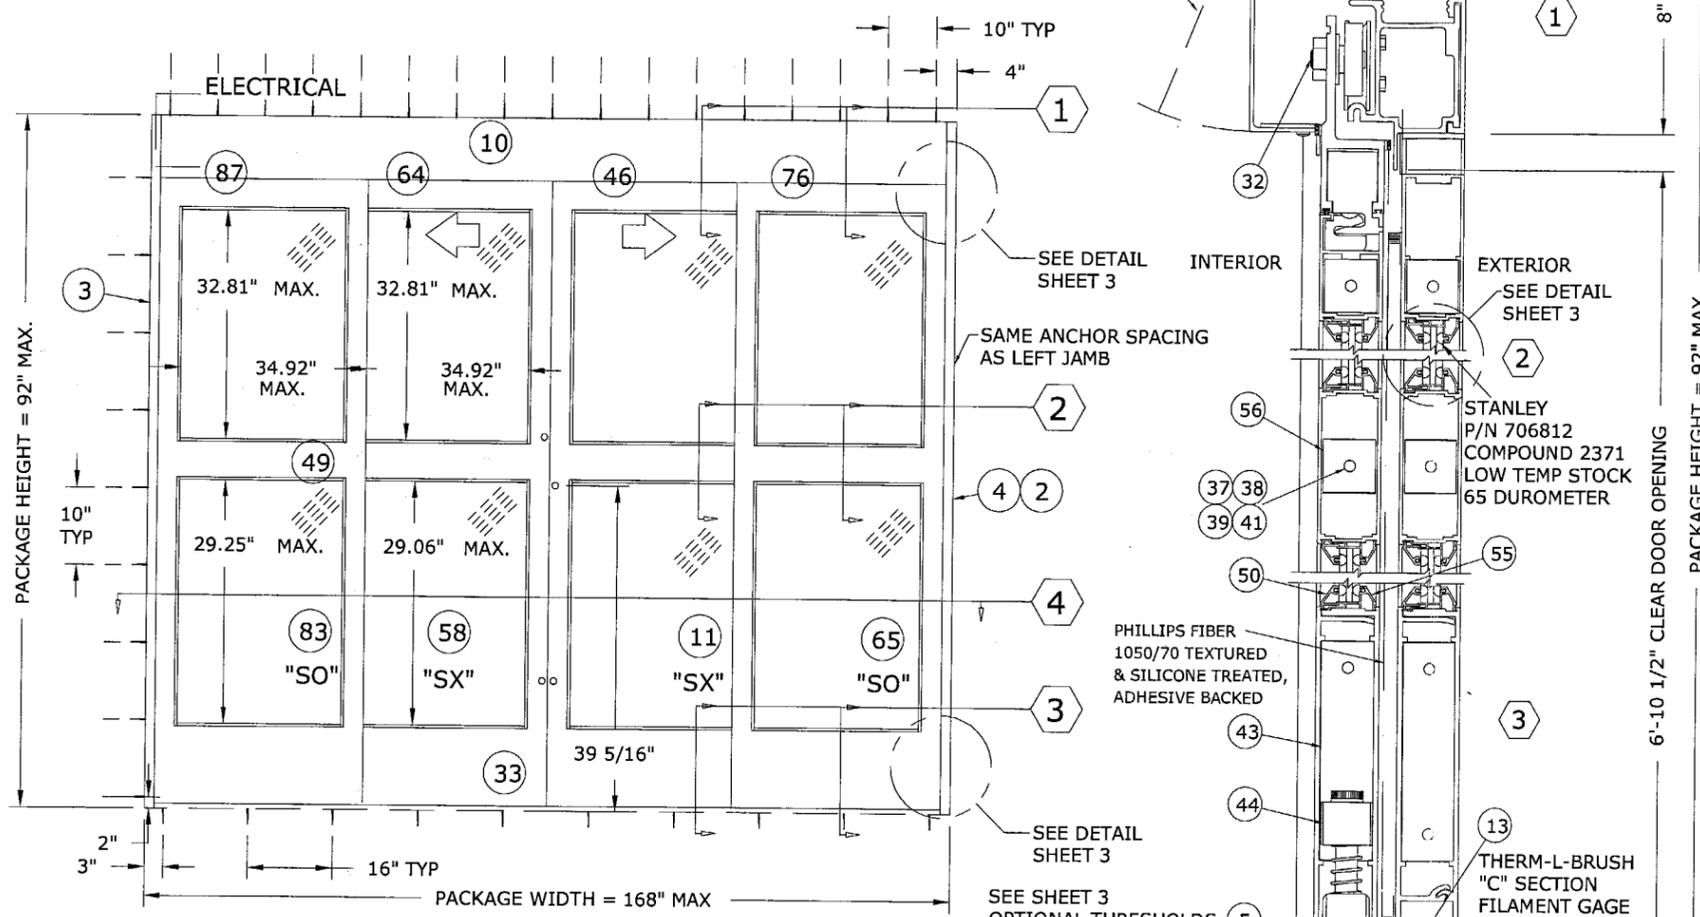


EXTERIOR ELEVATION (OXXO)

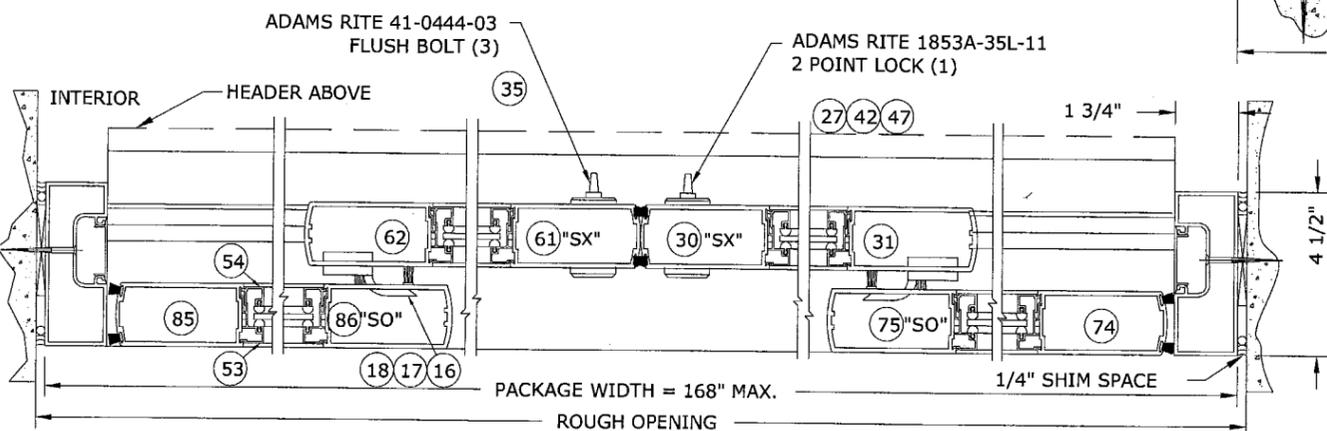

HORIZONTAL SECTION

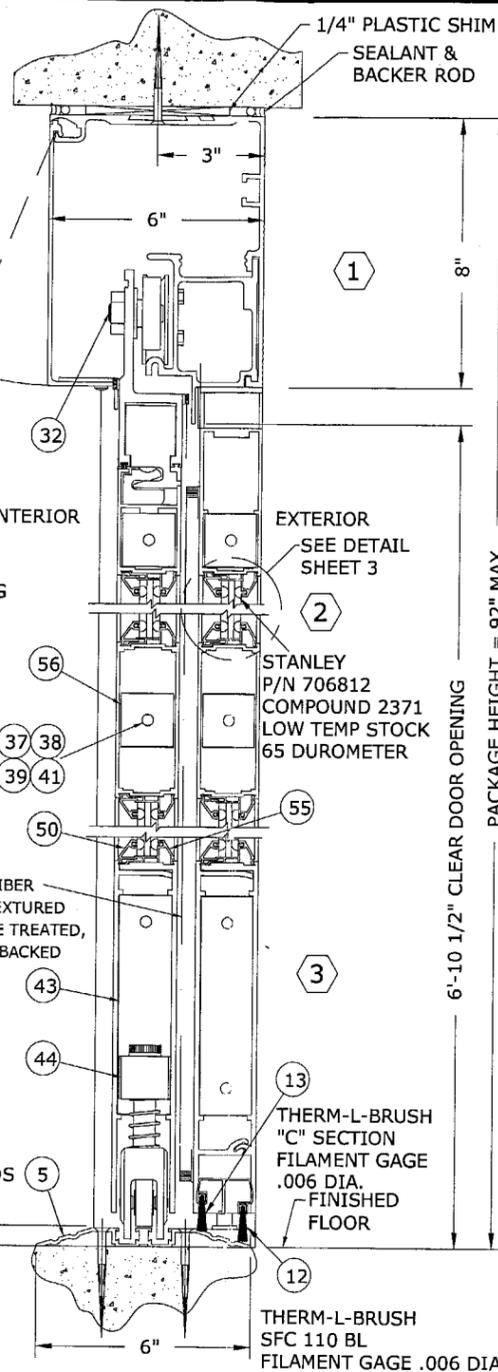

VERTICAL SECTION

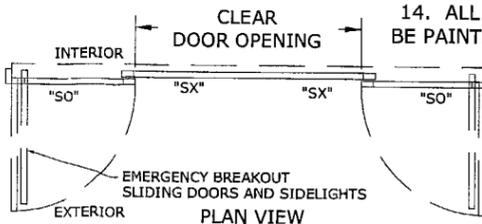

PLAN VIEW

PACKAGE HEIGHT INFORMATION FOR SURFACE APPLICATIONS			
PACKAGE HEIGHT	MASONRY OPENING	CAULKING ALLOWANCE	ACTUAL CLEAR OPG UNDER HEADER
7'-8" (92")	7'-8 1/4" (92 1/4")	1/4"	6'-10 1/2" (82 1/2")

PACKAGE WIDTH INFORMATION						
PKG WIDTH	SLIDING DOOR OPENING	(SX) DOOR WIDTH	(SO) DOOR WIDTH	DOOR TRAVEL	MASONRY OPENING	CAULKING ALLOWANCE
14'-0" (168")	68"	43 1/8"	43 1/8"	34"	14'-1/2" (168 1/2")	1/4" / SIDE

DESIGN PRESSURE RATING (NON-IMPACT)		
	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED.	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED.
POSITIVE	NOT APPROVED	+ 56 PSF
NEGATIVE	NOT APPROVED	- 56 PSF

### GENERAL NOTES:

- THIS PRODUCT HAS BEEN TESTED & DESIGNED IN ACCORDANCE WITH THE REQUIREMENTS OF THE 2004 FLORIDA BUILDING CODE - HIGH VELOCITY HURRICANE ZONE (HVHZ) - AND MIAMI-DADE PROTOCOLS TAS 202 AS A NON-IMPACT RESISTANT SYSTEM.
- NO 33-1/3% INCREASE IN ALLOWABLE STRESS HAS BEEN USED IN THE DESIGN OF THIS SYSTEM. WIND LOAD DURATION FACTOR Cd=1.6 HAS BEEN USED FOR WOOD ANCHOR DESIGN.
- POSITIVE & NEGATIVE DESIGN PRESSURES CALCULATED FOR USE WITH THIS SYSTEM SHALL BE DETERMINED BY OTHERS ON A JOB-SPECIFIC BASIS IN ACCORDANCE WITH THE GOVERNING CODE.
- THE SYSTEM DETAILED HEREIN IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SPECIFIC SITE. WHERE SITE CONDITIONS DIFFER FROM THE CONDITIONS DETAILED HEREIN, A LICENSED ENGINEER OR REGISTERED ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE IN CONJUNCTION WITH THIS DOCUMENT.
- PERMIT HOLDER SHALL VERIFY THE ADEQUACY OF THE EXISTING STRUCTURE TO WITHSTAND ADDITIONAL IMPOSED LOADS. WOOD BUCKS NOT BY THIS PRODUCT MANUFACTURER SHALL BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE HOST STRUCTURE.
- THE PRODUCT DETAILED HEREIN HAS BEEN DESIGNED AND TESTED TO THE MAXIMUM SPANS & LOADS SHOWN ON THESE DRAWINGS. REFERENCE FTL TEST REPORT #2443.
- ALL ALUMINUM PARTS ARE 6063-T5 OR 6063-T6 ALUMINUM.
- GLAZING: 1/4" TEMPERED GLASS OR 0.575" GLASSLAM SAFETY PLUS BY NEBULA INTERNATIONAL, INC. (1/4" TEMPERED INNER & OUTER LAYERS WITH 1/8" INTERLAYER).
- ALL UNITS SHALL BE INSTALLED WITH MIAMI-DADE COUNTY APPROVED IMPACT RESISTANT SHUTTERS FOR ALL INSTALLATIONS.
- CORNER PANEL CONSTRUCTION: PANEL CORNERS ARE BUTT JOINTED, SECURED W/ (4) FULL-WIDTH 5/16" THREADED TIE RODS AT TOP RAIL, INTERMEDIATE HORIZONTAL MUNTIN BAR AND BOTTOM RAIL. ALL JOINTS ARE ALSO WELDED.
- GLAZING MATERIAL IN BOTH FIXED & SLIDING PANELS OF ALL SLIDING DOORS SHALL COMPLY WITH THE REQUIREMENTS IN THE PERFORMANCE SPECIFICATIONS & METHODS OF TEST FOR SAFETY GLAZING MATERIALS USED IN BUILDINGS.
- ANCHORS SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS, SPACED AS NOTED HEREIN. ANCHOR EMBEDMENT TO BASE MATERIAL DOES NOT INCLUDE WALL DRESSING OR STUCCO.
- ALL BOLTS & WASHERS SHALL BE ZINC COATED, GALVANIZED, OR STAINLESS STEEL WITH A MINIMUM TENSILE STRENGTH OF 60 KSI, EXCEPT INSTALLATION ANCHORS.
- ALL STEEL IN CONTACT WITH ALUMINUM SHALL BE PAINTED OR COATED.

PRODUCT REVISED  
as complying with the Florida  
Building Code  
Acceptance No 05-0817.16  
Expiration Date APRIL 21, 2008  
By *Lehag I. Chanda*  
Miami Dade Product Control  
Division

FRANK L. BENNARDO, P.E., INC.  
CONSULTING ENGINEERS  
4441 NORTH DIXIE HIGHWAY  
BOCA RATON, FL 33431  
(561) 391-2888 FAX: (561) 391-2862  
WWW.FLBENGINEERING.COM  
CERTIFICATE OF AUTHORIZATION: #9885

**STANLEY**  
ACCESS TECHNOLOGIES  
65 SCOTT SWAMP ROAD  
FARMINGTON, CT 06032  
DURA-GLIDE SERIES 3000  
AUTOMATIC SLIDING GLASS DOORS  
(BI-PART, NON-REINFORCED, NON-IMPACT)

DRWN	CHKD	DATE
		7/3/03
		8/12/05

05-SAT-0026

PAGE SCALE: -  
DESCRIPTION:  
STANLEY DWG #413834

10/14/2005 - 8:35am changley F:\01 Project Files\Stanley (SAT)\2005 Jobs\05-SAT-0026 Dura Glide 3000, Non-Reinf, Non-Impact (NOA).dwg

10/14/2005 - 8:42am clangley F:\01 Project Files\Stanley (SAT)\2005 Jobs\05-SAT-0026 Dura Glide 3000, Non-Reinf, Non-Impact (NOA)\05-SAT-0026\_00c Dura Glide 3000, Non-Reinf, Non-Impact (NOA).dwg


**ANCHOR TYPE**

IN CONCRETE: Ø1/4" CONCRETE SCREW EMBEDDED 1 1/2" MIN.  
 IN STEEL: 1/4-20 SMS SAE GRADE 5 OR BETTER (NOTE 3/16" STEEL MIN.)  
 IN WOOD: #14 WOOD SCREW EMBEDDED 1 1/2" MIN.


(NOTE: MINIMUM 2X4 WOODBUCK FOR WOOD SCREWS)

**ANCHOR SPACING**


SILL: STAGGERED ROW, 3" FROM EACH CORNER WITH REMAINDER SPACED AT 16" O.C.  
 HEAD: SINGLE ROW, 3" FROM EACH CORNER WITH REMAINDER SPACED AT 10" O.C.  
 JAMBS: SINGLE ROW, 2" FROM BOTTOM CORNER WITH REMAINDER SPACED AT 10" O.C.

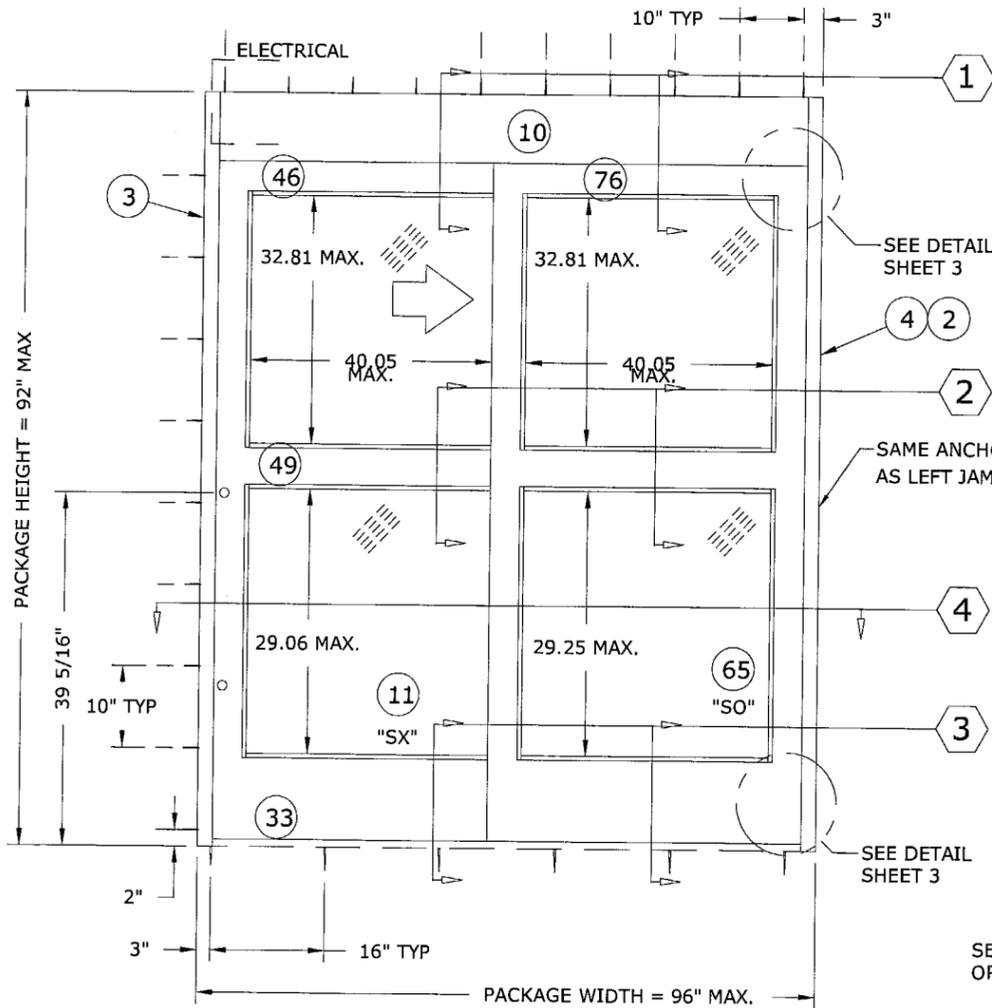


**EXTERIOR ELEVATION (XO)**

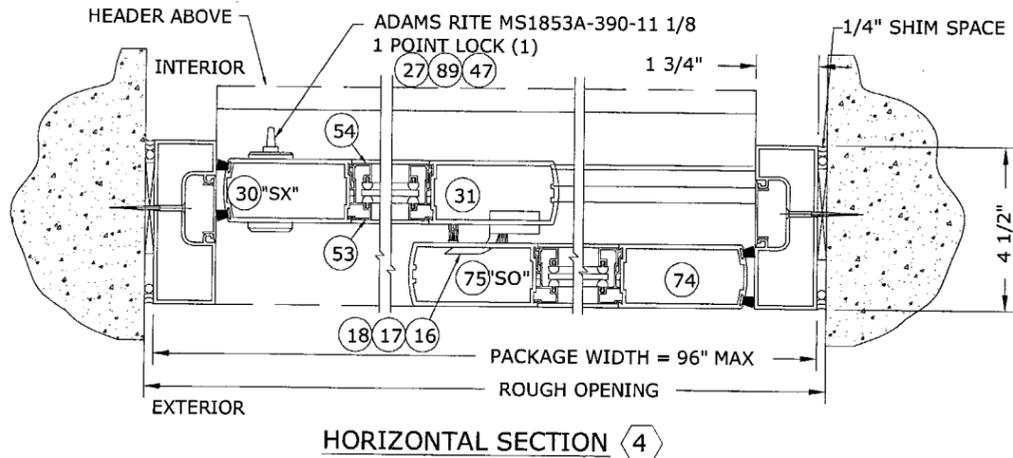

**HORIZONTAL SECTION**

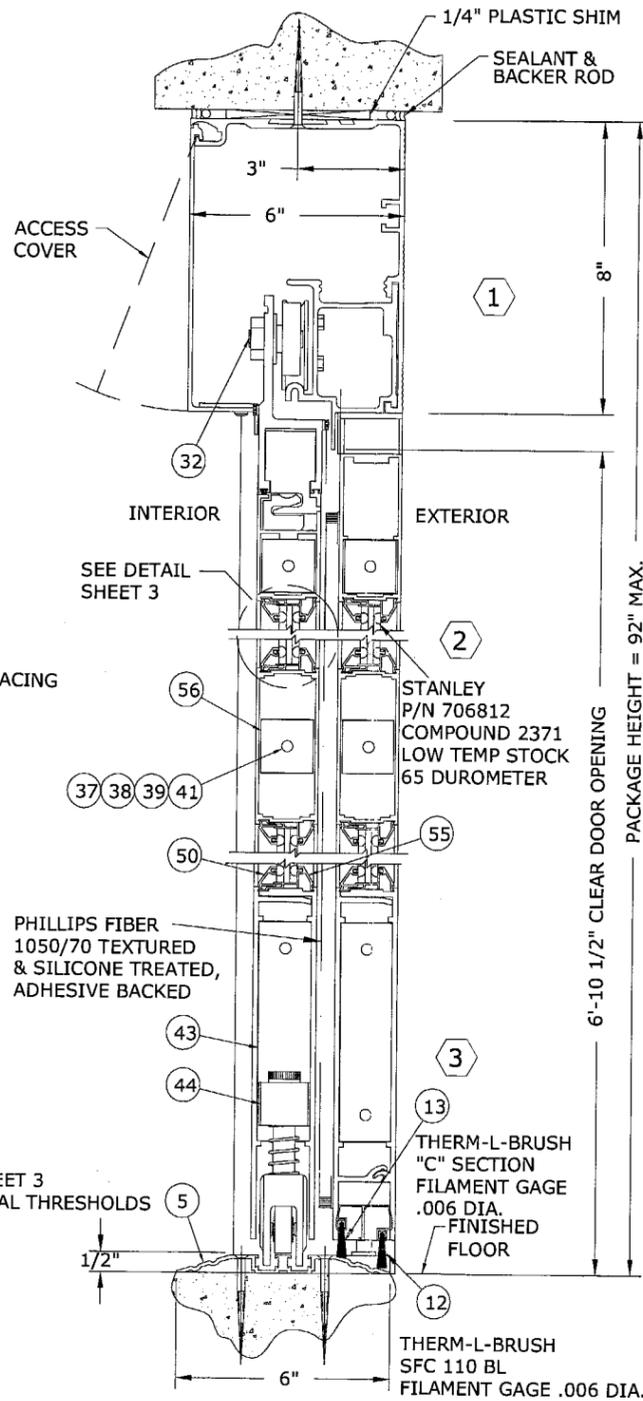

**VERTICAL SECTION**

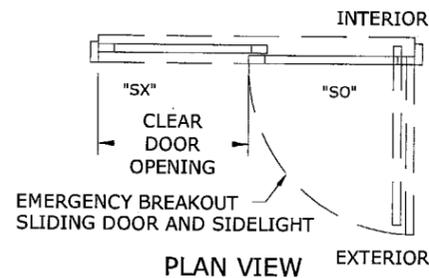

PACKAGE HEIGHT INFORMATION FOR SURFACE APPLICATIONS			
PACKAGE HEIGHT	MASONRY OPENING	CAULKING ALLOWANCE	ACTUAL CLEAR OPG UNDER HEADER
7'-8" (92")	7'-8 1/4" (92 1/4")	1/4"	6'-10 1/2" (82 1/2")

PACKAGE WIDTH INFORMATION						
PKG WIDTH	SLIDING DOOR OPENING	(SX) DOOR WIDTH	(SO) DOOR WIDTH	DOOR TRAVEL	MASONRY OPENING	CAULKING ALLOWANCE
8'-0" (96")	39 1/4"	48 1/4"	48 1/4"	39 1/4"	8'-1/2" (96 1/2")	1/4" / SIDE

DESIGN PRESSURE RATING (LARGE MISSILE IMPACT)		
	WHERE WATER INFILTRATION REQUIREMENT IS NEEDED.	WHERE WATER INFILTRATION REQUIREMENT IS NOT NEEDED.
POSITIVE	NOT APPROVED	+ 56 PSF
NEGATIVE	NOT APPROVED	- 56 PSF

**GENERAL NOTES:**  
 REFER TO GENERAL NOTED ON SHEET 1

FRANK L. BENNARDO, P.E.  
 # PE0046549

10/14/2005

**FRANK L. BENNARDO, P.E., INC.**  
**CONSULTING ENGINEERS**  
 4441 NORTH DIXIE HIGHWAY  
 BOCA RATON, FL 33431  
 (561) 391-2888 FAX: (561) 391-2862  
 WWW.FLBENGINEERING.COM  
 CERTIFICATE OF AUTHORIZATION: #9885

**STANLEY**  
 ACCESS TECHNOLOGIES  
 65 SCOTT SWAMP ROAD  
 FARMINGTON, CT 06032  
 DURA-GLIDE SERIES 3000  
 AUTOMATIC SLIDING GLASS DOORS  
 (BI-PART, NON-REINFORCED, NON-IMPACT)


DRWN	CHKD	DATE
		7/3/03
		8/12/05

REMARKS  
 INIT ISSUE  
 2004 FBC

**PRODUCT REVISED**  
 as complying with the Florida Building Code  
 Acceptance No. 05-0817.16  
 Expiration Date APRIL 21, 2008  
 By *Shaq I. Charles*  
 Miami Dade Product Control Division


05-SAT-0026  
 PAGE SCALE: -  
 DESCRIPTION:  
 STANLEY DWG #413834

10/14/2005

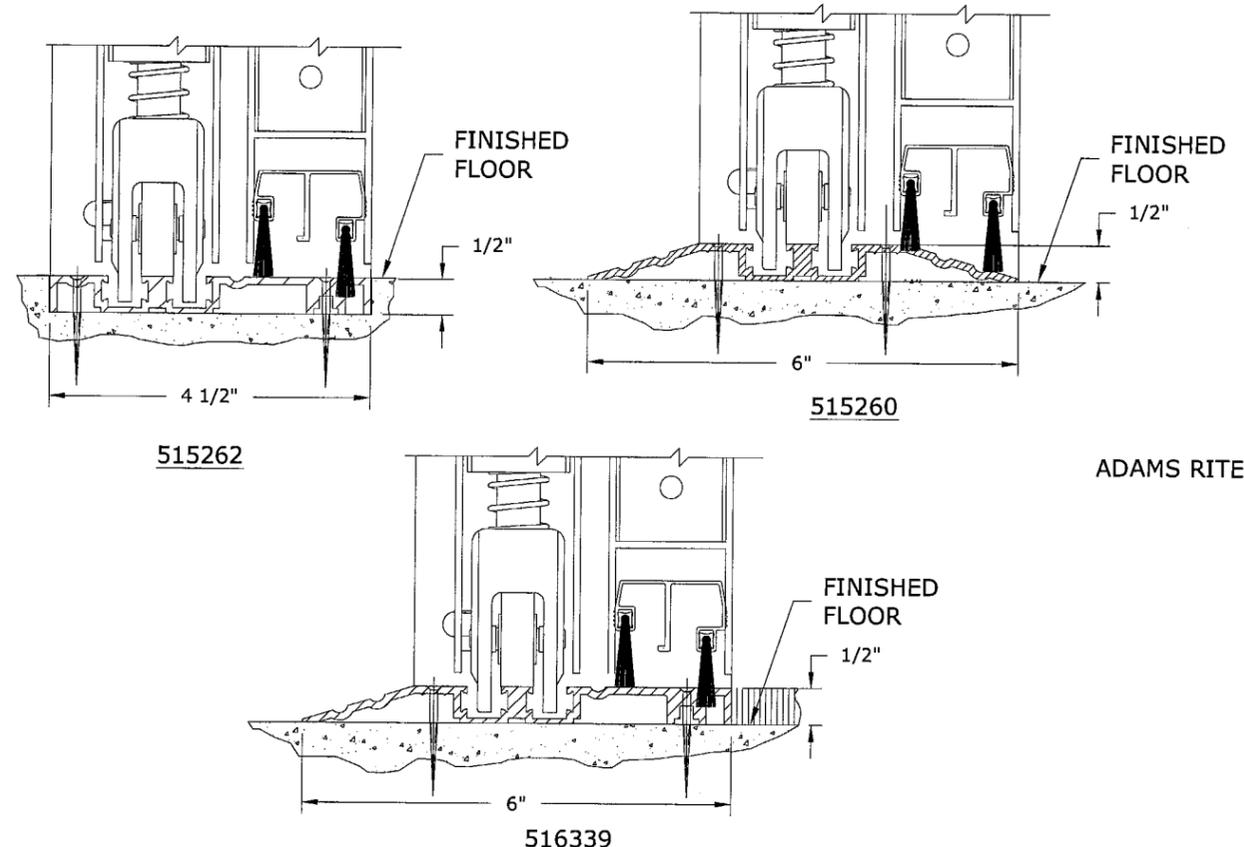


**5 THRESHOLD OPTIONS**


**GLAZING DETAILS**

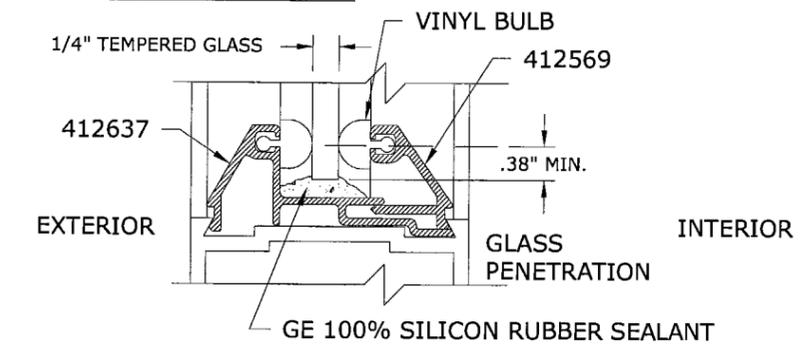

**OPTION 1: 1/4" TEMPERED GLASS**

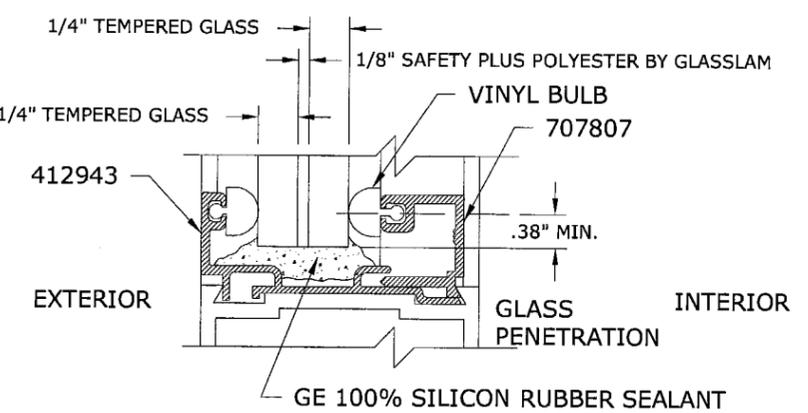

**OPTION 2: GLASSLAM SAFETY PLUS BY NEBULA INTERNATIONAL, INC. (PER CURRENT APPROVED NOA)**

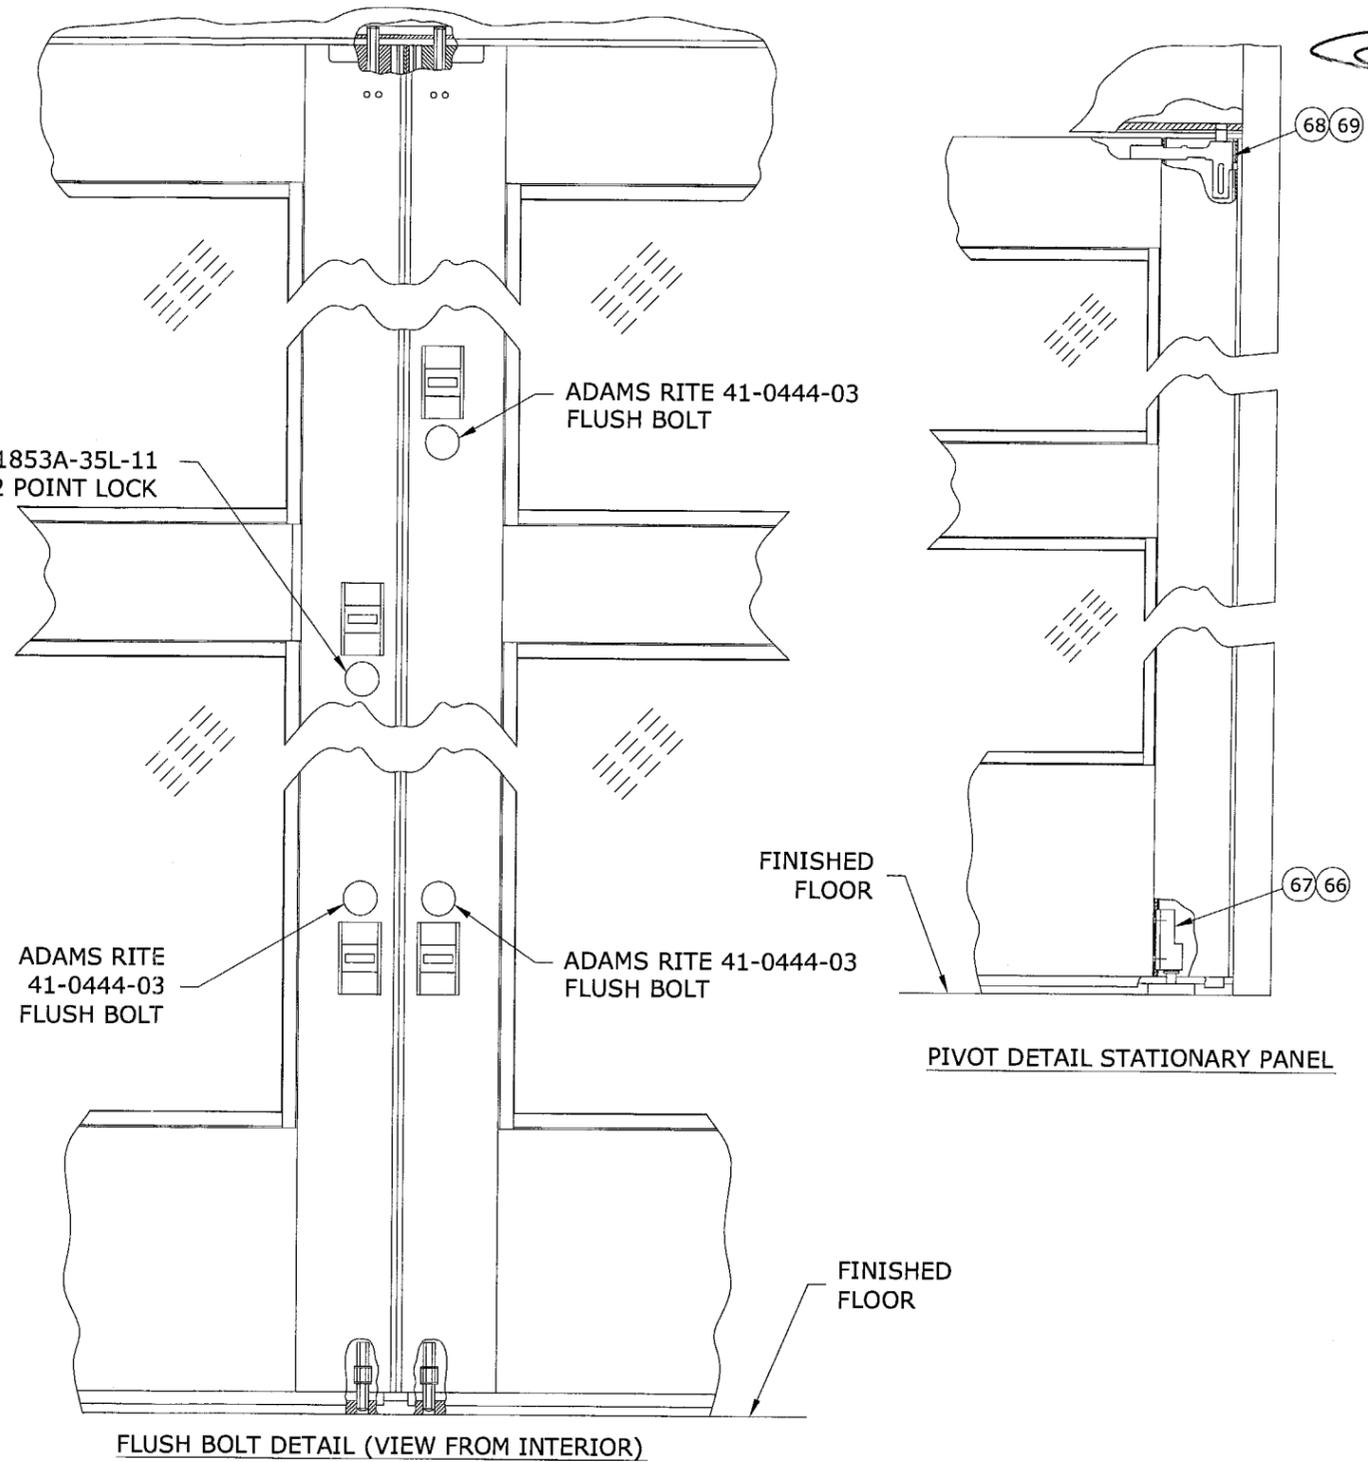

**FLUSH BOLT DETAIL (VIEW FROM INTERIOR)**

**FRANK L. BERNARDO, P.E., INC.**  
**CONSULTING ENGINEERS**  
4441 NORTH DIXIE HIGHWAY  
BOCA RATON, FL 33431  
(561) 391-2888 FAX: (561) 391-2862  
WWW.FLBENGINEERING.COM  
CERTIFICATE OF AUTHORIZATION: #9885

**STANLEY**  
ACCESS TECHNOLOGIES  
65 SCOTT SWAMP ROAD  
FARMINGTON, CT 06032  
DURA-GLIDE SERIES 3000  
AUTOMATIC SLIDING GLASS DOORS  
(BI-PART, NON-REINFORCED, NON-IMPACT)

REMARKS	DATE	DRWN	CHKD
INIT ISSUE	7/9/03		
2004-FBC	8/12/05	CL	FLB

**PRODUCT REVISED**  
as complying with the Florida  
Building Code  
Acceptance No. 05-0817-16  
Expiration Date APRIL 21, 2008  
*By Ismael Chaves*  
Miami Dade Product Control  
Division

**05-SAT-0026**  
PAGE SCALE: -  
DESCRIPTION:  
STANLEY DWG #413834

10/14/2005 - 9:35am clangley F:\01 Project Files\Stanley (SAT)\2005 Jobs\05-SAT-0026 Dura Glide 3000, Non-Reinf, Non-Impact (NOA)\05-SAT-0026\_00c Dura Glide 3000, Non-Reinf, Non-Impact (NOA).dwg

NO. QTY	PART NO.	DESCRIPTION	
1	1	DURA-GLIDE 3000 BI-PART	
2	413089-1	JAMB INSERT	
3	157541	JAMB ASSEMBLY, 4.500 X 1.750 X .100	
4	157542	JAMB ASSEMBLY, 4.500 X 1.750 X .100	
5	515260	THRESHOLD	
	1	516339	THRESHOLD
	1	515262	THRESHOLD
10A	1	515686	HEADER COVER, 8.468 X 1.968 X .109
10B	1	110755	HEADER, 8.000 X 6.000 X .140
10C	1	515056	HEADERTRACK TUBE, 4.624 X 3.110 X .125
11	1	157508	DOOR PANEL, SX - RH
12	1	713241	THERM-L-BRUSH
13	1	710739	THERM-L-BRUSH
14	2	713416	FLUSH BOLT GUIDE
15	12	312063499	SCREW, FHM-PH 1/4-20 X 1/2 LG
16	2	713823	REINFORCEMENT, SECURITY HOOK, OUTSIDE
17	2	713822	REINFORCEMENT, SECURITY HOOK, INSIDE
18	2	713821	HOOK, SECURITY, MEDIUM STILE
19	1	380901499	NUT, HEX JAM, 5/16-18
20	1	353367000	SCREW, SHC-SK, 5/16-18 X 2.0 LG
21	1	412638	LABEL, CAUTION
22	2	413162	EXIT INDICATOR
23	1	412571	BLOCK-ANCHOR
24	1	412572	SPACER-PILLOW BLOCK
25	2	353349000	SCREW, SHM-SK, 1/4-20 X 1.0 LG
26	2	312073499	SCREW, FHM-PH, 1/4-20 X 2.0 LG
27	2	709221	LOCK, THUMBTURN
28	2	351801499	SCREW, SHC-SK, 1/4-20 X 3/8 LG
29	4	713321	SCREW, FHC-SK, #10-32 X 3/8 LG
30	1	157523	STILE, LOCK-SX, RH, 3.531 X 1.750 X .125
31	1	157517	STILE, PIVOT-SX, RH, 3.531 X 1.750 X .125
32	1	111879-2	HANGER ASSEMBLY-SX, RH
33A	1	516329	RAIL, BOTTOM-SX, 9.625 X 1.595 X .140
33B	1	516630	RAIL, BOTTOM-SX, 9.625 X 1.530 X .140
34	4	312008960	SCREW, FHM-PH, #8-32 X 5/8LG
35	1	413821	FLUSH BOLT, ADAMS RITE 41-0444-03
36	2	413811	ROD ASSY, THROWBOLT ADAMS RITE 31-0278
37	6	711475	WASHER, TIE ROD
38	4	711474	NUT, TIE ROD
39	4	711483	ROD, TIE, 5/16-18 UNC-1A, STEEL, FULL LENGTH OF RAIL
40	16	706812	SEAL, WEATHER-LENGTH AS REQUIRED
41	8	706233	NUT, FLANGED
42	1	413810	LOCK, 2 POINT ADAMS RITE 1853A-35L-11, A1-0464-03
43	2	516338	CLIP, GUIDE
44	1	515265	BOTTOM GUIDE ASSEMBLY
45	1	516224	DETENT-DOOR PORTION
46	1	516643-1	RAIL, TOP-SX, RH, 2.875 X 1.735 X .093
47	2	706668	LOCK, CYLINDER
48	1	413805	SWEEP HOLDER
49	1	413741	BAR, MUNTIN, 4.250 X 1.735 X .093
50	4	412911-3	STOP, GLASS-HORIZONTAL, .625 X .462 X .051
51	2	412909-10	STOP, GLASS-VERTICAL, .625 X .519 X .051
52	2	412908-7	STOP, GLASS-VERTICAL, 1.551 X .649 X .041
53	2	412908-6	STOP, GLASS-VERTICAL, 1.551 X .649 X .041
54	2	412909-9	STOP, GLASS-VERTICAL, .625 X .519 X .051
55	4	412910-3	STOP, GLASS-HORIZONTAL, 1.551 X .649 X .041
56	4	412479	CLIP, GUIDE
57	1	411624	PILE, ADHESIVE BACKED

NO. QTY	PART NO.	DESCRIPTION	
58	1	157509	DOOR PANEL, SX - LH
			SAME AS 157508 EXCEPT AS NOTED
59	2	31251960	SCREW, FHM-PH, #10-32 X 1/2 LG
60	1	516552	STRIKE PLATE ASSEMBLY
61	1	157502	STILE, STRIKE-SX, LH, 3.531 X 1.750 X .125
62	1	157520	STILE, PIVOT-SX, LH, 3.531 X 1.750 X .125
63	1	111879-1	HANGER ASSEMBLY-SX, LH
64	1	516643-2	RAIL, TOP-SX, LH, 2.875 X 1.735 X .093
65	1	157510	DOOR PANEL, SO - RH
			SAME AS 157508 EXCEPT AS NOTED
66	2	312066499	SCREW, FHM-PH, 1/4-20 X 3/4 LG
67	1	410100	BOTTOM PIVOT-RH
68	5	713844	PIVOT-SELF TAPPING SCREW
69	1	413829	PIVOT ASSEMBLY (UPPER)-SO
70	2	711598	WIRE CLIP
71	1	712175	LOGO, STANLEY
72	1	711463-A	BREAK OUT SWITCH (MAGNET)
73	4	312024960	SCREW, FHM-PH, #10-24 X 3/8 LG
74	1	157521-1	STILE, TRAILING, SO-RH, 3.531 X 1.750 X .125
75	1	157503	STILE, LEAD, SO-RH, 3.531 X 1.750 X .125
76	1	516693-1	RAIL, TOP, SO-RH, 5.000 X 1.735 X .093
77	2	708867	BALL DETENT ASSEMBLY
79	1	411709	DOOR HOLDER ASSEMBLY
80	2	312068499	SCREW, FHM-PH, 1/4-20 X 1.0 LG
81	2	713223	RIVNUT
82	1	413830	DAMPER ASSEMBLY
83	1	157511	DOOR PANEL, SO - LH
			SAME AS 157510 EXCEPT AS NOTED
84	1	410101	BOTTOM PIVOT-LH
85	1	157521	STILE, TRAILING, SO-LH, 3.531 X 1.750 X .125
86	1	157504	STILE, LEAD, SO-LH, 3.530 X 1.750 X .125
87	1	516693-2	RAIL, TOP, SO-LH, 5.000 X 1.735 X .093
88	1		DURA-GLIDE 3000 SINGLE SLIDE
			SAME AS BI-PART EXCEPT AS NOTED
89	1	515193	LOCK, 2 POINT ADAMS RITE 1853A-390
90	2	312004960	SCREW, FHM-PH, #8-32 X 3/8 LG

**PRODUCT REVISED**  
 as complying with the Florida  
 Building Code  
 Acceptance No 05-0817-16  
 Expiration Date APRIL 21, 2008  
 By Ishag I. Chanda  
 Miami Door Product Control  
 Division

REMARKS	DRWN	CHKD	DATE
INIT ISSUE	-	-	7/3/03
2004 FEB	CL	FLB	8/12/05
	-	-	-
	-	-	-
	-	-	-

**05-SAT-0026**  
 PAGE SCALE: -  
 DESCRIPTION:  
 STANLEY DWG #413834

**STANLEY®**  
 ACCESS TECHNOLOGIES  
 65 SCOTT SWAMP ROAD  
 FARMINGTON, CT 06032  
 DURA-GLIDE SERIES 3000  
 AUTOMATIC SLIDING GLASS DOORS  
 (BI-PART, NON-REINFORCED, NON-IMPACT)

FRANK L. BENNARDO, P.E., INC.  
 CONSULTING ENGINEERS  
 4441 NORTH DIXIE HIGHWAY  
 BOCA RATON, FL 33431  
 (561) 391-2888 FAX: (561) 391-2862  
 WWW.FLBENGINEERING.COM  
 CERTIFICATE OF AUTHORIZATION: #9885

FRANK L. BENNARDO, P.E.  
 # PE0046549  
 10/14/2005