



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Tremco, Inc.
3735 Green Road
Beachwood, OH 44122

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER- Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: TremLock SL 24 Ga. (0.024" min. & 60 ksi min. yield strength) Steel Roof Panels System

APPROVAL DOCUMENT: Drawing #13-0716.14, titled "TremLock SL 24 GA. Roof Details", prepared by Force Engineering & Testing, Inc., dated November 12, 2013, signed and sealed by Terrence E. Wolfe, P.E., on January 30, 2014, bearing the Miami-Dade County Product Control Approval stamp with the Notice of Acceptance number and the approval date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Each panel shall bear a permanent label with the manufacturer's name or logo, Clinton, ILL, Peachtree City, GA, or Adelanto, CA and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of this page 1, evidence submitted page E-1 as well as approval document mentioned above. The submitted documentation was reviewed by Helmy A. Makar, P.E., M.S.



Helmy A. Makar
07/24/2014

NOA No. 13-0716.14
Expiration Date: 04/17/2018
Approval Date: 07/24/2014
Page 1

Tremco, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS:

1. *Drawing #13-0716.14, titled " TremLock SL 24 GA. Roof Details ", prepared by Force Engineering & Testing, Inc., dated November 12, 2013, signed and sealed by Terrence E. Wolfe, P.E., on January 30, 2014.*

B. TESTS

1. *See NOA # 13-0430.06.*

C. CALCULATIONS:

1. *See NOA # 13-0430.06.*

D. QUALITY ASSURANCE


1. *By Miami-Dade County Department of Regulatory and Economic Resources.*

E. MATERIAL CERTIFICATIONS:





1. *See NOA # 13-0430.06.*

F. STATEMENTS



1. *Florida Building Code, 2010 Edition, compliance letter prepared by Force Engineering & Testing, Inc., dated July 18, 2014, signed and sealed by Terrence E. Wolfe, P.E., on July 18, 2014.*



Helmy A. Makar, P.E., M.S.
Product Control Unit Supervisor
NOA No. 13-0716.14
Expiration Date: 04/17/2018
Approval Date: 07/24/2014

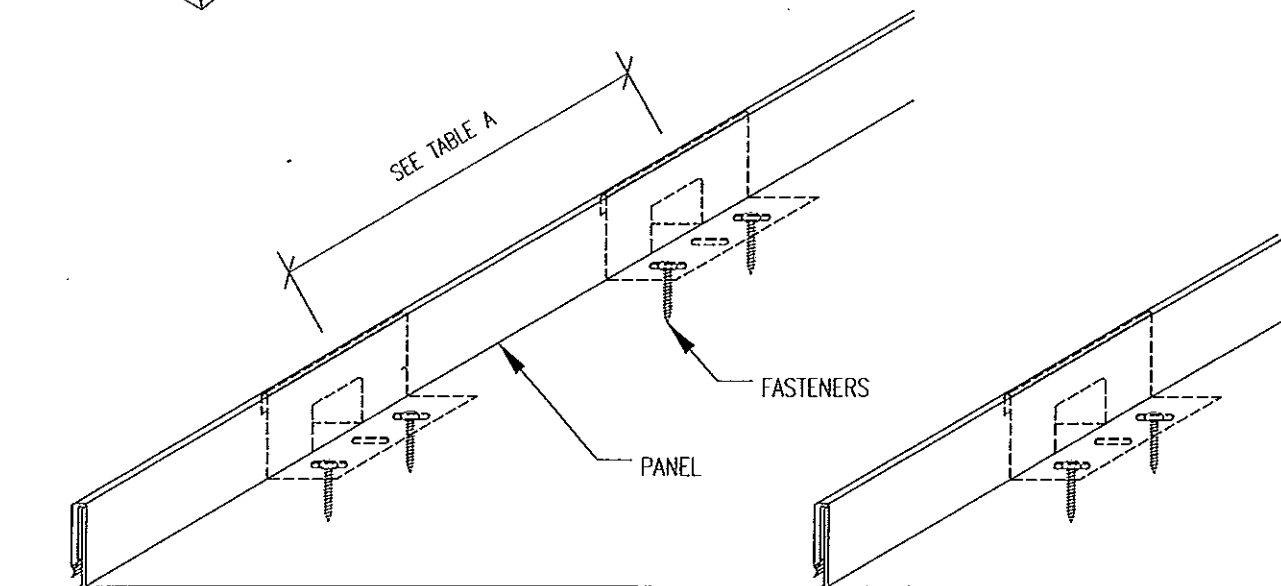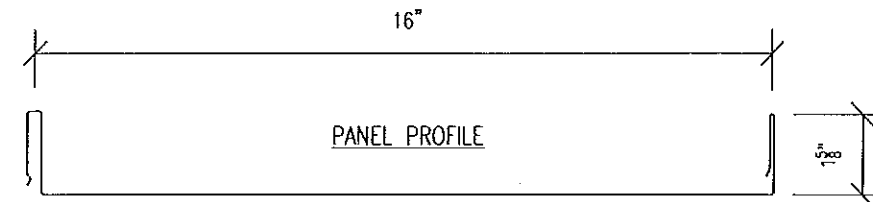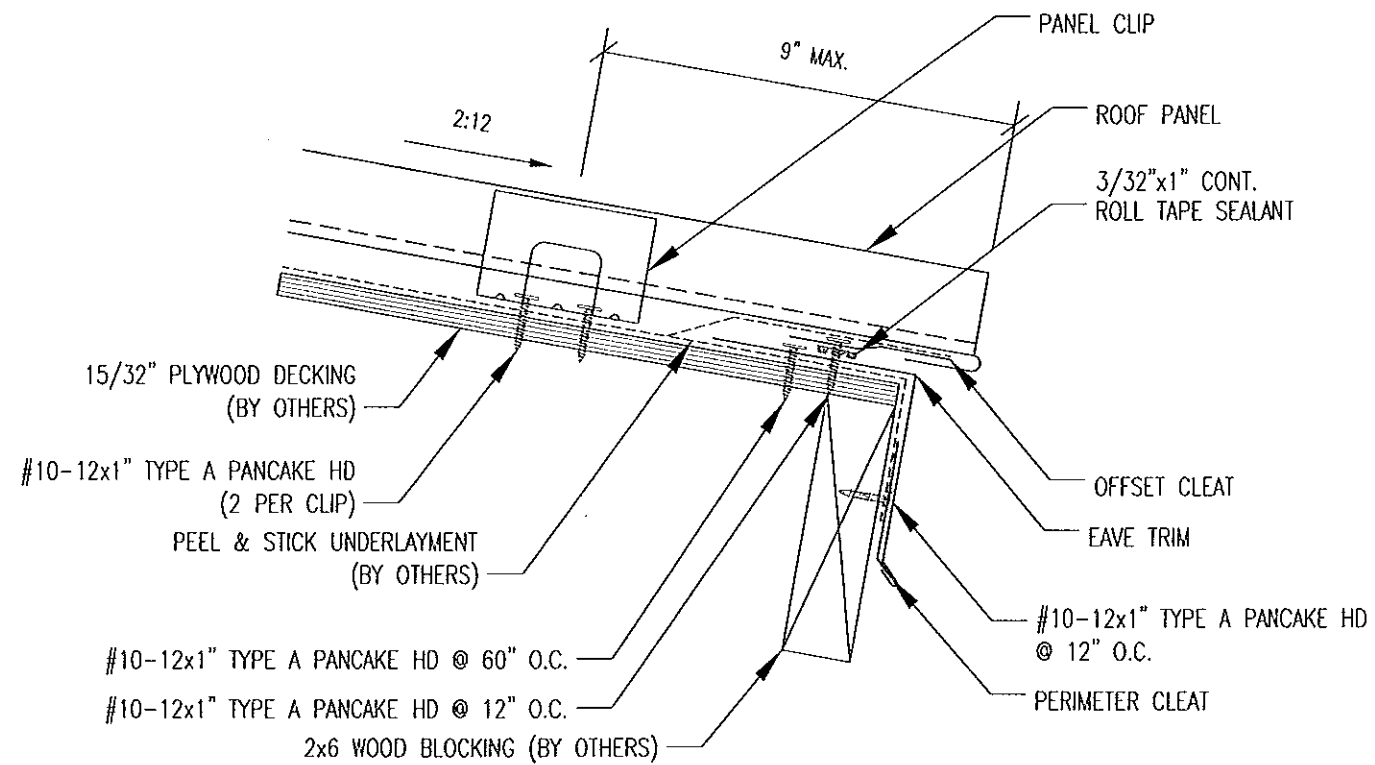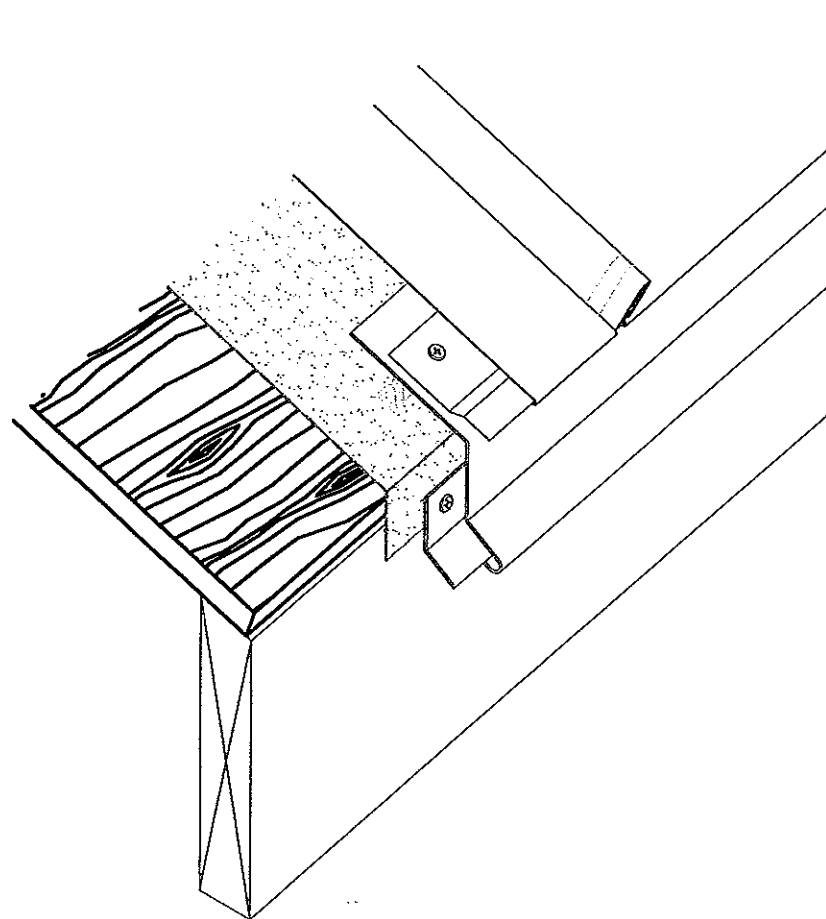

PANEL WITH CLIP & FASTENERS - ISO

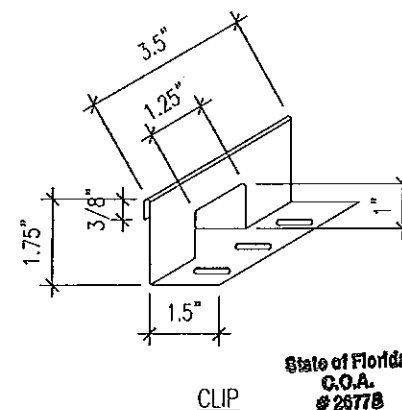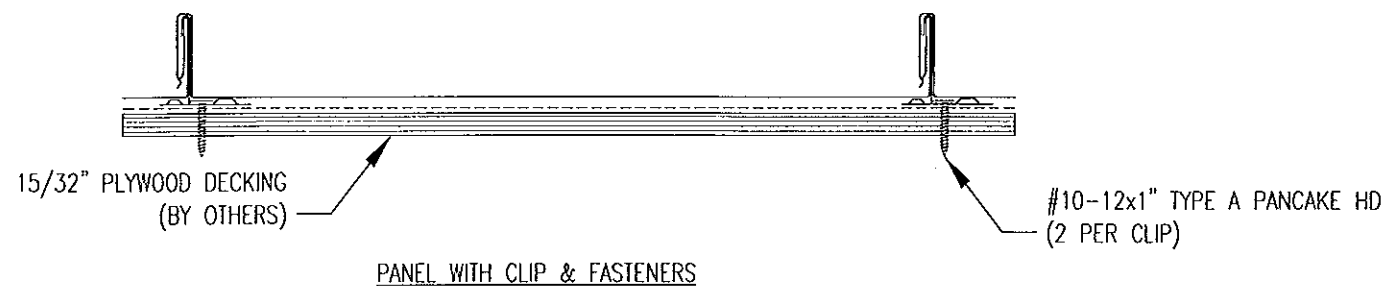

State of Florida
C.O.A.
#26778

TABLE A MAXIMUM DESIGN PRESSURES		
ROOF AREAS	FIELD	PERIMETER AND CORNER *
MAXIMUM DESIGN PRESSURES	-54.25 PSF	-71.25 PSF
MAXIMUM CLIP SPACING	36" O.C.	12" O.C.


* EXTRAPOLATION SHALL NOT BE ALLOWED

LOW EAVE




Approved as complying with the
Florida Building Code
Date 07/24/2014
NOA# 13-071614
Miami Dade Product Control

By Heather P. Wolfe


MANUFACTURING ENGINEER		TERRENCE E. WOLFE, P.E.	
FLORIDA REGISTRATION NO.		44923	
PROJECT		DADE COUNTY TESTING	
SHEET TITLE		TREMLOCK SL 24ga. ROOF DETAILS	
LOCATION		DADE COUNTY, FLORIDA	
REL	BY	REVISION	DATE
		FOR APPROVAL	11-12-13
DATE: 11-12-13		SCALE: N.T.S.	
DRAWN BY: [Signature]		CHECKED BY: [Signature]	
PROJECT NUMBER: 13-0716.14		SHEET NUMBER: E1 of 5	

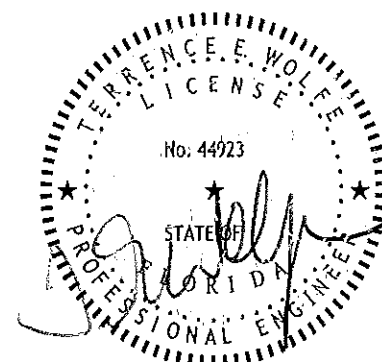

JAN 30 2014

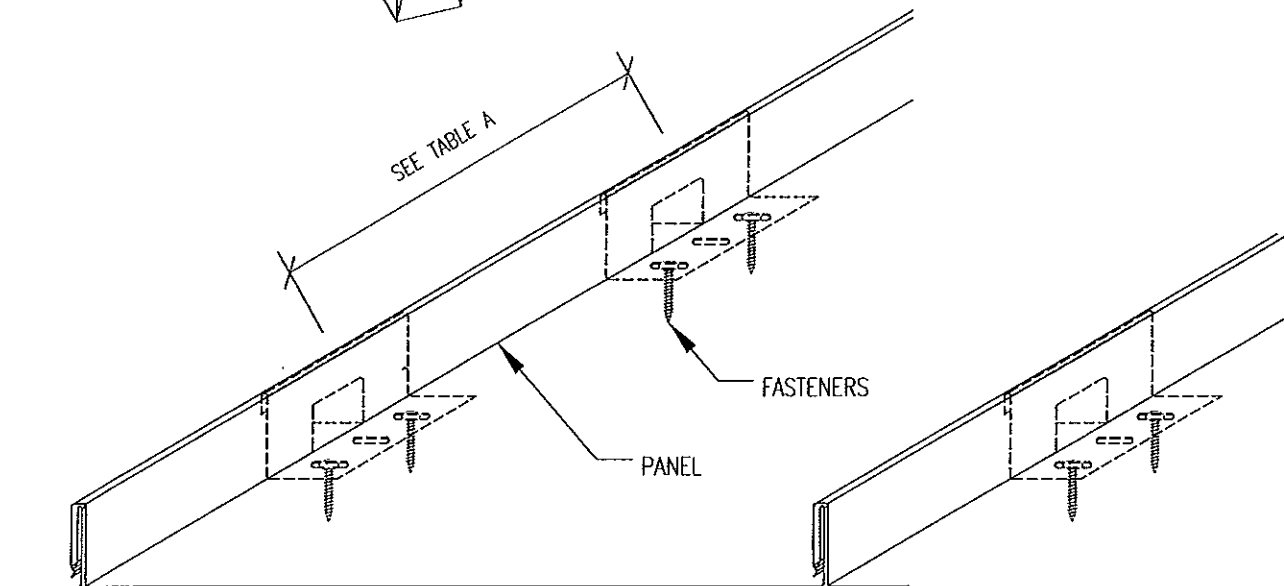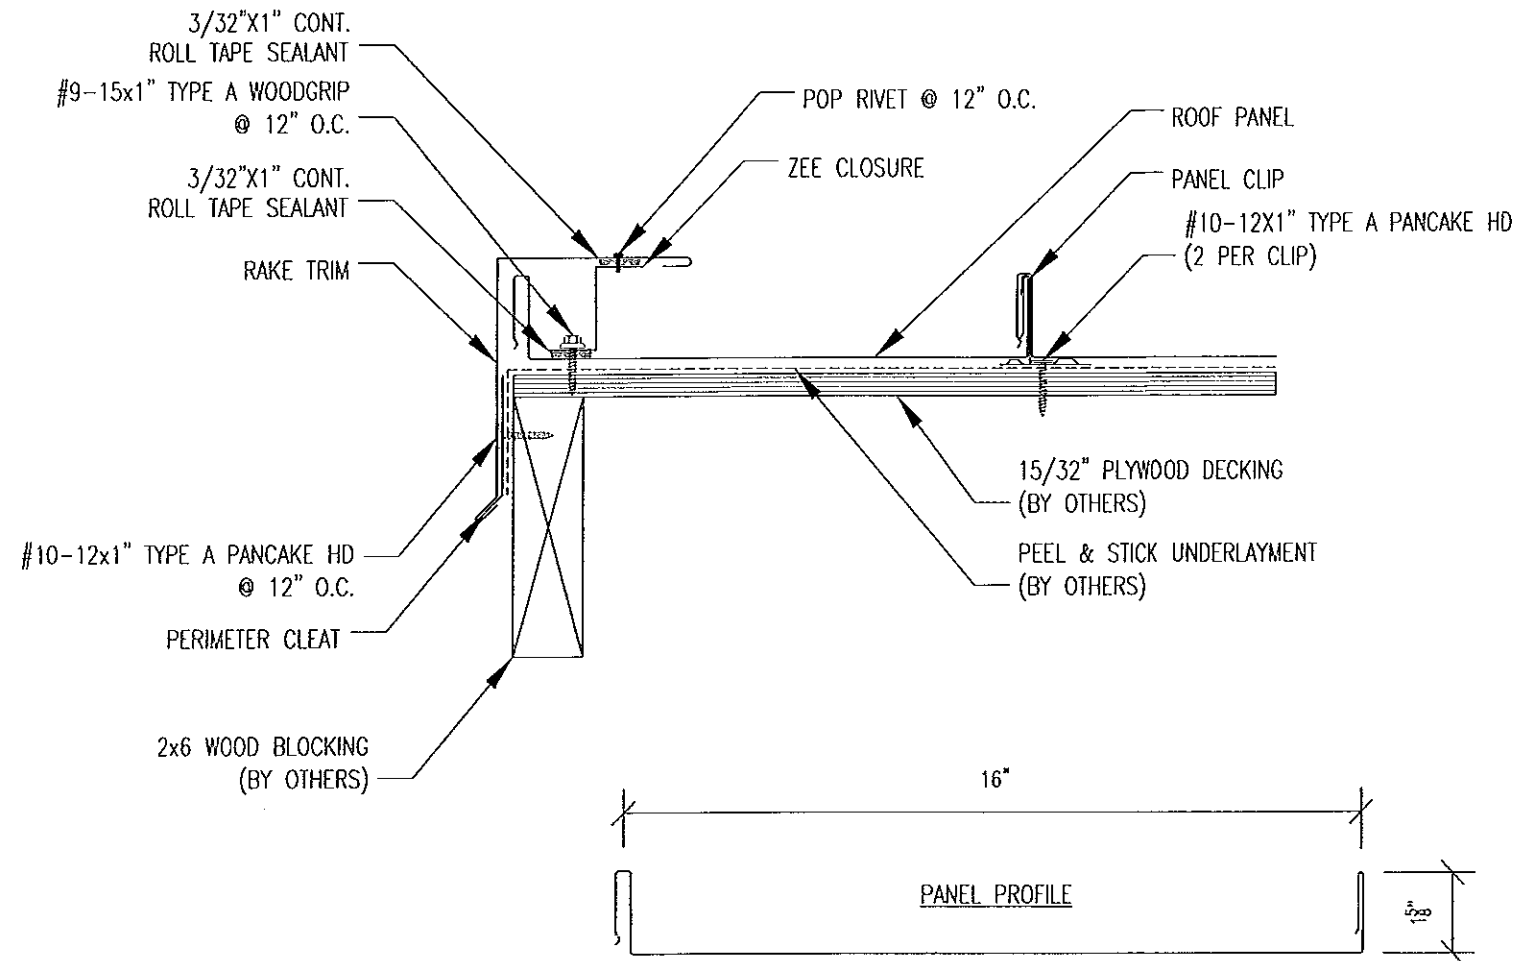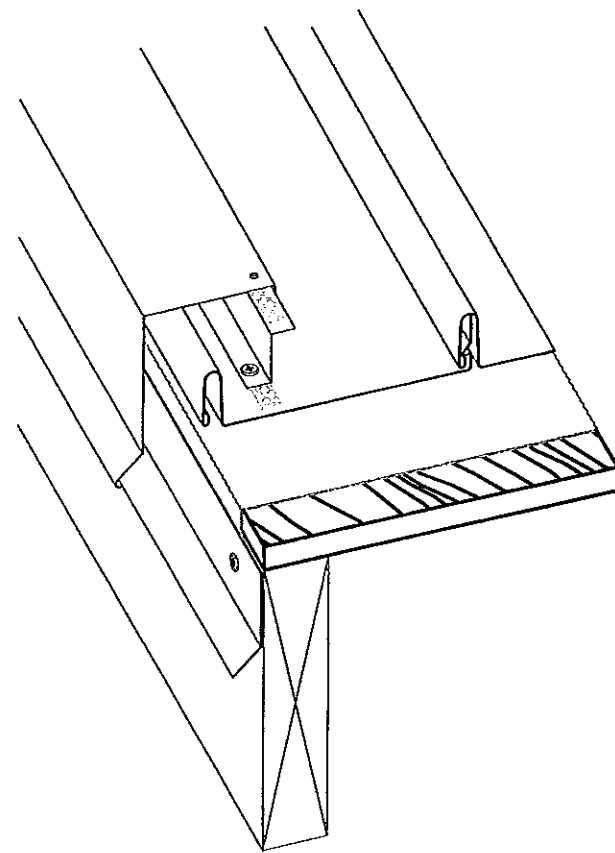


PANEL WITH CLIP & FASTENERS - ISO

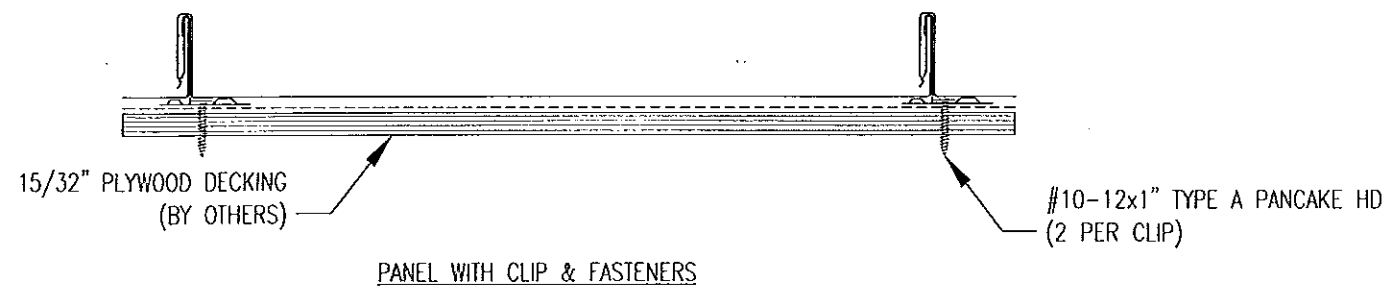

PANEL WITH CLIP & FASTENERS

TABLE A MAXIMUM DESIGN PRESSURES		
ROOF AREAS	FIELD	PERIMETER AND CORNER *
MAXIMUM DESIGN PRESSURES	-54.25 PSF	-71.25 PSF
MAXIMUM CLIP SPACING	36" O.C.	12" O.C.

* EXTRAPOLATION SHALL NOT BE ALLOWED

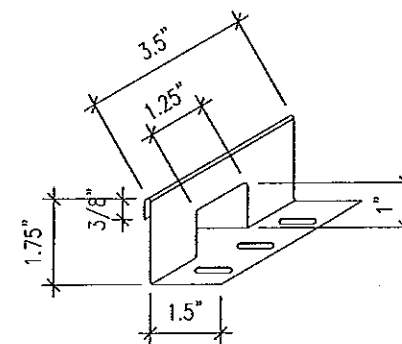


CLIP

State of Florida
C.O.A.
#20778





RAKE ON-MODULE

Approved as complying with the
Florida Building Code
Date 07/24/2014
NOA# 13-0716-14
Miami Dade Product Control
By *[Signature]*

MANUFACTURING ENGINEER		TERRENCE E. WOLFE, P.E.	
FLORIDA REGISTRATION NO.		44923	
<div style="text-align: center;"> <p>ROOFING & BUILDING MAINTENANCE</p> </div>			
PROJECT	DADE COUNTY TESTING	REL.	DATE
SHEET TITLE	TREMLOCK SL 24ga. ROOF DETAILS	REV.	DATE
LOCATION	DADE COUNTY, FLORIDA	FOR APPROVAL	11-12-13
DRAWN BY		DATE 11-12-13	
CHECKED BY		SCALE: N.T.S.	
PROJECT NUMBER		DRAWING NUMBER	SHEET NUMBER
		13-0716.14	E2 of 5

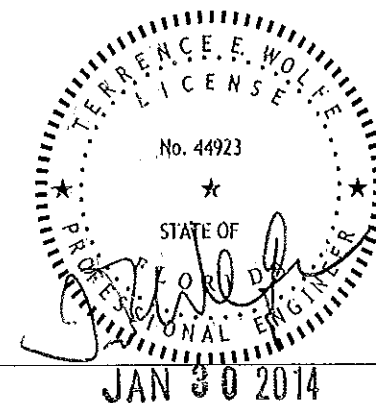


JAN 30 2014

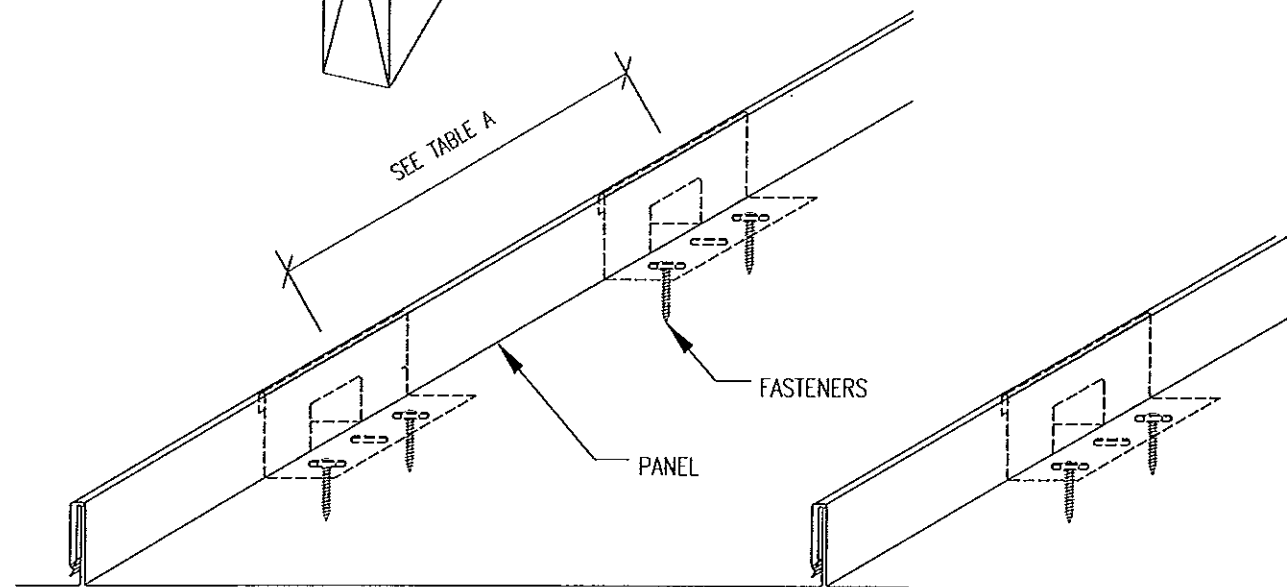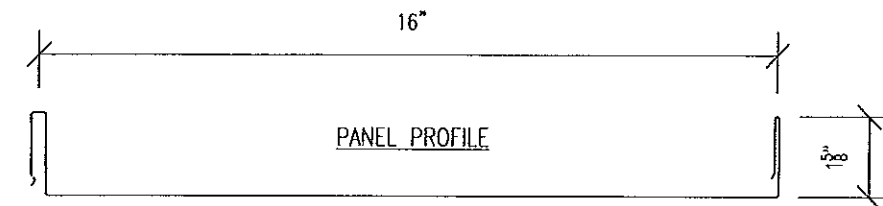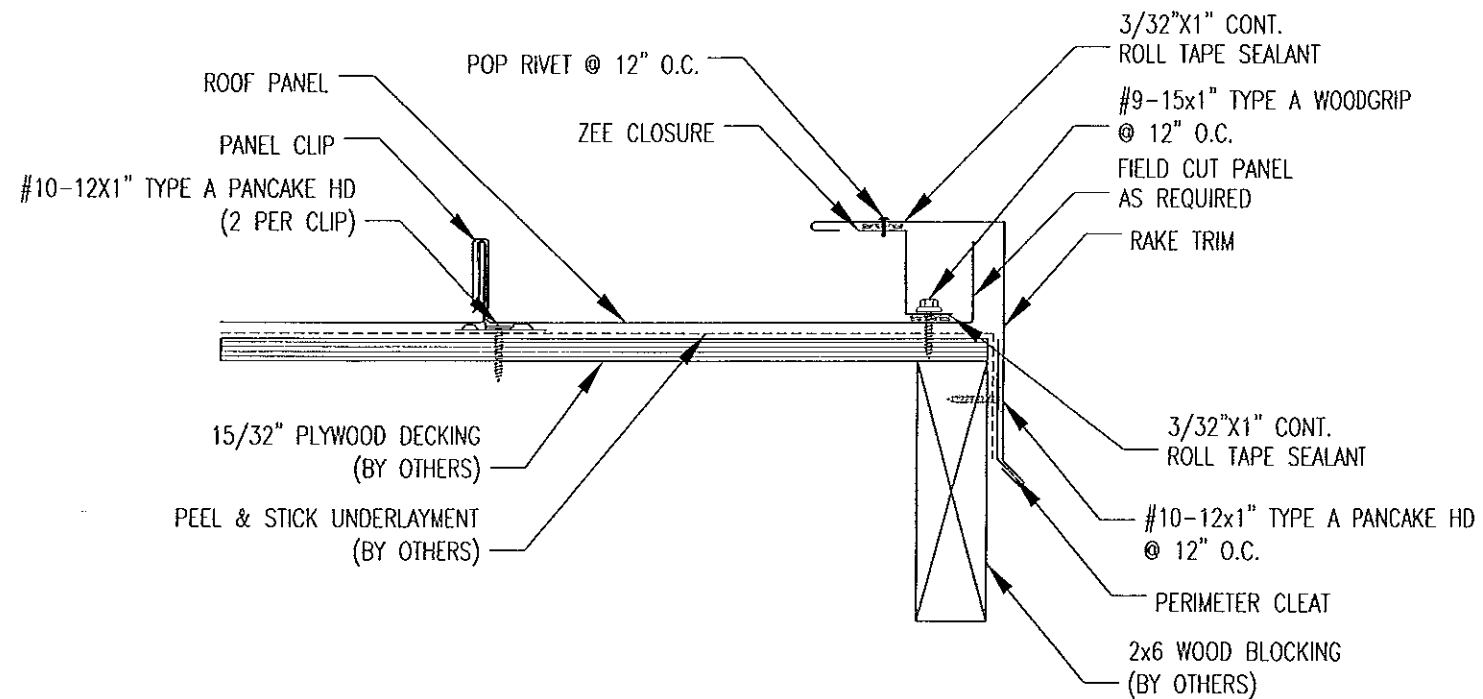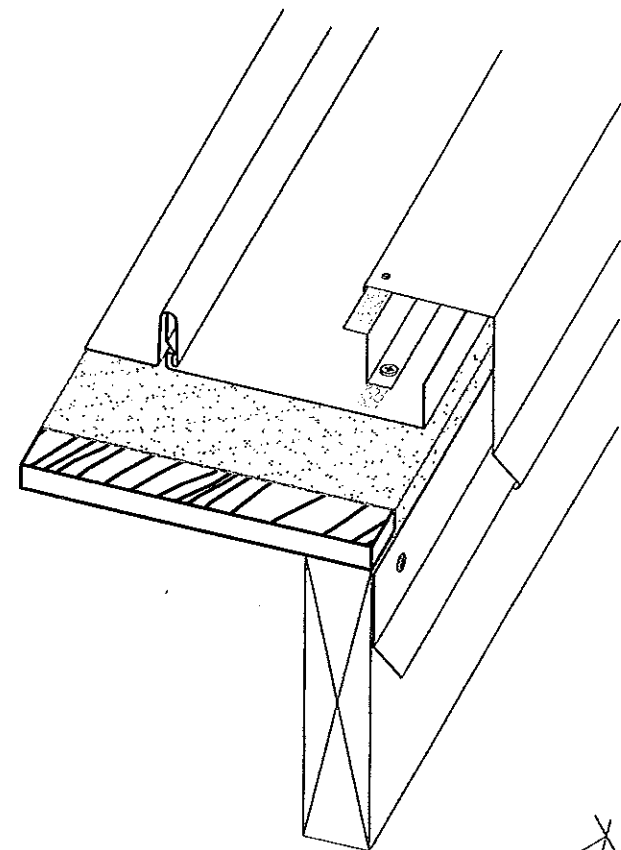

PANEL WITH CLIP & FASTENERS - ISO

TABLE A MAXIMUM DESIGN PRESSURES		
ROOF AREAS	FIELD	PERIMETER AND CORNER *
MAXIMUM DESIGN PRESSURES	-54.25 PSF	-71.25 PSF
MAXIMUM CLIP SPACING	36" O.C.	12" O.C.

* EXTRAPOLATION SHALL NOT BE ALLOWED

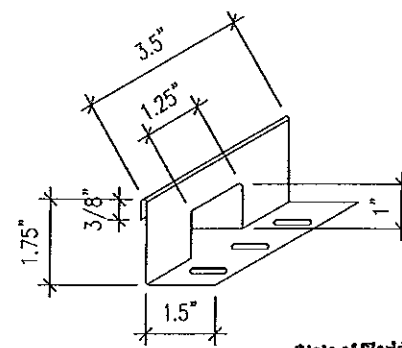

CLIP


State of Florida
C.O.A.
#28778

RAKE OFF-MODULE


Approved as complying with the
Florida Building Code
Date 07/24/2014
NOA# 13-0716.14
Miami Dade Product Control

By *[Signature]*


MANUFACTURING ENGINEER		TERRENCE E. WOLFE, P.E.	
FLORIDA REGISTRATION NO.		44923	
<p>TREMCO ROOFING & BUILDING MAINTENANCE</p>			
PROJECT	DADE COUNTY TESTING	REL	BY
SHEET TITLE	TREMLOCK SL 24ga. ROOF DETAILS	REV	DATE
LOCATION	DADE COUNTY, FLORIDA	FOR APPROVAL	11-12-13
DATE: 11-12-13		SCALE: N.T.S.	
PROJECT NUMBER: 13-0716.14		SHEET NUMBER: E3 of 5	

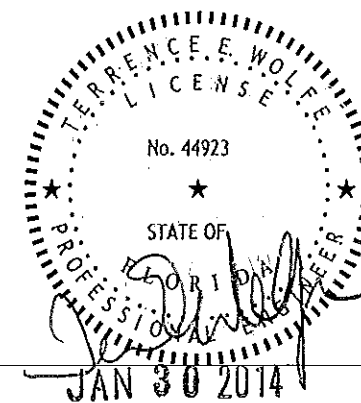

JAN 30 2014

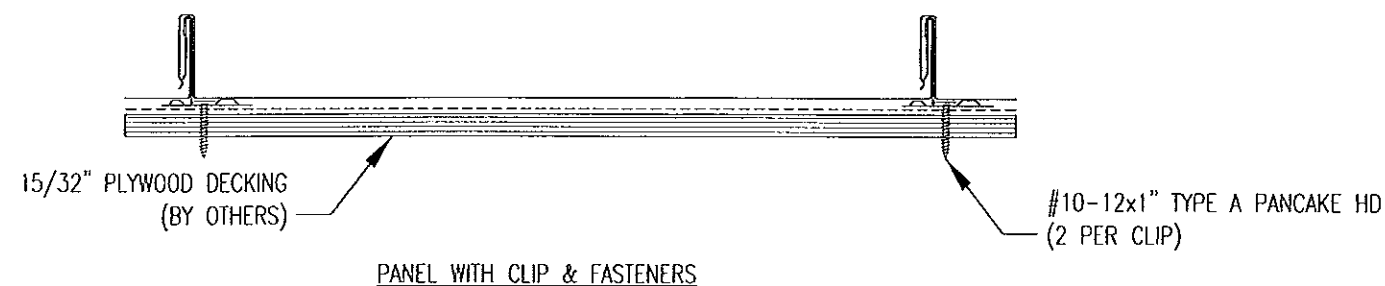

PANEL WITH CLIP & FASTENERS

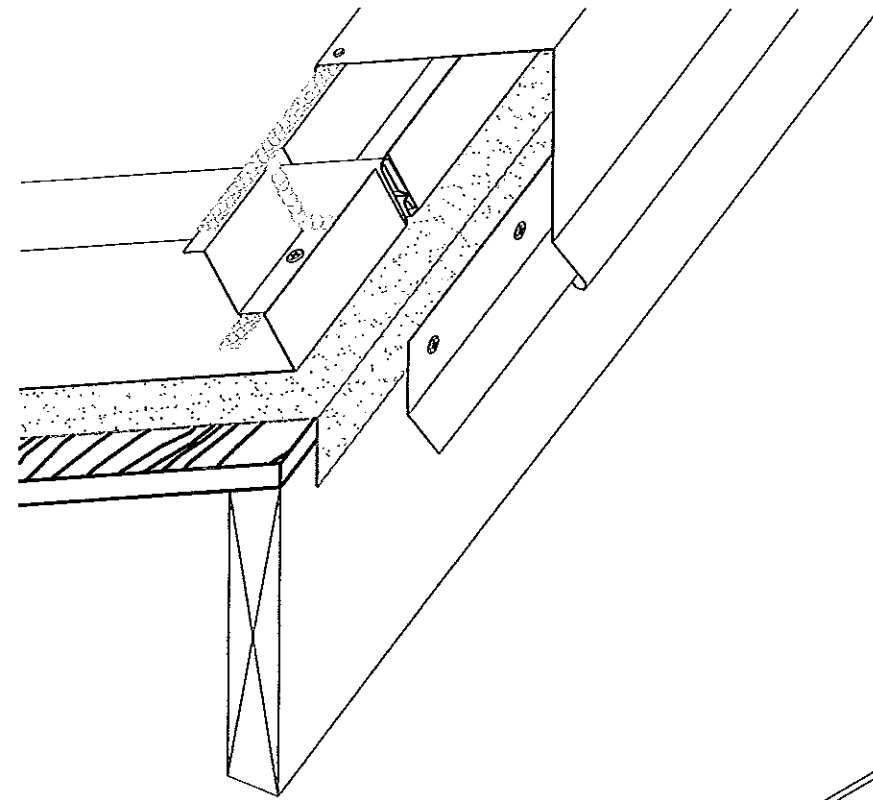

PEEL & STICK UNDERLAYMENT
(BY OTHERS)



POP RIVET @ 6" O.C.
3/32"x1" CONT.
ROLL TAPE SEALANT

ROOF PANEL

2:12

#9-15x1" TYPE A WOODGRIP
(2 PER PANEL MIN.)
3/32"x1" CONT.
ROLL TAPE SEALANT
HIGH EAVE TRIM
15/32" PLYWOOD DECKING
(BY OTHERS)

#10-12x1" TYPE A PANCAKE HD
@ 12" O.C.
PERIMETER CLEAT
2x6 WOOD BLOCKING
(BY OTHERS)

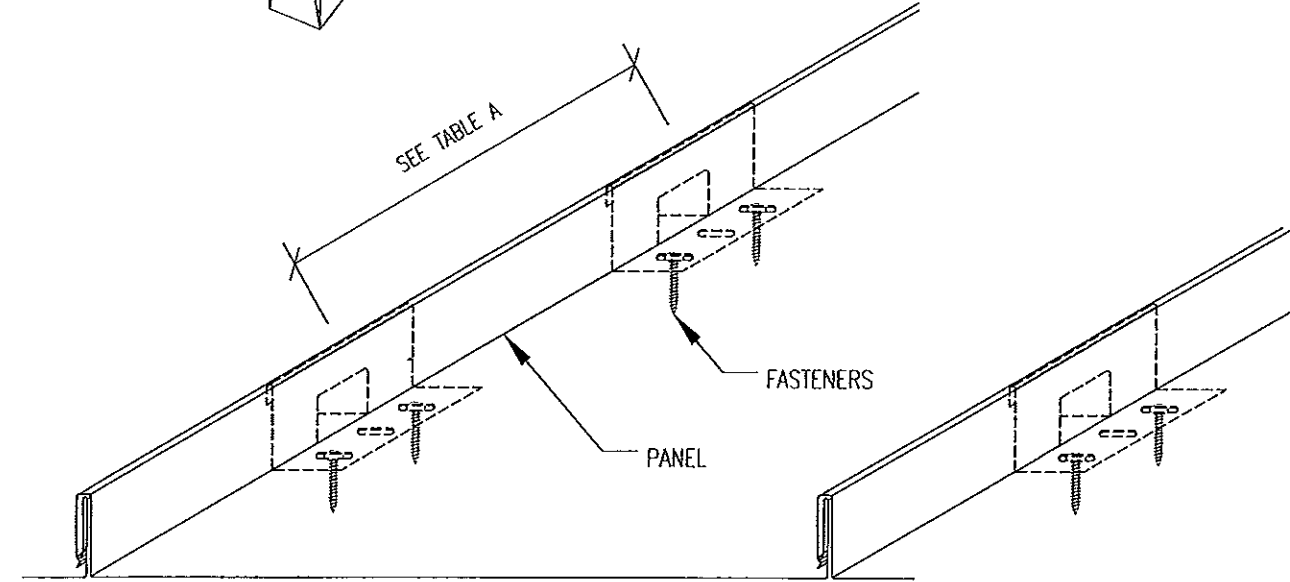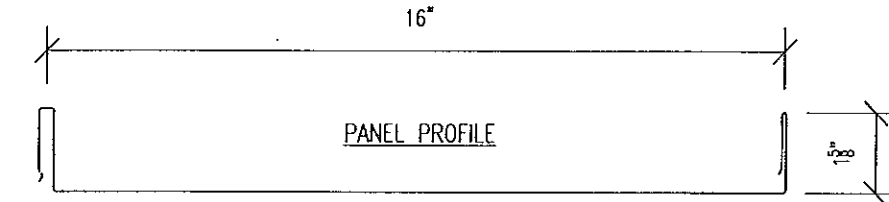


SEE TABLE A

FASTENERS

PANEL

PANEL WITH CLIP & FASTENERS - ISO

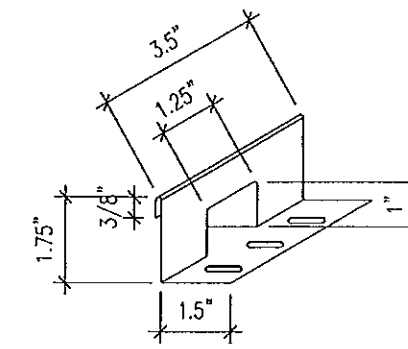


CLIP

State of Florida
C.O.A.
#29778

TABLE A MAXIMUM DESIGN PRESSURES		
ROOF AREAS	FIELD	PERIMETER AND CORNER *
MAXIMUM DESIGN PRESSURES	-54.25 PSF	-71.25 PSF
MAXIMUM CLIP SPACING	36" O.C.	12" O.C.

* EXTRAPOLATION SHALL NOT BE ALLOWED


HIGH EAVE

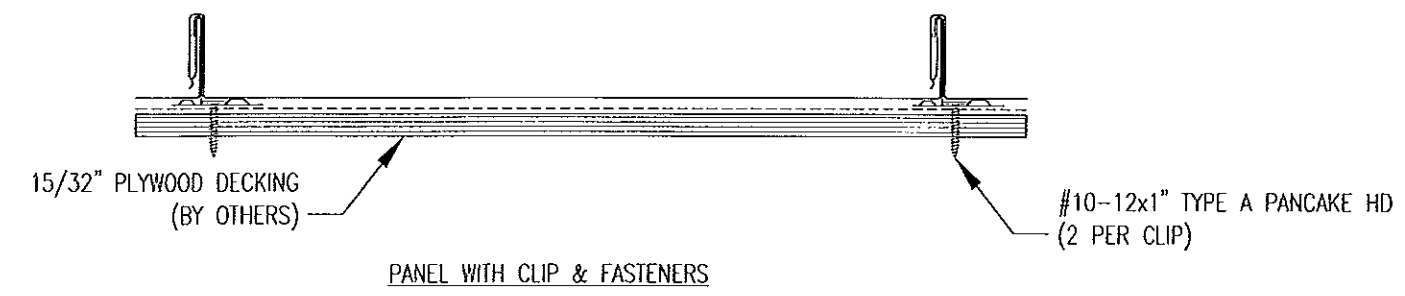

15/32" PLYWOOD DECKING
(BY OTHERS)

#10-12x1" TYPE A PANCAKE HD
(2 PER CLIP)

PANEL WITH CLIP & FASTENERS

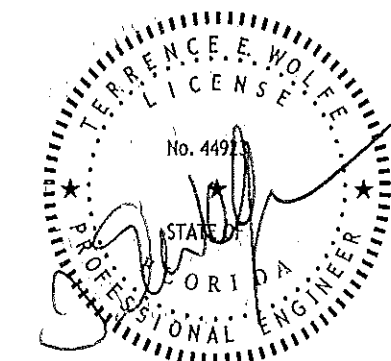

JAN 30 2014

Approved as complying with the Florida Building Code Date 07/24/2014 NOA# 13-0716-14 Miami Dade Product Control By <i>[Signature]</i>			
MANUFACTURING ENGINEER TERRENCE E. WOLFE, P.E. FLORIDA REGISTRATION NO. 44923			
TREMCO ROOFING & BUILDING MAINTENANCE		REL BY TY	DATE 11-12-13
PROJECT DADE COUNTY TESTING			
SHEET TITLE TREMLOCK SL 24go. ROOF DETAILS		DATE 11-12-13	
LOCATION DADE COUNTY, FLORIDA		CHECKED BY DATE 13-0716.14	SHEET NUMBER E4 of 5

