



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

Roatan Mahogany Millwork, Inc.
4004 C Aurora Street
Coral Gables, FL 33146

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "Roatan Mahogany" Outswing Wood Casement Window - L.M.I.

APPROVAL DOCUMENT: Drawing No. 12-131, titled "Mahogany Casement Windows", sheets 1 through 7 of 7, dated 06/25/12, prepared by EngCo, Inc., signed and sealed by Pedro M. De Figueiredo, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA# 12-0713.05 and consists of this page 1 and evidence pages E-1, E-2 and E-3, as well as approval document mentioned above.

The submitted documentation was reviewed by Manuel Perez, P.E.



MP
8/23/13

NOA No. 13-0814.03
Expiration Date: August 08, 2014
Approval Date: August 29, 2013
Page 1

Roatan Mahogany Millwork, Inc.


NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS

1. Manufacturer's die drawings and sections.
2. Drawing No. **12-131**, titled "Mahogany Casement Windows", sheets 1 through 7 of 7, dated 06/25/12, prepared by EngCo, Inc., signed and sealed by Pedro M. De Figueiredo, P.E.
(Submitted under previous NOA# 12-0713.05)

B. TESTS

1. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1006**, dated 10/26/01, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)
2. Test reports on: 1) Air Infiltration Test, per FBC TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC TAS 202-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1184**, dated 10/29/01, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)
3. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1095**, dated 11/02/01, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)
4. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
3) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1077**, dated 09/09/01, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)
5. Test reports on: 1) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
2) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1190**, dated 09/25/01, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)

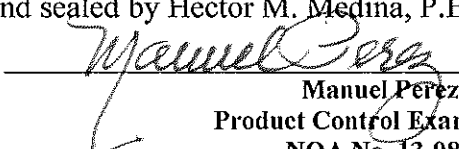
Manuel Perez, P.E.
Product Control Examiner
NOA No. 13-0814.03
Expiration Date: August 08, 2014
Approval Date: August 29, 2013

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

B. TESTS (CONTINUED)

6. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
3) Forced Entry Test, per FBC 2411 3.2.1, TAS 202-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1079**, dated 09/26/01, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)
7. Test reports on: 1) Air Infiltration Test, per FBC TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC TAS 202-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1185**, dated 04/18/2001, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)
8. Test reports on: 1) Large Missile Impact Test per FBC, TAS 201-94
2) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1007**, dated 09/06/2001, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)
9. Test reports on: 1) Air Infiltration Test,
2) Uniform Static Air Pressure Test,
3) Water Resistance Test
along with marked-up drawings and installation diagram of an outswing wood casement window, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1186**, dated 04/18/2001, signed and sealed by Hector M. Medina, P.E.
(Submitted under NOA# 02-0510.03)

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with FBC-2004, prepared by EngCo, Inc., dated 07/12/07, signed and sealed by Pedro M. De Figueiredo, P.E.
(Submitted under NOA# 07-0717.07)
2. Glazing complies with ASTM E1300-04


Manuel Perez, P.E.
Product Control Examiner
NOA No. 13-0814.03

Expiration Date: August 08, 2014
Approval Date: August 29, 2013

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **08-0709.04** issued to **Glasslam N.G.I., Inc.** for their "Safety-Plus II Laminated Glass" dated 09/11/08.

F. STATEMENTS

1. Statement letter of conformance, complying with FBC-2007 and FBC-2010, and of no financial interest, dated August 13, 2012, signed and sealed by Pedro De M. Figueiredo, P.E.
(Submitted under previous NOA# 12-0713.05)
2. Inspection report on: 1) Sealant by Dow Corning 995 along with marked-up drawings and installation diagram, prepared by Hurricane Engineering & Testing, Inc., Test Report No. **HETI-01-1190, HETI-01-1077, HETI-01-1095, HETI-01-1184, HETI-01-1079, HETI-01-1185, HETI-01-1007, HETI-01-1186, and HETI-01-1006**, dated 06/28/02, signed and sealed by Rafael E. Droz-Seda, P.E.
(Submitted under NOA# 02-0510.03)
3. Testing agreement letter, dated 08/13/12, between Fenestration Testing Laboratory (FTL) and Roetan Mahogany Millwork, Inc., issued by FTL and signed by Leigh B. Sanchez.
(Submitted under previous NOA# 12-0713.05)

G. OTHER

1. Notice of Acceptance No. **12-0713.05**, issued to Roatan Mahogany Millwork, Inc. for their Series "Roatan Mahogany" Outswing Wood Casement Window – L.M.I., approved on 09/06/12 and expiring on 08/08/13.
2. One year approval, subjected to successful verification test, the final approval will be issued for the balance of a total of 5 years.


Manuel Perez, P.E.
Product Control Examiner
NOA No. 13-0814.03

Expiration Date: August 08, 2014
Approval Date: August 29, 2013

GENERAL NOTES:


FLORIDA BUILDING CODE 2010 HVHZ
LARGE & SMALL MISSILE IMPACT RATED

- 1- DEFINITION: THIS PRODUCT IS A CASEMENT MAHOGANY WINDOW; DESIGNED, CONSTRUCTED AND ERECTED TO ENCLOSE AN AREA, PROVIDING PROTECTION FROM HURRICANE FORCE WINDS WITHIN THE ALLOWABLE DESIGNED PRESSURES AND LIMITATIONS STATED IN THIS APPROVAL.
- 2- CODE: THIS PRODUCT HAS BEEN TESTED AND DESIGNED IN ACCORDANCE WITH THE 2010 FLORIDA BUILDING CODE, HIGH VELOCITY HURRICANE ZONES (HVHZ).
- 3- POSTING: A PERMANENT LEGIBLE DECAL SHALL BE PLACED AT A READILY VISIBLE LOCATION STATING THE FOLLOWING:
"ROATAN MAHOGANY MILLWORK INC.- MIAMI - FLORIDA
LARGE MISSILE IMPACT RESISTANT
ROATAN CASEMENT WINDOW
MIAMI-DADE COUNTY PRODUCT APPROVED"
- 4- LOADS: DESIGNED LOAD CALCULATED BASED ON THE ASCE 7-10 AND PROVIDED BY A PROFESSIONAL ARCHITECT OR ENGINEER FOR EACH SPECIFIC PROJECT. THE CALCULATED DESIGNED PRESSURE MUST NOT EXCEED THE ALLOWABLE PRESSURES HEREIN SPECIFIED. THE DESIGN PRESSURES, AS DETERMINED FROM ASCE 7-10, ARE TO BE MULTIPLE BY 0.6.
- 5- MATERIAL: ALL WOOD MATERIAL TO BE FABRICATED FROM KILN DRIED MAHOGANY.
- 6- FASTENERS: ASSEMBLY SCREWS AND ANCHORS SHALL BE AS SPECIFIED IN THE CURRENT SET OF DRAWINGS. INSTALLATION AND LOADS AS PER THIS APPROVAL.
- 7- USE: IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR, ARCHITECT OR ENGINEER OF RECORD TO VERIFY THE FOLLOWING:
7.1- THE STABILITY OF THE STRUCTURE WHERE THE SHUTTER IS TO BE ATTACHED INSURING PROPER ANCHORAGE.
7.2- THE SITE SPECIFIC PROJECT CRITERIA, SUCH AS BUT NOT LIMITED TO, WINDLOADS, LOCAL CODE REQUIREMENTS, DESIGNED PRESSURES ETC.
7.3- THAT THIS APPROVAL IS ADEQUATE TO THE SPECIFIC PROJECT.
- 8- DISSIMILAR MATERIALS: MATERIALS, INCLUDING BUT NOT LIMITED TO STEEL, THAT COME IN CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF 2010 FLORIDA BUILDING CODE.

TABLE OF CONTENTS:

SHEET	CONTENTS
1 OF 7	TYPICAL SINGLE ELEVATIONS, DESIGN RATING, GENERAL NOTES
2 OF 7	TYPICAL PAIR ELEVATIONS, DESIGN RATING
3 OF 7	TYPICAL ANCHORAGE LAY-OUT
4 OF 7	TYPICAL CROSS SECTIONS AND CLADDING OPTIONS
5 OF 7	HARDWARE LAY-OUT
6 OF 7	ANCHORAGE DETAIL, PRODUCT ASSEMBLY
7 OF 7	PRODUCT COMPONENTS AND BILL OF MATERIALS

TYPICAL SINGLE ELEVATIONS

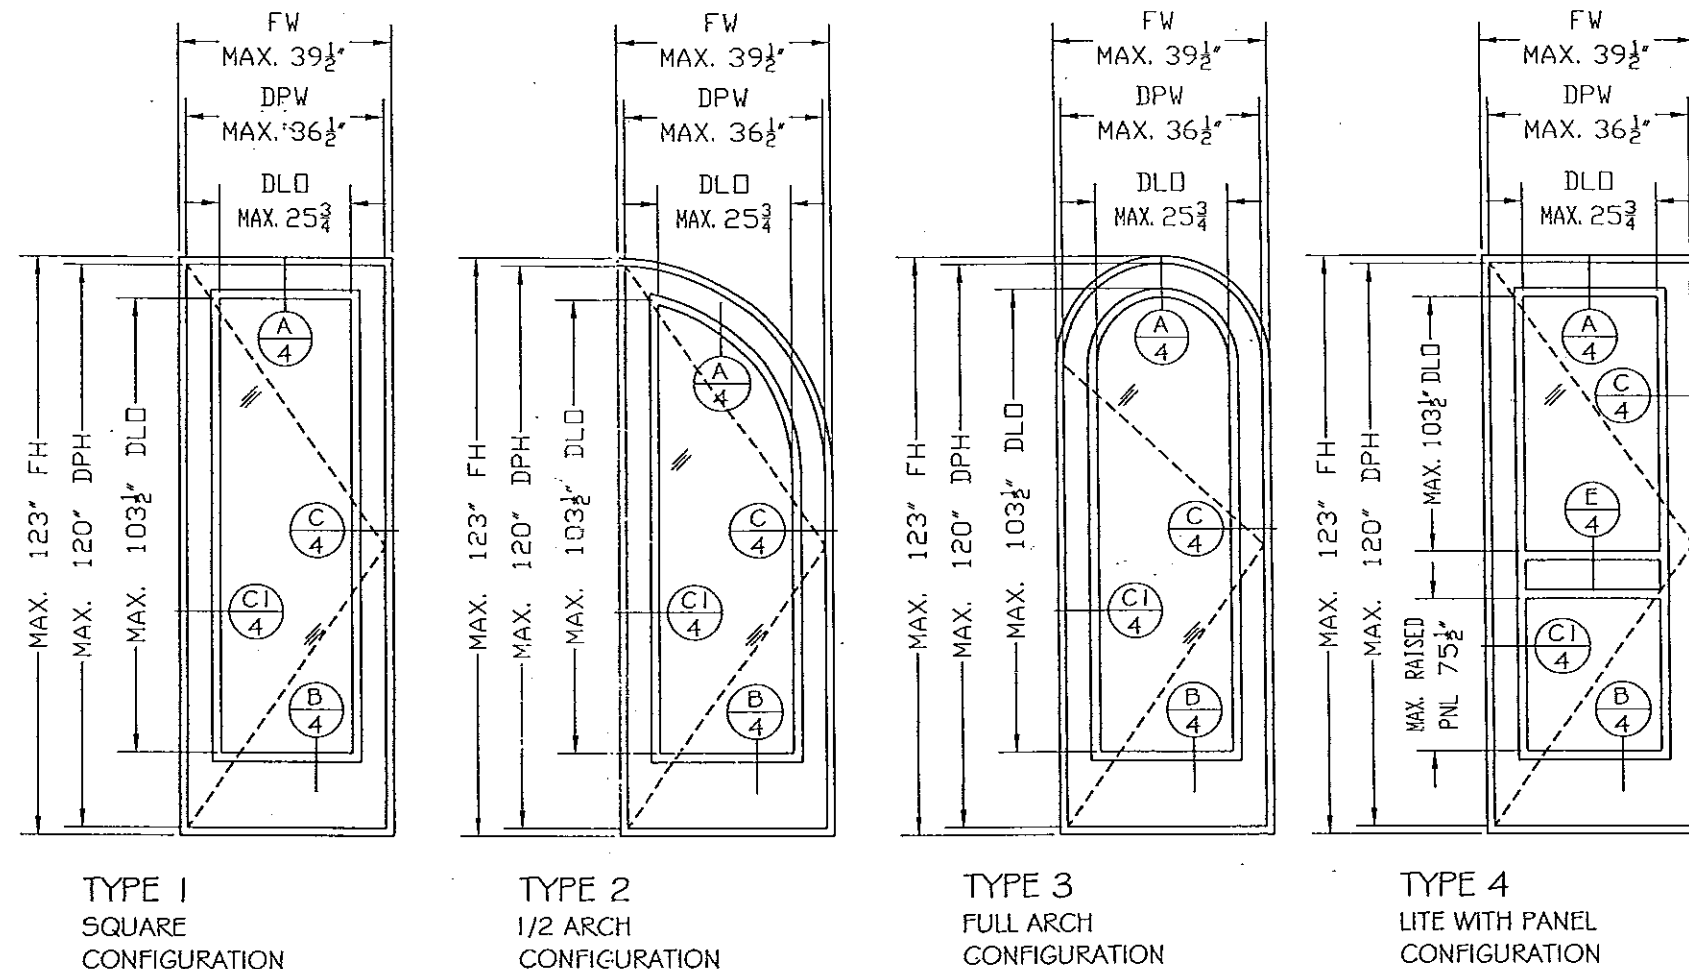

DESIGNED PRESSURE RATING Pd = ± 75 PSF

MAXIMUM FRAME SIZES:
FINISHED WIDTH: FW = 39 1/2"
FINISHED HEIGHT: FH = 123"

MAXIMUM CLADDING SIZES:
1/2" GLASLAM SAFETY-PLUS II IMPACT GLASS
DLO: 25 3/4" X 103 1/2"
1 1/2" MAHOGANY SOLID WOOD PANEL
DLO: 25 3/4" X 75 1/2"

LEGEND
FH - FINISHED HEIGHT
FW - FINISHED WIDTH
DLO - DAY LIGHT OPENING
DPH - WINDOW PANEL HEIGHT
DPW - WINDOW PANEL WIDTH

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 13-0814.03
Expiration Date Aug. 8, 2014
By *Mamuel Sora*
Miami Dade Product Control

WOOD TYPE:
VERNACULAR NAME: TRUE MAHOGANY
SCIENTIFIC NAME: SWietenia Macrophylla G. KING
FAMILY: MELIACEAE
MINIMUM SPECIFIC GRAVITY: 0.45

GLASS TYPE:
1/2" LAMINATED MADE OF TWO 3/16" ANNEAL LITES
PLUS GLASLAM SAFETY-PLUS II INTERLAYER AS PER
CURRENT NOA

MANUFACTURER:

ROATAN
MAHOGANY
MILLWORK INC

4004C AURORA STREET
CORAL GABLES, FL 33146
PHONE: (305) 774-5999
FAX: (305) 774-0083

PRODUCT:


MAHOGANY
CASEMENT
WINDOWS

CASEMENT WINDOW
LARGE & SMALL MISSILE IMPACT

ENGINEERING:

ENGCO INC. CA 8116

5595 ORANGE DR. 201
DAVIE, FL. 33314
Tel.: (954) 585-0304
ENGCO@AOL.COM

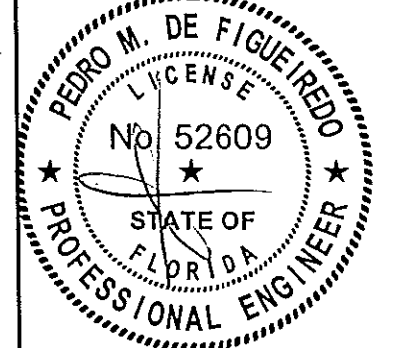

JUL 10 2012

Engineer Seal
Pedro De Figueiredo - PE 52609

MIAMI-DADE BCCO:

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 12-0713.05
Expiration Date Aug. 8, 2013


By *Mamuel Sora*
Miami Dade Product Control

DATE: 06/25/2012
SCALE: NA
DESIGN BY: PPWF


SHEET
1 OF 7

DRAWING #:
12-131


TYPICAL PAIR ELEVATIONS

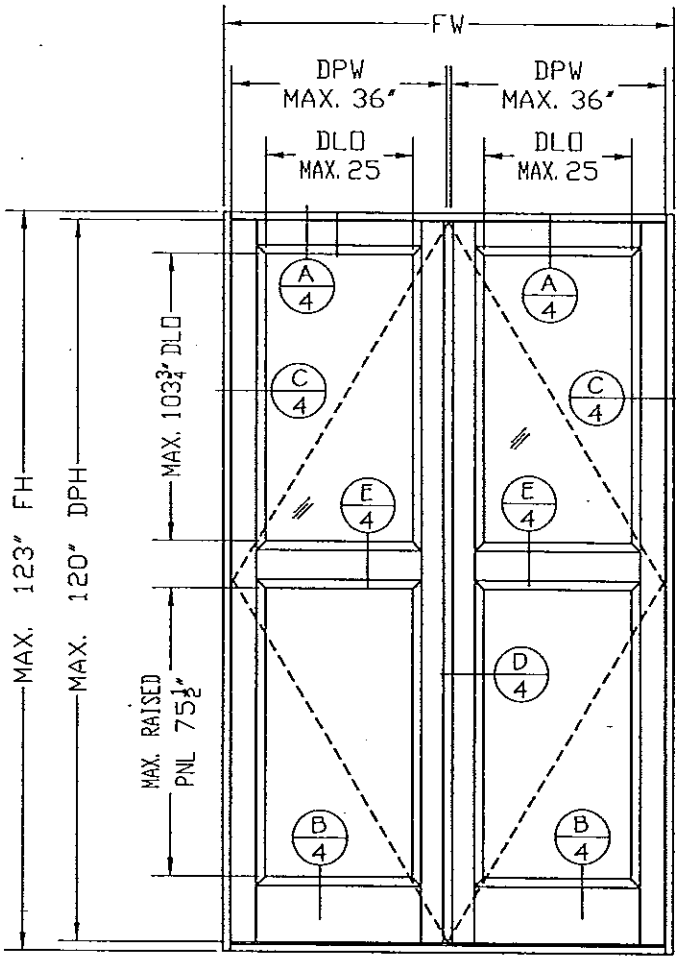

TYPE 5
SPLIT PANEL CONFIGURATION

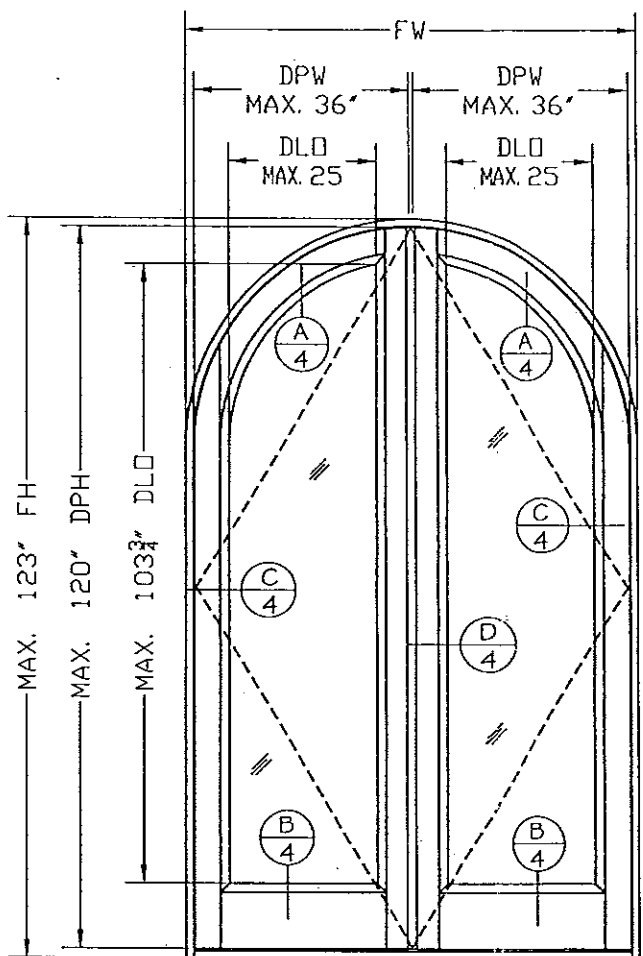

TYPE 6
ARCH CONFIGURATION

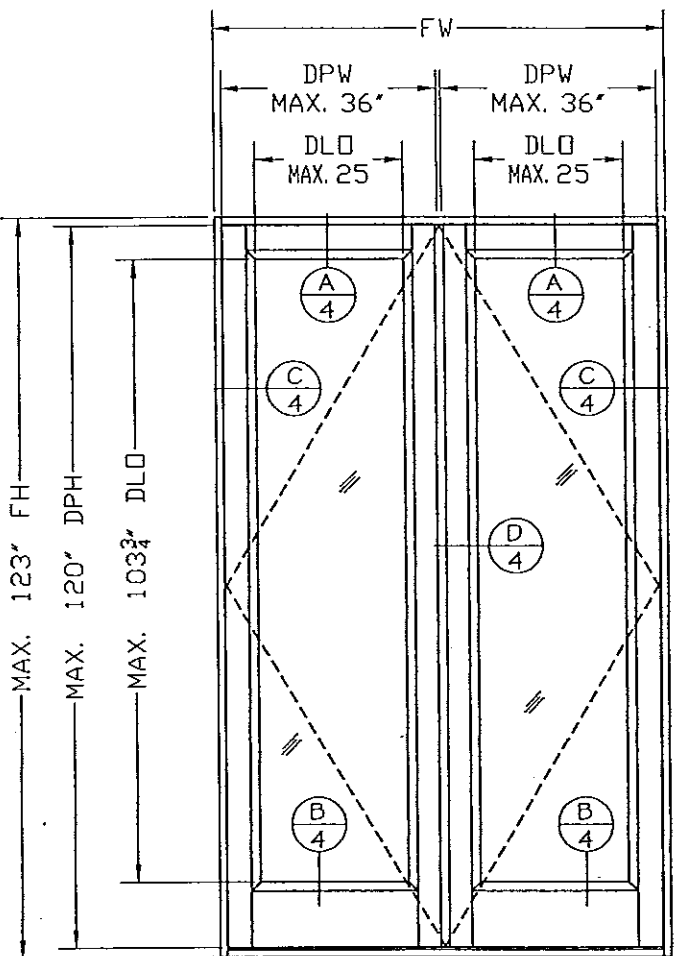

TYPE 7
SQUARE CONFIGURATION

DESIGNED PRESSURE RATING $P_d = \pm 75$ PSF
MAXIMUM FRAME SIZES: FINISHED WIDTH: FW = 75 1/2" FINISHED HEIGHT: FH = 123"
MAXIMUM CLADDING SIZES: 1/2" GLASLAM SAFETY-PLUS II IMPACT GLASS DLO: 25" X 103 3/4" 1 1/2" MAHOGANY SOLID WOOD PANEL DLO: 25" X 75 1/2"

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 13-0814-03
Expiration Date Aug. 8, 2014
By *Manuel Perez*
Miami Dade Product Control

MANUFACTURER:
**ROATAN
MAHOGANY
MILLWORK INC**
4004C AURORA STREET
CORAL GABLES, FL 33146
PHONE: (305) 774-5999
FAX: (305) 774-0083

PRODUCT:
**MAHOGANY
CASEMENT
WINDOWS**
CASEMENT WINDOW
LARGE & SMALL MISSILE IMPACT

ENGINEERING:
ENGCO INC. CA 8116
5595 ORANGE DR. 201
DAVIE, FL. 33314
Tel.: (954) 585-0304
ENGCO@AOL.COM

JUL 10 2012
Engineer Seal
Pedro De Figueiredo - PE 52609





MIAMI-DADE BCCO:
PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 12-0713-05
Expiration Date Aug. 8, 2013
By *Manuel Perez*
Miami Dade Product Control

DATE: 06/25/2012
SCALE: NA
DESIGN BY: PPMF

SHEET
2 OF 7

DRAWING #:
12-131

TYPICAL ANCHORAGE LAY-OUT
(SEE SHEET 6 OF 7 FOR ANCHOR DETAILS)

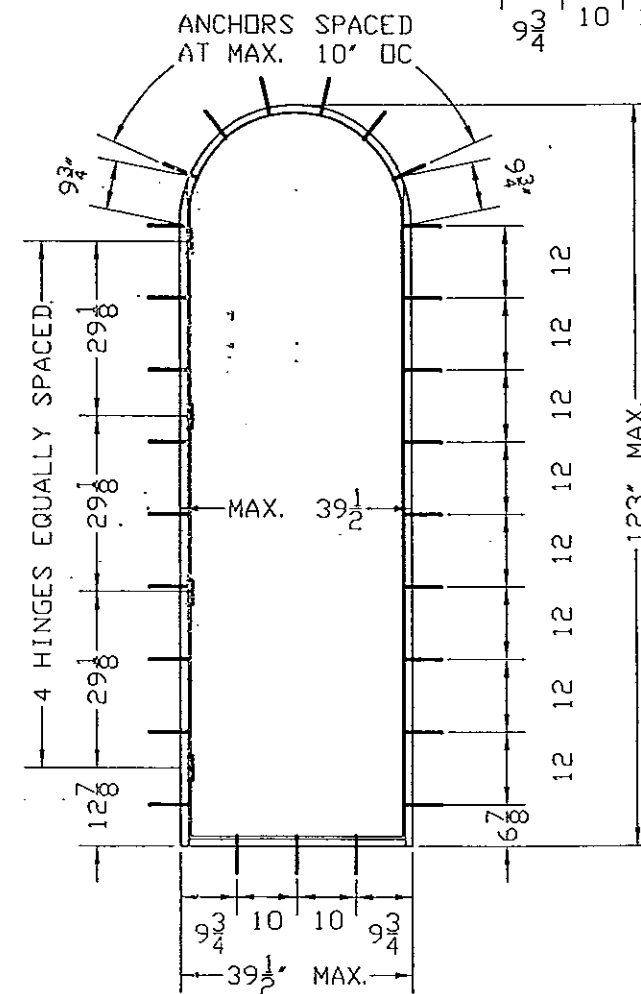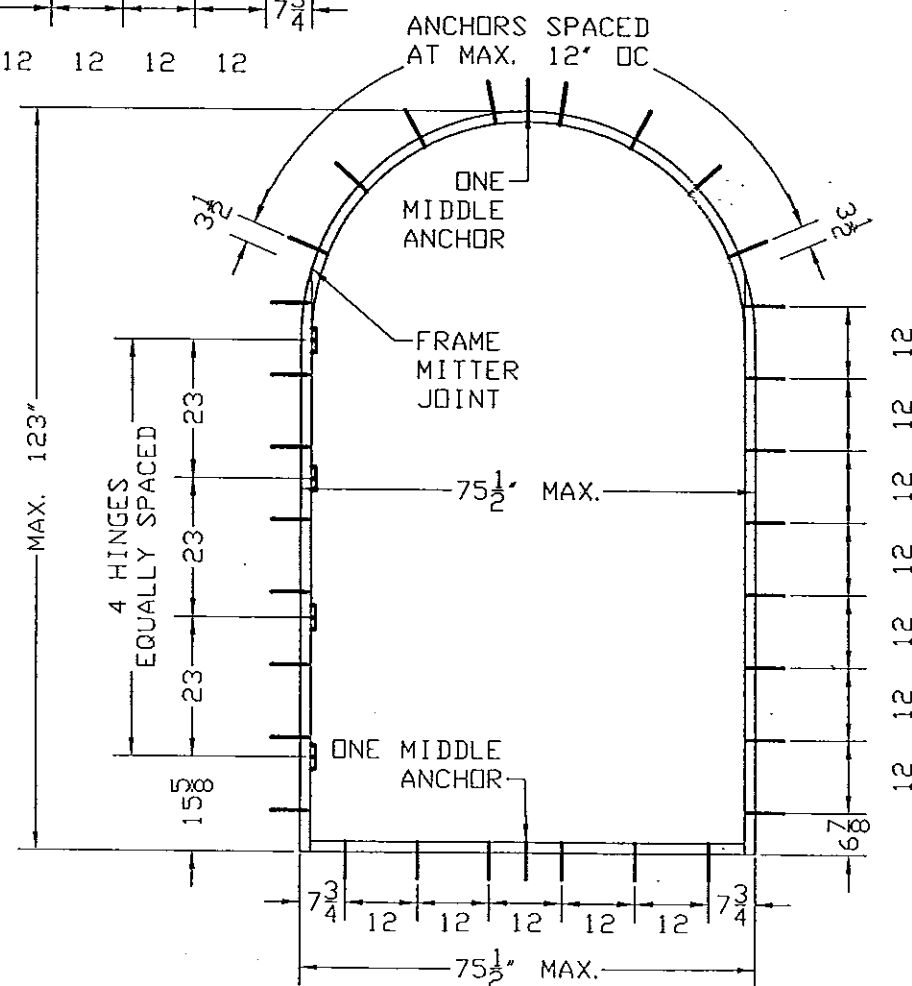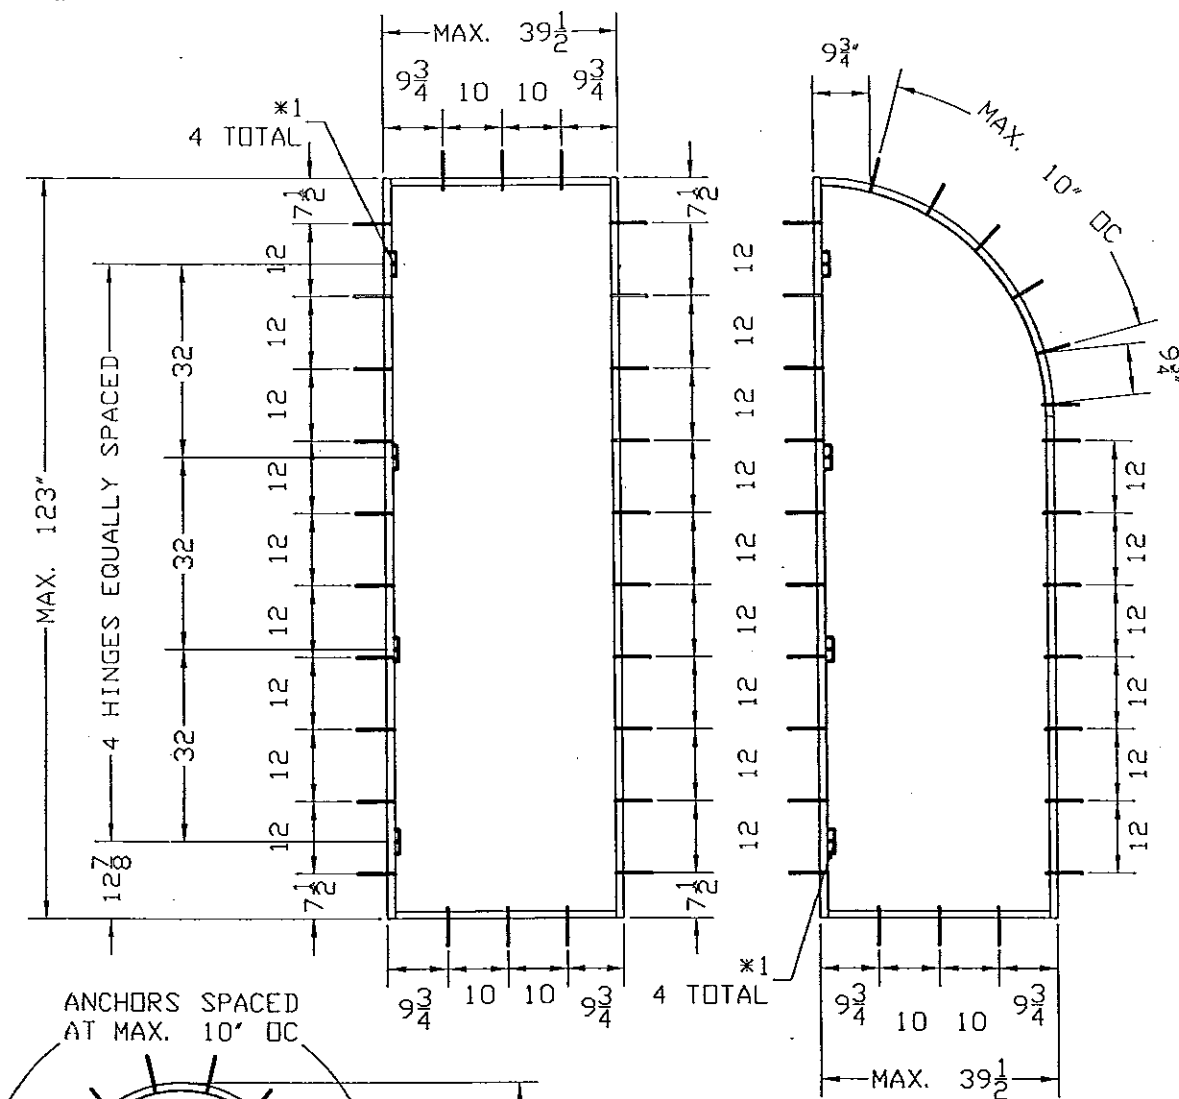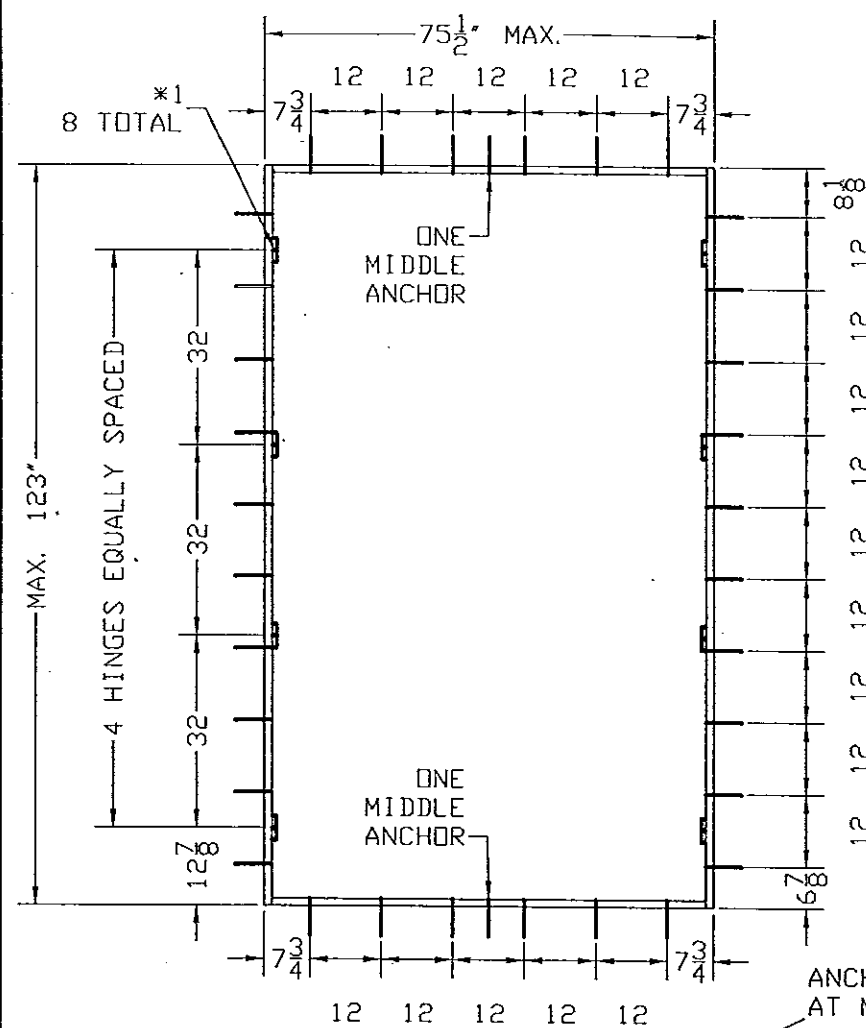

MANUFACTURER:

**ROATAN
MAHOGANY
MILLWORK INC**

4004C AURORA STREET
CORAL GABLES, FL 33146
PHONE: (305) 774-5999
FAX: (305) 774-0083

PRODUCT:


**MAHOGANY
CASEMENT
WINDOWS**

CASEMENT WINDOW
LARGE & SMALL MISSILE IMPACT

ENGINEERING:

ENGCO INC. CA 8116

5595 ORANGE DR. 201
DAVIE, FL. 33314
Tel.: (954) 585-0304
ENGCO@AOL.COM

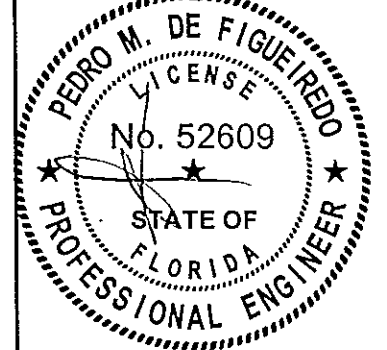

JUL 10 2012

Engineer Seal
Pedro De Figueiredo - PE 52609

MIAMI-DADE BCCO:

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 12-0713.05
Expiration Date Aug. 8, 2013

By *Manuel Perez*
Miami Dade Product Control




PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 13-0814.03
Expiration Date Aug. 8, 2014
By *Manuel Perez*
Miami Dade Product Control

DATE: 06/25/2012
SCALE: NA
DESIGN BY: PPMF




SHEET
3 OF 7

DRAWING #:
12-131

CLADDING OPTIONS

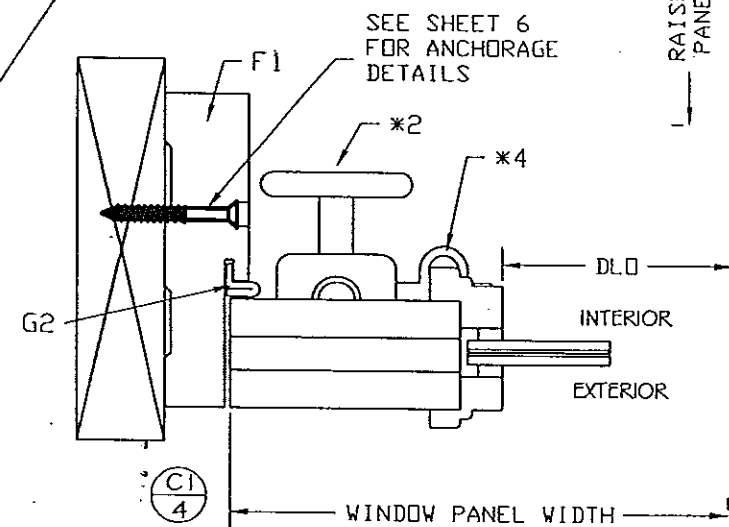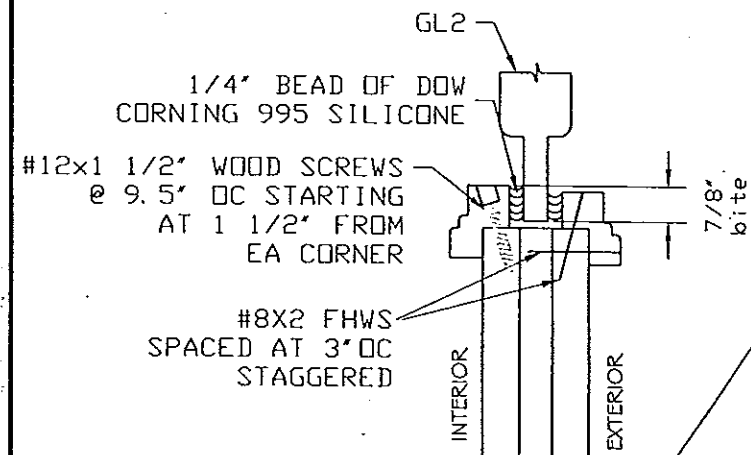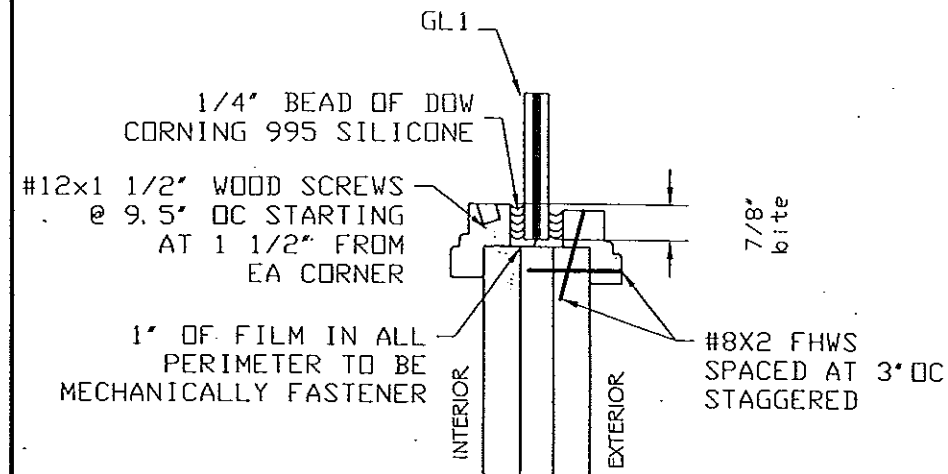

TYPICAL CROSS SECTIONS

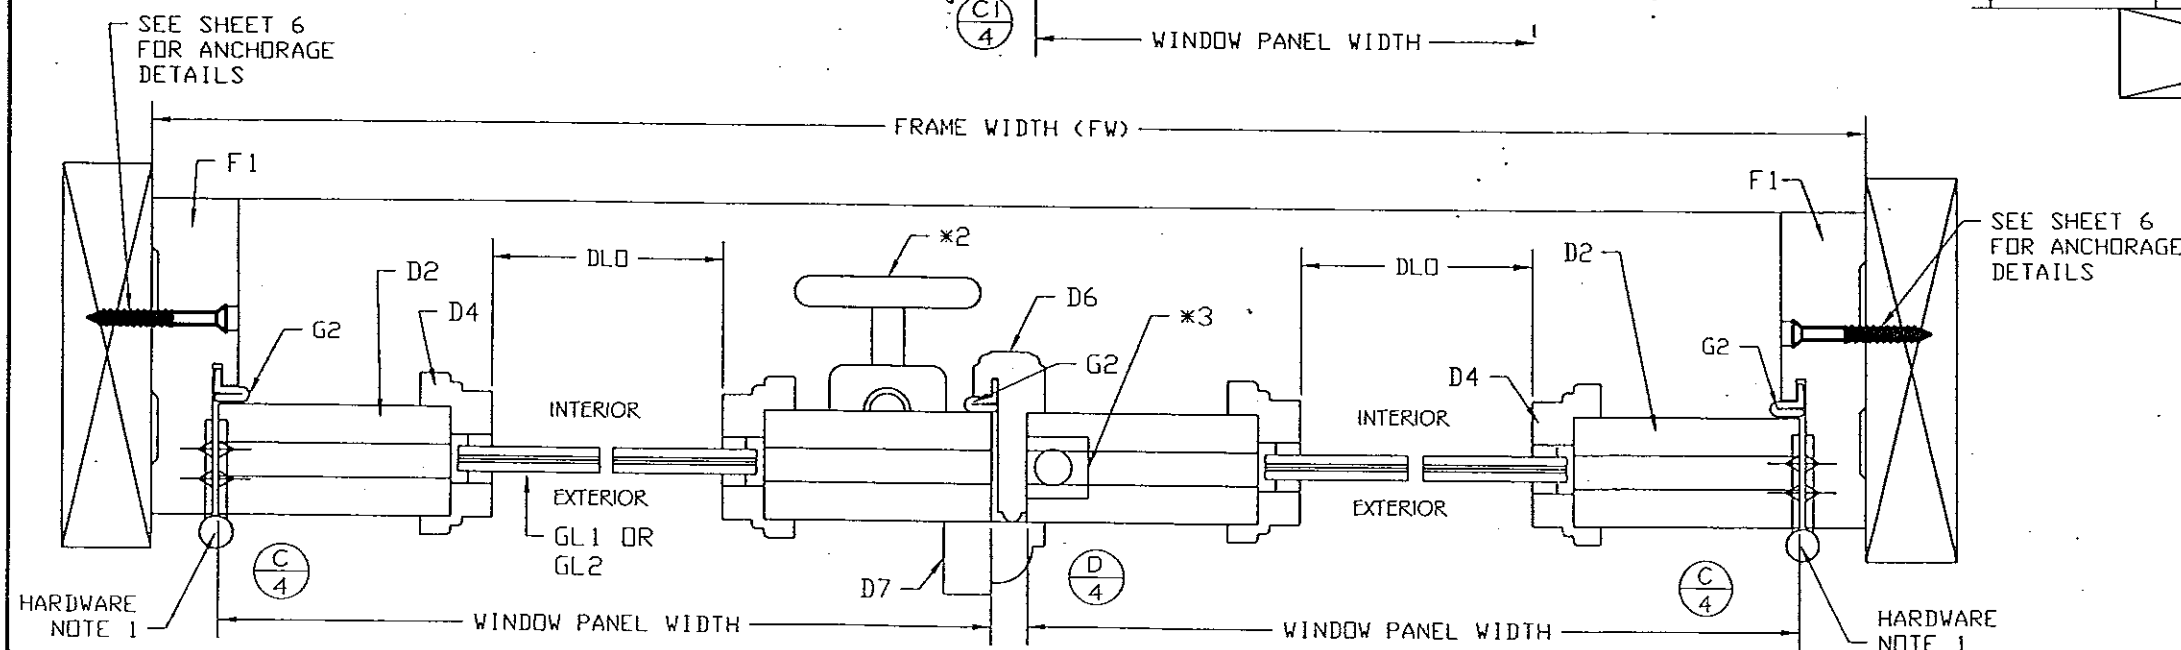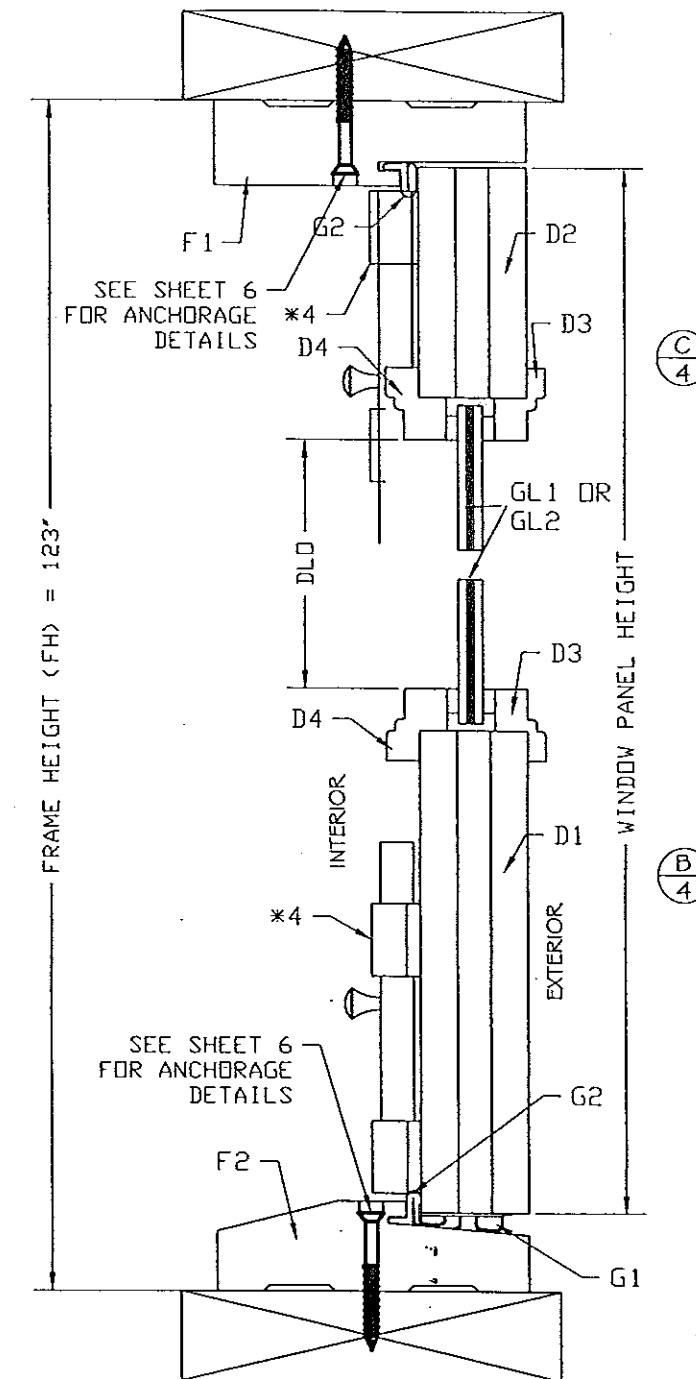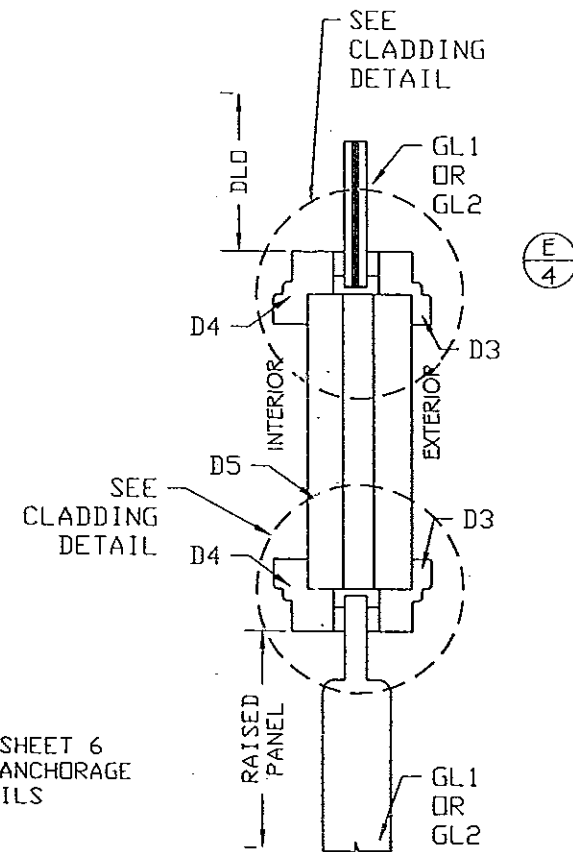

MANUFACTURER:

ROATAN
MAHOGANY
MILLWORK INC

4004C AURORA STREET
CORAL GABLES, FL 33146
PHONE: (305) 774-5999
FAX: (305) 774-0083

PRODUCT:


MAHOGANY
CASEMENT
WINDOWS

CASEMENT WINDOW
LARGE & SMALL MISSILE IMPACT

ENGINEERING:

ENGCO INC. CA 8116

5595 ORANGE DR. 201
DAVIE, FL. 33314
Tel.: (954) 585-0304
ENGCO@AOL.COM

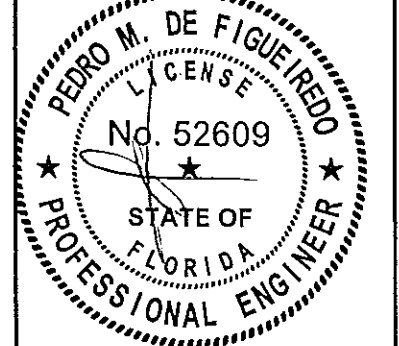

JUL 10 2012 Engineer Seal
Pedro De Figueiredo - PE 52609

MIAMI-DADE BCCO:

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 12-0713.05
Expiration Date Aug. 8, 2013
By Manuel Jerez
Miami Dade Product Control

DATE: 06/25/2012
SCALE: NA
DESIGN BY: PPMF



SHEET
4 OF 7

DRAWING #:
12-131


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 13-0814.03
Expiration Date Aug. 8, 2014
By Manuel Jerez
Miami Dade Product Control

*3- NATIONAL .60" DIAM. THROW BOLT


HARDWARE LAY-OUT

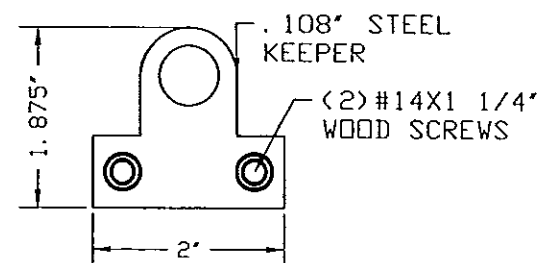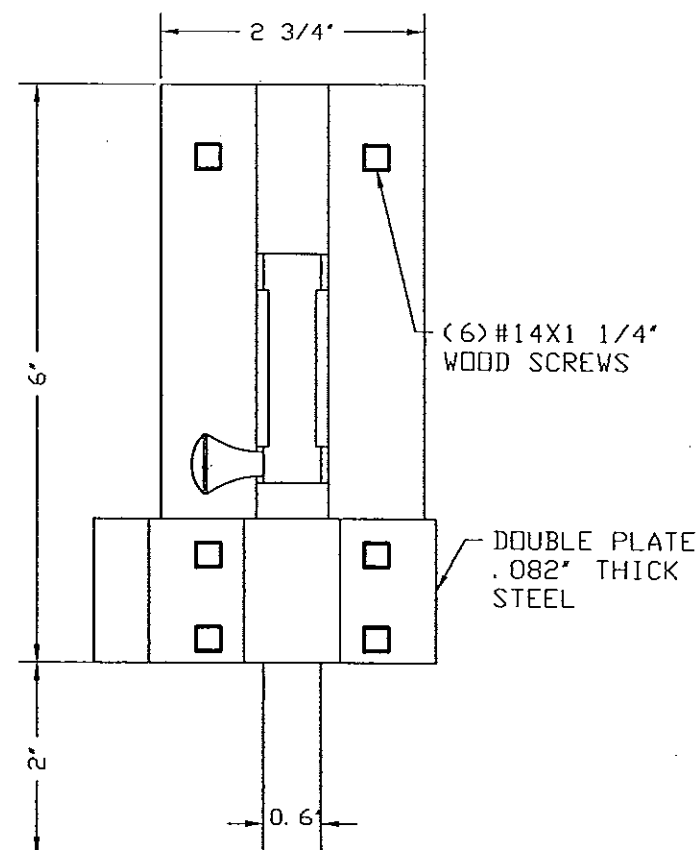



*2- ARDIMPEX THREE POINT CREMONES
SAME DETAIL TOP AND BOTTOM

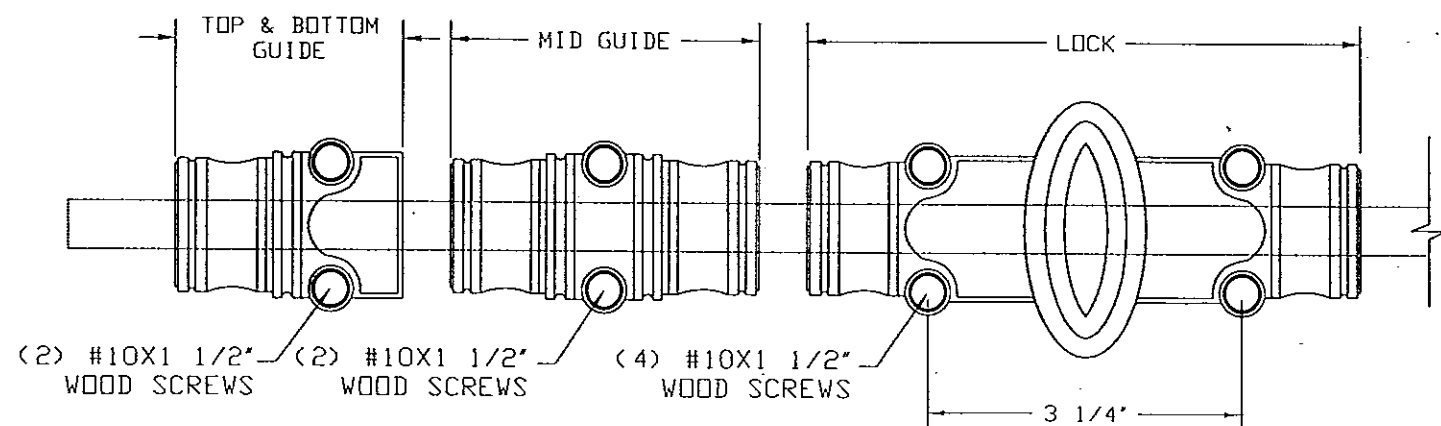

- * HARDWARE**
- 1- 4 1/2"x 4 1/2"x .136 HAGER 1279 HINGES SPACED AS PER ELEVATIONS ABOVE AND CONNECTED WITH (8) #12x1 1/4" FH SMS. (SQUARE WINDOW, 4 PER LEAF AND ARCH WINDOW, 3 PER LEAF)
 - 2- ARDIMPEX THREE POINT CREMONES ON ACTIVE LEAF FASTENED WITH (12) #10x1 1/2" FH SMS.
 - 3- HARROW PRODUCTS INC. FLUSH BOLTS 296G UL LISTED TOP AND BOTTOM OF INACTIVE LEAF.
 - 4- SECONDARY LOCKS (ACTIVATE ONLY WHEN HURRICANE FORCE WINDS ARE EXPECTED) - NATIONAL .60 DIA THROW BOLT ANCHORED WITH (6) #14x1 1/4" ON ACTIVE AND INACTIVE DOORS TOP AND BOTTOM RAILS.

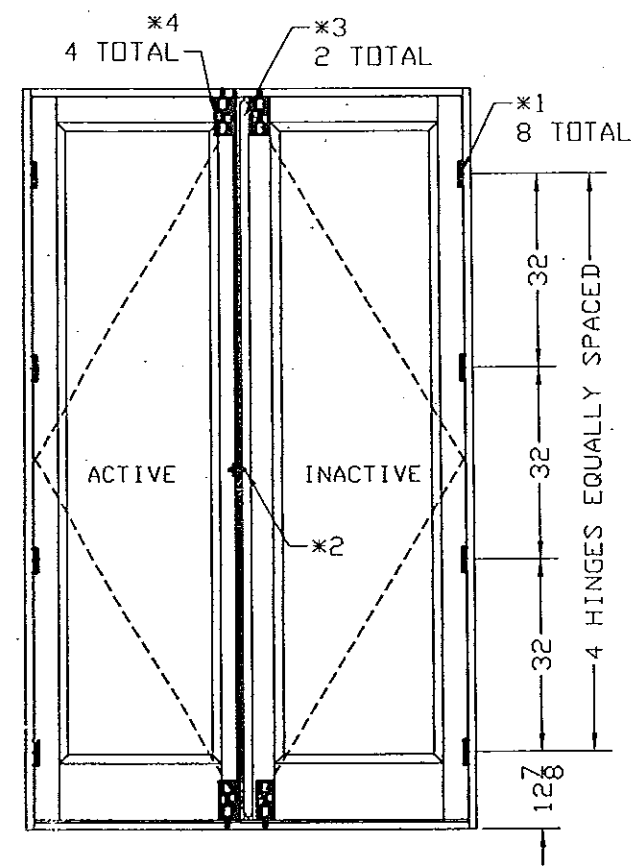

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 13-0814.03
Expiration Date Aug. 8, 2014
By *Manuel Perez*
Miami Dade Product Control

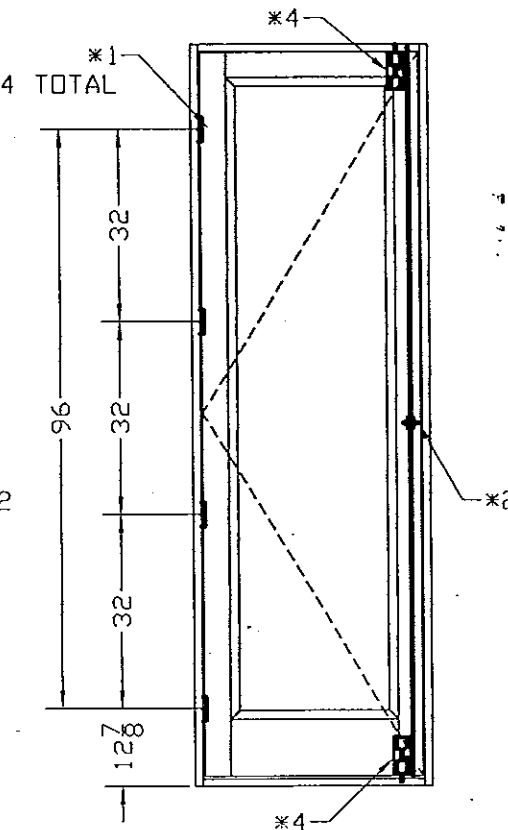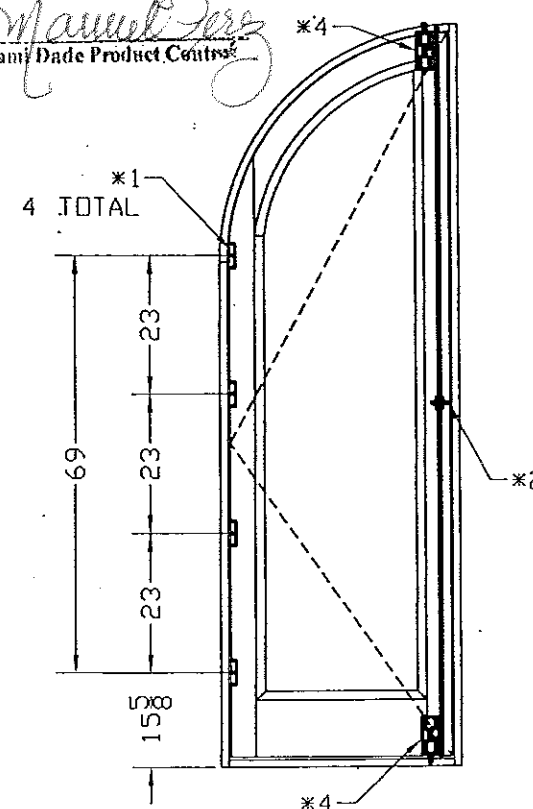

MANUFACTURER:

ROATAN
MAHOGANY
MILLWORK INC

4004C AURORA STREET
CORAL GABLES, FL 33146
PHONE: (305) 774-5999
FAX: (305) 774-0083


PRODUCT:

MAHOGANY
CASEMENT
WINDOWS

CASEMENT WINDOW
LARGE & SMALL MISSILE IMPACT

ENGINEERING:

ENGCO INC. CA 8116
5595 ORANGE DR. 201
DAVIE, FL. 33314
Tel.: (954) 585-0304
ENGCO@AOL.COM

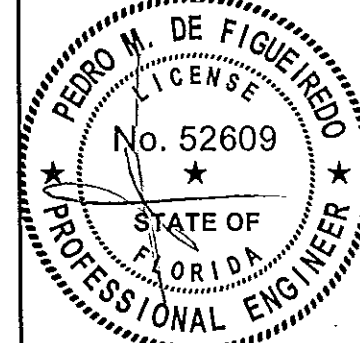

JUL 10 2012

Engineer Seal
Pedro De Figueiredo - PE 52609

MIAMI-DADE BCCO:

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 12-0713.05
Expiration Date Aug. 8, 2013


By *Manuel Perez*
Miami Dade Product Control

DATE: 06/25/2012
SCALE: NA
DESIGN BY: PPMF


SHEET
5 OF 7

DRAWING #:
12-131


TYPICAL ANCHORAGE DETAILS

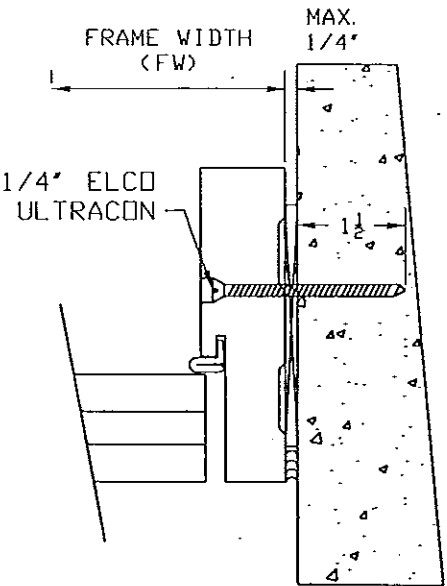


OPTION 1
FRAME WITH MAXIMUM 1/4" PT WOOD SHIM
1/4" ULTRACONS BY ELCO WITH 1 1/4" MIN.
EMBEDMENT INTO MASONRY
(SEE SHEET 3 OF 7 FOR ANCHORS LAY-OUT)

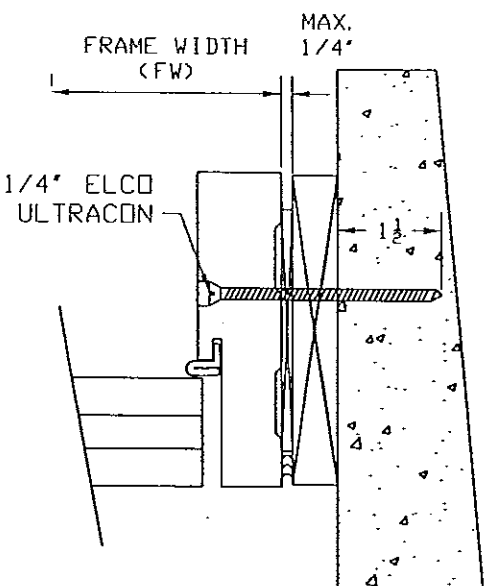

OPTION 2
FRAME WITH MAXIMUM 1/4" PT WOOD SHIM AND
1" PT CONT. WOOD SPACER
1/4" ULTRACONS BY ELCO WITH 1 1/4" MIN.
EMBEDMENT INTO MASONRY
(SEE SHEET 3 OF 7 FOR ANCHORS LAY-OUT)

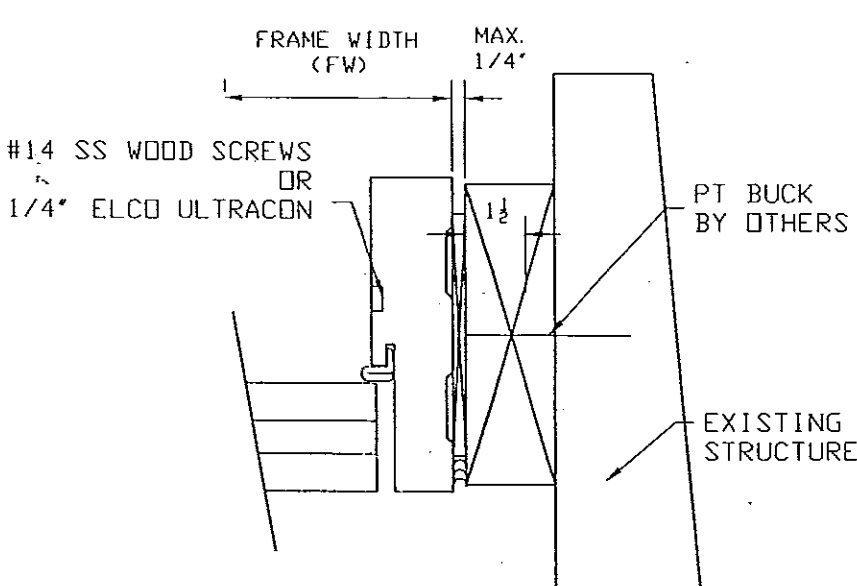

OPTION 3
FRAME WITH MAXIMUM 1/4" PT WOOD SHIM
AND 2" PT CONT. WOOD BUCK BY OTHERS
#14 SS WOOD SCREWS OR 1/4" ULTRACONS WITH
1 1/2" MIN. EMBEDMENT INTO WOOD (SG=.55)
(SEE SHEET 3 OF 7 FOR ANCHORS LAY-OUT)

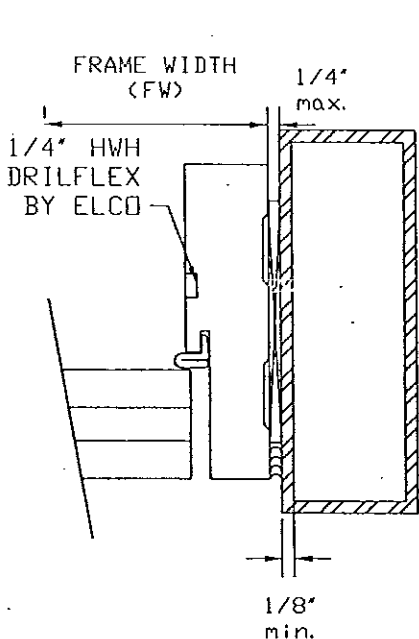

OPTION 4
FRAME WITH MAXIMUM 1/4" PT WOOD SHIM
1/4"-20 HWH DRILFLEX SELF DRILLING SCREWS BY
ELCO INTO MIN. 1/8" A36 STEEL
(SEE SHEET 3 OF 7 FOR ANCHORS LAY-OUT)

MANUFACTURER:

ROATAN
MAHOGANY
MILLWORK INC

4004C AURORA STREET
CORAL GABLES, FL 33146
PHONE: (305) 774-5999
FAX: (305) 774-0083

PRODUCT:


MAHOGANY
CASEMENT
WINDOWS

CASEMENT WINDOW
LARGE & SMALL MISSILE IMPACT

ENGINEERING:

ENGCO INC. CA 8116

5595 ORANGE DR. 201
DAVIE, FL. 33314
Tel.: (954) 585-0304
ENGCO@AOL.COM

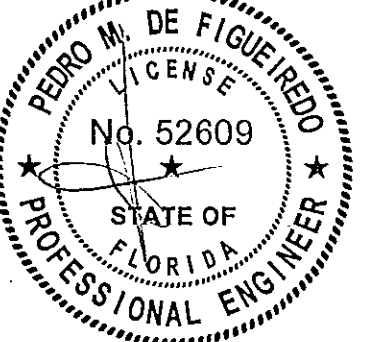

Engineer Seal
Pedro De Figueiredo - PE 52609


MIAMI-DADE BCCO:

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 12-0713.05
Expiration Date Aug. 8, 2013
By *Manuel Perez*
Miami Dade Product Control




DATE: 06/25/2012
SCALE: NA
DESIGN BY: PPMF

SHEET
6 OF 7
DRAWING #:
12-131

ACTIVE ASTRAGAL INSTALLATION TO WINDOW STILE
SAME DETAIL TOP AND BOTTOM

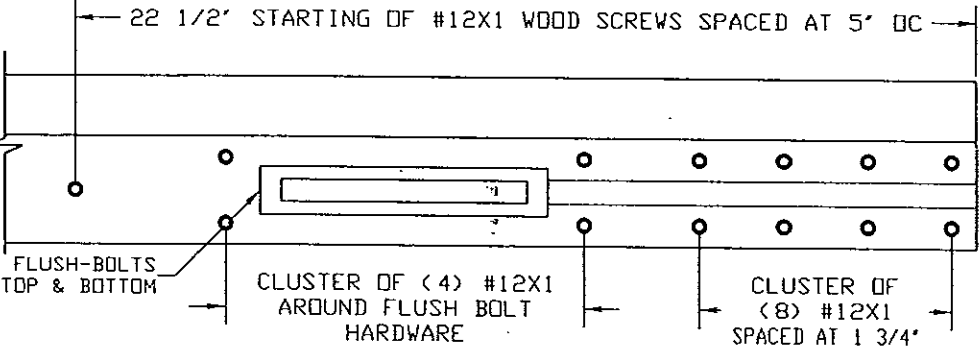


INACTIVE ASTRAGAL INSTALLATION TO WINDOW STILE
SAME DETAIL TOP AND BOTTOM

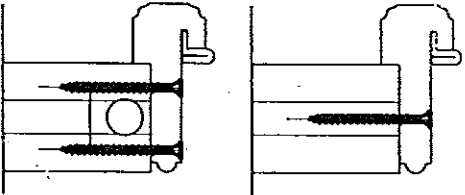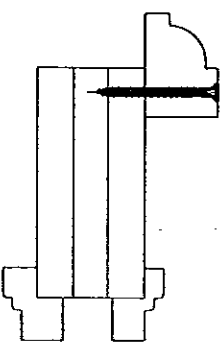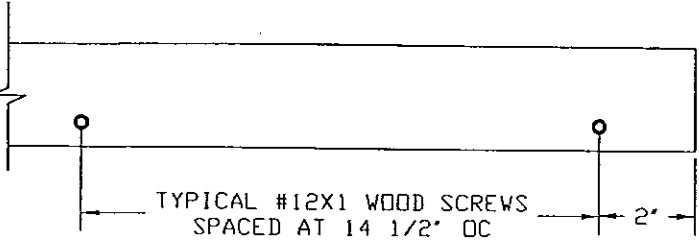


FRAME AND WINDOW ASSEMBLY

TYPICAL CORNER FRAMING
CONSTRUCTION

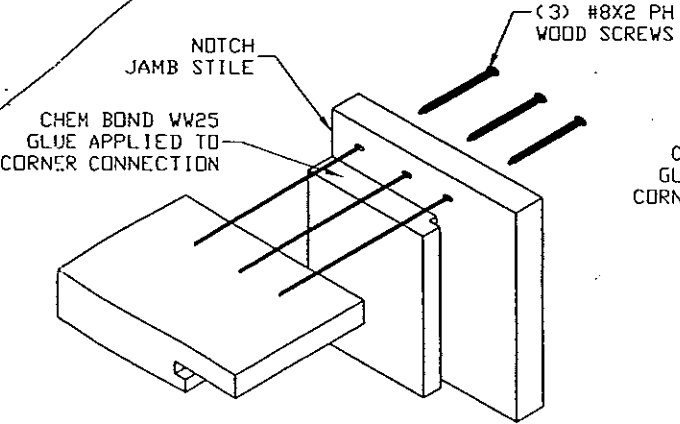

NOTE: AFTER FRAMING ASSEMBLAGE
ALL JOINTS ARE TO BE SEALED
WITH DOW 995 SILICONE.

TYPICAL WINDOW CORNER
CONSTRUCTION

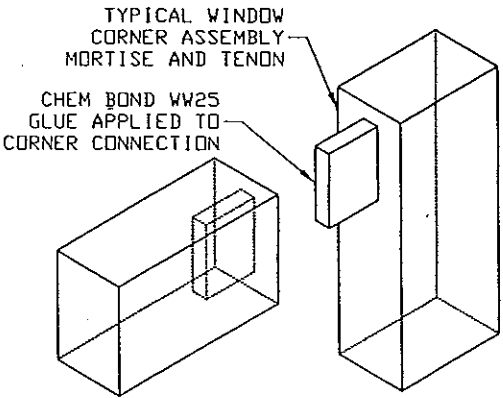


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 13-0814.03
Expiration Date Aug. 8, 2014
By *Manuel Perez*
Miami Dade Product Control


JUL 10 2012

PRODUCT COMPONENTS AND BILL OF MATERIALS


SASH PARTS

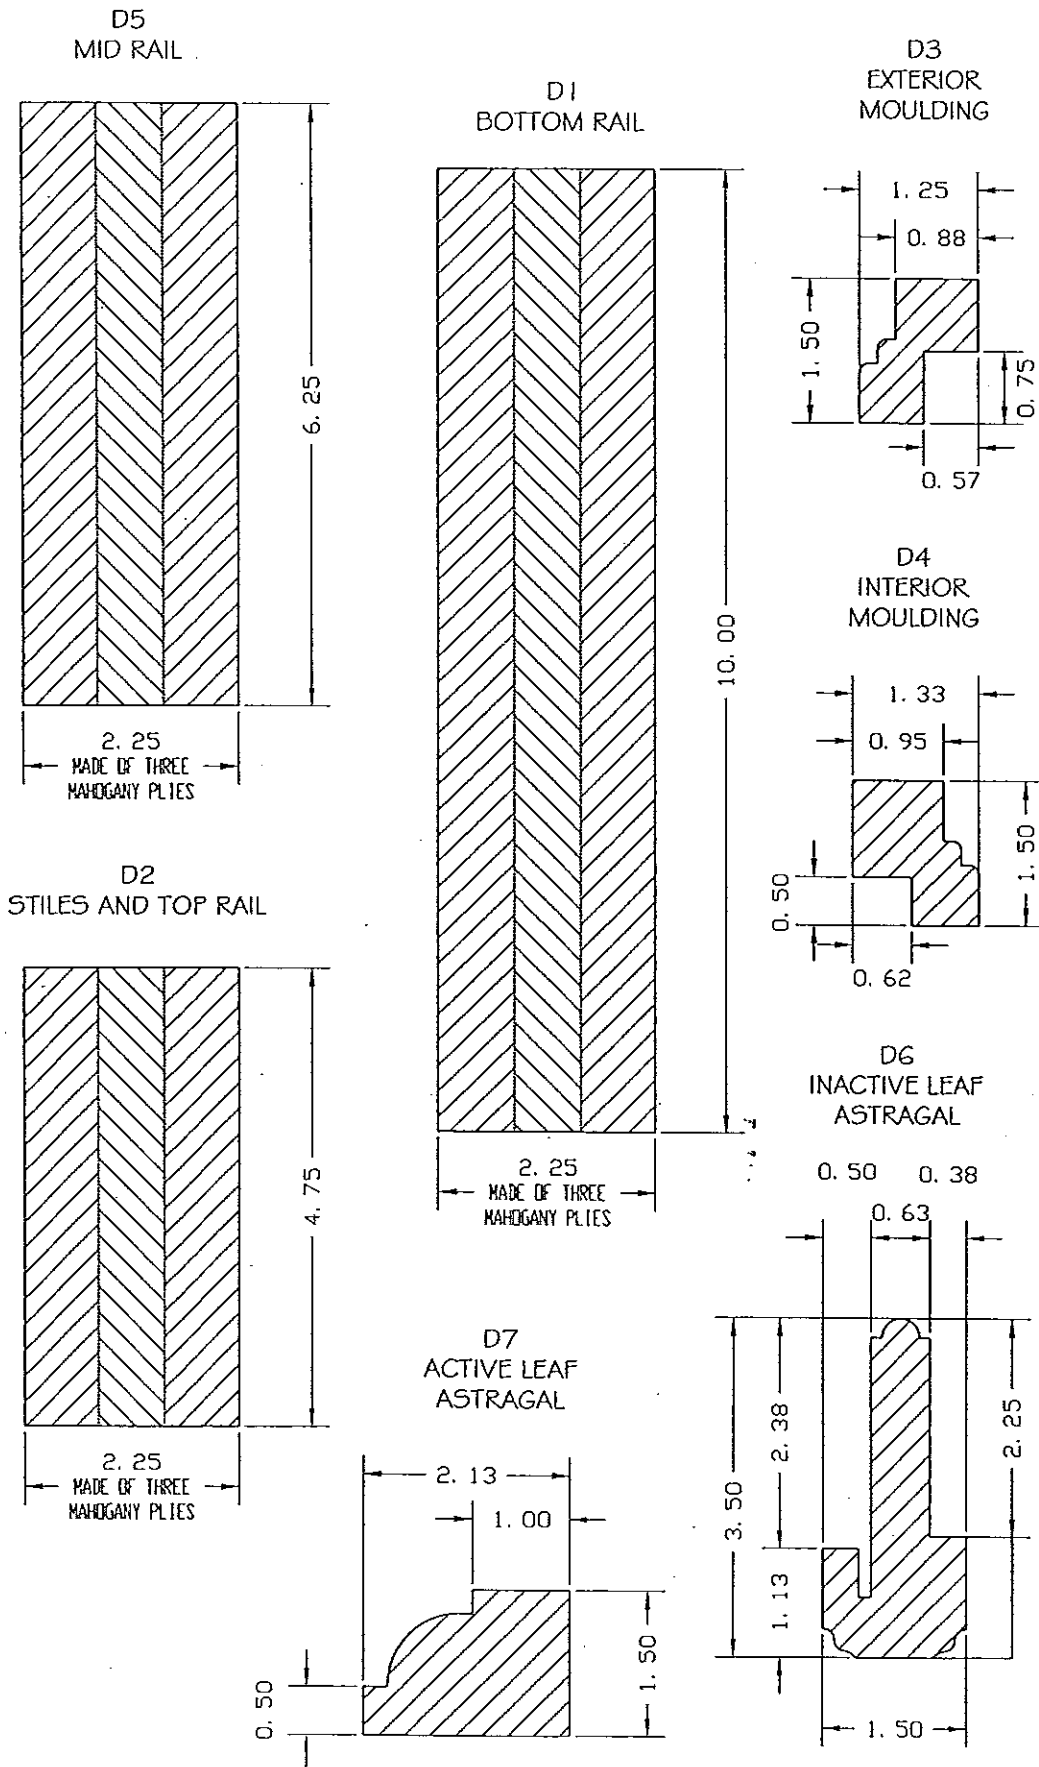

CLADDING

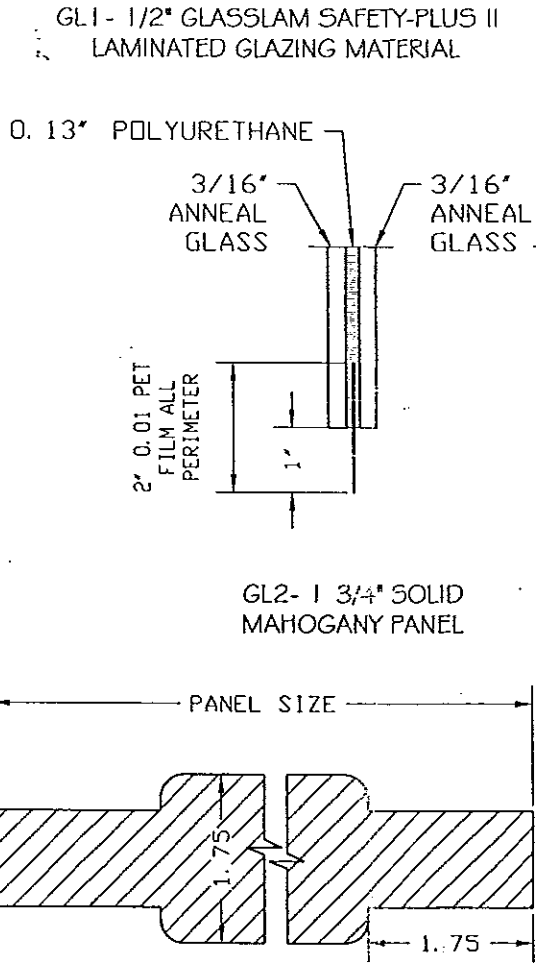


FRAME PARTS

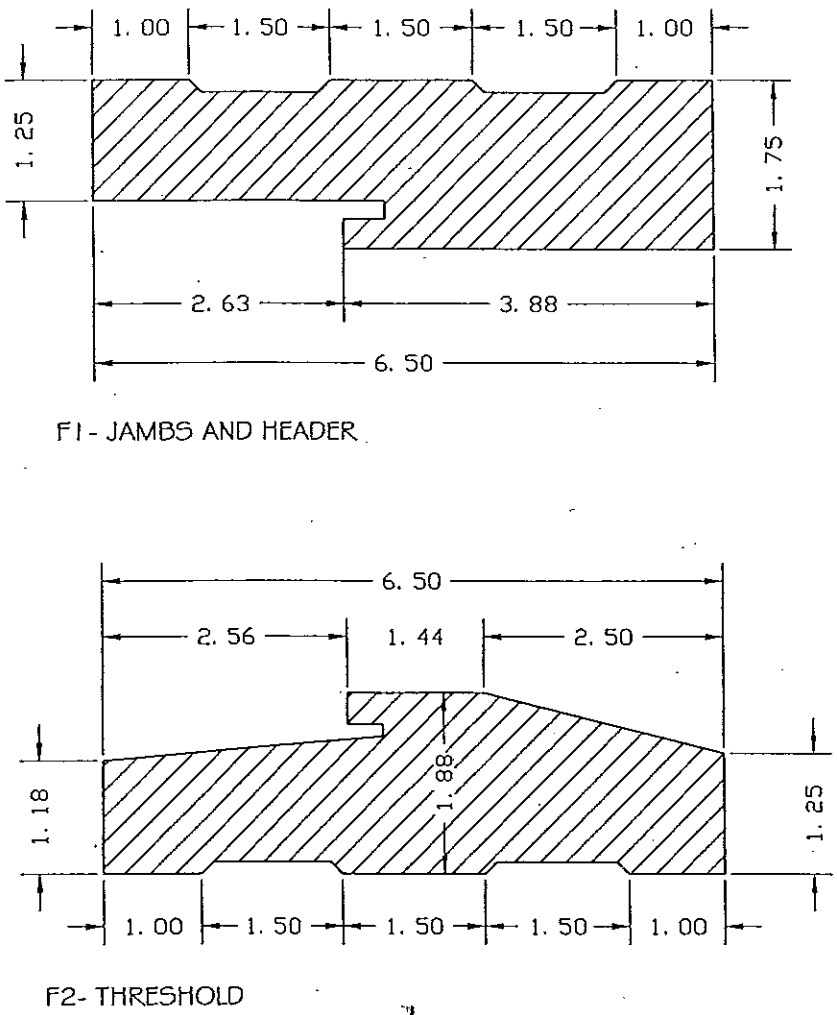

BILL OF MATERIALS

ITEM#	DESCRIPTION	SIZE	REMARKS
D1	BOTTOM RAIL	2.25"X 10"	MAHOGANY WOOD
D2	TOP RAIL & STILES	2.25"X 4.75"	MAHOGANY WOOD
D3	EXTERIOR MOULDING	1.50"X 1.25"	MAHOGANY WOOD
D4	INTERIOR MOULDING	1.50"X 1.375"	MAHOGANY WOOD
D5	MID RAIL	2.25"X 6.25"	MAHOGANY WOOD
D6	INACTIVE ASTRAGAL	3.50"X 1.50"	MAHOGANY WOOD
D7	ACTIVE ASTRAGAL	2.13"X 1.50"	MAHOGANY WOOD
GL1	IMPACT GLASS	1/2" LAMINATED	BY GLASSLAM
GL2	SOLID PANEL	1.75" THICK	MAHOGANY WOOD
F1	JAMB AND HEADER	1.75"X 6.50"	MAHOGANY WOOD
F2	SILL	1.875"X 6.50"	MAHOGANY WOOD
G1	BOTTOM RAIL GASKET	2.25"X 0.5"	PEMKO V80DS VINYL
G2	FRAME SEAL	0.65"X 0.58"	SCHLEGEL QDS 650

PRODUCT RENEWED as complying with the Florida Building Code Acceptance No. 13-0814.03 Expiration Date Aug 8, 2014 By Manuel Perez Miami Dade Product Control

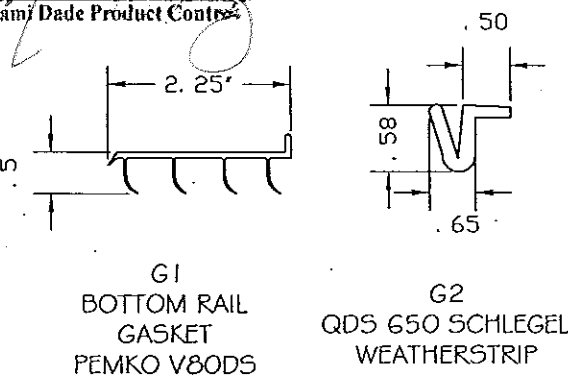

MANUFACTURER:
ROATAN MAHOGANY MILLWORK INC
4004C AURORA STREET
CORAL GABLES, FL 33146
PHONE: (305) 774-5999
FAX: (305) 774-0083

PRODUCT:
MAHOGANY CASEMENT WINDOWS
CASEMENT WINDOW
LARGE & SMALL MISSILE IMPACT

ENGINEERING:
ENGCO INC. CA 8116
5595 ORANGE DR. 201
DAVIE, FL. 33314
Tel.: (954) 585-0304
ENGCO@AOL.COM

PEDRO M. DE FIGUEIREDO
LICENSE
No. 52609
STATE OF FLORIDA
PROFESSIONAL ENGINEER
JUL 10 2012
Engineer Seal
Pedro De Figueiredo - PE 52609

MIAMI-DADE BCCO:
PRODUCT REVISED as complying with the Florida Building Code Acceptance No. 12-0713.05 Expiration Date Aug 8, 2013 By Manuel Perez Miami Dade Product Control

DATE: 06/25/2012
SCALE: NA
DESIGN BY: PPMF

SHEET 7 OF 7
DRAWING #: 12-131