

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

The Airolite Company, LLC P.O. Box 410 Schofield, WI 54476

Scope:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code. This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Model K605MD Aluminum Louver

APPROVAL DOCUMENT: Drawing No. K605MD, titled "K605MD Louver", Sheets 1 through 16 of 16, dated 04/27/2009, prepared by The Airolite Company, LLC, signed and sealed by Chander P. Nangia, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series, and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official. This NOA renews NOA # 09-0519.15 and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by Carlos M. Utrera, P.E.

MIAMI-DADE COUNTY APPROVED 1 09/16/2014

NOA No. 14-0624.17 Expiration Date: August 05, 2019 Approval Date: September 25, 2014

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

A. DRAWINGS "Submitted under NOA # 09-0519.15"

1. Drawing No. **K605MD**, titled "K605MD Louver", sheets 1 through 16 of 16, dated 04/27/2009, prepared by The Airolite Company, LLC, signed and sealed by Chander P. Nangia, P.E.

B. TESTS "Submitted under NOA # 09-0519.15"

- 1. Test report on 1) Uniform Static Air Pressure Test per FBC, TAS 202-94
 - 2) Large Missile Impact Test per FBC, TAS 201-94,
 - 3) Cyclic Wind Pressure Test per FBC, TAS 203-94,

along with marked-up drawings and installation diagram of Model ESS-502D fixed aluminum louvers, prepared by Architectural Testing, Inc., Test Report No. 89882.01-602-18, dated 04/30/2009, signed and sealed by Joseph A. Reed, P.E.

C. CALCULATIONS "Submitted under NOA # 09-0519.15"

1. Structural load calculations, prepared by Greenheck Fan Corporation, dated 04/14/2009, signed and sealed by Chander P. Nangia, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS


1. Statement letter of code compliance to 2010 FBC issued by Chander P. Nangia, P.E., dated 06/19/2014, signed and sealed by Chander P. Nangia, P.E.


"Submitted under NOA # 09-0519.15"


2. No financial interest letter issued by Chander P. Nangia, P.E., dated 04/27/2009, signed and sealed by Chander P. Nangia, P.E.


Carlos M. Utrera, P.E. Product Control Examiner NOA No. 14-0624.17


Expiration Date: August 05, 2019 Approval Date: September 25, 2014

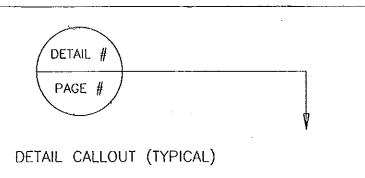


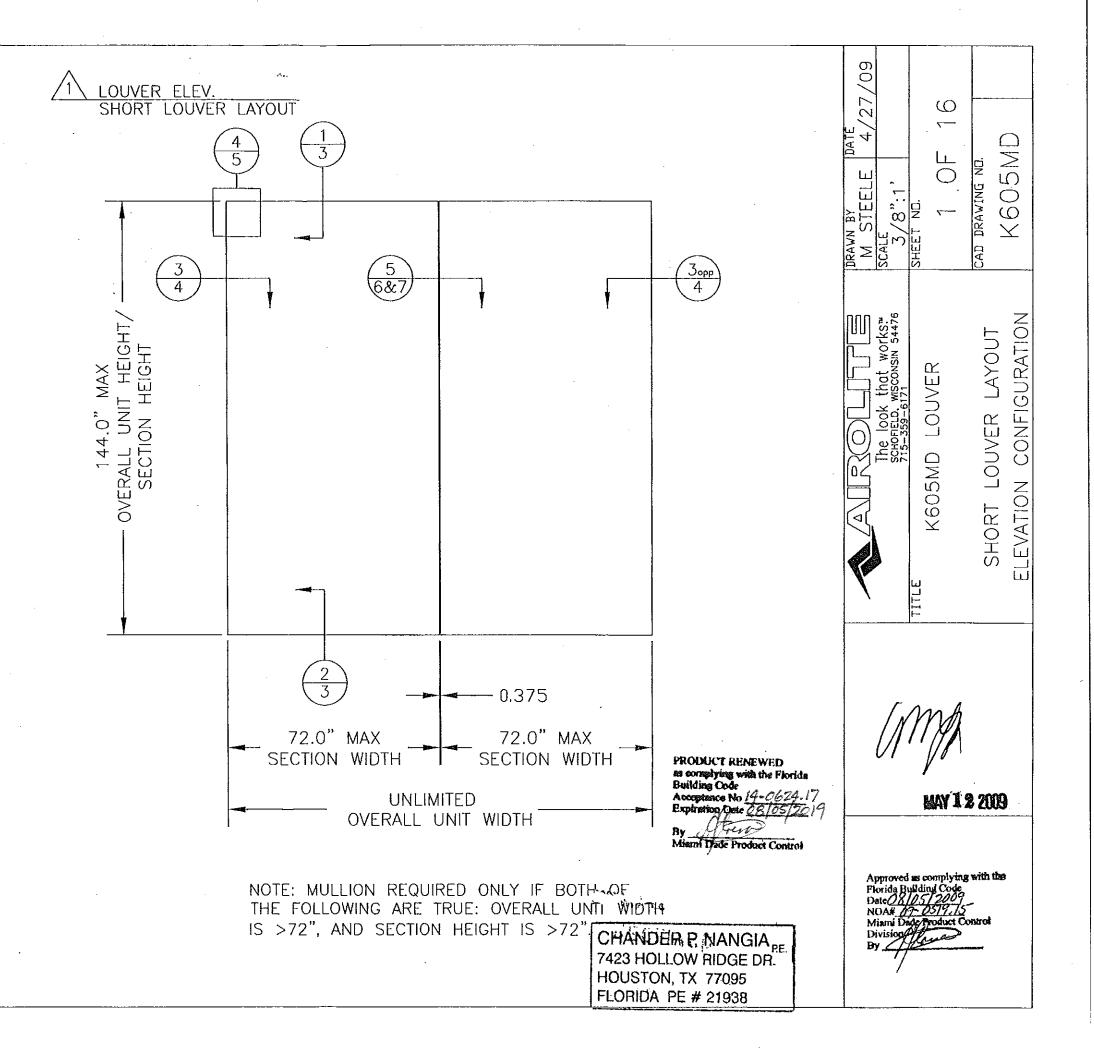


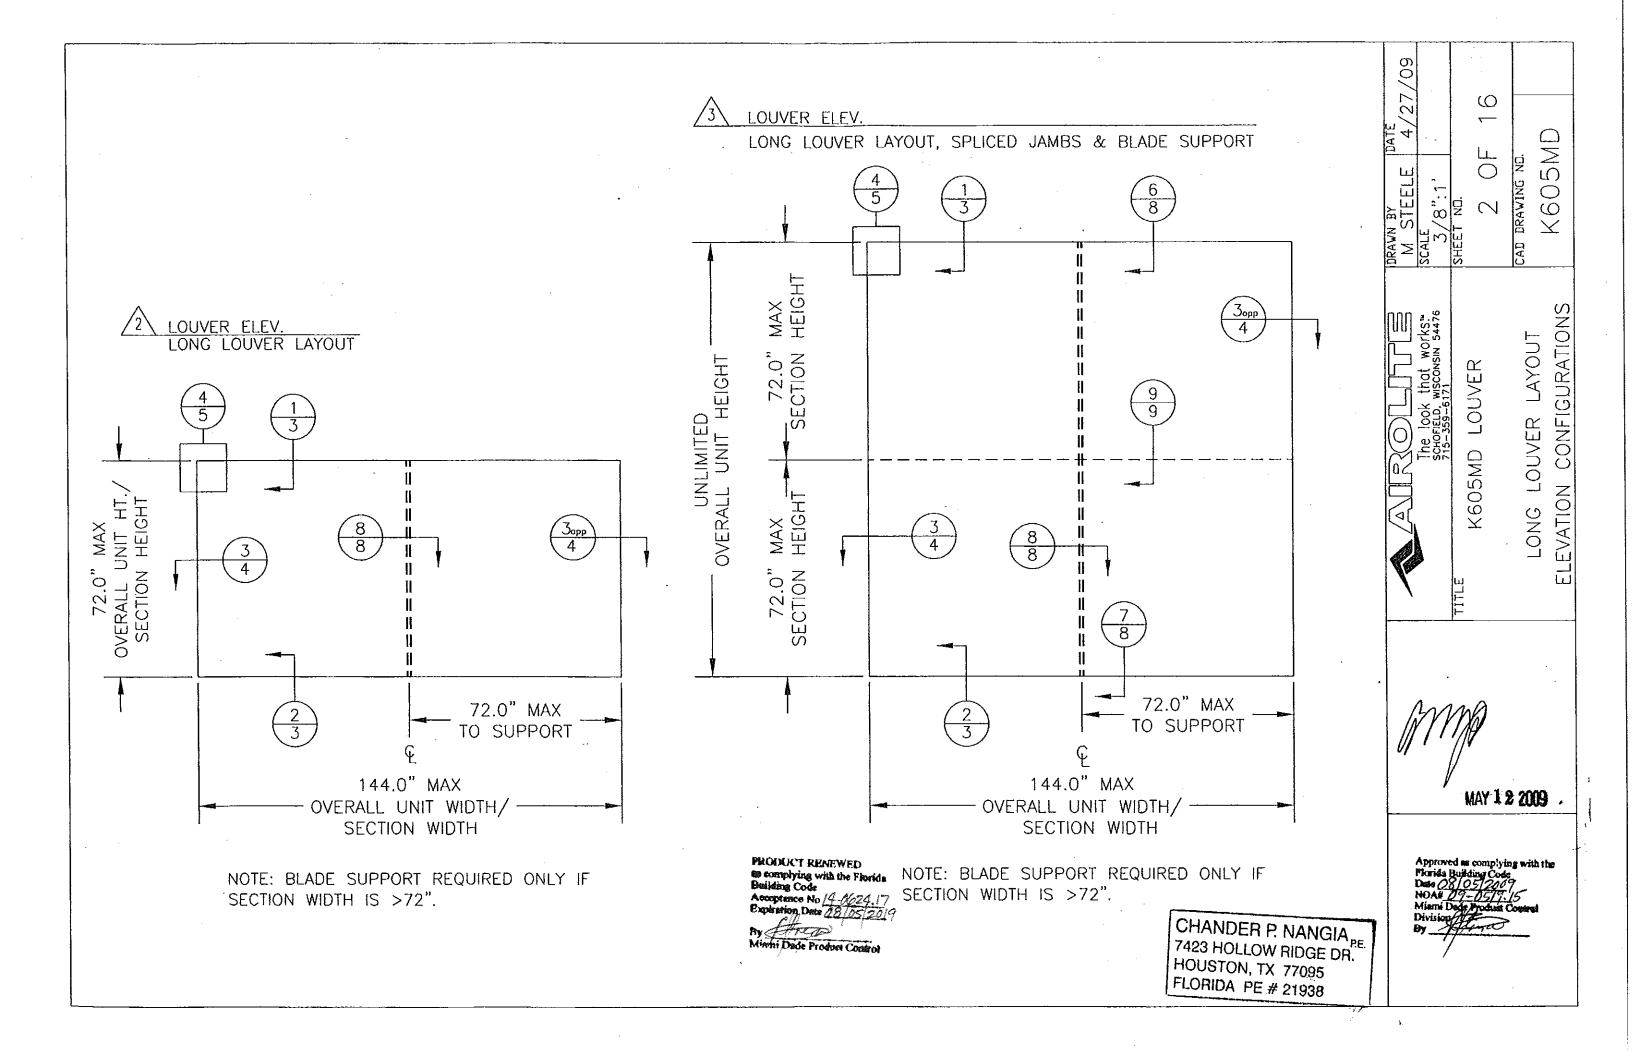


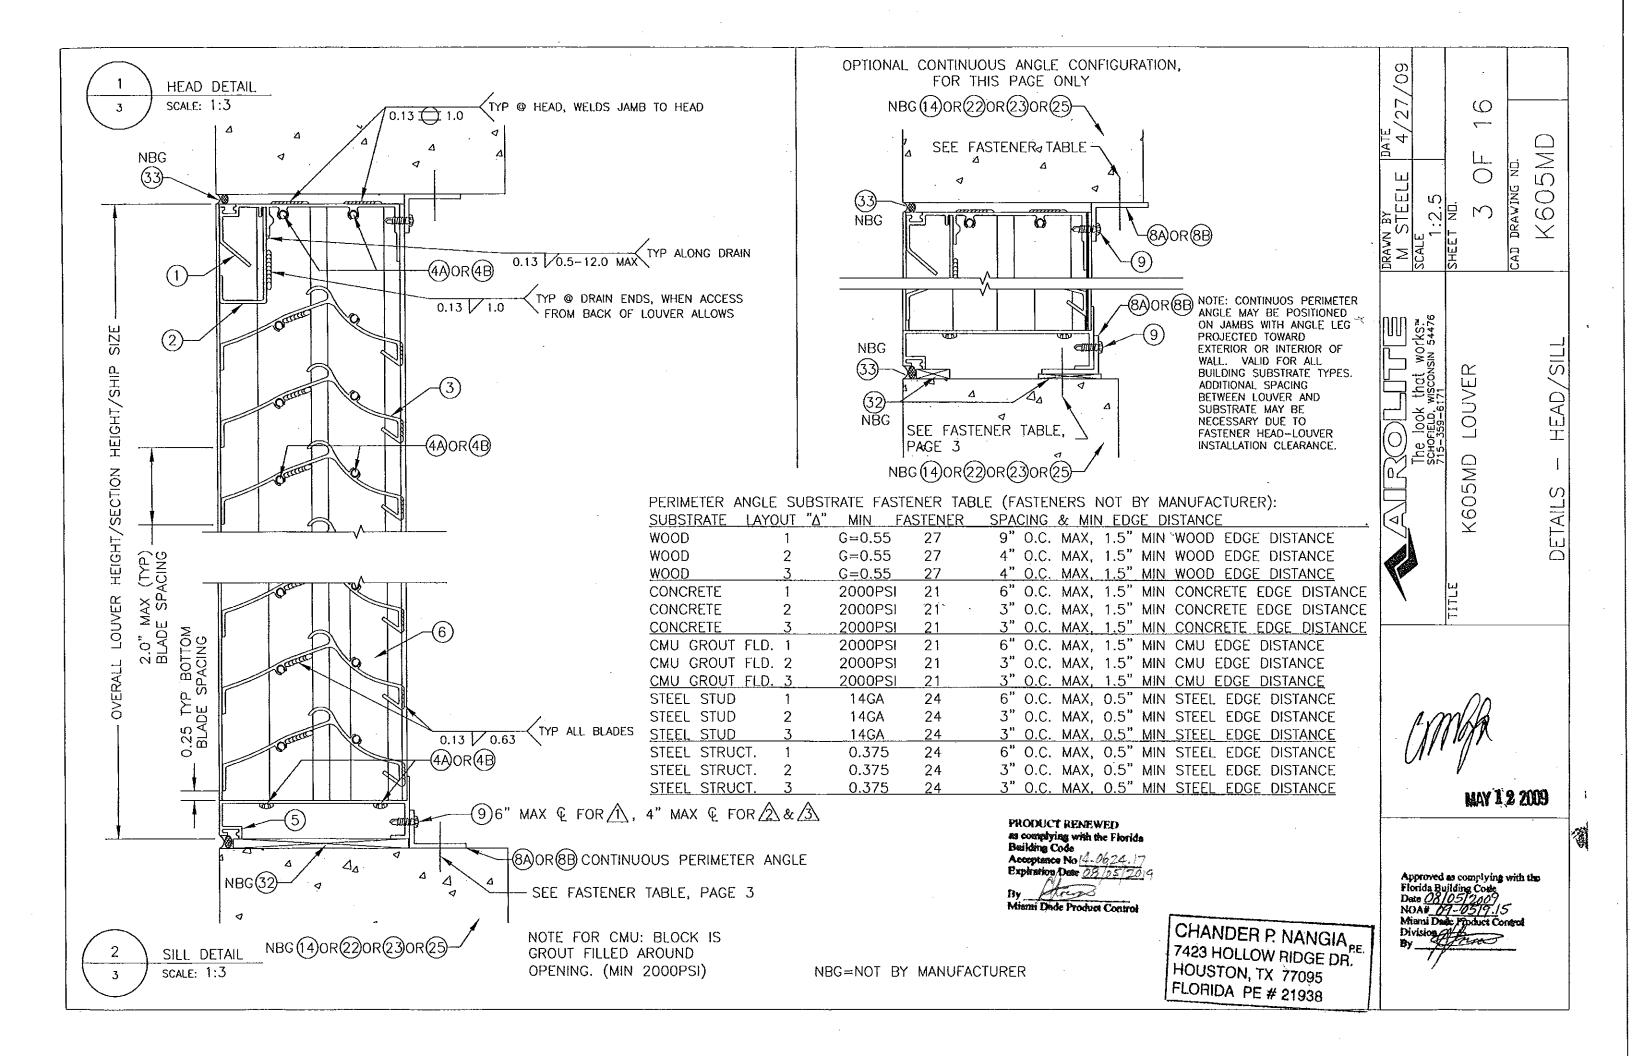


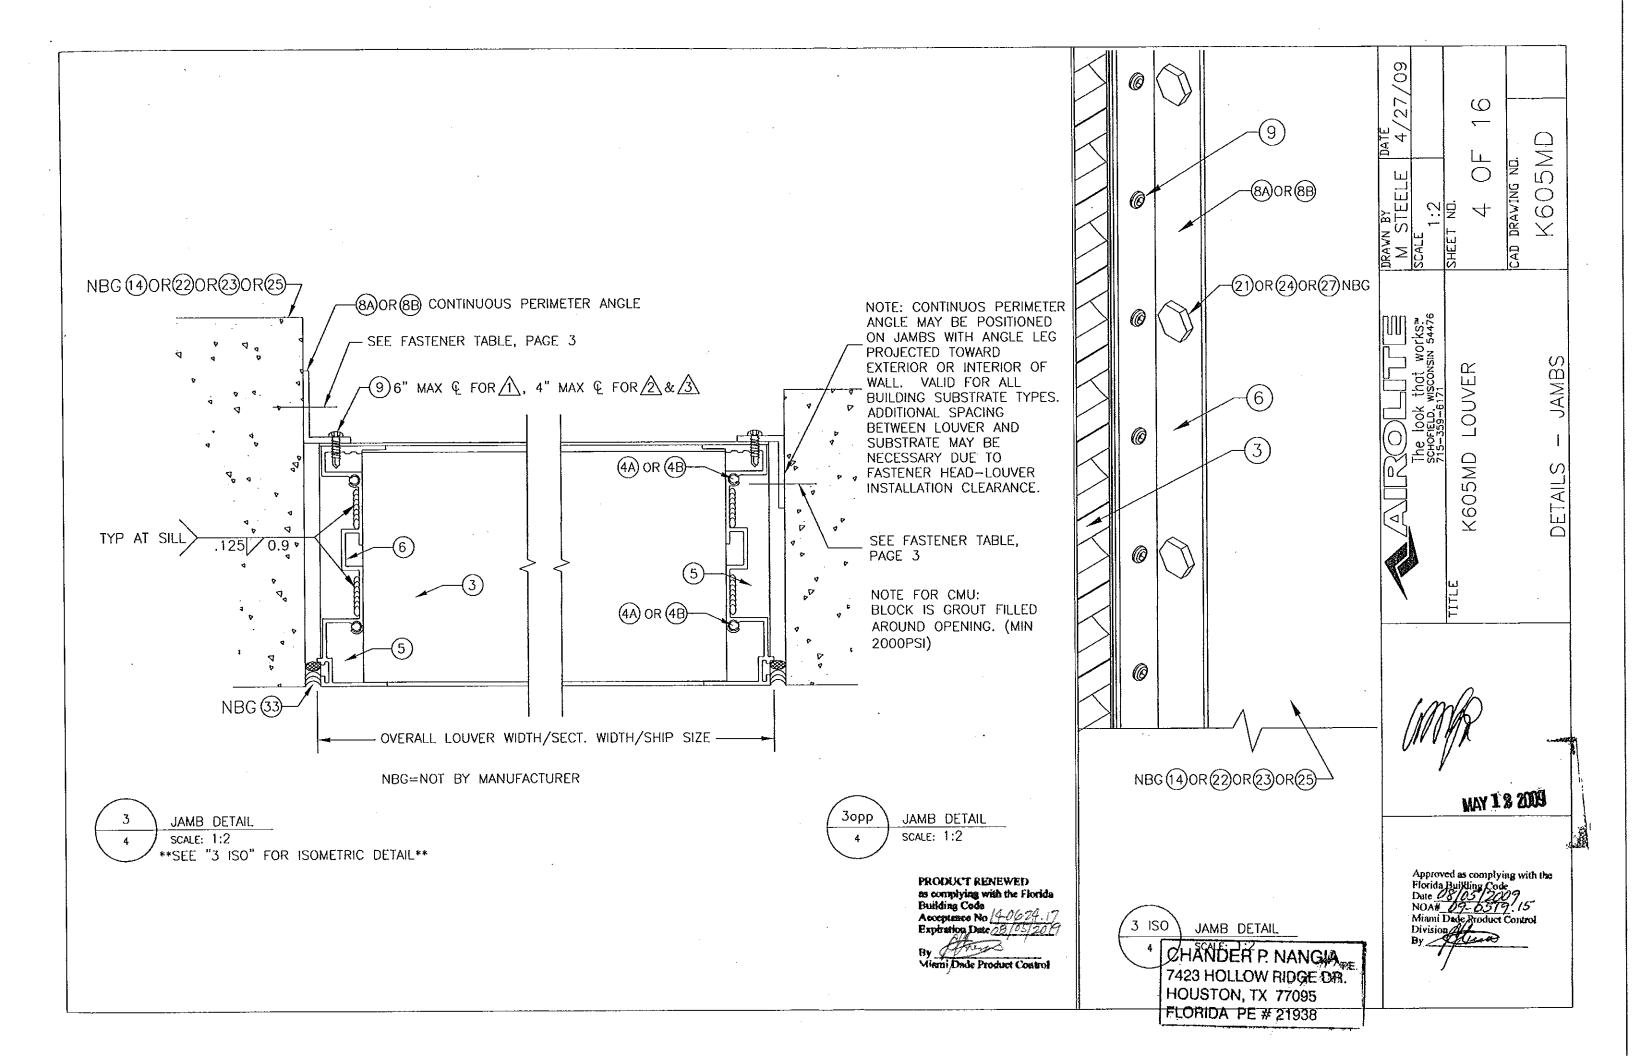


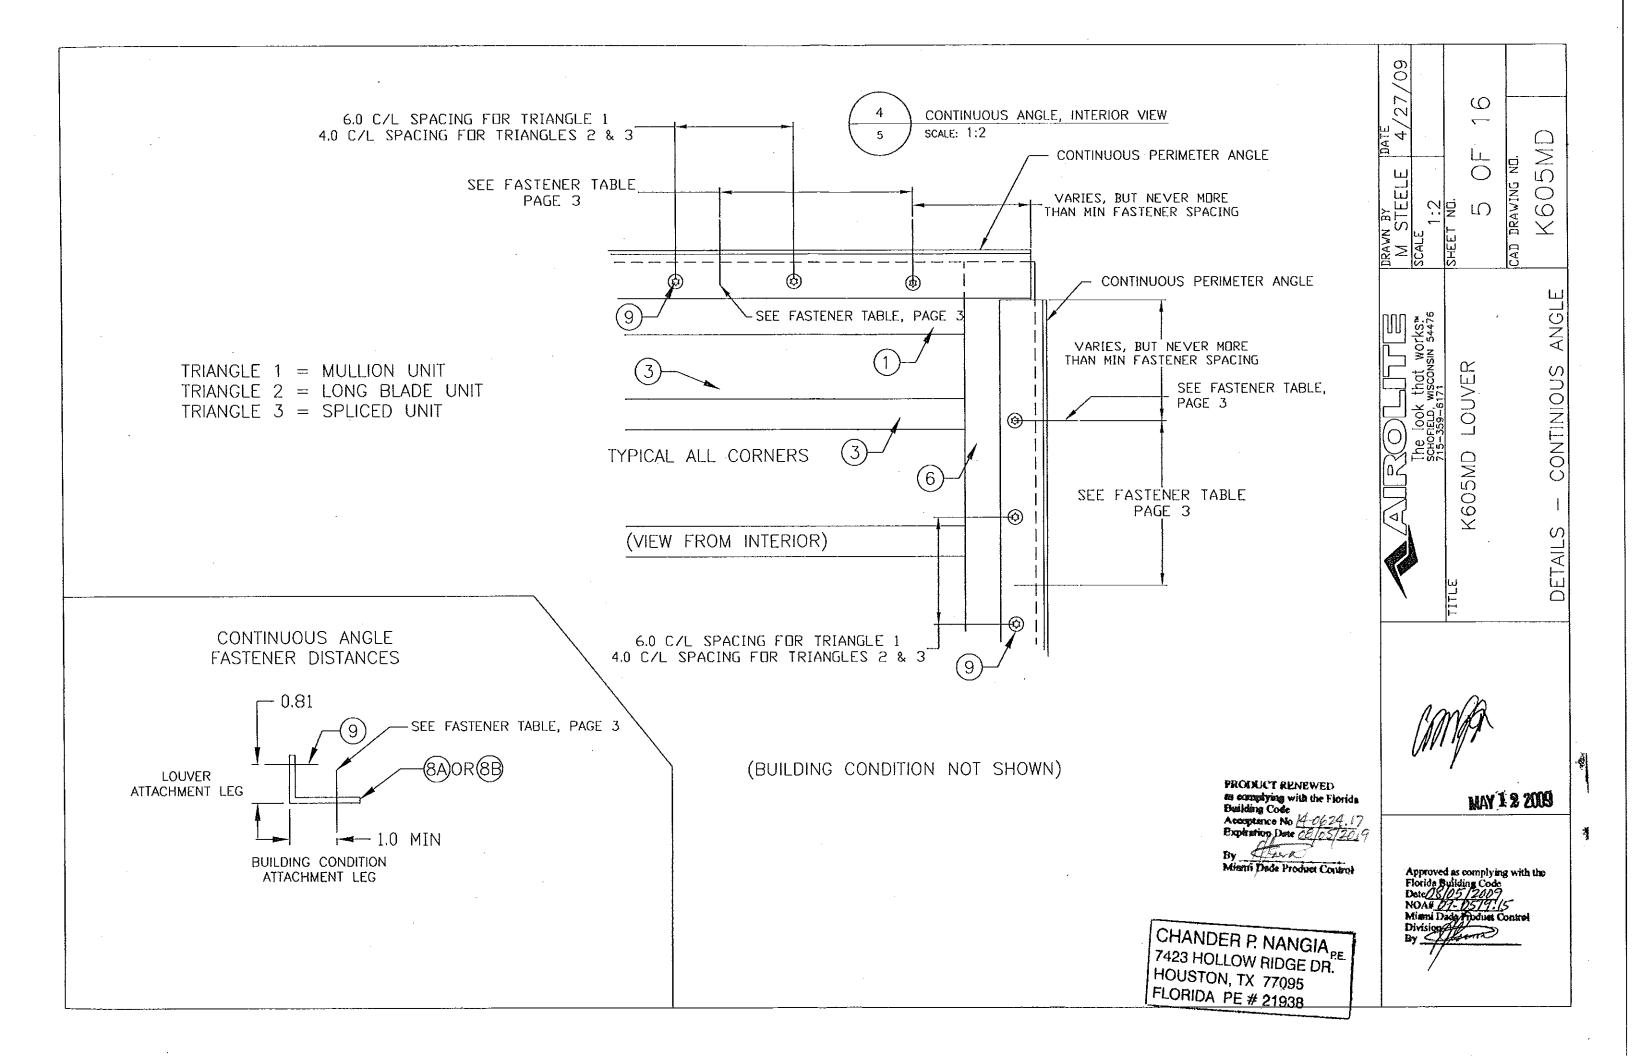

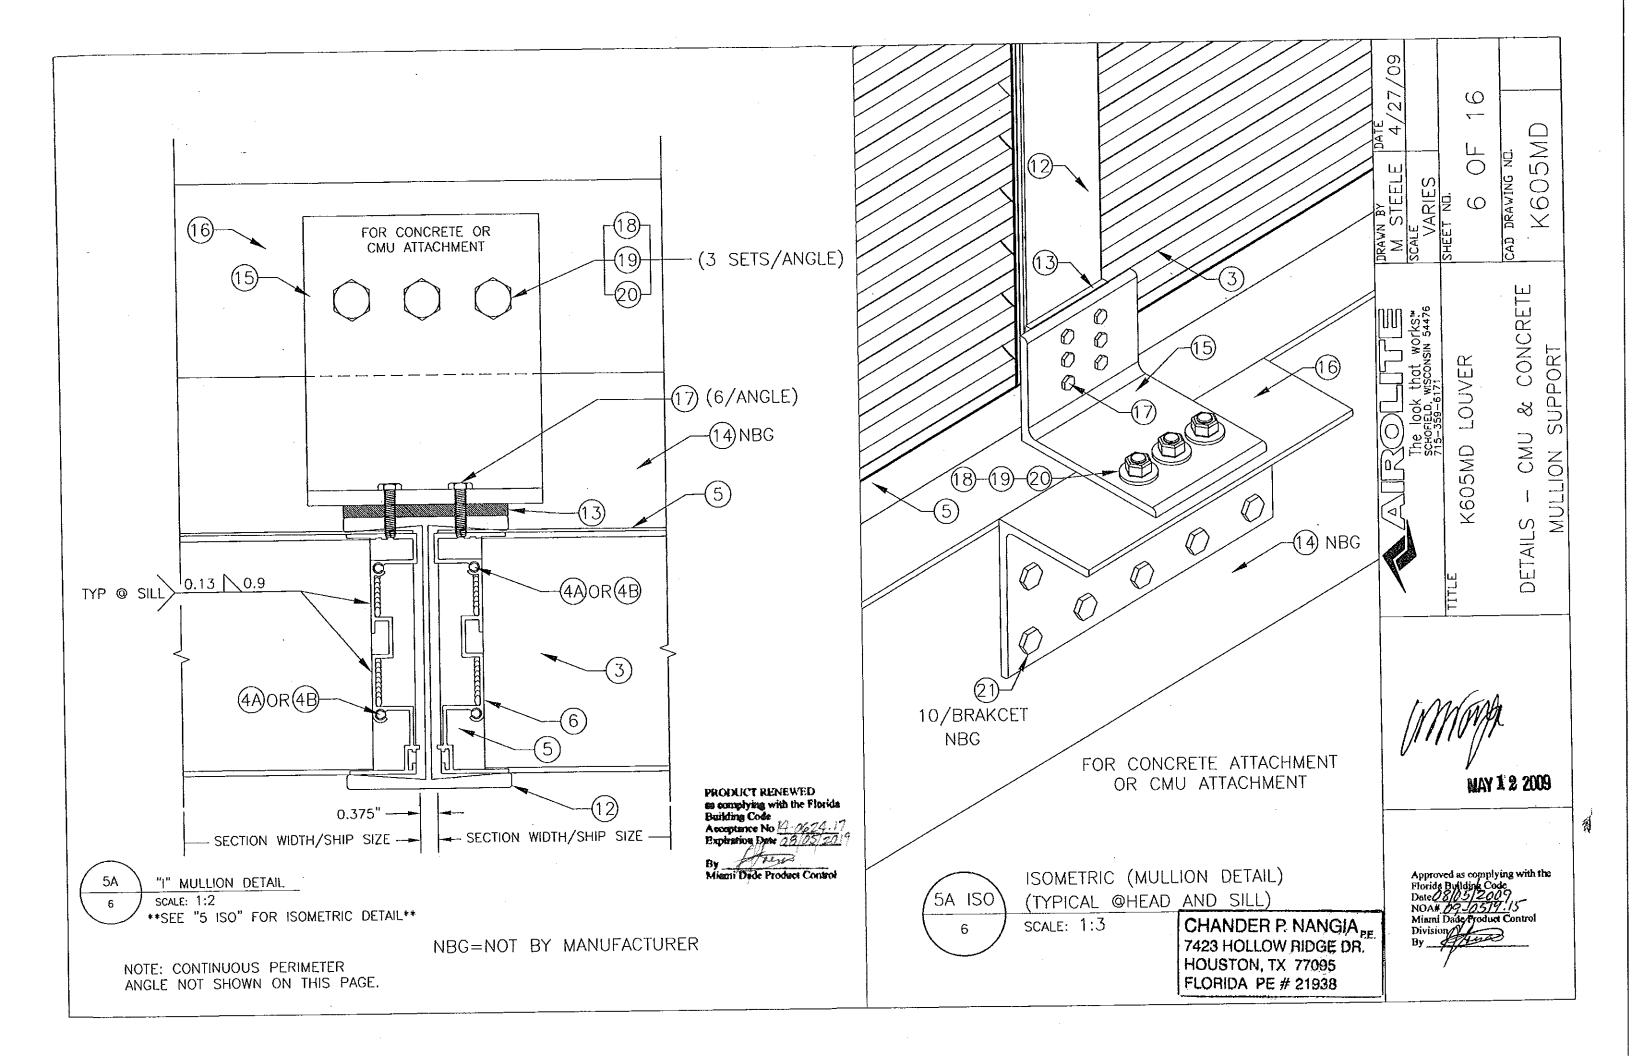

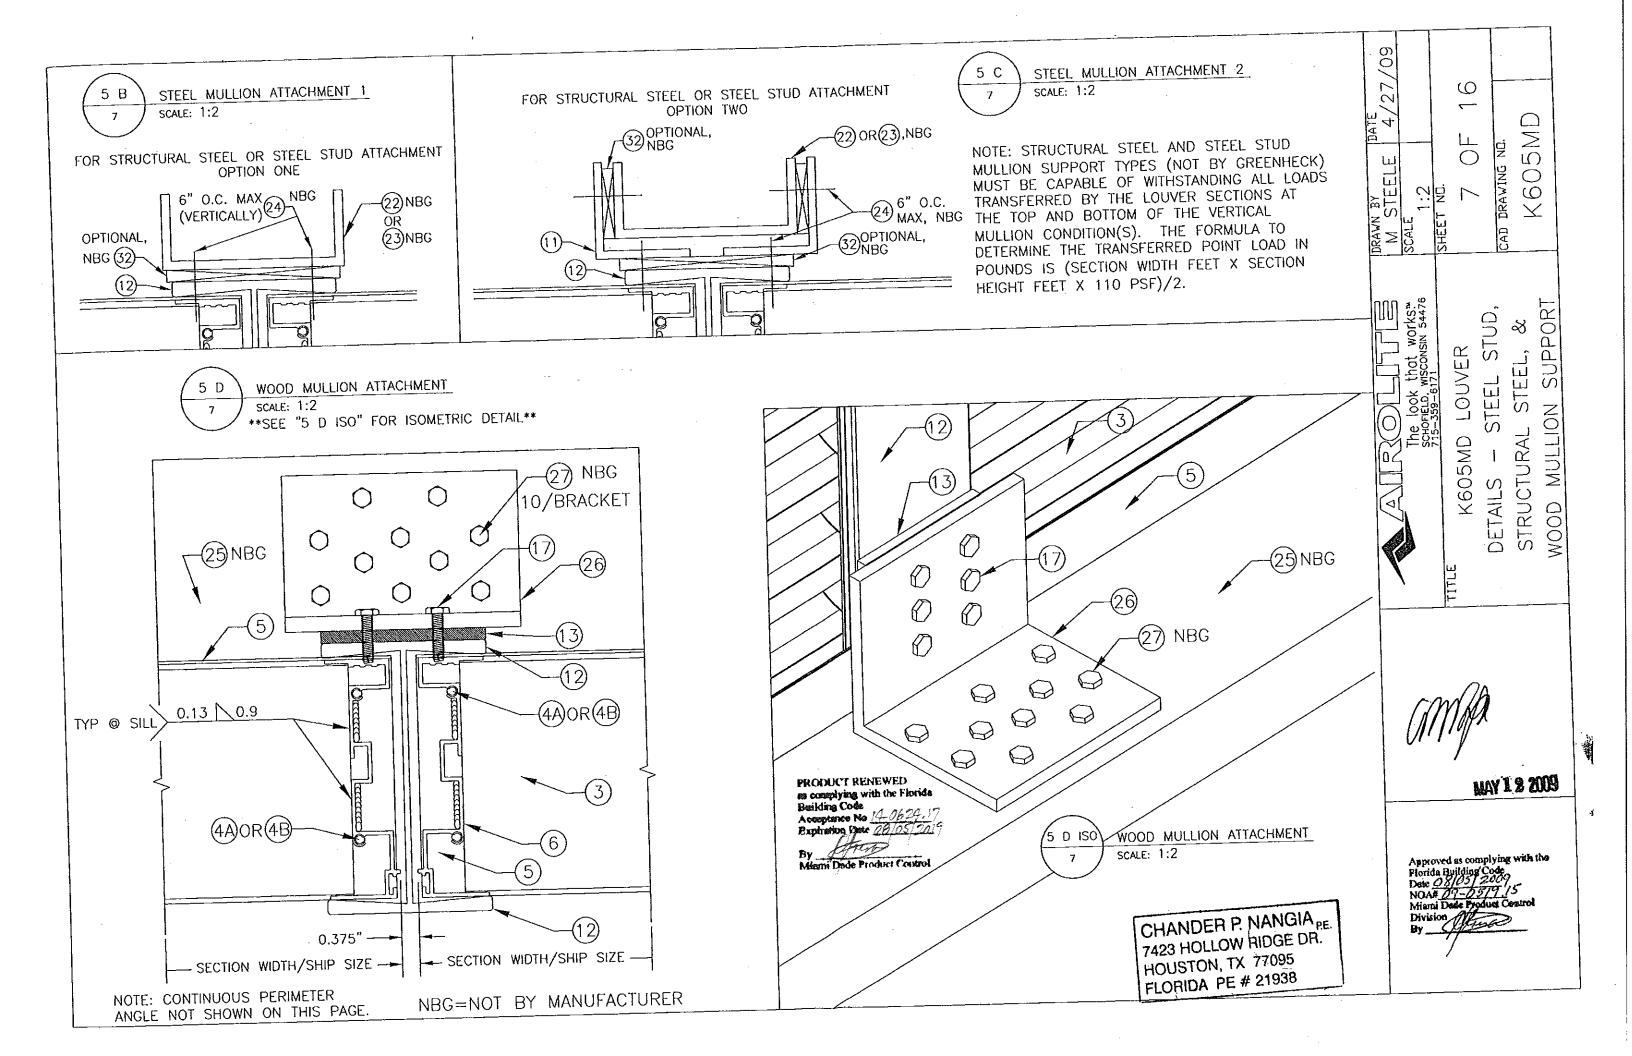

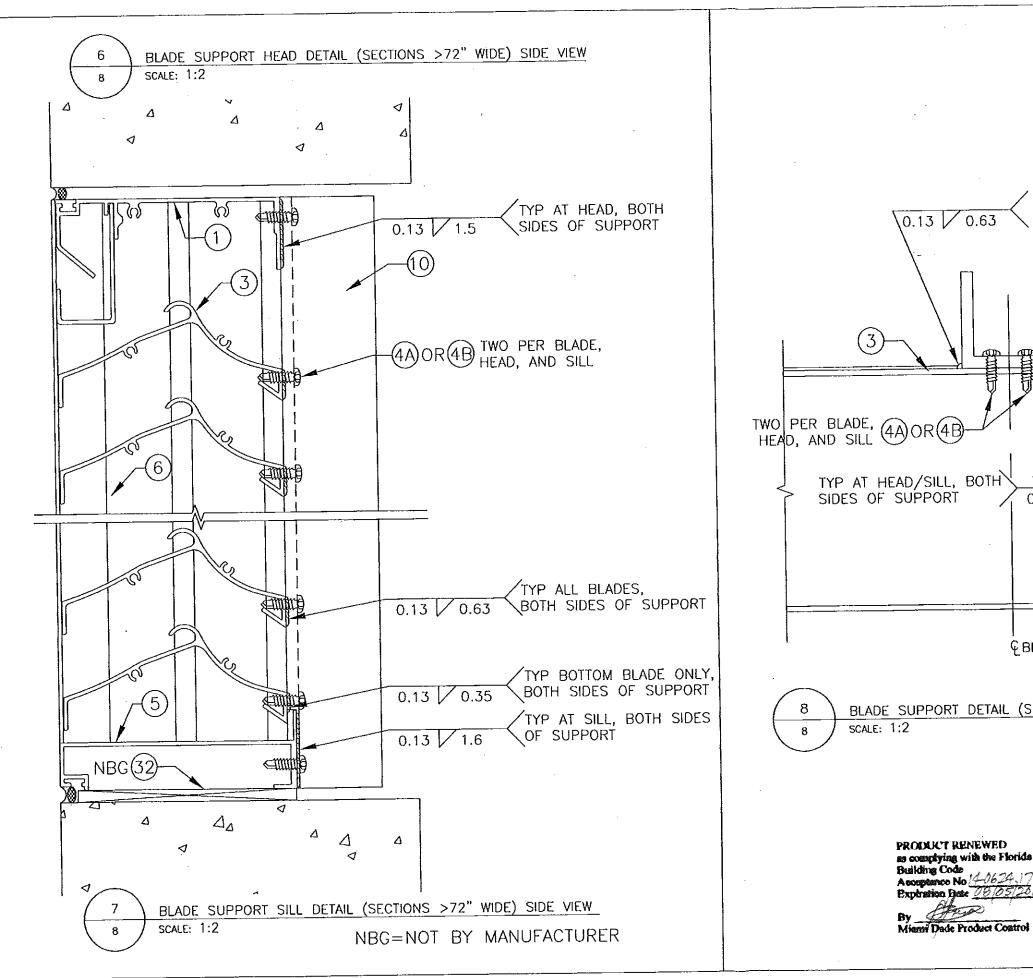

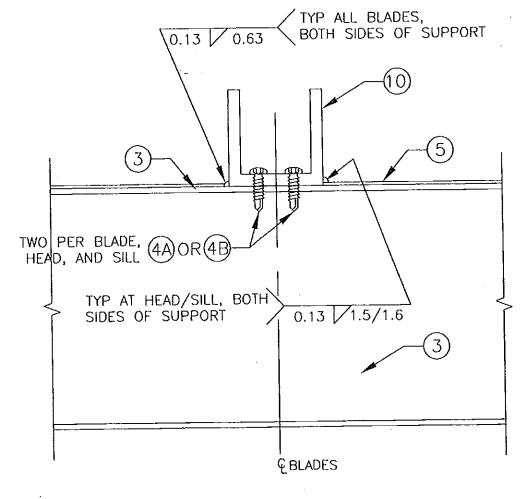


BLADE SUPPORT DETAIL (SECTIONS >72" WIDE) TOP VIEW

as complying with the Florida Building Code


CHANDER P. NANGIA RE. 7423 HOLLOW RIDGE DR." HOUSTON, TX 77095 FLORIDA PE # 21938

 \odot (605MD L_ \bigcirc DRAWN BY
M STEELE \times SUPPORT that works: LOUVER BLADE K605MD MAY 1 2 2009 Approved as complying with the Florida Building/Code
Date 08/05/2007
NOAH 09-05/9/5
Mianal Dade Product Control
Division

60

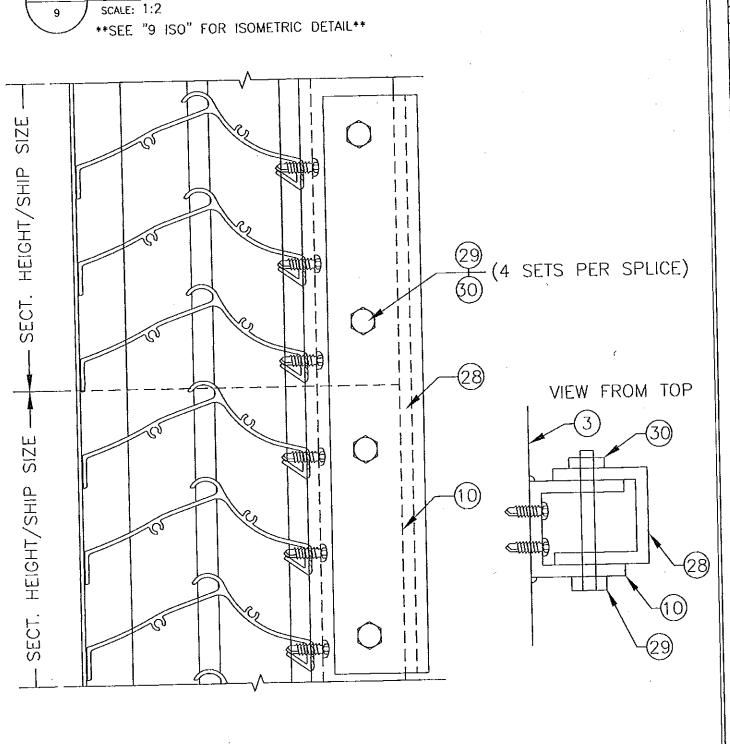

VERTICAL SPLICE/STACK DETAIL

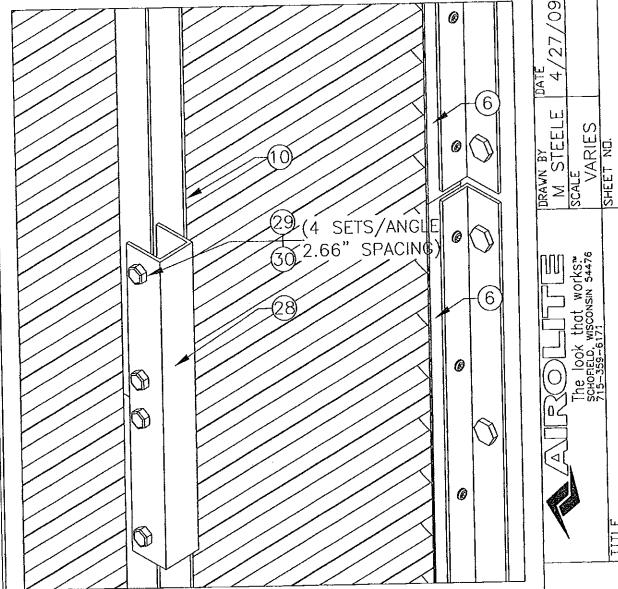

9 ISO ISOMETRIC (SPLICE/STACK DETAIL)
9 SCALE: 1:3

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 4-0624, 17
Exploration Date: Chilos (2017)
By

CHANDER P. NANGIA 7423 HOLLOW RIDGE OR. HOUSTON, TX 77895 FLORIDA PE # 21938 mile

 \bigcirc

LL

 \bigcirc

K605MD LOUVER

X605MD

CAD DRAWING

BLADE


SPLICED


DETAILS


SUPPORT


MAY X 2 2009

Approved as complying with the Florida Building Code
Date 08/05/2009
NOA# 07-05/7:15
Mianui Dedu Product Control
Division Florida
By

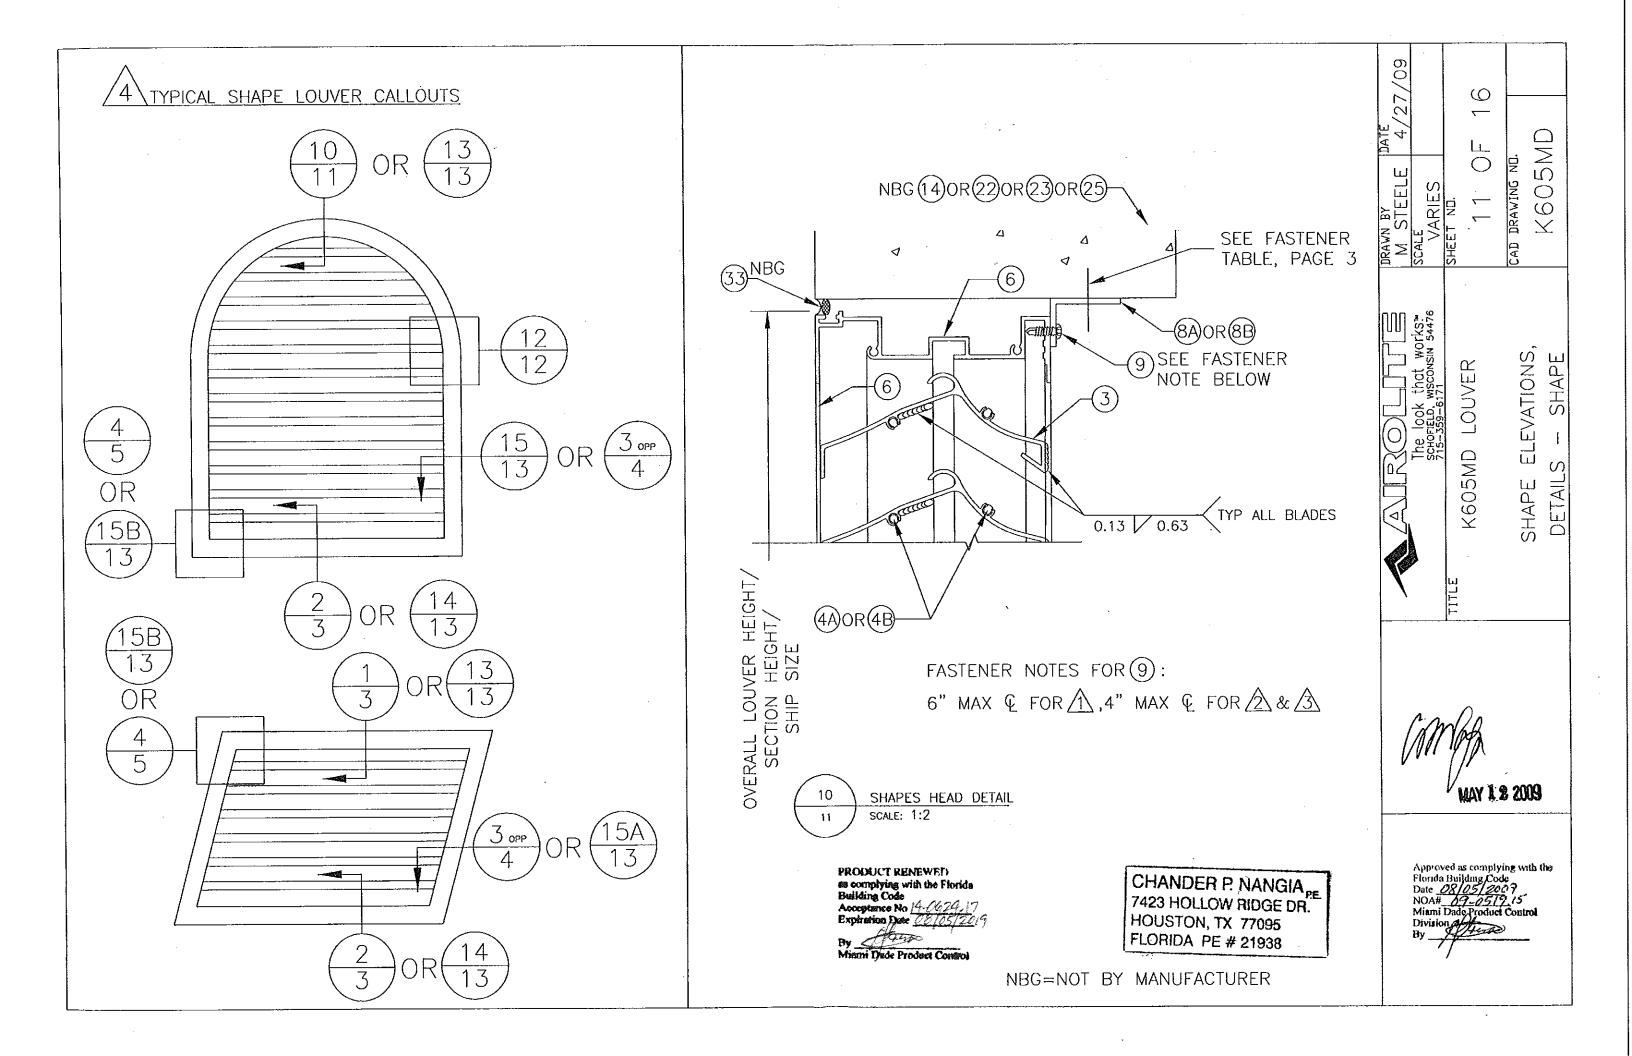

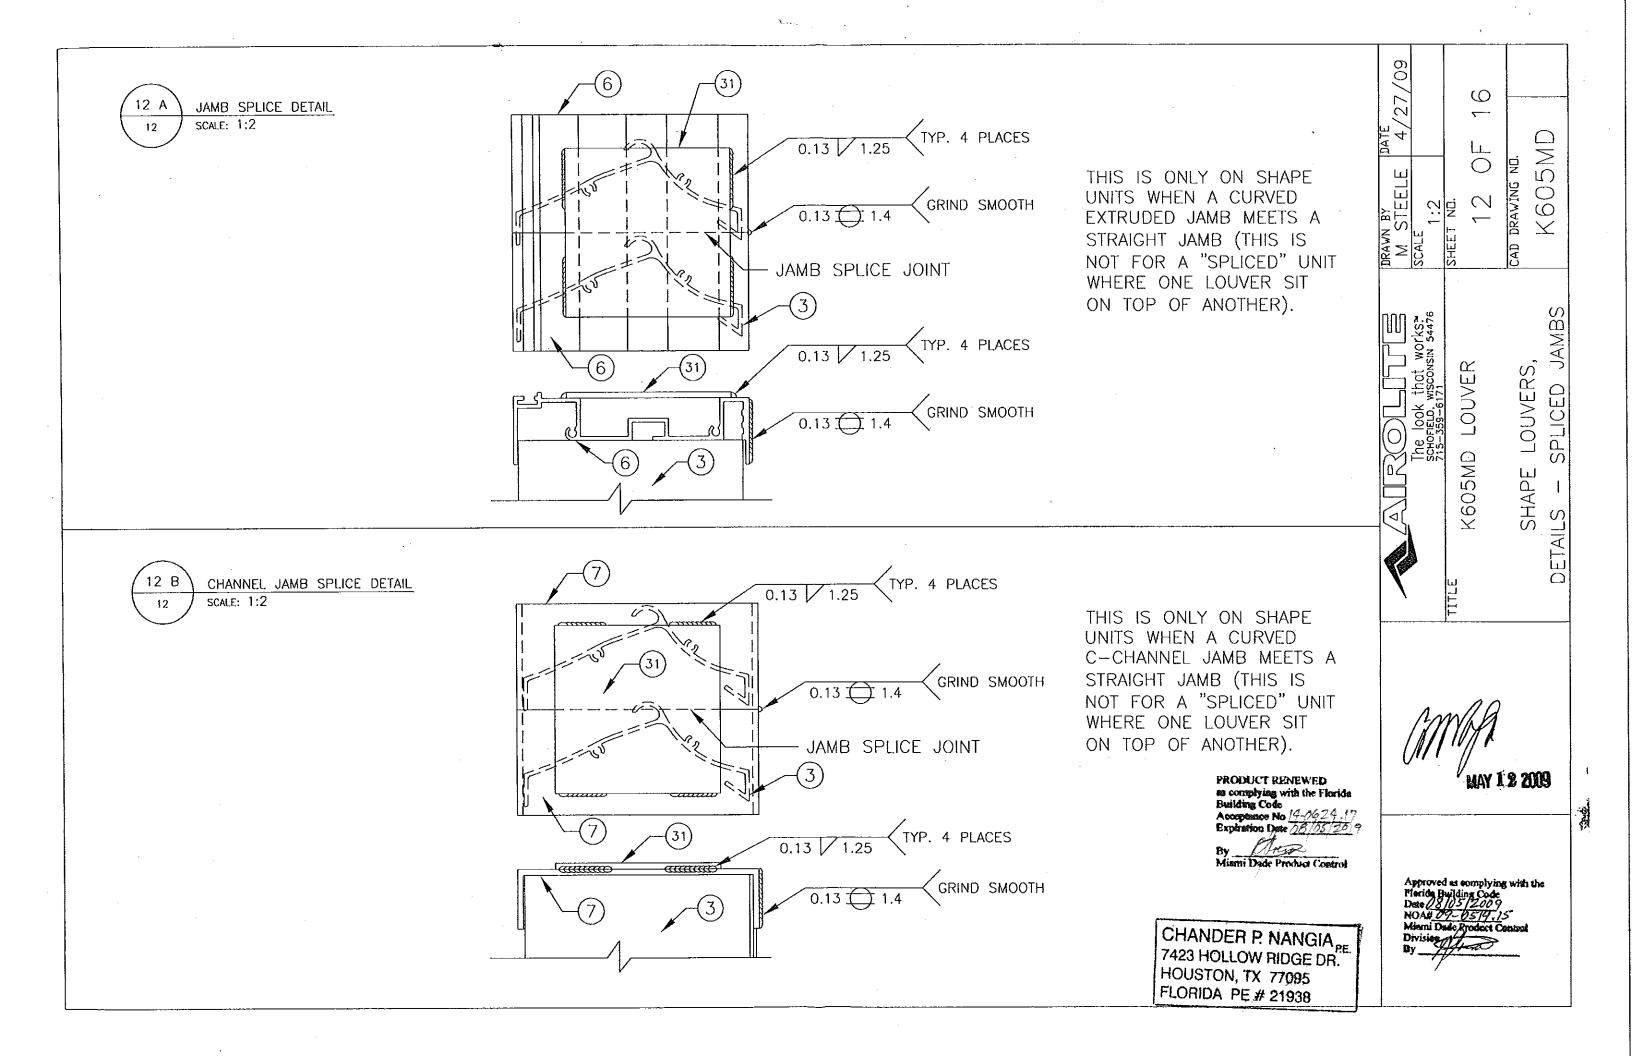

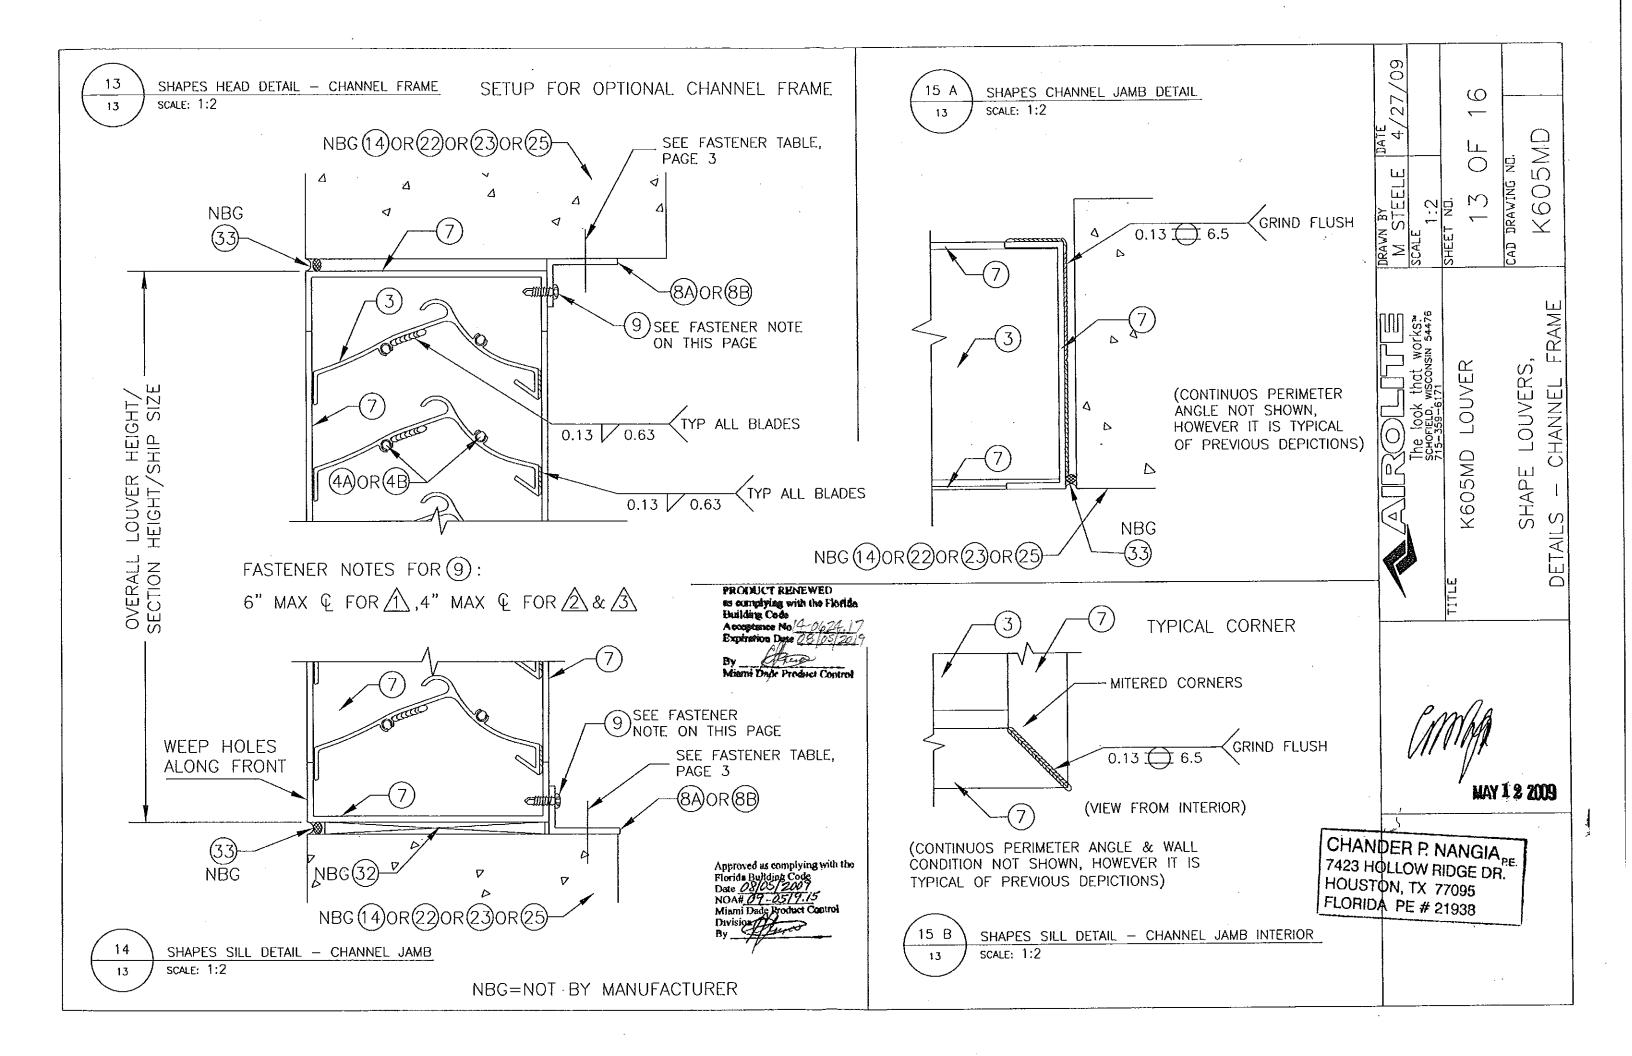

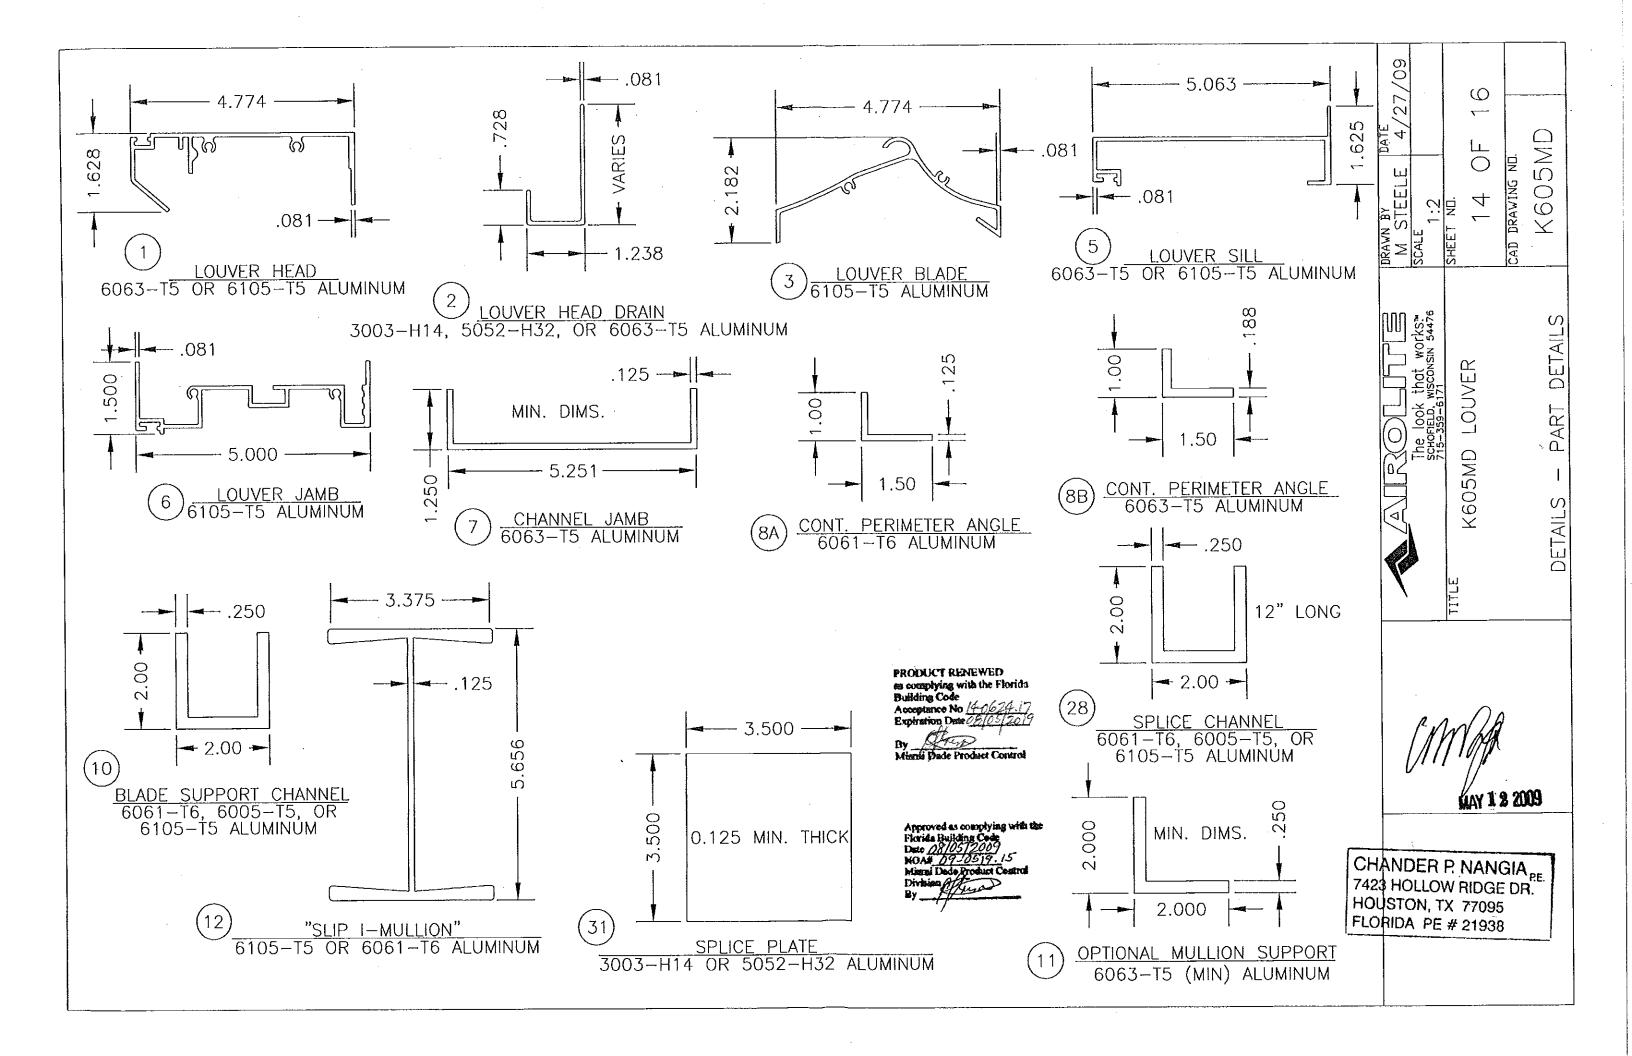

1. Liduver Head 2. Liduver Head Drain 3. Liduver Blade 4. Lim 4. Lim 3. Liduver Blade 4. A. Hid 4. Lim	ITEM	DESCRIPTION	MATERIAL	NOTES
3 LQUVER BLADE	1	LOUVER HEAD	ALUM	
HIO × 0.5 MIN THREAD, SCREW, 7075-T6 ALUM	2	LOUVER HEAD DRAIN	ALUM	
#10	3	LOUVER BLADE	ALUM	
5 LOUVER SILL 6 LOUVER JAMB ALUM 7 DPTIONAL C-CHANNEL JAMB 8A CONTINUOUS MTG ANGLE, 1.0x1.5x0.125 MIN, 6061-T6 8B CONTINUOUS MTG ANGLE, 1.0x1.5x0.188 MIN, 6063-T5 9 #10-24 OR #12-24 x 0.5 MIN THREAD, SCREW 9 #10-24 OR #12-24 x 0.5 MIN THREAD, SCREW 10 BLADE SUPPORT CHANNEL, 2x2x2x0.25 11 DETIONAL ADDITIONAL MULLION SUPPORT ANGLE 12 SLIP '1' MULLION 13 GASKET, 3.5x4x0.25 MIN (BY MANUFACTURER) 14 CONCRETE OR GROUT FILLED CMU, 2000 PSI MIN 15 LOUVER MULLION ANGLE FOR CONCRETE/CMU 16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU 17 0.25-20x1 MIN, SCREW (BY MANUFACTURER) 18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON W/ ADV. THREADFORM, SS/STEEL 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G-0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 29 BOLT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE CHANEL, 2x2x2x0.25, 12' LONG 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 33 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 34 VARIES NOT BY MANUFACTURER 35 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 35 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 36 VARIES NOT BY MANUFACTURER 37 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 37 VARIES NOT BY MANUFACTURER 38 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 37 VARIES NOT BY MANUFACTURER 38 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 38 SHIMS, OPTIONAL COMPTICES 39 SHIMS, OPTIONAL COMPTICES ALUM 39 SHIMS, OPTIONAL COMPTICES AND OPTIONAL AS REQUIRED.	4A	#10 × 0.5 MIN THREAD, SCREW, 7075-T6 ALUM	ALUM	USED ON ANODIZED UNITS
ALUW	4 B	#10 DR #12 × 0.5 MIN THREAD, SCREW, STAINLESS	22	TYPICALLY USED
7 OPTIONAL C-CHANNEL JAMB 8A CONTINUOUS MTG ANGLE, 1.0×1.5×0.125 MIN, 6061-T6 8B CONTINUOUS MTG ANGLE, 1.0×1.5×0.125 MIN, 6063-T5 9 #10-24 OR #12-24 × 0.5 MIN THREAD, SCREW 10 BLADE SUPPORT CHANNEL, 2×2×2×0.25 11 OPTIONAL ADDITIONAL MULLION SUPPORT ANGLE 12 SLIP '1' MULLION 13 GASKET, 3.5×4×0.25 MIN (BY MANUFACTURER) 14 CONCRETE OR GROUT FILLED CMU, 2000 PSI MIN VARIES NOT BY MANUFACTURER 15 LOUVER MULLION ANGLE FOR CONCRETE/CMU STEEL/ALUM 16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU STEEL/ALUM 17 0.25-20×1 MIN, SCREW (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 MUT, 0.5-13×1 MIN (BY MANUFACTURER) 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 O.25 DIAM ITW BUILDEX TAPCON W/ ADV. THREADFORM, SS/STEEL NOT BY MANUFACTURER 25 VOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12' LONG 39 NUT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313×2.5 MIN (BY MANUFACTURER) 31 SPLICE CHANNEL, 2×2×2×0.25, 12' LONG 31 SPLICE CHANNEL, 2×2×2×0.25, 12' LONG 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER	. 5	LOUVER SILL	ALUM	
8A CONTINUOUS MTG ANGLE, 1.0×1.5×0.125 MIN, 6061-T6	6	LOUVER JAMB	ALUM	
88 CONTINUOUS MTG ANGLE, 1.0×1.5×0.188 MIN, 6063-T5	7	OPTIONAL C-CHANNEL JAMB	ALUM	OPTIONAL FOR SHAPE UNITS
9	88	CONTINUOUS MTG ANGLE, 1.0×1.5×0.125 MIN, 6061-T6	ALUM	
10 BLADE SUPPORT CHANNEL, 2x2x2x0.25 11 OPTIONAL ADDITIONAL MULLION SUPPORT ANGLE 12 SLIP '1' MULLION 13 GASKET, 3.5x4x0.25 MIN (BY MANUFACTURER) 14 CONCRETE OR GROUT FILLED CMU, 2000 PSI MIN 15 LOUVER MULLION ANGLE FOR CONCRETE/CMU 16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU 17 0.25-20x1 MIN, SCREW (BY MANUFACTURER) 18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON W/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 30 NUT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NUT BY MANUFACTURER ALUM 4 OAD TIONAL ALUM 4 OAD TIONAL ALUM 5 SCREW 4 OAD TO BY MANUFACTURER 5 WOOD SUBSTRATE, G=0.55 MIN DENSITY 4 OAT BY MANUFACTURER 5 WOOD SUBSTRATE, G=0.55 MIN DENSITY 6 MULLION ANGLE FOR WOOD 7 O.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 7 O.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 8 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 8 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 9 BOLT, 0.313x2.5 MIN (BY MANUFACTURER) 20 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 10 VARIES NUT BY MANUFACTURER 11 SPLICE PLATE 12 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 12 VARIES NUT BY MANUFACTURER	88	CONTINUOUS MTG ANGLE, 1.0×1.5×0.188 MIN, 6063-T5	ALUM	
11 DPTIONAL ADDITIONAL MULLION SUPPORT ANGLE 12 SLIP '1' MULLION 13 GASKET, 3.5x4x0.25 MIN (BY MANUFACTURER) 14 CONCRETE OR GROUT FILLED CMU, 2000 PSI MIN 15 LOUVER MULLION ANGLE FOR CONCRETE/CMU 16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU 17 0.25-20x1 MIN, SCREW (BY MANUFACTURER) 18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) 19 NUT, 0.5-13x1 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON W/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 30 NUT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE ALUM OARIES RUBBER/NEOPRENE LIKE ALUM STEELS NOT BY MANUFACTURER ALUM OPTIONAL OP	9	#10-24 OR #12-24 × 0.5 MIN THREAD, SCREW	22	
12 SLIP 'I' MULLION 13 GASKET, 3.5×4×0.25 MIN (BY MANUFACTURER) 14 CONCRETE OR GROUT FILLED CMU, 2000 PSI MIN 15 LOUVER MULLION ANGLE FOR CONCRETE/CMU 16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU 17 0.25-20×1 MIN, SCREW (BY MANUFACTURER) 18 BOLT, 0.5-13×1 MIN (BY MANUFACTURER) 19 NUT, 0.5-13 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON W/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12' LONG 30 NUT, 0.313×2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES RUBBER/NEOPREN LIKE LIKE VARIES RUBBER/NEOPREN LIKE VARIES RUBBER/NEOPREN LIKE LIKE LIKE LIKE VARIES RUBBER/NEOPREN LIKE LIKE LIKE LIKE LIKE VARIES RUBBER/NEOPREN LIKE LIKE LIKE LIKE LIKE LIKE LIKE LIKE	10	BLADE SUPPORT CHANNEL, 2x2x2x0.25	ALUM	
GASKET, 3.5×4×0.25 MIN (BY MANUFACTURER)	11	OPTIONAL ADDITIONAL MULLION SUPPORT ANGLE	ALUM	OPTIONAL
14 CONCRETE OR GROUT FILLED CMU, 2000 PSI MIN VARIES NOT BY MANUFACTURER 15 LOUVER MULLION ANGLE FOR CONCRETE/CMU STEEL/ALUM 16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU STEEL/ALUM 17 0.25-20x1 MIN, SCREW (BY MANUFACTURER) SS 18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) SS 19 NUT, 0.5-13 MIN (BY MANUFACTURER) SS 20 WASHER, 0.5 MIN (BY MANUFACTURER) SS 21 0.25 DIA. ITW BUILDEX TAPCON w/ ADV. THREADFORM, 1.75 MIN EMBEDMENT SS/STEEL NOT BY MANUFACTURER 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS SS/STEEL NOT BY MANUFACTURER 23 STEEL STUD, 14GA MIN SS/STEEL NOT BY MANUFACTURER 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL SS/STEEL NOT BY MANUFACTURER 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY WOOD NOT BY MANUFACTURER 26 MULLION ANGLE FOR WOOD STEEL/ALUM 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT SS/STEEL NOT BY MANUFACTURER 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG ALUM 29 BOLT, 0.313x2.5 MIN (BY MANUFACTURER) SS 30 NUT, 0.313(SX16) (BY MANUFACTURER) SS 31 SPLICE PLATE ALUM 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER			ALUM	
15 LOUVER MULLION ANGLE FOR CONCRETE/CMU 16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU 17 0.25-20x1 MIN, SCREW (BY MANUFACTURER) 18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) 19 NUT, 0.5-13 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON W/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 30 NUT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER			VARIES	RUBBER/NEOPRENE LIKE
16 SUBSTRATE MULLION ANGLE FOR CONCRETE/CMU 17 0.25-20x1 MIN, SCREW (BY MANUFACTURER) 18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) 19 NUT, 0.5-13 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON w/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12' LONG 30 NUT, 0.313×2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER ALUM 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER	14	CONCRETE OR GROUT FILLED CMU, 2000 PSI MIN	VARIES	NOT BY MANUFACTURER
17 0.25-20x1 MIN, SCREW (BY MANUFACTURER) 18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) 19 NUT, 0.5-13 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON W/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 30 NUT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE ALUM 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE SS SS SS MOD SUBSTRATE SS MOT BY MANUFACTURER SS ALUM AND BY MANUFACTURER SS ALUM VARIES NOT BY MANUFACTURER	15	LOUVER MULLION ANGLE FOR CONCRETE/CMU	STEEL/ALUM	·
18 BOLT, 0.5-13x1 MIN (BY MANUFACTURER) 19 NUT, 0.5-13 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON w/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 30 NUT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE 35 VARIES NOT BY MANUFACTURER 36 VARIES NOT BY MANUFACTURER			STEEL/ALUM	
19 NUT, 0.5-13 MIN (BY MANUFACTURER) 20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON w/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12* LONG 29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER VARIES NOT BY MANUFACTURER				
20 WASHER, 0.5 MIN (BY MANUFACTURER) 21 0.25 DIA. ITW BUILDEX TAPCON w/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 30 NUT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER	1			
21 0.25 DIA. ITW BUILDEX TAPCON W/ ADV. THREADFORM, 1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG 30 NUT, 0.313x2.5 MIN (BY MANUFACTURER) 31 SPLICE PLATE ALUM 29 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER		I		
1.75 MIN EMBEDMENT 22 STRUCTURAL STEEL, 0.075 MIN THICKNESS 23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12' LONG 29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE ALUM 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER	50	WASHER, 0.5 MIN (BY MANUFACTURER)	22	
23 STEEL STUD, 14GA MIN 24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12* LONG 29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER ALUM SS/STEEL NOT BY MANUFACTURER ALUM ALUM SS/STEEL NOT BY MANUFACTURER	21		\$\$/\$TEEL	NOT BY MANUFACTURER
24 0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL 25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12" LONG 29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER	55	STRUCTURAL STEEL, 0.075 MIN THICKNESS	SS/STEEL	NOT BY MANUFACTURER
25 WOOD SUBSTRATE, G=0.55 MIN DENSITY 26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12' LONG 29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE WOOD NOT BY MANUFACTURER STEEL/ALUM SS/STEEL NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER	53	STEEL STUD, 14GA MIN	SS/STEEL	NOT BY MANUFACTURER
26 MULLION ANGLE FOR WOOD 27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12" LONG 29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE STEEL/ALUM SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER	24	0.25 DIAMETER SCREW, MUST FULLY ENGAGE STEEL	SS/STEEL	NOT BY MANUFACTURER
27 0.375 DIA. LAG SCREW, 3.0 MIN EMBEDMENT 28 SPLICE CHANNEL, 2×2×2×0.25, 12" LONG 29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE SS/STEEL NOT BY MANUFACTURER SS/STEEL NOT BY MANUFACTURER ALUM VARIES NOT BY MANUFACTURER	25	WOOD SUBSTRATE, G=0.55 MIN DENSITY	WOOD	NOT BY MANUFACTURER
28 SPLICE CHANNEL, 2x2x2x0.25, 12' LONG ALUM 29 BOLT, 0.313x2.5 MIN (BY MANUFACTURER) SS 30 NUT, 0.313(5X16) (BY MANUFACTURER) SS 31 SPLICE PLATE ALUM 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER			STEEL/ALUM	
29 BOLT, 0.313×2.5 MIN (BY MANUFACTURER) 30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER	L		SS/STEEL	NOT BY MANUFACTURER
30 NUT, 0.313(5X16) (BY MANUFACTURER) 31 SPLICE PLATE 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER	28	·	ALUM	
31 SPLICE PLATE ALUM 32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER	29	BOLT, 0.313×2.5 MIN (BY MANUFACTURER)	22	
32 SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE VARIES NOT BY MANUFACTURER	30	NUT, 0.313(5X16) (BY MANUFACTURER)	22	
	31	SPLICE PLATE	ALUM	
33 SEALANT AND BACKER ROD VARIES NOT BY MANUFACTURER	35	SHIMS, OPTIONAL, AS REQUIRED, INCOMPRESSABLE	VARIES	NOT BY MANUFACTURER
	33	SEALANT AND BACKER ROD	VARIES	NOT BY MANUFACTURER

GENERAL NOTES:

- 1. IT SHALL BE THE RESPONSIBILITY OF THE PERMIT HOLDER TO VERIFY THE STRUCTURAL INTEGRITY OF THE EXISTING STRUCTURE TO SUPPORT THE LOADS IMPOSED BY THE PENTHOUSE ASSEMBLY.
- 2. THE K605MD HAS BEEN DESIGNED AND QUALIFIED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE (FBC) AND TEST PROTOCOLS TAS-201 (IMPACT), TAS-202 (UNIFORM STATIC PRESSURE), AND TAS-203 (CYCLIC FATIGUE) TO A MAXIMUM DESIGN LOAD OF +/- 110 PSF.
- 3. THE MAXIMUM UNSUPPORTED BLADE LENGTH SHALL NOT EXCEED 72" WITHOUT STIFFENER AND 144" WITH STIFFENER.
- 4. THE MAXIMUM OVERALL UNIT HEIGHT IS UNLIMITED BY MEANS OF STACKING AND USE OF SPLICED BLADE SUPPORTS. THE MAXIMUM OVERALL UNIT WIDTH IS UNLIMITED BY USE OF MULLIONS.
- 5. LOUVER CONSTRUCTION: HEAD, SILL, JAMBS, AND BLADES ARE SQUARE CUT AT BOTH ENDS. BLADE SPACING IS 2" MAX. EACH JAMB IS SECURED TO THE SILL WITH (2) SCREWS AND WELDED. BLADES AND HEADS ARE SECURED TO JAMBS WITH (2) SCREWS AND WELDED.
- 6. ALL WOOD SUBSTRATE SHALL BE G = 0.55 DENSITY OR BETTER.
- 7. ALL STEEL STUD SUBSTRATE SHALL BE MIN. 14 GA. FY = 50 KSI.
- 8. ALL STRUCTURAL STEEL SUBSTRATE SHALL BE MIN. 0.075" THICK FY = 36 KSI.
- 9. ALL CONCRETE SUBSTRATE SHALL BE MIN. 2000 PSI.
- 10. CONCRETE MASONRY SHALL BE ASTM C90, TYPE II, MIN. 2000 PSI GROUT-FILLED.
- 11. THE LOUVER MANUFACTURER DOES NOT DETERMINE THE STRUCTURAL INTEGRITY OF THE SUBSTRATE STRUCTURE.
- 12. THE SYSTEM SHALL ONLY BE INSTALLED IN A LOCATION WHERE THE ENCLOSED AREA/ROOM BEHIND THE LOUVER IS DESIGNED TO DRAIN WATER PENETRATING INTO THE AREA/ROOM, AND THE AREA/ROOM WILL HOUSE WATER RESISTANT/PROOF EQUIPMENT, COMPONENTS, AND/OR SUPPLIES.
- 13. INSTALLER TO PROVIDE SEPARATION OF DISSIMILAR MATERIALS AS REQUIRED.

PROINCT RENEWED as complying with the Florida Building Code
Acceptance No. 4.0024/7
Expiration Date UB/05/2019

By Hard Missni Pade Product Control

CHANDER R-NANGIA_{RE} 7423 HOLLOW RIDGE DR. HOUSTON, TX 77095 FLORIDA PE # 21938

0 0 27 **___** DATE 4/ \perp \geq \bigcirc Ω إلنا DRAWN BY M STEELE SCALE \bigcirc \odot 9 \leq that works: wisconsin 54476 એ \odot LISTIN(LOUVER لنا NON PART ERAL X605MD EN TEMIZED 9

MAY 1 2 2009

Approved as complying with the Florida Building Code
Date 08/05/2009
NOA# 19-0519./5
Missai Date Product Control
Division Affice.