

MIAMI-DADE COUNTY

PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786)315-2590 F (786) 315-2599

www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

Eagle Roofing Products LLC 1575 East C.R. 470 Sumterville, FL 33585

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (in Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Malibu Concrete Tile

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA #11-0321.01 and consists of pages 1 through 8. The submitted documentation was reviewed by Gaspar J Rodriguez.



NOA No.:15-0223.19 Expiration Date: 10/05/16 Approval Date: 09/24/15

Page 1 of 8

ROOFING ASSEMBLY APPROVAL

Category:RoofingSub Category:Roofing TilesMaterial:Concrete

1. SCOPE:

This approves a system using Eagle Roofing Products Malibu Concrete Roof Tile, as manufactured by **Eagle Roofing Products LLC** in **Sumterville**, **FL**. and described in Section 2 of this Notice of Acceptance. For locations where the pressure requirements, as determined by applicable Building Code does not exceed the design pressure values obtained by calculations in compliance with RAS 127 using the values listed in section 4 herein. The attachment calculations shall be done as a moment based system.

2. PRODUCT DESCRIPTION:

Manufactured by Applicant	Dimensions	Test Specifications	Product <u>Description</u>
Malibu Concrete Tile	L = 17" $W = 12 \frac{1}{2}"$ Thickness= $\frac{1}{2}$ "	TAS 112	Low profile, interlocking, high pressure extruded concrete roof tile equipped with three nail hole and double roll ribs. For direct deck or battened nail-on, mortar or adhesive set applications.
Trim Pieces	L = varies W = varies varying thickness	TAS 112	Accessory trim, concrete roof pieces for use at hips, rakes, ridges and valley terminations. Manufactured for each tile profile.



NOA No.:15-0223.19 Expiration Date: 10/05/16 Approval Date: 09/24/15

Page 2 of 8

2.1 EVIDENCE SUBMITTED:

Test Agency	Test Identifier	Test Name/Report	<u>Date</u>
PRI Construction Materials Technologies	PRI06178	TAS 112	08/23/06
Redland Technologies	7161-03 Appendix III	Static Uplift Testing TAS 102 & TAS 102(A)	Dec. 1991
Redland Technologies	7161-03 Appendix II	Wind Tunnel Testing TAS 108 (Nail-On)	Dec. 1991
Redland Technologies	P0402	Withdrawal Resistance Testing of screw vs. smooth shank nails	Sept. 1993
The Center for Applied Engineering, Inc.	94-060B	Static Uplift Testing TAS 101 (Adhesive Set)	March, 1994
The Center for Applied Engineering, Inc.	94-084	Static Uplift Testing TAS 101 (Mortar Set)	May 1994
Redland Technologies	P0631-01	Wind Tunnel Testing TAS 108 (Mortar Set)	July 1994
Redland Technologies	Letter Dated Aug. 1, 1994	Wind Tunnel Testing TAS 108 (Nail-On)	Aug. 1994
Professional Service Industries, Inc.	224-47099	Physical Properties TAS 112	Sept. 1994
The Center for Applied Engineering, Inc.	25-7094-1	Static Uplift Testing TAS 102 (4" Headlap, Nails, Direct Deck, New Construction)	Oct. 1994
The Center for Applied Engineering, Inc.	25-7094-7	Static Uplift Testing TAS 102 (4" Headlap, Nails, Battens)	Oct. 1994
The Center for Applied Engineering, Inc.	25-7094-4	Static Uplift Testing TAS 102 (4" Headlap, Nails, Direct Deck, Recover/Reroof)	Oct. 1994
The Center for Applied Engineering, Inc.	Project No. 307025 Test #MDC-76	Wind Driven Rain TAS 100	Oct. 1994
The Center for Applied Engineering, Inc.	25-7183-1	Static Uplift Testing TAS 102 (2 Quik-Drive Screws, Direct Deck)	Feb. 1995
The Center for Applied Engineering, Inc.	25-7183-2	Static Uplift Testing TAS 102 (2 Quik-Drive Screws, Battens)	Feb. 1995



NOA No.:15-0223.19 Expiration Date: 10/05/16 Approval Date: 09/24/15 Page 3 of 8

The Center for Applied Engineering, Inc.	25-7214-2 25-7214-6	Static Uplift Testing TAS 102 (1 Quik-Drive Screw, Direct Deck) (1 Quik-Drive Screw, Battens)	March, 1995
Celotex Corporation	528454-2-1	Static Uplift Testing	Sep. 1998
Testing Services	520109-2	TAS 101	Dec. 1998
Walker Engineering, Inc.	Evaluation Calculations	Two Patty Adhesive Set System	April 1999
Walker Engineering, Inc.	Evaluation Calculations	25-7183	March 1995
Walker Engineering, Inc.	Evaluation Calculations	25-7094	February 1996
Walker Engineering, Inc.	Evaluation Calculations	25-7496	April 1996
Walker Engineering, Inc.	Evaluation	25-7584	December
	Calculations	25-7804b-8	1996
		25-7804-4 & 5	
		25-7848-6	
Walker Engineering, Inc.	Calculations	Aerodynamic Multiplier	Sep. 2006
Walker Engineering, Inc.	Calculations	Restoring Moment Due to Gravity	Sep. 2006

3. LIMITATIONS:

- **3.1** Fire classification is not part of this acceptance.
- **3.2** For mortar or adhesive set tile applications, a static field uplift test in accordance with TAS 106 shall be required, refer to applicable Building Code.
- 3.3 Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with TAS 112, appendix 'A'. Such testing shall be submitted to the Miami-Dade County Product Control Section for review.
- **3.4** Minimum underlayment shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- 3.5 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- **3.6** This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with applicable Building Code.



NOA No.:15-0223.19 Expiration Date: 10/05/16 Approval Date: 09/24/15

Page 4 of 8

4. Installation

- **4.1** Eagle Roofing Products LLC Malibu Concrete Tile and its components shall be installed in strict compliance with Roofing Application Standard RAS 118, RAS 119 and RAS 120.
- **4.2** Data For Attachment Calculations

Table 1: Average Weight (W) and Dimensions (I x w)					
Tile Profile Weight-W (lbf) Length-I (ft) Width-w (ft)					
Malibu Tile 9.5 1.417 1.04					

Table 2: Aerodynamic Multipliers - λ (ft³)						
Tile λ (ft ³) λ (ft ³)						
Profile	Batten Application	Direct Deck Application				
Malibu Tile	0.305	0.282				

Table 3: Restoring Moments due to Gravity - Mg (ft-lbf)										
Tile Profile	3":1	2"	4":12"		5":12"		6":12"		7":12" or greater	
Malibu Tile	Battens	Direct Deck	Battens	Direct Deck	Battens	Direct Deck	Battens	Direct Deck	Battens	Direct Deck
	6.30	6.65	6.21	6.54	6.08	6.41	5.93	6.25	5.77	6.08

Table 4: Attachment Resistance Expressed as a Moment - M _f (ft-lbf) for Nail-On Systems				
Tile Profile	Fastener Type	Direct Deck (min 15/32" plywood)	Direct Deck (min. 19/32" plywood)	Battens
Malibu Tile	2-10d Ring Shank Nails	27.8	37.4	28.8
	1-10d Smooth or Screw Shank Nail	8.8	11.8	4.1
	2-10d Smooth or Screw Shank Nails	16.4	21.9	7.1
	1 #8 Screw	25.8	25.8	22.9
	2 #8 Screw	47.1	47.1	49.1
	1-10d Smooth or Screw Shank Nail (Field Clip)	24.3	24.3	24.2
	1-10d Smooth or Screw Shank Nail (Eave Clip)	19.0	19.0	22.1
	2-10d Smooth or Screw Shank Nails (Field Clip)	35.5	35.5	34.8
	2-10d Smooth or Screw Shank Nails (Eave Clip)	31.9	31.9	32.2
1	2-10d Ring Shank Nails ¹	43.0	67.5	50.9
1 Installation	with a 4" tile headlap and faste			1 20.0



NOA No.:15-0223.19 Expiration Date: 10/05/16 Approval Date: 09/24/15 Page 5 of 8

Table 5: Attachment Resistance Expressed as a Moment M _f (ft-lbf) for Two Patty Adhesive Set Systems						
Tile	Tile Application	Minimum Attachment				
Profile	Profile Resistance					
Malibu Tile	Adhesive ²	26.1 ³				
See manufactures component approval for installation requirements.						
3 Flexible Products Company TileBond Average weight per patty 11.4 grams.						
Polyfoam Product, Inc. Average weight per patty 8 grams.						

Table 6: Attachment Resistance Expressed as a Moment - M _f (ft-lbf) for Single Patty Adhesive Set Systems							
Tile	Tile Tile Application Minimum Attachment						
Profile	Resistance						
Malibu Tile	Polyfoam PolyPro™	86.61 ⁴					
	Polyfoam PolyPro™ 45.5 ⁵						
4 Large paddy placement of 54grams of PolyPro™.							
5 Medium paddy placemen	t of 24grams of PolyPro™.						

Table 7: Attachment Resistance Expressed as a Moment - M _f (ft-lbf) for Mortar Set Systems					
Tile Profile					
Malibu Tile	Mortar Set ¹	20.60			
1 Tile-Tite Roof Tile Mortar.					



NOA No.:15-0223.19 **Expiration Date: 10/05/16** Approval Date: 09/24/15 Page 6 of 8

5. LABELING:

All tiles shall bear the imprint or identifiable marking of the manufacturer's name or logo (See **Detail Below**), or following statement: "Miami-Dade County Product Control Approved".



(LOCATED ON UNDERSIDE OF TILE)

OR

EAGLE FL

(LOCATED ON FRONTSIDE OF TILE)

MALIBU CONCRETE ROOF TILE LABEL, SUMMERVILLE PLANT




NOA No.:15-0223.19 Expiration Date: 10/05/16 Approval Date: 09/24/15

Page 7 of 8

6. BUILDING PERMIT REQUIREMENTS:

- **6.1** Application for building permit shall be accompanied by copies of the following:
 - **6.1.1** This Notice of Acceptance.
 - **6.1.2** Any other documents required by AHJ or applicable Building Code in order to properly evaluate the installation of this system.

PROFILE DRAWING

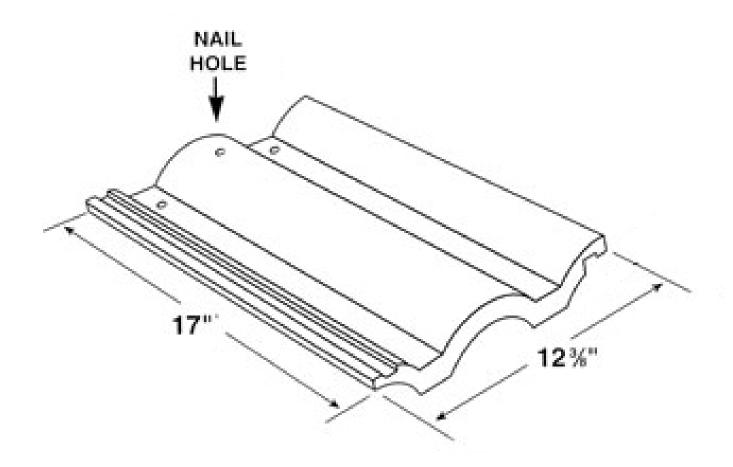

MALIBU CONCRETE ROOF TILE

END OF THIS ACCEPTANCE



NOA No.:15-0223.19 Expiration Date: 10/05/16 Approval Date: 09/24/15

Page 8 of 8