



**BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908**

NOTICE OF ACCEPTANCE (NOA)

**W.H. Maze Company
100 Church Street
Peru, IL 61354**

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Stormguard Nails

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This new NOA consists of pages 1 through 3.

The submitted documentation was reviewed by Jorge L. Acebo.



**NOA No.: 06-0517.08
Expiration Date: 08/17/11
Approval Date: 08/17/06
Page 1 of 3**

ROOFING ASSEMBLY APPROVAL:

Category: Roofing
Sub Categories: Roofing Fasteners

Materials: Steel
Maximum Design Pressure N/A

SCOPE

This approves “**Stormguard Nails**” as manufactured by W.H. Maze Company and described in this Notice of Acceptance.

PRODUCT DESCRIPTION

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Stormguard Nails	Various Diameters 1.25” to 4” Length	TAS 114	A double hot dipped galvanized Ringshank Nail for use as a fastener in approved assemblies and components.

EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
Testing Evaluation Laboratories	ASTM G 85 Annex 5	TEL 06-0512-1	05/12/06

APPROVED APPLICATIONS

Trade name: Stormguard Nails

Application: See specific Roof Assembly Product Control Notice of Acceptance for fastener density and Approved attachment patterns.


Deck: Wood




NOA No.: 06-0517.08
Expiration Date: 08/17/11
Approval Date: 08/17/06
Page 2 of 3

DETAIL DRAWING

0.28" to 0.38" Head Diameter



Shank Diameter 0.127" to 0.185"

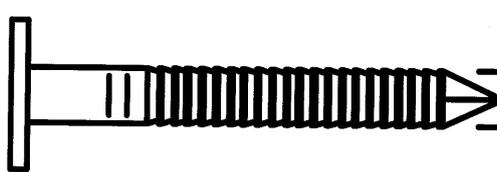

|-----1.25" to 4" Nail Length-----|

END OF THIS ACCEPTANCE

