



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Rollingshield, Inc.
9875 N.W. 79th Avenue
Hialeah Gardens, Florida 33016

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER- Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: "RS-1 High Velocity" Aluminum Accordion Shutter System

APPROVAL DOCUMENT: Drawing No. 01-12 (RS1-06), titled "RS-1 High Velocity Shutter System", sheets 1 through 9 of 9, & 2A of 9, prepared by V. M. Engineering, last revision #5 dated April 22, 2015, signed and sealed by Morgan Villanueva, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, the following statement: "Miami-Dade County Product Control Approved", and NOA number, per TAS201, TAS-202, and TAS-203, unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews NOA #15-0505.01** and consists of this page 1, evidence submitted pages E-1, E-2, E-3, E-4 & E-5 as well as approval document mentioned above.

The submitted documentation was reviewed by **Helmy A. Makar, P.E., M.S.**



Helmy A. Makar
09/15/2016

NOA No. 16-0725.01
Expiration Date: 01/19/2022
Approval Date: 09/15/2016
Page 1

Rollingshield, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 06-0822.03

A. DRAWINGS

1. *Drawing No. 06-003RS1, titled " RS-1 High Velocity Shutter System ", sheets 1 through 9 of 9, prepared by V. M. Engineering, dated July 05, 2006, last revision #1 dated November 25, 2006, signed and sealed by Morgan Villanueva, P.E.*

B. TESTS

1. *See Association's generic approval under 06-1826.*

C. CALCULATIONS:

1. *See Association's generic approval under 06-1826.*

D. QUALITY CONTROL

1. *By Miami-Dade County Building Code Compliance Office.*

E. MATERIAL CERTIFICATION:

1. *See Association's generic approval under 06-1826.*

F. STATEMENTS

1. *Release letter issued by National Shutter Association, dated October 19, 2006, certifying this product to meet the criteria of product tested and approved, and allowing Rollingshield, Inc. to use the test results approved under Miami-Dade County Approval No. 06-1826, signed by Jose Delgado.*
2. *Acknowledgment letter by Rollingshield, Inc., dated October 27, 2006, signed by Jose Delgado.*
3. *Letter issued by V. M. Engineering, dated October 19, 2006, certifying that the drawing (No. 06-003RS1) prepared for Rollingshield, Inc., signed and sealed by Morgan Villanueva, P.E. is engineering wise identical to National Shutter Association generic drawing (No. 06-004RS1).*
4. *Acceptance Letter issued to Mr. Jose Delgado on December 10, 2006 and returned signed by Mr. Jose Delgado on December 11, 2006, indicating to please issue the proposed Notice of Acceptance as submitted and reviewed.*

2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #07-0206.03

A. DRAWINGS

1. *Drawing No. 06-003RS1, titled "RS-1 High Velocity Shutter System", sheets 1 thru. 9 of 9, & 2A of 9, prepared by V. M. Engineering, dated 07/05/2006, last revision #2 dated 11/10/2006, signed and sealed by Morgan Villanueva, P.E. on 02/02/07.*



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 16-0725.01
Expiration Date: 01/19/2022
Approval Date: 09/15/2016

Rollingshield, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

B. TESTS

1. *See Association's generic approval under 06-2372.*

C. CALCULATIONS:

1. *See Association's generic approval under 06-2372.*

D. QUALITY CONTROL

1. *By Miami-Dade County Building Code Compliance Office.*

E. MATERIAL CERTIFICATION:

1. *See Association's generic approval under 06-2372.*

F. STATEMENTS

1. *Release letter issued by National Shutter Association, dated October 19, 2006, certifying this product to meet the criteria of product tested and approved, and allowing Rollingshield, Inc. to use the test results approved under Miami-Dade County Approval No. 06-2372, signed by Jose Delgado.*
2. *Acknowledgment letter by Rollingshield, Inc., dated October 27, 2006, signed by Jose Delgado.*
3. *Letter issued by V. M. Engineering, dated October 19, 2006, certifying that the drawing (No. 06-003RS1) prepared for Rollingshield, Inc., signed and sealed by Morgan Villanueva, P.E. is engineering wise identical to National Shutter Association generic drawing (No. 06-004RS1), revision #2.*
4. *Acceptance Letter issued to Mr. Jose Delgado on December 09, 2006 and returned signed by Mr. Jose Delgado on December 11, 2006, indicating to please issue the proposed Notice of Acceptance as submitted and reviewed.*

3. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #09-0604.13

A. DRAWINGS


1. *Drawing No. 09-008RS1, titled "RS-1 High Velocity Shutter System", sheets 1 thru. 9 of 9, & 2A of 9, prepared by V. M. Engineering, dated 05/14/2009, last revision #3 dated 05/14/2009, signed and sealed by Morgan Villanueva, P.E. on 05/27/09.*

B. TESTS

1. *See Association's generic approval under 09-0830.*

C. CALCULATIONS:

1. *See Association's generic approval under 09-0830.*



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 16-0725.01
Expiration Date: 01/19/2022
Approval Date: 09/15/2016

Rollingshield, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

D. QUALITY CONTROL

1. *By Miami-Dade County Building Code Compliance Office.*

E. MATERIAL CERTIFICATION:

1. *See Association's generic approval under 09-0830.*

F. STATEMENTS

1. *Release letter issued by National Shutter Association, dated May 21, 2009, certifying this product to meet the criteria of product tested and approved, and allowing Rollingshield, Inc. to use the test results approved under Miami-Dade County Approval No. 09-0830, signed by Jose Delgado.*
2. *Acknowledgment letter by Rollingshield, Inc., dated May 21, 2009, signed by Mr. Jose Delgado.*
3. *Letter issued by V. M. Engineering, dated May 21, 2009, certifying that the drawing (No. 09-008RS1) prepared for Rollingshield, Inc., signed and sealed by Morgan Villanueva, P.E. is engineering wise identical to National Shutter Association generic drawing (No. 09-016RS1), dated May 29, 2009.*

4. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #11-1227.04

A. DRAWINGS

1. *Drawing No. 12-2011(RS1-06), titled "RS-1 High Velocity Shutter System", sheets 1 through 9 of 9, & 2A of 9, prepared by V. M. Engineering, dated 12/26/2011, last revision #4 dated 12/26/2011, signed and sealed by Morgan Villanueva, P.E.*

B. TESTS

1. *See Association's generic approval under 12-0074.*

C. CALCULATIONS:


1. *See Association's generic approval under 12-0074.*

D. QUALITY CONTROL

1. *By Miami-Dade County Department of Permitting, Environment, and Regulatory Affairs (PERA).*

E. MATERIAL CERTIFICATION:

1. *See Association's generic approval under 12-0074.*



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 16-0725.01
Expiration Date: 01/19/2022
Approval Date: 09/15/2016

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

F. STATEMENTS

1. *Release letter issued by National Shutter Association, dated January 13, 2012, certifying this product to meet the criteria of product tested and approved, and allowing Rollingshield, Inc. to use the test results approved under Miami-Dade County Approval No. 12-0074, signed by Jose Delgado.*
2. *Acknowledgment letter by Rollingshield, Inc., dated January 13, 2012, signed by Mr. Jose Delgado.*
3. *Letter issued by V. M. Engineering, dated January 13, 2012, certifying that the drawing (No. 12-2011(RS1-06) prepared for Rollingshield, Inc., signed and sealed by Morgan Villanueva, P.E. is engineering wise identical to National Shutter Association generic drawing.*

5. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #15-0505.01

A. DRAWINGS

1. *Drawing No. 01-12 (RS1-06), titled "RS-1 High Velocity Shutter System", sheets 1 through 9 of 9, & 2A of 9, prepared by V. M. Engineering, last revision #5 dated April 22, 2015, signed and sealed by Morgan Villanueva, P.E.*

B. TESTS

1. *None.*

C. CALCULATIONS:

1. *None.*

D. QUALITY CONTROL


1. *By Miami-Dade County Department of Regulatory and Economic Resources (RER).*

E. MATERIAL CERTIFICATION:

1. *None.*

F. OTHERS

1. *Florida Building Code, 2014 Edition, compliance letter, prepared by V. M. Engineering, dated May 12, 2015, signed and sealed by Morgan Villanueva, P.E.*



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 16-0725.01
Expiration Date: 01/19/2022
Approval Date: 09/15/2016

Rollingshield, Inc.

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

6. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. *None.*

B. TESTS

1. *None.*

C. CALCULATIONS:

1. *None.*

D. QUALITY CONTROL


1. *By Miami-Dade County Department of Regulatory and Economic Resources (RER).*

E. MATERIAL CERTIFICATION:

1. *None.*

F. OTHERS

1. *Florida Building Code, 2014 Edition, compliance letter, prepared by V. M. Engineering, dated July 19, 2016, signed and sealed by Morgan Villamueva, P.E.*



Helmy A. Makar, P.E., M.S.
Product Control Section Supervisor
NOA No. 16-0725.01
Expiration Date: 01/19/2022
Approval Date: 09/15/2016

GENERAL NOTES:

1. THIS SHUTTER ACCORDION "RS-1" HAS BEEN VERIFIED IN ACCORDANCE WITH SECTIONS 1609 OF THE FLORIDA BUILDING CODE EDITION 2014, AS PER TAS 201-94, TAS 202-94 & TAS 203-94 OF THE TEST PROTOCOLS FOR HIGH-VELOCITY HURRICANE ZONES, AND AS PER AMERICAN TESTING LABORATORY WITH THE TEST NO. 4986.
THE DESIGN LOADS COMPLY WITH SECTION 1620 OF THE FLORIDA BUILDING CODE EDITION 2014. THE WIND PRESSURES SHOWN IN THE TABLES ON SHEETS (6 OF 9) AND (7 OF 9) IN THIS DOCUMENTS ARE AS PER FBC 2014 EDITION (ALLOWABLE SERVICE DESIGN), TO OBTAIN THE EQUIVALENT ULTIMATE WIND PRESSURES, DIVIDE THE WIND PRESSURES SHOWN IN THE TABLES ON SHEETS (6 OF 9) AND (7 OF 9) OF THIS DOCUMENT BY 0.6 FACTOR (ULTIMATE FACTOR DESIGN). IN ORDER TO VERIFY THAT ANCHORS ON THIS PRODUCT APPROVAL DOCUMENTS, AS TESTED, WERE NOT OVERSTRESSED, A 33% INCREASE IN ALLOWABLE STRESS FOR WIND LOADS WAS NOT USED IN THEIR ANALYSIS, AND IN THE LABORATORY THE TEST LOAD WAS 50% MORE OF DESIGN LOAD.
THE RS-1 ALUMINUM ACCORDION HIGH VELOCITY SHUTTER SYSTEM IS ADEQUATE FOR IMPACT AND FATIGUE RESISTANCE AS SHOWN IN THE TEST RESULTS FROM LABORATORY.
AND LAST BUT NOT LESS, THE RS-1 ALUMINUM ACCORDION HIGH VELOCITY SHUTTER SYSTEM MAY BE INSTALLED AT HIGH VELOCITY HURRICANE ZONES (H.V.H.Z.)"

2. ALL ALUMINUM EXTRUSIONS SHALL BE ALUMINUM ASSOCIATION 6063-T6 ALLOY AND TEMPER, WITH $F_y = 25.0$ ksi MINIMUM (UNLESS OTHERWISE NOTED).

3. SCREWS SHALL BE:
- AISI SERIES 304 OR 316 STAINLESS STEEL, $F_y=35$ ksi MIN.
- CARBON STEEL CORROSION RESISTANT AS PER DIN 50018, $F_y=50$ ksi.

4. BOLTS SHALL BE:
- T4-2024 ALUMINUM ALLOY AND TEMPER, $F_y= 18$ ksi MIN.
- ASTM A-307 GALVANIZED STEEL, $F_y= 50$ ksi
- AISI SERIES 304 STAINLESS STEEL, $F_y=35$ ksi MIN.

5. ANCHORS TO WALL SHALL BE AS FOLLOWS:

(5.1) TO EXISTING POURED CONCRETE: (Min. $f'_c = 3$ ksi)
- $1/4"$ TAPCON ANCHORS AND $1/4"$ MAXI-SET TAPCON, AS MANUFACTURED BY I.T.W. RAMSET/ RED HEAD.
- $1/4"$ CRETE-FLEX SS4 ANCHORS, AS MANUFACTURED BY ELCO TEXTRON.
- $1/4"$ x $7/8"$ CALK-IN ANCHORS AS MANUFACTURED BY ALL POWERS FASTENERS

NOTES:

5.1.1) MINIMUM EMBEDMENT INTO POURED CONCRETE OF TAPCON ANCHORS IS $1\ 3/4"$.
5.1.2) MINIMUM EMBEDMENT OF $1/4"$ CALK-IN ANCHORS SHALL BE $7/8"$ INTO THE POURED CONCRETE.
NO EMBEDMENT INTO STUCCO SHALL BE PERMITTED. $1/4"$ ϕ -20 S.S. MACHINE SCREW USED TOGETHER WITH $1/4"$ CALK-IN ANCHORS.

5.2) IN CASE THAT PRECAST STONE, PRECAST CONCRETE PANELS, PAVERS OR ANY VENEER BE FOUND ON THE EXISTING WALL OR FLOOR, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SAID WALL FINISHES. ANCHORAGE SHALL BE AS INDICATED ON NOTES 5.1.1) & 5.1.2) ABOVE.

(5.3) TO EXISTING CONCRETE BLOCK WALL:

- $1/4"$ TAPCON ANCHORS AND $1/4"$ MAXI-SET TAPCON, AS MANUFACTURED BY I.T.W. RAMSET/ RED HEAD.
- $1/4"$ CRETE-FLEX SS4 ANCHORS, AS MANUFACTURED BY ELCO TEXTRON.
- $1/4"$ x $7/8"$ CALK-IN ANCHORS AS MANUFACTURED BY ALL POWERS FASTENERS

NOTES:

5.4.1) MINIMUM EMBEDMENT INTO CONCRETE BLOCK OF TAPCON & WEDGE-BOLT ANCHORS, IS $1\ 1/4"$.
5.4.2) MINIMUM EMBEDMENT OF $1/4"$ CALK-IN ANCHORS SHALL BE $7/8"$ INTO THE POURED CONCRETE.
NO EMBEDMENT INTO STUCCO SHALL BE PERMITTED. $1/4"$ ϕ -20 S.S. MACHINE SCREW USED TOGETHER WITH $1/4"$ CALK-IN ANCHORS.

5.5) IN CASE THAT PRECAST STONE, PRECAST CONCRETE PANELS, PAVERS OR ANY VENEER BE FOUND ON THE EXISTING WALL OR FLOOR, ANCHORS SHALL BE LONG ENOUGH TO REACH THE MAIN STRUCTURE BEHIND SAID WALL FINISHES. ANCHORAGE SHALL BE AS INDICATED ON NOTES 5.4.1) & 5.4.2) ABOVE.

(5.6) ANCHORS SHALL BE INSTALLED FOLLOWING ALL OF THE RECOMMENDATIONS AND SPECIFICATIONS OF THE ANCHOR'S MANUFACTURER.

(5.7) SEE SCHEDULE BELOW FOR EDGE DISTANCE (E.D.) VERSUS SPACING RELATIONSHIP FOR ANCHORS ON SHEET 7 OF 9.

6 MOUNTING SECTIONS CAN BE COMBINED IN ANY WAY TO SUIT ANY INSTALLATION. (SEE ALTERNATIVES NOTES ON SHEET 6 OF 9).
- FLOOR MOUNTING INSTALLATION SHALL BE REMOVABLE WHEN PERFORMED ADJACENT TO AN OPERABLE EXIT OR ENTRANCE

7. CONTRACTOR SHALL VERIFY THE EXISTING CONDITIONS OF THE OPENINGS WHERE SHUTTER WILL BE INSTALLED TO INSURE APPROPRIATE INSTALLATION.

CONTRACTOR SHALL BE RESPONSIBLE FOR:

-VERIFY THE EXISTING CONDITIONS OF THE STRUCTURE WHERE SHUTTER WILL BE INSTALLED TO PREVENT ANY DAMAGE TO EXISTING STRUCTURE.
-SEAL ALL SHUTTER TRACKS COMPONENTS ALL AROUND EDGES IN CONTACT WITH THE STRUCTURE TO PREVENT ANY DAMAGE DUE TO WIND AND RAIN
-SELECT THE PROPER TYPE OF INSTALLATION TO PROVIDE APPROPRIATE WORK INCLUDING LIFE SAFETY OF THIS PRODUCT.
-IF IN ANY CASE CONTRACTOR NEEDS TO MAKE ANY MODIFICATION HE/SHE SHOULD COMMUNICATE IMMEDIATELY TO ENGINEER OF RECORD BEFORE ANY ACTION.

8. A LABEL SHALL BE PLACED FOR EVERY OPENING BY THE MANUFACTURER AND SHALL BE EXPOSED ON THE CENTERMATE, COMPONENT 2 OR 3.
LABEL SHALL READ:


RS-1 ALUMINUM ACCORDION.
ROLLINGSHIELD INC.
MIAMI, FLORIDA
MIAMI-DADE COUNTY PRODUCT CONTROL APPROVED.

9. THE INSTALLATION OF THIS RS-1 ALUMINUM ACCORDION HIGH VELOCITY SHUTTER SYSTEM SHALL COMPLY WITH THE SPECIFICATIONS INDICATED IN THIS DRAWING PLUS ANY BUILDING AND ZONING REGULATIONS PROVIDED BY THE JURISDICTION WHERE PERMIT IS APPLIED TO.


10. THIS PRODUCT APPROVAL DOCUMENTS WILL BE VALID ONLY WHEN IT MEETS THE FOLLOWING TERMS:
-PLANS SHALL BE SIGNED & SEALED BY THE ENGINEER OF RECORD.
-NO MODIFICATIONS AND/OR ALTERATIONS MAY BE MADE BY ANY MEANS.

11. THIS PRODUCT APPROVAL DOCUMENTS WAS NOT PREPARED FOR A SPECIFIC SITE.


PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 16-0725.01
Expiration Date 01/19/2022
By *Hebert A. M...*
Miami Dade Product Control

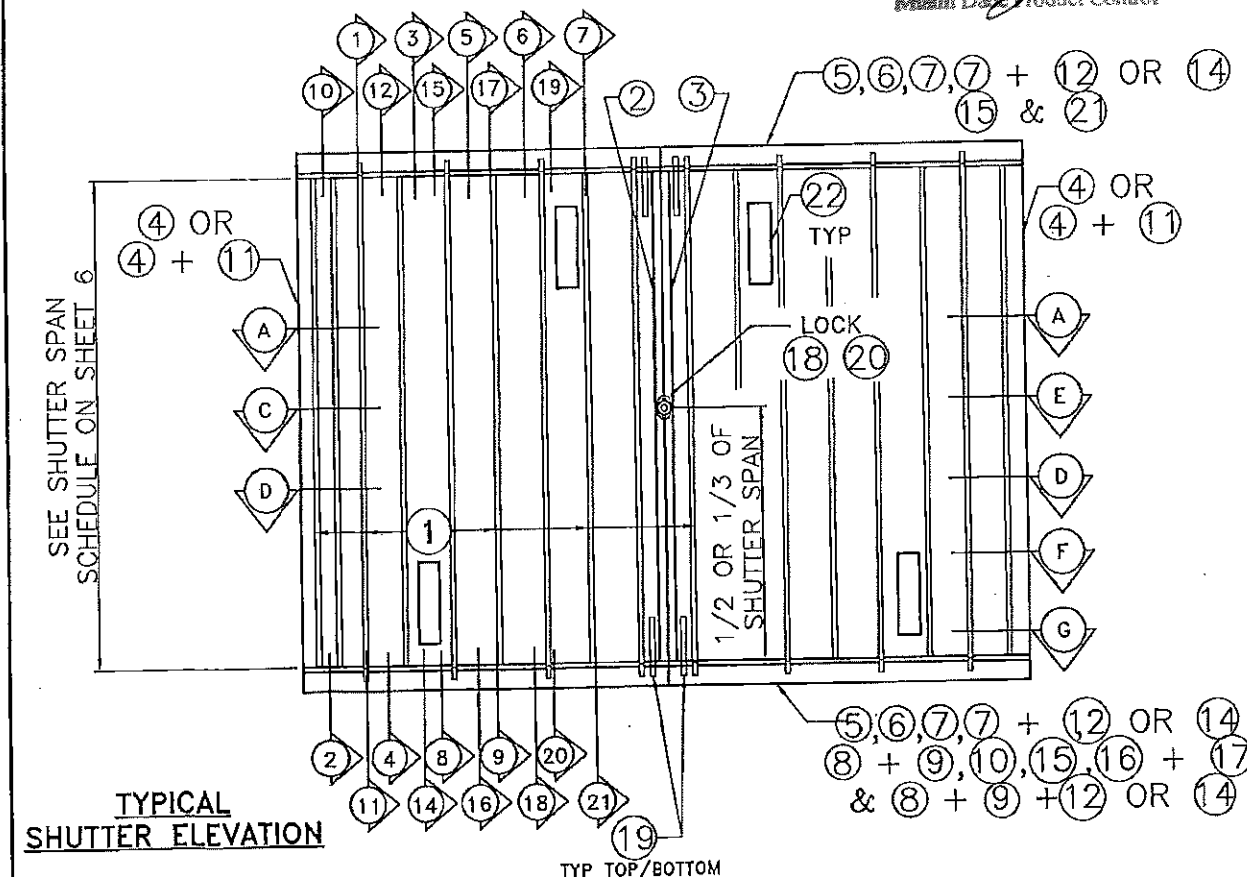

RS-1 ALUMINUM SHUTTER HIGH VELOCITY SHUTTER SYSTEM		ROLLINGSHIELD INC.		DATE	
PHONE (305) 438-6661 FAX (305) 438-5523		8875 NW 78th AVE		9-30-08	
Hialeah Gardens, FL 33016		www.rollingshield.com		11/10/08	
REV. No	DESCRIPTION	GENERAL		RENEWAL AS PER FBC 2007	
1	GENERAL	RENEWAL AS PER FBC 2010		12-28-2011	
2	ADDITION/ NEW COMPONENTS 21 & 22	RENEWAL AS PER FBC 2014		4-22-2015	
3	RENEWAL AS PER FBC 2007				
4	RENEWAL AS PER FBC 2010				
5	RENEWAL AS PER FBC 2014				



V.M.
Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896

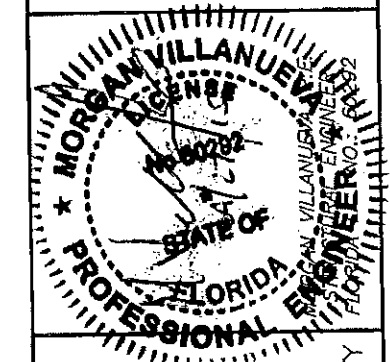


PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0595.01
Expiration Date 01/19/2017
By *Hebert A. M...*
Miami Dade Product Control

SCALE:
DATE: 4-22-2015


F.B.C.
(High Velocity Hurricane Zone)

DWG No: 01-12 (RS1-06)


SHEET 1 OF 9

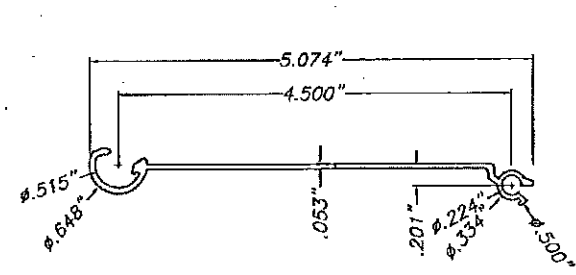


① MALE/FEMALE BLADE

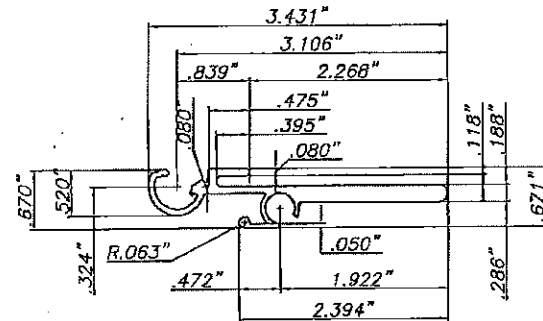


② MALE CENTERMATE BLADE

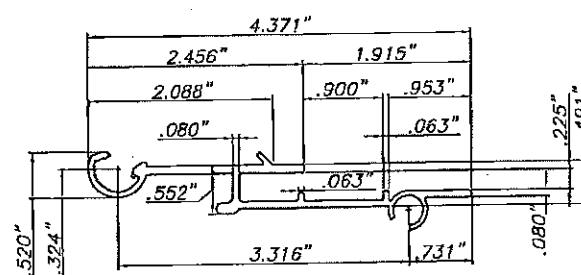


③ FEMALE CENTERMATE BLADE

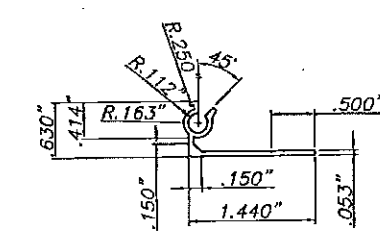


④ 180° MALE STARTER

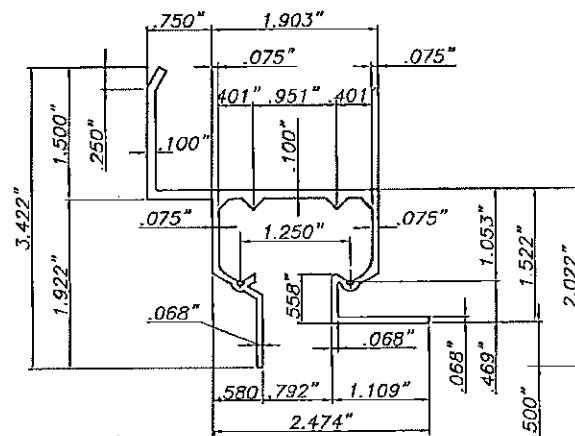


⑤ HEADER WALL MOUNT.

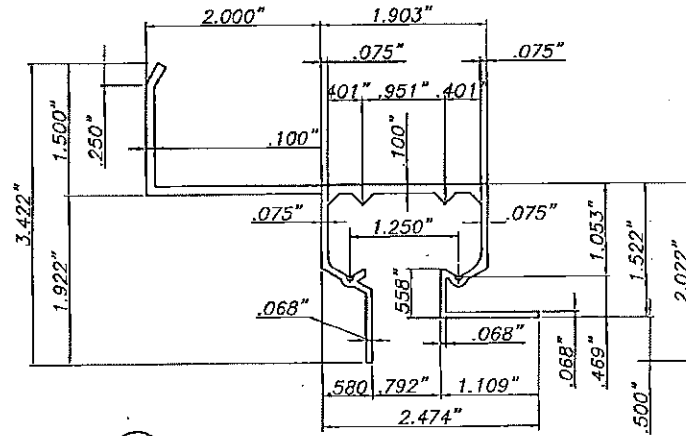


⑥ B.O. HEADER WALL MOUNT.

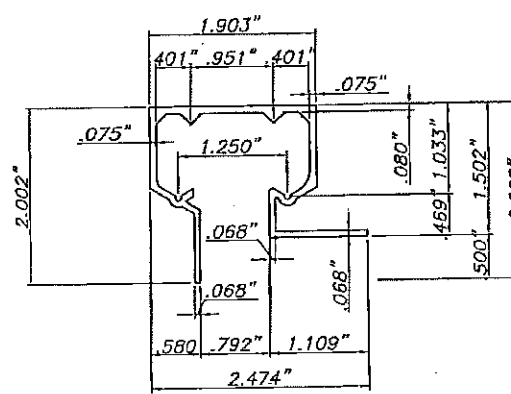


⑦ CEILING HEADER MOUNT.

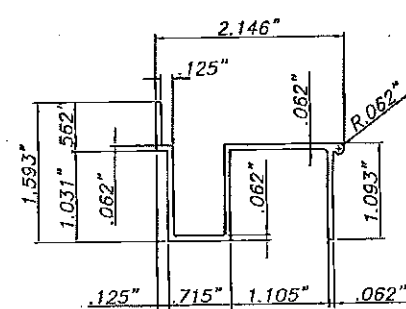


⑧ FLOOR SILL

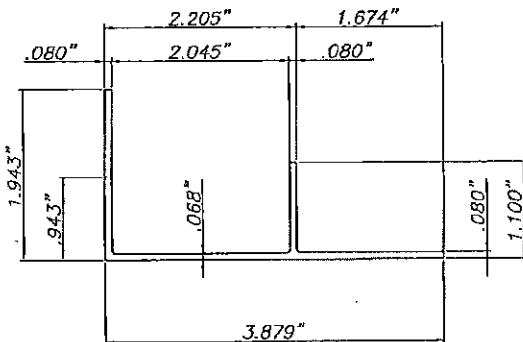


⑨ ADJUSTABLE FLOOR SILL ADAPTOR

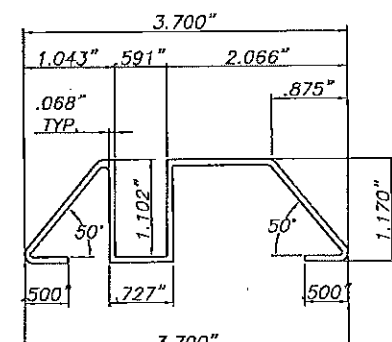


⑩ THRESHOLD TRACK




⑪ STARTER ANGLE

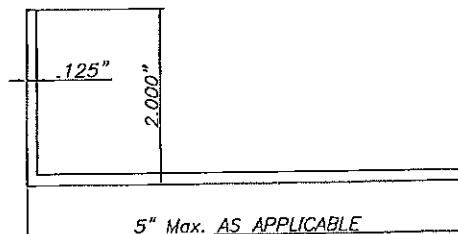


⑫ ALUMINUM B.O. ANGLE

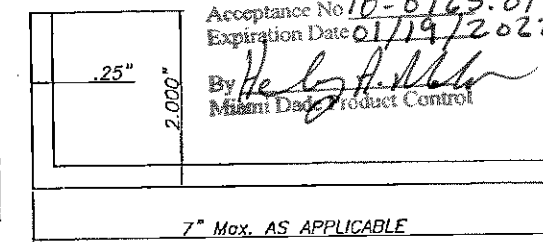


⑬ ALUMINUM B.O. ANGLE

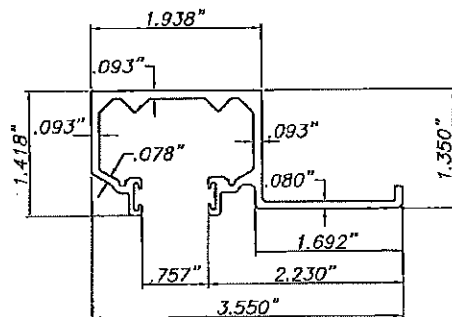


⑮ CEILING HEADER

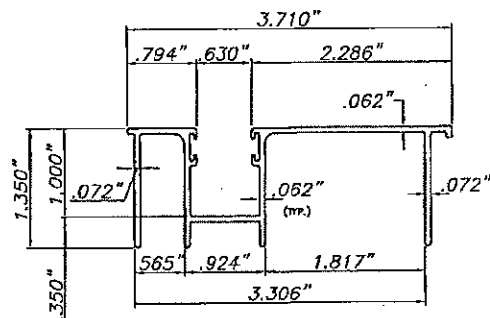

⑯ FLOOR SILL

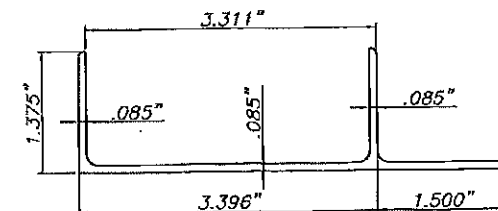


⑰ ADJUSTABLE FLOOR SILL ADAPTOR W / LIP

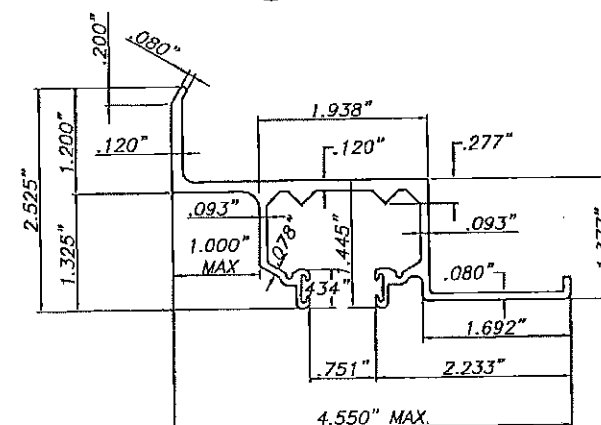

⑱ WALL HEADER

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 16-0725.01
Expiration Date 01/19/2022
By Healy Product Control
Miami Dade Product Control

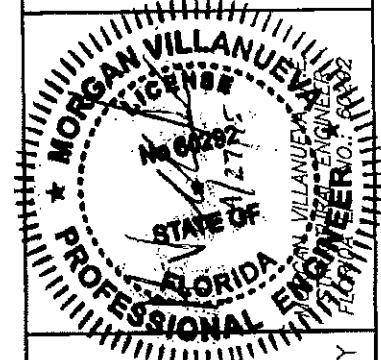

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 5-0505.01
Expiration Date 01/19/2017
By Healy Product Control
Miami Dade Product Control



SCALE:
DATE: 4-22-2015
F.B.C.
(High Velocity Hurricane Zone)
DWG No: 01-12 (RS1-06)
SHEET 2 OF 9

RS-1 ALUMINUM SHUTTER
HIGH VELOCITY SHUTTER SYSTEM

ROLLINGSHIELD INC.
PHONE (305) 436-8661 FAX (305) 436-5523
9875 NW 79th AVE
Hialeah Gardens, FL 33016
www.rollingshield.com

REV	No	DESCRIPTION	DATE
1	1	GENERAL	9-30-08
2	2	ADDENDUM / NEW COMPONENTS 21 & 22	11/10/08
3	3	RENEWAL AS PER FBC 2007	5-14-08
4	4	RENEWAL AS PER FBC 2010	12-28-2011
5	5	RENEWAL AS PER FBC 2015	4-22-2015



V.M.
Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896

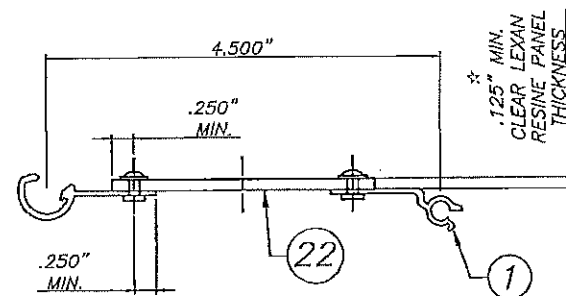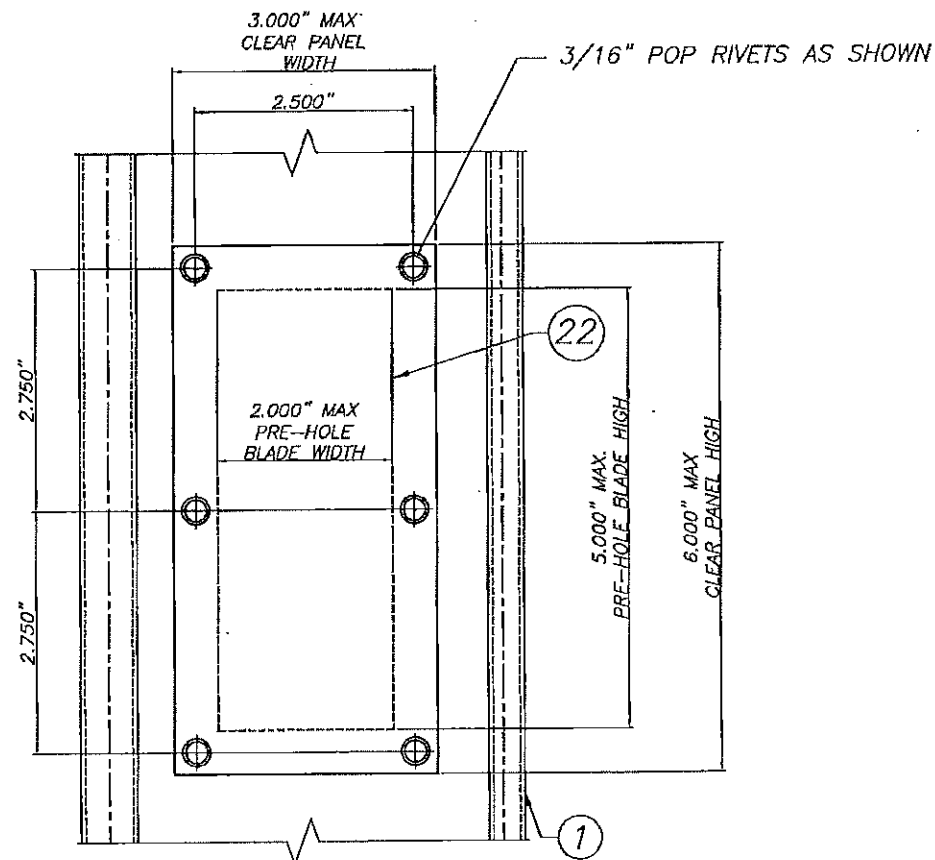



MALE/FEMALE BLADE DETAIL OF CLEAR PANEL LOCATION

MAXIMUM NUMBER OF CLEAR PANELS PER SHUTTER MUST NOT EXCEED FOUR (4) PER ACCORDION AND LOCATED TWO AT EACH SIDE OF THE CENTERMATES STARTED AT THIRD BLADE AFTER THE CENTERMATES AND THE SECOND ONE FOURTH BLADE AFTER, TYPICAL AT EACH SIDE OF THE SHUTTER.


★ CLEAR PANEL SHALL BE LEXAN RESIN #103-112 (UV STABILIZED) OR EQUIVALENT COMPARABLE TO G.E. LEXAN POLYMER SHEET #90-34, THERMOPLASTIC POLYMER TENSILE STRENGTH $F_y=8.9\text{ksi}$, $F_b=12.9\text{ksi}$, $E=328.7\text{ksi}$

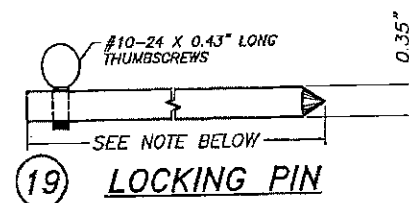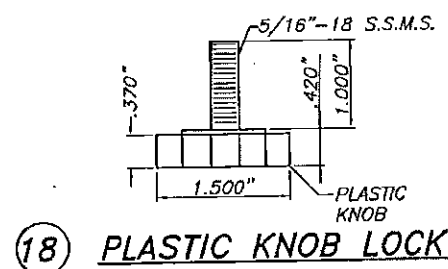


24" Min. FOR UP TO 9'-0" SHUTTER BLADE LENGTHS, AND FOR SHUTTER BLADE LENGTHS GREATER THAN 9'-0" INCREASE LOCKING PIN'S LENGTH BY 2" FOR EVERY 6" INCREASE ON SHUTTER BLADE'S LENGTH.

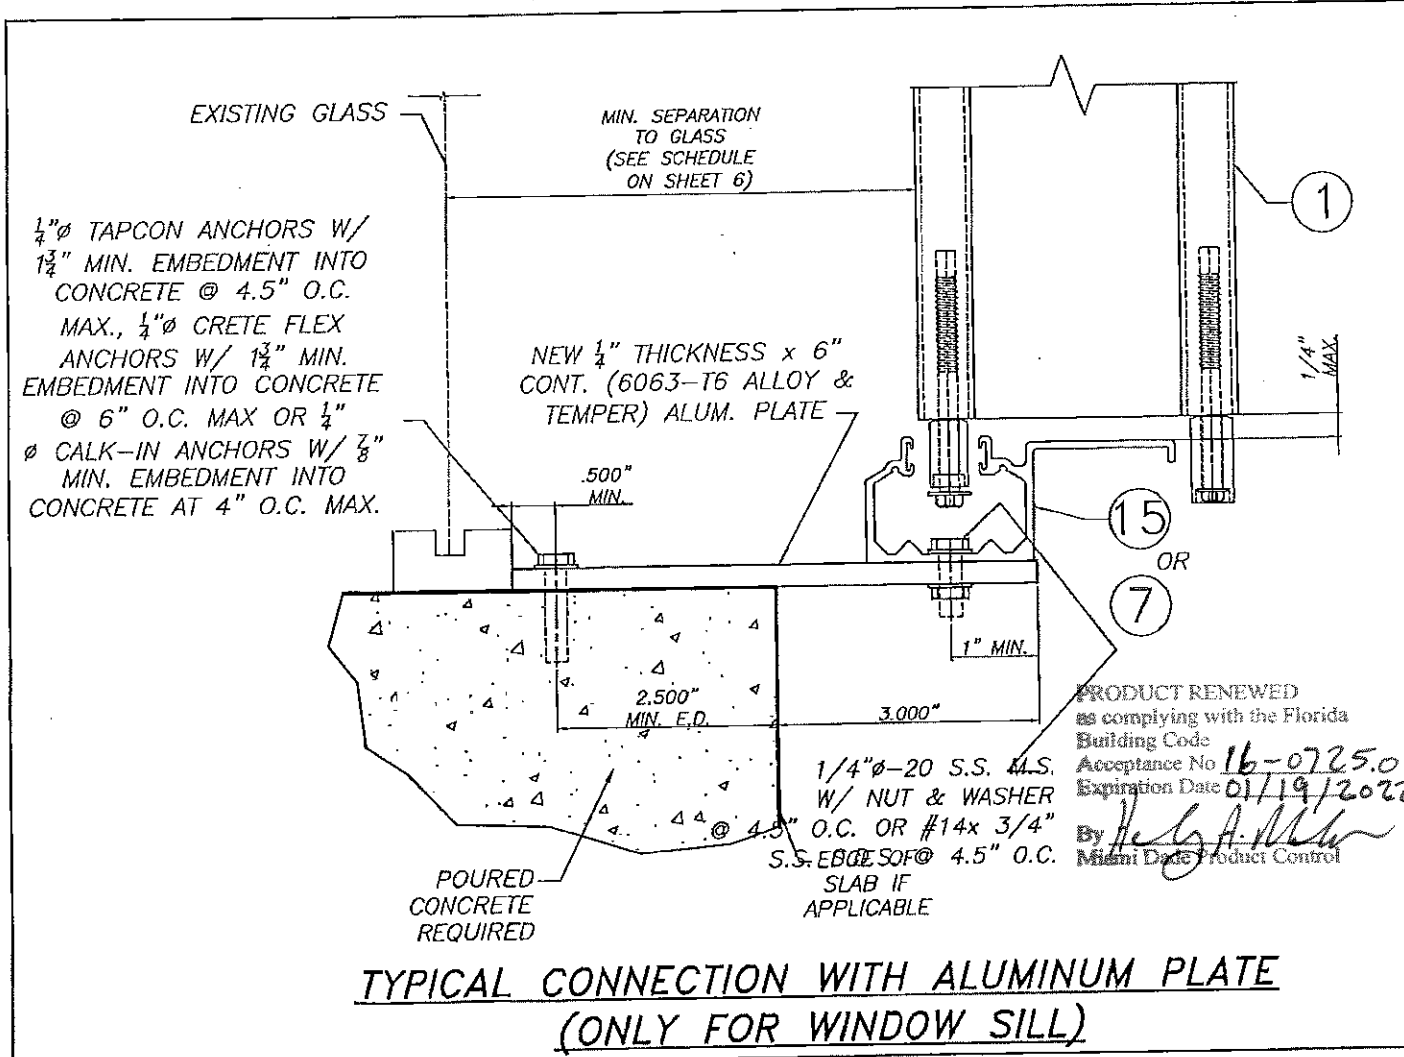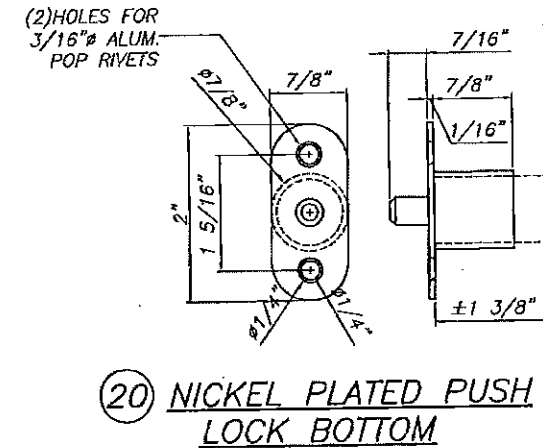

RS-1 ALUMINUM SHUTTER HIGH VELOCITY SHUTTER SYSTEM	
ROLLINGSHIELD INC. PHONE (305) 436-6661 FAX (305) 436-5523 5875 NW 79th AVE Hialeah Gardens, FL 33016 www.rollingshield.com	
REV. No	DESCRIPTION
1	GENERAL
2	ADDENDUM/ NEW COMPONENTS 21 & 22
3	RENEWAL AS PER FBC 2007
4	RENEWAL AS PER FBC 2010
5	RENEWAL AS PER FBC 2014
DATE	
9-30-06	
11/10/08	
9-14-09	
12-26-2011	
4-22-2015	




V.M. Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896

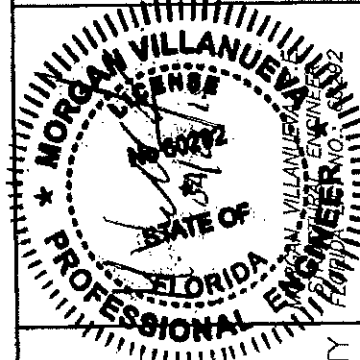


PRODUCT REVISED as complying with the Florida Building Code Acceptance No 15-0505.01 Expiration Date 01/19/2017
By He G. A. M. Miami Dade Product Control

SCALE:	
DATE:	4-22-2015
F.B.C. (High Velocity Hurricane Zone)	
DWG No:	01-12 (RS1-06)
SHEET	2A OF 9


MIAMI-DADE COUNTY

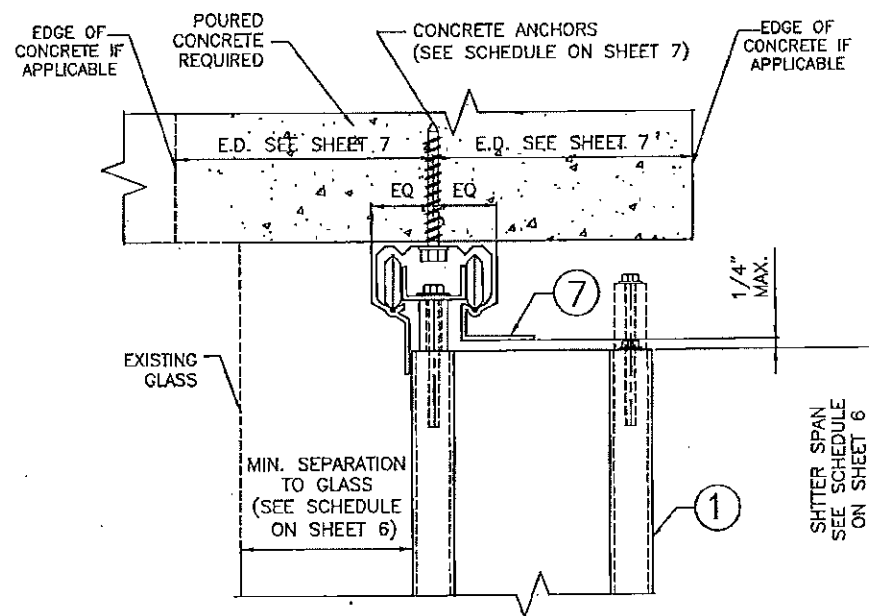


① CEILING HEADER MOUNTING INSTALLATION

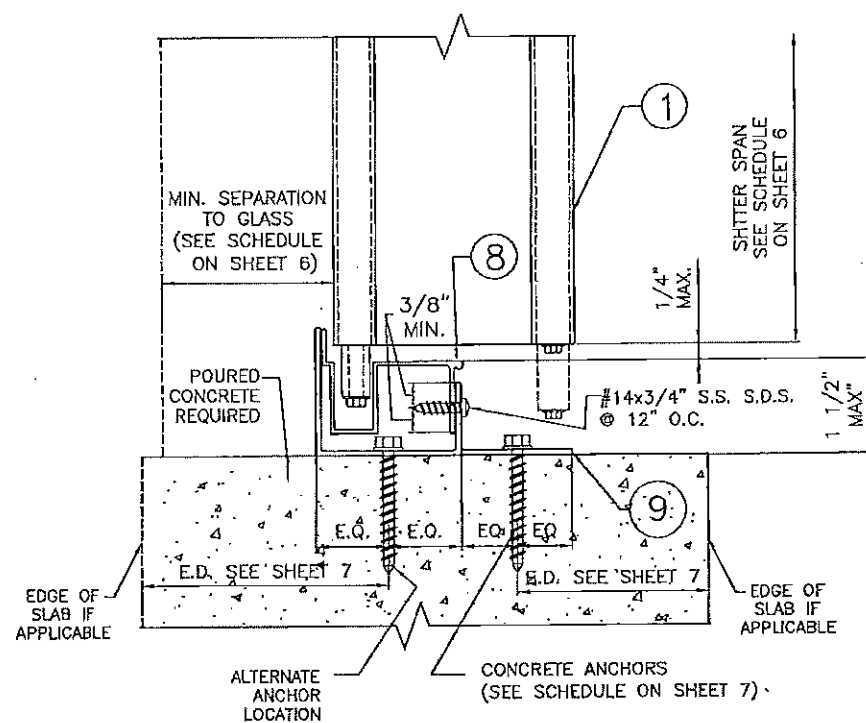

② SILL & ADJUSTABLE FLOOR MOUNTING INSTALLATION

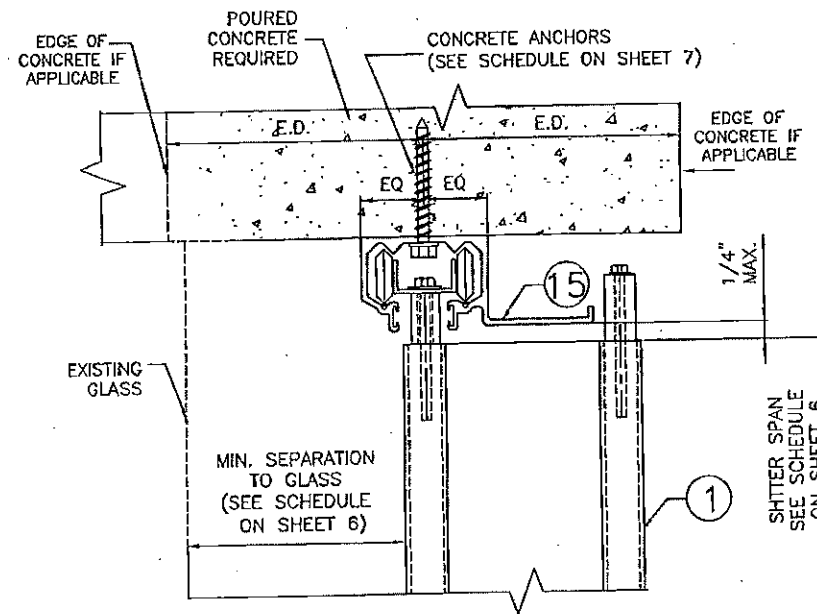


③ CEILING HEADER MOUNTING INSTALLATION

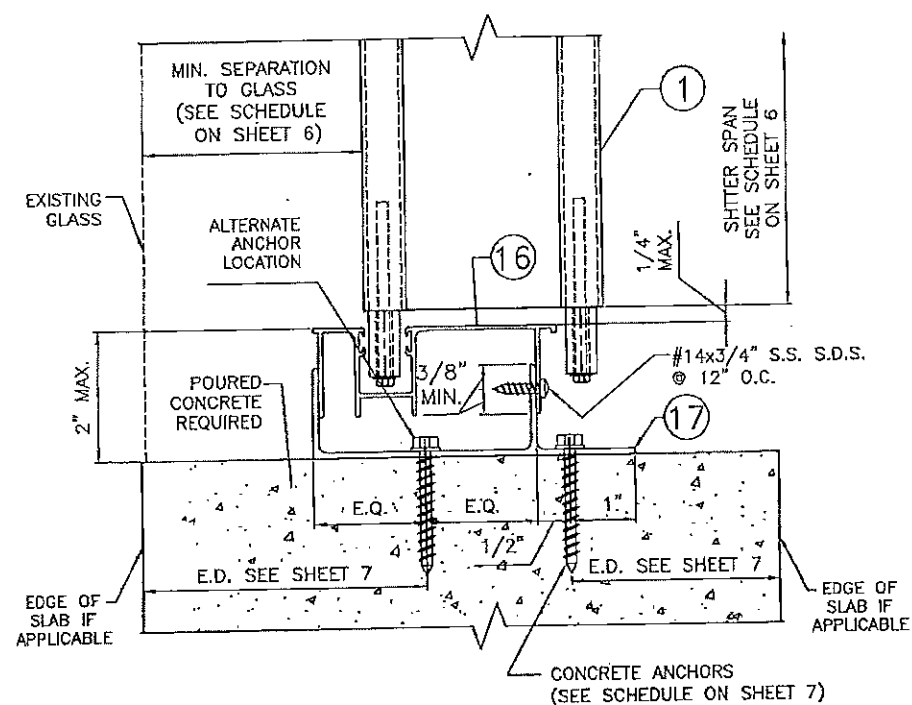


④ SILL & ADJUSTABLE FLOOR MOUNTING INSTALLATION

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 16-0725.01
Expiration Date 01/19/2022
By *Healy A. Miller*
Miami Dade Product Control

RS-1 ALUMINUM SHUTTER HIGH VELOCITY SHUTTER SYSTEM		ROLLINGSHIELD INC.		DATE	
PHONE (305) 436-6661 FAX (305) 436-5523		8575 NW 79th AVE		9-30-06	
Hialeah Gardens, FL 33016		www.rollingshield.com		11/6/08	
REV. No	DESCRIPTION	GENERAL		REVISIONS	
1				2	ADDITIONAL NEW COMPONENTS 21 & 22
2				3	RENEWAL AS PER FBC 2007
3				4	RENEWAL AS PER FBC 2010
4				5	RENEWAL AS PER FBC 2014



V.M. Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896

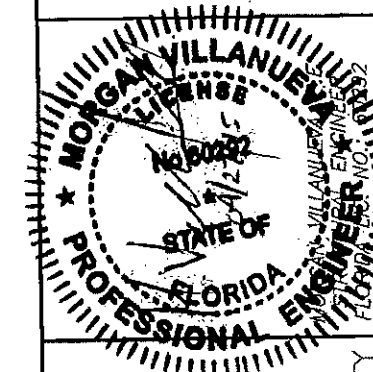

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0505.01
Expiration Date 01/19/2017
By *Healy A. Miller*
Miami Dade Product Control


MIAMI-DADE COUNTY

SCALE:
DATE: 4-22-2015


F.B.C.
(High Velocity Hurricane Zone)

DWG No: 01-12 (RS1-06)


SHEET 3 OF 9

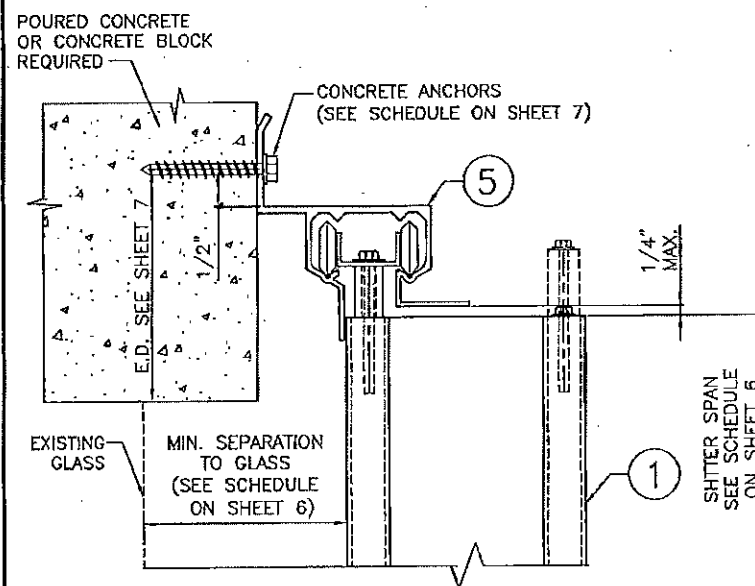


⑤ HEADER WALL MOUNTING INSTALLATION

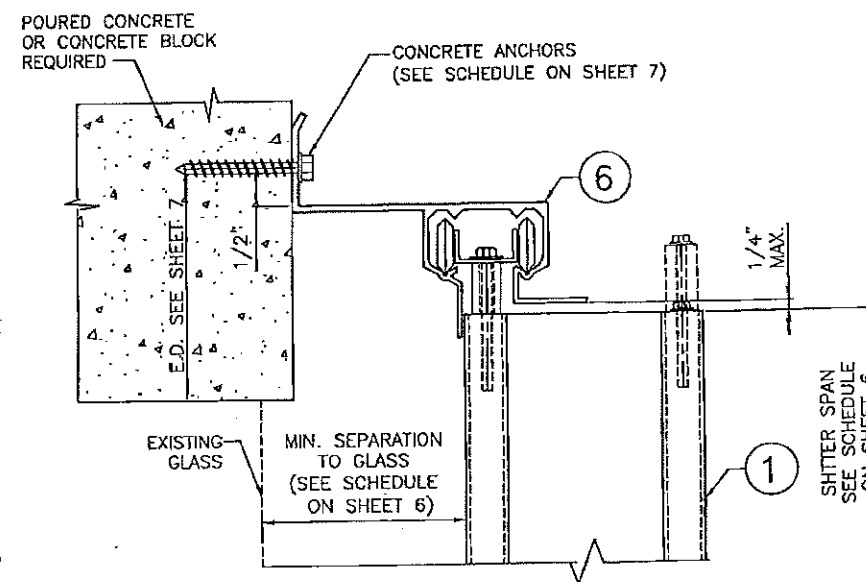


⑥ B.O. HEADER WALL MOUNTING INSTALLATION

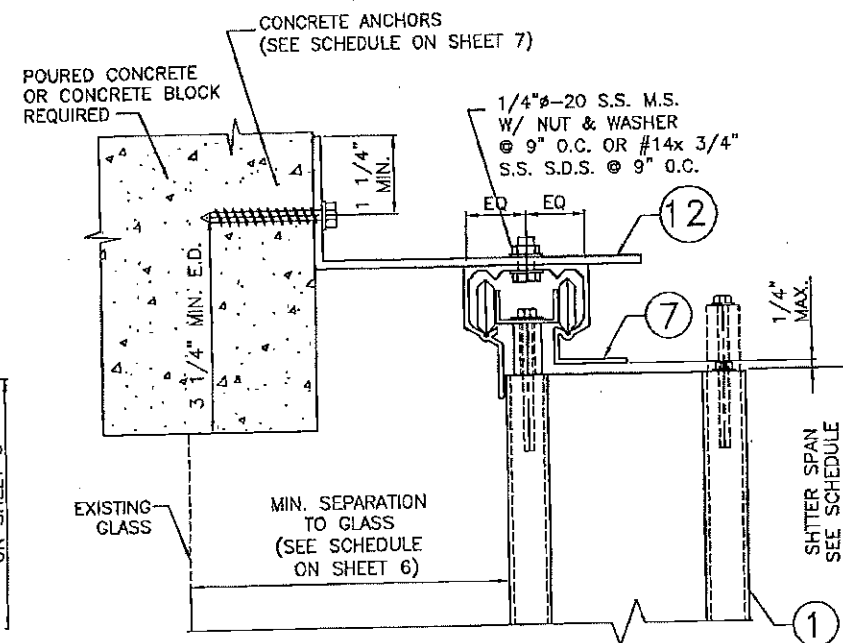


⑦ B.O. CEILING HEADER MOUNTING INSTALLATION

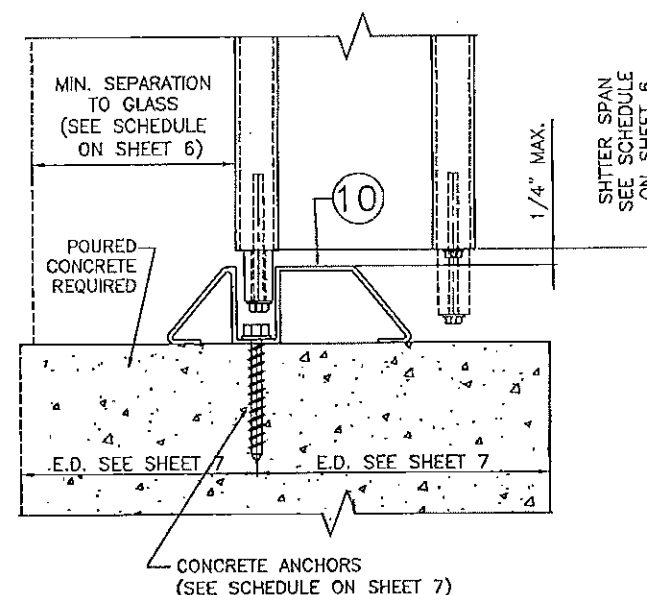

⑨ THRESHOLD FLOOR MOUNTING INSTALLATION

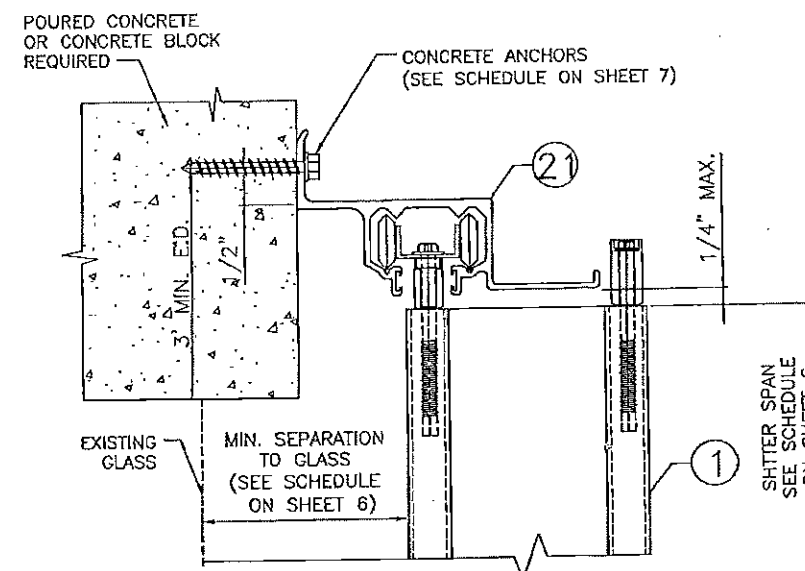


⑩ WALL MOUNTING INSTALLATION

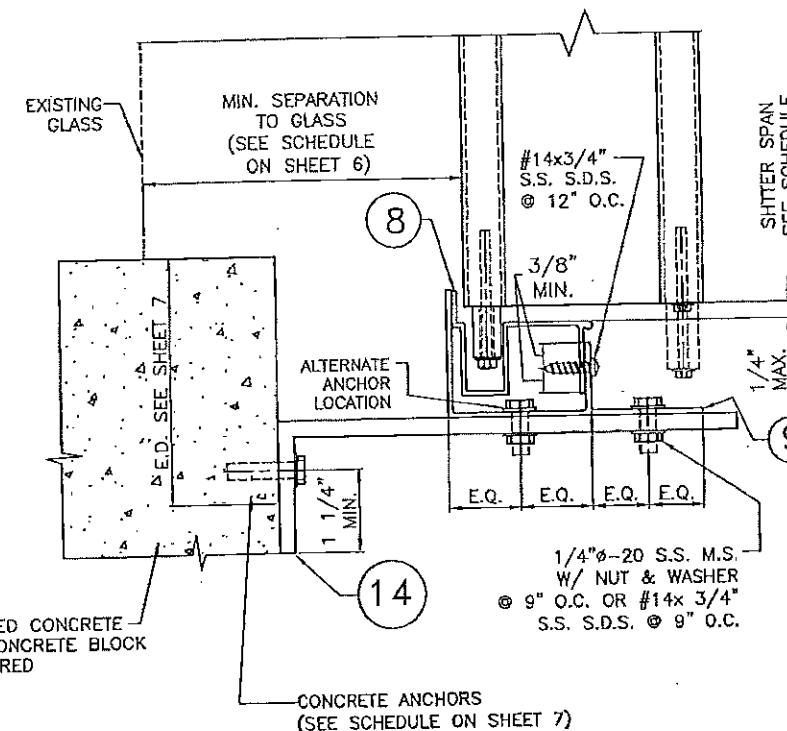


⑧ B.O. SILL & ADJUSTABLE FLOOR MOUNTING INSTALLATION

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 16-0725.01
Expiration Date 01/19/2022
By *[Signature]*
Miami Dade Product Control

RS-1 ALUMINUM SHUTTER HIGH VELOCITY SHUTTER SYSTEM		ROLLINGSHIELD INC.		DATE	
PHONE (305) 436-8861 FAX (305) 436-8523		3875 NW 79th AVE		9-30-08	
Hialeah Gardens, FL 33016		www.rollingshield.com		11/19/08	
REV. No	DESCRIPTION	GENERAL		RENEWAL AS PER FBC 2007	
1				8-14-09	
2	ADDENDUM/ NEW COMPONENTS 21 & 22			12-26-2011	
3				4-22-2015	
4					
5					










V.M. Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896

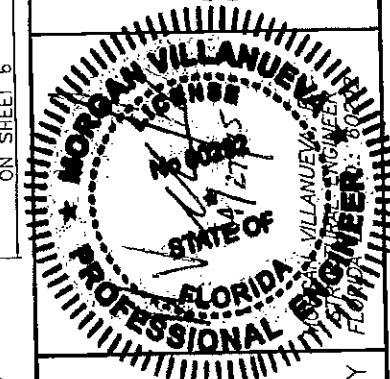

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0505.01
Expiration Date 01/19/2017
By *[Signature]*
Miami Dade Product Control

SCALE:	4-22-2015
DATE:	F.B.C.
	(High Velocity Hurricane Zone)
DWG No:	01-12 (RS1-06)
SHEET	4 OF 9


MIAMI-DADE COUNTY

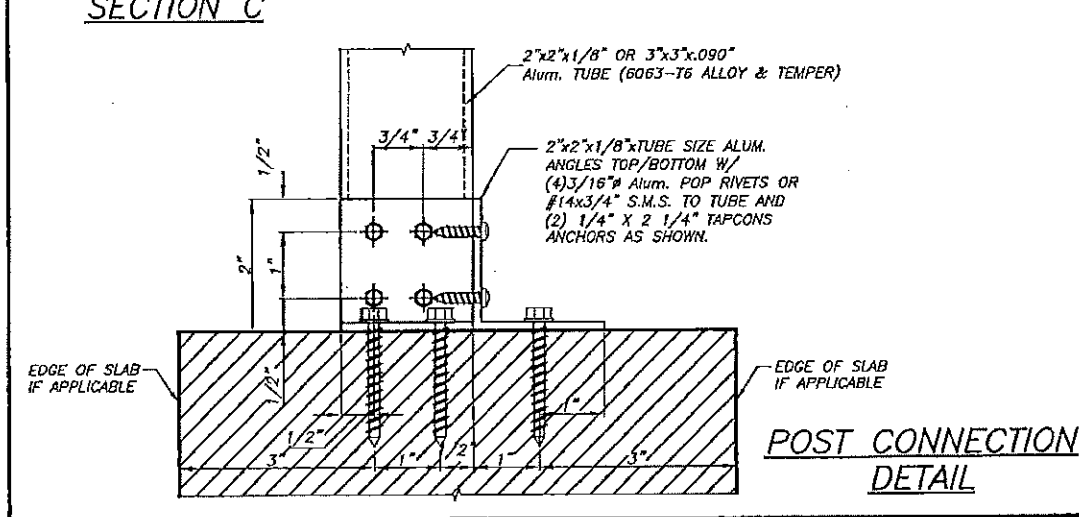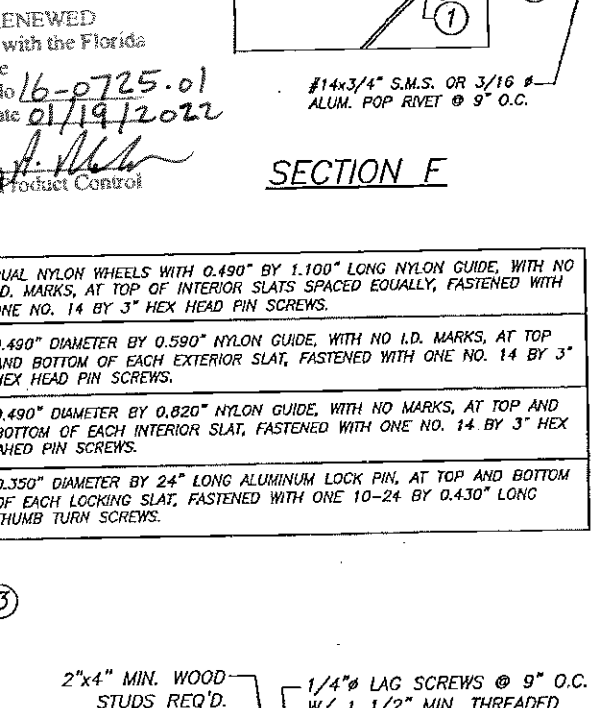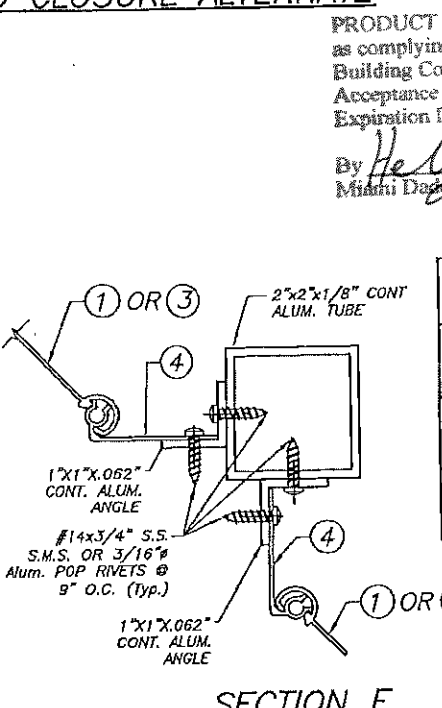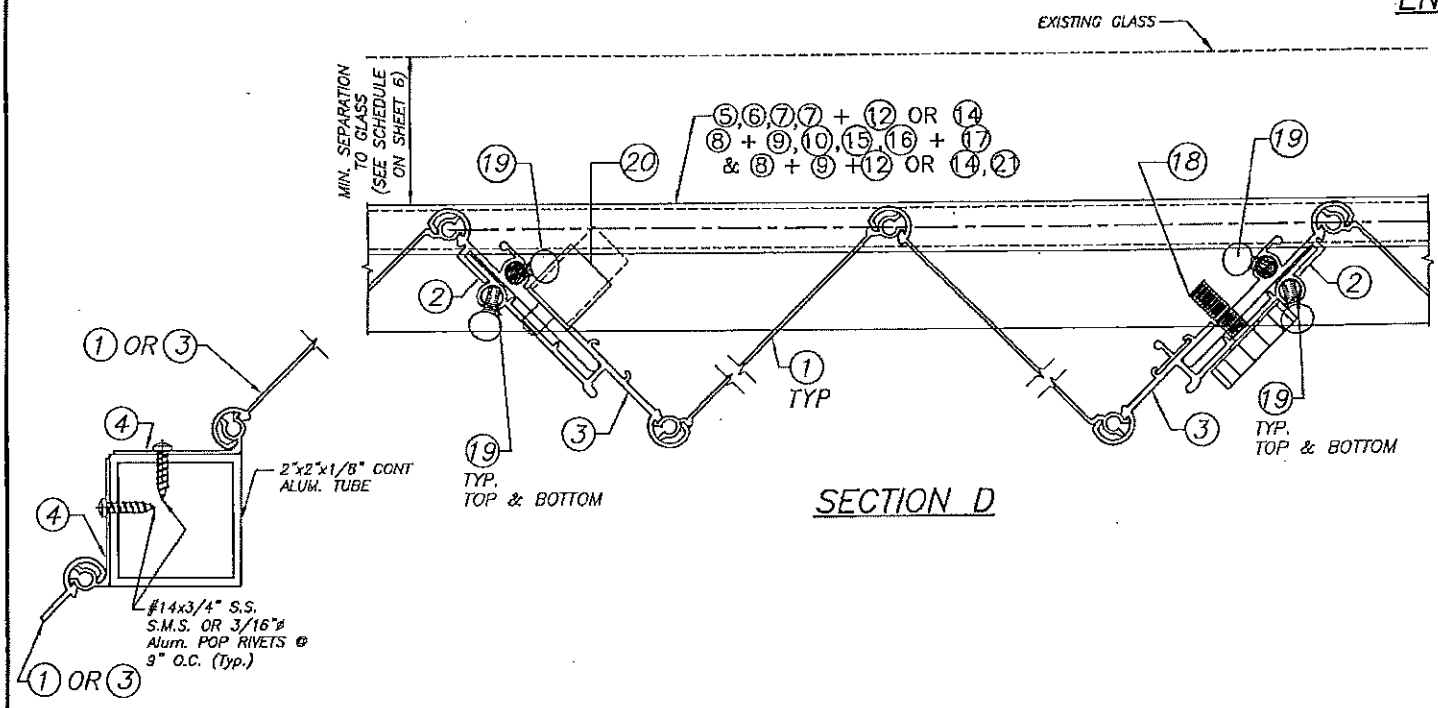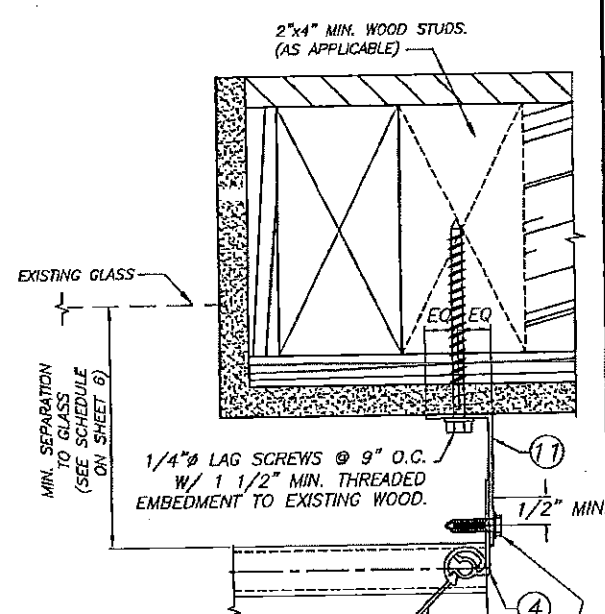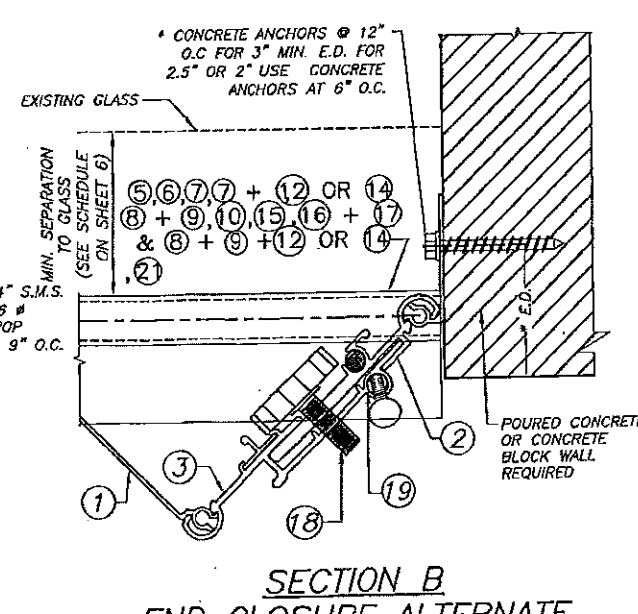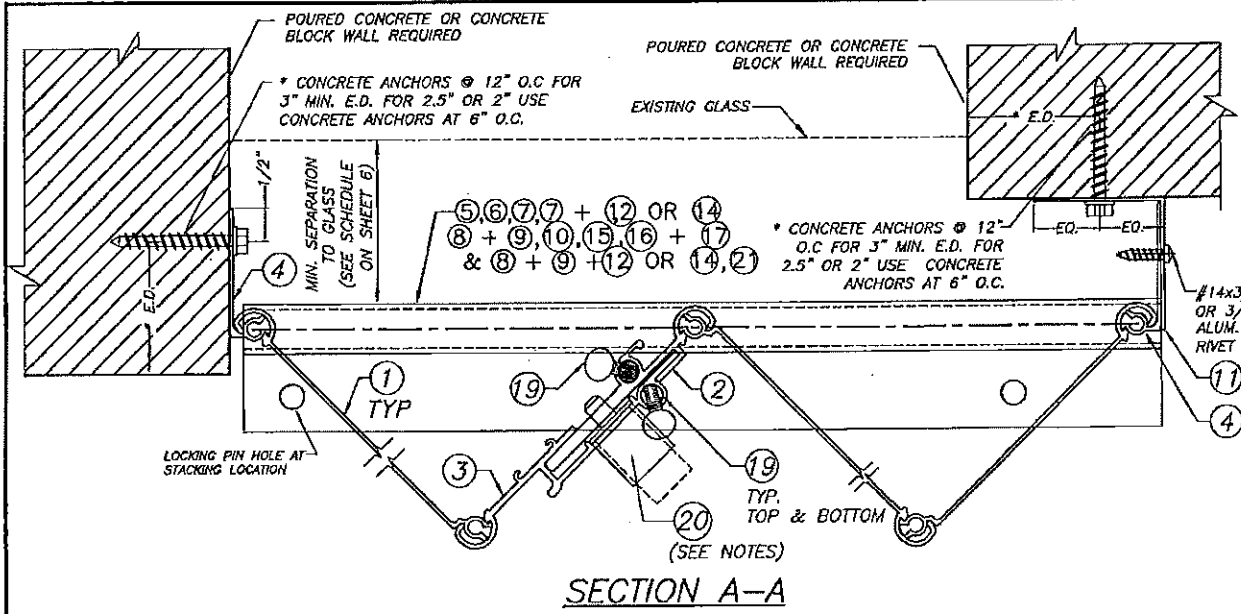

NOTES FOR LOCKING OF (2) & (3)

PUSH BOTTOM LOCK (2) MAY BE USED FOR INSTALLATIONS SECURED FROM THE OUTSIDE OR INSIDE OF SHUTTER. WHEN INSTALLING (2) FROM THE OUTSIDE, A 7/8" HOLE SHALL BE DRILLED AT (3) AND (2) MUST BE RIVETED FROM THE BACK OF (3) TO THE FRONT W/ (2) 3/16" ALUM. POP RIVETS. A 3/8" HOLE MUST THEN BE DRILLED AT (2) TO ALLOW FOR (2) PIN TO PASS THRU. WHEN INSTALLING (2) FROM THE INSIDE, (2) MUST BE RIVETED TO (2) W/ (2) 3/16" ALUM. POP RIVETS. A 3/8" HOLE MUST THEN BE DRILLED THRU (3) AND (2) TO ALLOW FOR (2) PIN TO PASS THRU.

5/16"x1" LOCK (18) MAY BE USED ALTERNATIVELY TO (2) LOCK FOR INSTALLATIONS SECURED FROM THE OUTSIDE OR INSIDE OF SHUTTER. IN THIS CASE, A 5/16" HOLE SHALL BE DRILLED THRU (2) AND (3) HOLE DRILLED TO (2) SHALL BE TAPPED TO ACCEPT (18) THREADS PER INCH MACHINE SCREW.

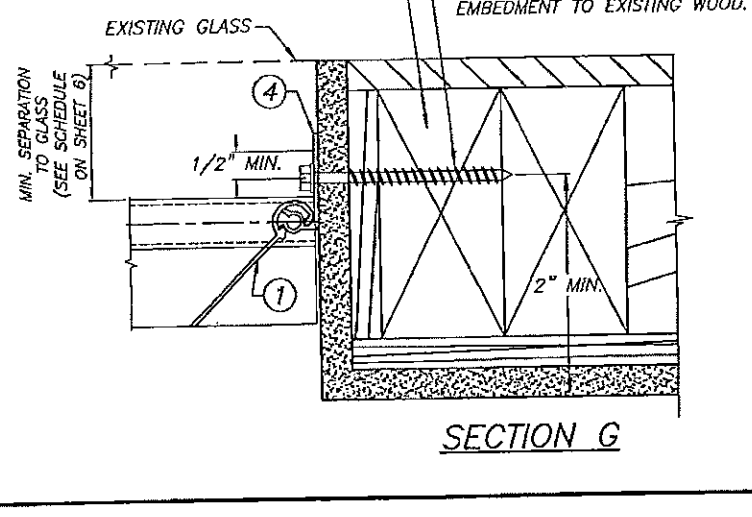

PRODUCT RENEWED as complying with the Florida Building Code Acceptance No 16-0725.01 Expiration Date 01/19/2022

By *Heidi A. Allen* Miami Dade Product Control

DUAL NYLON WHEELS WITH 0.490" BY 1.100" LONG NYLON GUIDE, WITH NO I.D. MARKS, AT TOP OF INTERIOR SLATS SPACED EQUALLY, FASTENED WITH ONE NO. 14 BY 3" HEX HEAD PIN SCREWS.

0.490" DIAMETER BY 0.590" NYLON GUIDE, WITH NO I.D. MARKS, AT TOP AND BOTTOM OF EACH EXTERIOR SLAT, FASTENED WITH ONE NO. 14 BY 3" HEX HEAD PIN SCREWS.

0.490" DIAMETER BY 0.820" NYLON GUIDE, WITH NO MARKS, AT TOP AND BOTTOM OF EACH INTERIOR SLAT, FASTENED WITH ONE NO. 14 BY 3" HEX AHED PIN SCREWS.

0.350" DIAMETER BY 24" LONG ALUMINUM LOCK PIN, AT TOP AND BOTTOM OF EACH LOCKING SLAT, FASTENED WITH ONE 10-24 BY 0.430" LONG THUMB TURN SCREWS.

RS-1 ALUMINUM SHUTTER SYSTEM
HIGH VELOCITY SHUTTER SYSTEM

ROLLINGSHIELD INC.
PHONE (305) 436-6661 FAX (305) 436-5523
9875 NW 79th AVE
Hialeah Gardens, FL 33016
www.rollingshield.com

REV. No	DESCRIPTION	DATE
1	GENERAL	9-20-06
2	ADDENDUM/ NEW COMPONENTS 21 & 22	11/10/08
3	RENEWAL AS PER REC 2007	5-14-09
4	RENEWAL AS PER REC 2010	12-26-2011
5	RENEWAL AS PER REC 2014	4-22-2015

V.M. Engineering Inc.
of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896

MORGAN VILLANUEVA
LICENSE
FLORIDA
PROFESSIONAL ENGINEER
#29182

MIAMI-DADE COUNTY

PRODUCT REVISED as complying with the Florida Building Code Acceptance No 15-0505.01 Expiration Date 01/19/2017

By *Heidi A. Allen* Miami Dade Product Control

SCALE: 4-22-2015

F.B.C.
(High Velocity Hurricane Zone)

DWG No: 01-12 (RS1-06)

SHEET 5 OF 9

MAXIMUM DESIGN PRESSURE RATING "W" (p.s.f.) AND
CORRESPONDING MAXIMUM SPAN "L" SCHEDULE.

MAXIMUM ALLOWABLE WIND LOAD DESIGN "W" (p.s.f.)	MAXIMUM ALLOWABLE DESIGN SPANS								MINIMUM SEPARATION TO GLASS (in.)	
	SECTIONS 5 TO 8 WALL MOUNTING INSTALLATIONS		SECTIONS 1, 2 & 9 FLOOR/CEILING MOUNTING INSTALLATIONS		SECTIONS 3 & 4 FLOOR/CEILING MOUNTING INSTALLATIONS		SECTION 10 WALL MOUNTING INSTALLATION		WHEN SHUTTERS INSTALLED WITHIN THE FIRST 30'-0" ELEVATION OF BUILDING MEASURED AT BOTTOM OF SHUTTER.	WHEN SHUTTERS INSTALLED ABOVE 30'-0" ELEVATION OF BUILDING, MEASURED AT BOTTOM OF SHUTTER.
	L+	L-	L+	L-	L+	L-	L+	L-		
30	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	3"	2 3/4"
35	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	3"	2 3/4"
40	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	12'-4"	3"	2 3/4"
45	11'-10"	11'-10"	11'-10"	11'-10"	12'-4"	12'-4"	12'-1"	12'-3"	3"	2 3/4"
50	11'-3"	11'-3"	11'-5"	11'-5"	12'-4"	12'-4"	11'-11"	12'-1"	3"	2 3/4"
55	10'-8"	10'-8"	11'-0"	11'-0"	12'-4"	12'-4"	11'-8"	12'-0"	3"	2 3/4"
60	10'-3"	10'-3"	10'-7"	10'-7"	12'-0"	12'-4"	11'-6"	11'-10"	3"	2 3/4"
65	9'-10"	9'-10"	10'-2"	10'-2"	11'-6"	12'-4"	11'-3"	11'-9"	3"	2 3/4"
70	9'-6"	9'-6"	9'-9"	9'-9"	11'-1"	12'-4"	11'-1"	11'-6"	3"	2 3/4"
75	9'-2"	9'-2"	9'-4"	9'-4"	10'-9"	12'-4"	10'-10"	11'-4"	3"	2 3/4"
80	8'-10"	8'-10"	9'-4"	9'-4"	10'-5"	12'-4"	10'-8"	11'-2"	3"	2 3/4"
85	8'-7"	8'-7"	9'-0"	9'-4"	10'-1"	12'-4"	10'-5"	11'-0"	3"	2 3/4"
90	8'-4"	8'-4"	8'-9"	9'-3"	9'-10"	12'-4"	10'-3"	10'-10"	3"	2 3/4"
95	7'-8"	8'-2"	8'-6"	9'-3"	9'-6"	12'-4"	10'-0"	10'-8"	2 3/4"	2 3/4"
100	6'-10"	7'-11"	8'-4"	9'-1"	9'-4"	12'-4"	9'-10"	10'-6"	2 3/4"	2 3/4"
105	6'-3"	7'-9"	8'-1"	8'-10"	8'-10"	12'-2"	9'-7"	10'-5"	2 3/4"	2 3/4"
110	5'-6"	7'-7"	7'-9"	8'-8"	8'-6"	11'-11"	9'-5"	10'-3"	2 3/4"	2 3/4"
115	4'-10"	7'-5"	7'-3"	8'-6"	8'-0"	11'-8"	9'-2"	10'-2"	2 3/4"	2 3/4"
120	4'-2"	7'-3"	7'-2"	8'-3"	7'-7"	11'-5"	9'-0"	10'-1"	2 3/4"	2 3/4"
125	3'-6"	7'-1"	7'-0"	8'-1"	7'-3"	11'-2"	-	10'-0"	2 3/4"	2 3/4"
130	-	6'-11"	-	7'-11"	7'-0"	10'-11"	-	9'-10"	2 3/4"	2 3/4"
135	-	6'-10"	-	7'-10"	6'-9"	10'-9"	-	9'-9"	2 3/4"	2 3/4"
140	-	6'-8"	-	7'-8"	6'-6"	10'-7"	-	9'-8"	2 3/4"	2 3/4"
145	-	6'-7"	-	7'-6"	6'-3"	10'-4"	-	9'-7"	2 3/4"	2 3/4"
150	-	6'-6"	-	7'-1"	6'-0"	10'-2"	-	9'-6"	2 3/4"	2 3/4"
155	-	6'-4"	-	6'-9"	5'-10"	10'-0"	-	9'-5"	2 3/4"	2 3/4"
160	-	6'-3"	-	6'-5"	5'-8"	9'-10"	-	9'-4"	2 3/4"	2 3/4"
165	-	6'-2"	-	6'-0"	5'-6"	9'-9"	-	9'-4"	2 1/2"	2 3/4"
170	-	5'-11"	-	5'-8"	5'-4"	9'-7"	-	9'-3"	2 1/2"	2 3/4"
175	-	5'-6"	-	5'-4"	5'-2"	9'-5"	-	9'-1"	2 1/2"	2 3/4"
180	-	5'-2"	-	4'-11"	5'-0"	9'-4"	-	9'-0"	2 1/2"	2 3/4"
185	-	4'-10"	-	4'-7"	4'-10"	9'-0"	-	8'-11"	2 1/2"	2 3/4"
190	-	4'-5"	-	4'-2"	4'-9"	8'-10"	-	8'-9"	2 1/2"	2 3/4"
195	-	4'-1"	-	3'-10"	4'-8"	8'-6"	-	8'-6"	2 1/2"	2 3/4"
200	-	3'-6"	-	3'-6"	4'-7"	8'-0"	-	8'-0"	2 1/2"	2 3/4"

NOTES:

(1) L+: ALLOWABLE SPAN DUE TO POSITIVE DESIGN LOAD +W (psf)
L-: ALLOWABLE SPAN DUE TO NEGATIVE DESIGN LOAD -W (psf)

(2) TO DETERMINE MAXIMUM ALLOWABLE SPAN:
GIVEN: POSITIVE LOAD (W+) AND NEGATIVE LOAD (W-)

- IDENTIFY TYPE OF INSTALLATION (WALL MOUNTING, FLOOR
MOUNTING, ...ETC.).

- DETERMINE VALUE OF L+ AND L- FROM TABLE

FINAL MAXIMUM ALLOWABLE SPAN SHALL BE EQUAL TO THE
"MINIMUM" OF VALUES OF L+ AND L-

(3) AFTER THE MAXIMUM ALLOWABLE SPAN CHECK SCHEDULE TABLE
TO OBTAIN MAXIMUM ANCHOR SPACING.

REMEMBER TO SELECT ANCHOR SPACING USING NEGATIVE DESIGN
LOAD (W psf)

DUAL NYLON WHEELS WITH 0.490" BY 1.100" LONG NYLON GUIDE, WITH NO
I.D. MARKS, AT TOP OF INTERIOR SLATS SPACED EQUALLY, FASTENED WITH
ONE NO. 14 BY 3" HEX HEAD PIN SCREWS.

0.490" DIAMETER BY 0.590" NYLON GUIDE, WITH NO I.D. MARKS, AT TOP
AND BOTTOM OF EACH EXTERIOR SLAT, FASTENED WITH ONE NO. 14 BY 3"
HEX HEAD PIN SCREWS.

0.490" DIAMETER BY 0.820" NYLON GUIDE, WITH NO MARKS, AT TOP AND
BOTTOM OF EACH INTERIOR SLAT, FASTENED WITH ONE NO. 14 BY 3" HEX
HEAD PIN SCREWS.

0.350" DIAMETER BY 24" LONG ALUMINUM LOCK PIN, AT TOP AND BOTTOM
OF EACH LOCKING SLAT, FASTENED WITH ONE 10-24 BY 0.430" LONG
THUMB TURN SCREWS.

ALTERNATIVES NOTES:

A) SECTIONS (1) & (2) ON THESE GROUPS CAN BE COMBINED AND
MOST BE TAKEN THE LOWEST SPAN.

B) SECTIONS (1) & (2) ON THESE GROUPS CAN BE COMBINED AND
MOST BE TAKEN THE LOWEST SPAN.

TO OBTAIN ULTIMATE WIND PRESSURE= ALLOWABLE WIND PRESSURE
0.6

SAMPLE: FOR 100psf ALLOWABLE
ULTIMATE = $\frac{100}{0.6} = 167$ psf

PRODUCT RENEWED

as complying with the Florida
Building Code

Acceptance No. 16-0725.01

Expiration Date 01/19/2022


By *Heb A. M...*
Miami Dade Product Control

RS-1 ALUMINUM SHUTTER
HIGH VELOCITY SHUTTER SYSTEM

ROLLINGSHIELD INC.
PHONE (305) 436-6661 FAX (305) 436-6623
9875 NW 75th AVE
Hialeah Gardens, FL 33018
www.rollingshield.com

REV. No.	DESCRIPTION	DATE
1	GENERAL	9-30-06
2	ADDENDUM / NEW COMPONENTS 21 & 22	11/10/08
3	RENEWAL AS PER FBC 2007	5-14-09
4	RENEWAL AS PER FBC 2010	12-26-2011
5	RENEWAL AS PER FBC 2014	4-22-2015

V.M.
Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-8968
TEL: 305-383-5896

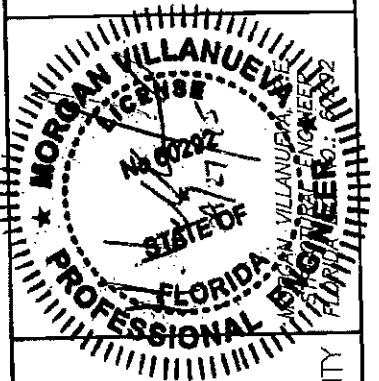

PRODUCT REVISED

as complying with the Florida

Building Code

Acceptance No. 15-0505.01

Expiration Date 01/19/2017

By *Heb A. M...*
Miami Dade Product Control

SCALE:

DATE: 4-22-2015

F.B.C.

(High Velocity Hurricane Zone)

DWG No: 01-12 (RS1-06)

SHEET 6 OF 9

**MAXIMUM WIND LOAD DESIGN PRESSURE "W" AND
CORRESPONDING MAXIMUM ANCHOR SPACING (in.) SCHEDULE.**

MAXIMUM ALLOWABLE DESIGN LOAD "W" (p.s.f.)	WALL MOUNTING INSTALLATION AT TOP OR BOTTOM (SECTIONS 5 THRU 8) (TO CONCRETE)			WALL MOUNTING INSTALLATION AT TOP OR BOTTOM (SECTIONS 5 THRU 8) (TO MASONRY)		
	SHUTTER SPAN			SHUTTER SPAN		
	5'-0" OR LESS	5'-0" TO 8'-6"	8'-6" TO MAX. ALLOWED	5'-0" OR LESS	5'-0" TO 8'-6"	8'-6" TO MAX. ALLOWED
LESS THAN 30.0	9	9	9	9	9	9
FROM >30.0 TO 60.0	9	9	9	9	7	5
	9	9	8	9	9	9
FROM >60.0 TO 70.0	9	9	9	9	5.5	4
	9	9	8	9	9	8.5
FROM >70.0 TO 80.0	9	9	9	9	8	6
	9	9	9	9	4	3.5
FROM >80.0 TO 90.0	9	9	6.5	9	8	7.5
	9	9	9	9	6	5.5
FROM >90.0 TO 100.0	9	9	6	8	3.5	n/a
	9	9	n/a	9	6.5	n/a
FROM >100.0 TO 120.0	9	9	n/a	9	5	n/a
	9	9	n/a	9	4.5	n/a
FROM >120.0 TO 140.0	9	8	n/a	7	3	n/a
	8.5	4	n/a	9	6	n/a
FROM >140.0 TO 160.0	7	9	n/a	9	4.5	n/a
	9	7	n/a	7.5	3	n/a
FROM >160.0 TO 180.0	8	3.5	n/a	7.5	4.5	n/a
	7	8	n/a	5.5	3	n/a
FROM >180.0 TO 200.0	9	6	n/a	3	n/a	n/a
	6.5	3.5	n/a	6	4	n/a
FROM >200.0 TO 220.0	6.5	7	n/a	4	3	n/a
	7.5	5	n/a	n/a	n/a	n/a
FROM >220.0 TO 240.0	6	3	n/a	5	4	n/a
	6	6	n/a	3.5	3	n/a
FROM >240.0 TO 260.0	9	n/a	n/a	4	n/a	n/a
	9	n/a	n/a	3.5	n/a	n/a
FROM >260.0 TO 280.0	9	n/a	n/a	3.5	n/a	n/a
	9	n/a	n/a	3.5	n/a	n/a

MAXIMUM ANCHOR SPACINGS FOR TAPCON, MAXI-SET TAPCONS OR CRETE-FLEX SS4 ARE VALID FOR 3 1/2" EDGE DISTANCE. FOR EDGE DISTANCE LESS THAN 3 1/2", REDUCE ANCHOR SPACING BY MULTIPLYING SPACING GIVEN ON SCHEDULE BY THE BELLOW FACTORS. THE MINIMUM EDGE DISTANCE FOR CALK-IN ANCHORS IS 2 1/2". THE MINIMUM ANCHOR SPACING FOR TAPCON, MAXI-SET TAPCONS OR CRETE-FLEX SS4 IS 3" O.C. AND 2 1/2" FOR CALK-IN ANCHORS.

EXISTING E. D.	FACTOR
3"	.90
2 1/2"	.75
2"	.50

ANCHOR LEGEND
TAPCON OR MAXI-SET TAPCONS
CRETE-FLEX SS4
CALK-IN

**MAXIMUM WIND LOAD DESIGN PRESSURE "W" AND
CORRESPONDING MAXIMUM ANCHOR
SPACING (in.) SCHEDULE.**

MAXIMUM ALLOWABLE DESIGN LOAD "W" (p.s.f.)	CEILING & FLOOR MOUNTING INSTALLATION AT TOP OR BOTTOM (SECTIONS 1,2 & 9) (TO CONCRETE)		
	SHUTTER SPAN		
	5'-0" OR LESS	5'-0" TO 8'-6"	8'-6" TO MAX. ALLOWED
LESS THAN 30.0	9	9	9
FROM >30.0 TO 60.0	9	9	9
	9	7.5	6
FROM >60.0 TO 70.0	9	9	9
	9	7.5	6
FROM >70.0 TO 80.0	9	6.5	5.5
	9	9	8
FROM >80.0 TO 90.0	9	6.5	5.5
	9	5.5	5
FROM >90.0 TO 100.0	9	8	7.5
	9	5.5	5
FROM >100.0 TO 120.0	8.5	5	4.5
	9	7	6.5
FROM >120.0 TO 140.0	8.5	5	4.5
	7.5	4.5	4.5
FROM >140.0 TO 160.0	9	6.5	6
	8	4.5	4.5
FROM >160.0 TO 180.0	6.5	4	n/a
	9	5.5	n/a
FROM >180.0 TO 200.0	6.5	4	n/a
	5.5	3.5	n/a
FROM >200.0 TO 220.0	8	5	n/a
	5.5	3.5	n/a
FROM >220.0 TO 240.0	5	3.5	n/a
	7	5.0	n/a
FROM >240.0 TO 260.0	5	3.5	n/a
	4	3.5	n/a
FROM >260.0 TO 280.0	6.5	n/a	n/a
	4.5	n/a	n/a
FROM >280.0 TO 300.0	4.0	n/a	n/a
	6.5	n/a	n/a
FROM >300.0 TO 320.0	4.5	n/a	n/a
	4.5	n/a	n/a

**MAXIMUM WIND LOAD DESIGN PRESSURE "W" AND
CORRESPONDING MAXIMUM ANCHOR
SPACING (in.) SCHEDULE.**

MAXIMUM ALLOWABLE DESIGN LOAD "W" (p.s.f.)	CEILING & FLOOR MOUNTING INSTALLATION AT TOP OR BOTTOM (SECTIONS 3 & 4) (TO CONCRETE)		
	SHUTTER SPAN		
	5'-0" OR LESS	5'-0" TO 8'-6"	8'-6" TO MAX. ALLOWED
LESS THAN 30.0	9	9	9
FROM >30.0 TO 60.0	9	9	9
	9	9	6.5
FROM >60.0 TO 70.0	9	9	9
	9	9	6
FROM >70.0 TO 80.0	9	8	5.5
	9	9	8
FROM >80.0 TO 90.0	9	8	5.5
	9	7	4.5
FROM >90.0 TO 100.0	9	9	7
	9	7	4.5
FROM >100.0 TO 120.0	9	6	4
	9	9	6
FROM >120.0 TO 140.0	9	6	4
	9	5.5	3.5
FROM >140.0 TO 160.0	9	8	5.5
	9	5.5	3.5
FROM >160.0 TO 180.0	9	5.5	3.5
	8	4.5	3.5
FROM >180.0 TO 200.0	7.5	4.5	3.5
	6.5	4	3
FROM >200.0 TO 220.0	9	6	4.5
	6.5	4	3
FROM >220.0 TO 240.0	6	3.5	3
	8.5	5	4.5
FROM >240.0 TO 260.0	5.5	3.5	3
	5	3	n/a
FROM >260.0 TO 280.0	7.5	4.5	4
	5	3	2.5
FROM >280.0 TO 300.0	4.5	3	n/a
	7	4	n/a
FROM >300.0 TO 320.0	4.5	3	n/a
	4.5	3	n/a

**MAXIMUM WIND LOAD DESIGN PRESSURE "W" AND
CORRESPONDING MAXIMUM ANCHOR SPACING (in.) SCHEDULE.**

MAXIMUM ALLOWABLE DESIGN LOAD "W" (p.s.f.)	WALL MOUNTING INSTALLATION AT TOP OR BOTTOM (SECTIONS 5 THRU 8) (TO CONCRETE)			WALL MOUNTING INSTALLATION AT TOP OR BOTTOM (SECTIONS 5 THRU 8) (TO MASONRY)		
	SHUTTER SPAN			SHUTTER SPAN		
	5'-0" OR LESS	5'-0" TO 8'-6"	8'-6" TO MAX. ALLOWED	5'-0" OR LESS	5'-0" TO 8'-6"	8'-6" TO MAX. ALLOWED
LESS THAN 30.0	9	9	9	9	9	9
FROM >30.0 TO 60.0	9	9	9	9	9	9
	9	9	9	9	7	3.5
FROM >60.0 TO 70.0	9	9	9	9	9	7.5
	9	9	9	9	9	5.5
FROM >70.0 TO 80.0	9	9	7	9	6	n/a
	9	9	9	9	9	4.5
FROM >80.0 TO 90.0	9	9	8	9	9	3.5
	9	9	5	9	4.5	n/a
FROM >90.0 TO 100.0	9	9	7	9	9	3.5
	9	9	6	9	6.5	2.5
FROM >100.0 TO 120.0	9	8.5	4	8	n/a	n/a
	9	9	6	9	5.5	n/a
FROM >120.0 TO 140.0	9	9	5	9	4	n/a
	9	6	3.5	7.5	n/a	n/a
FROM >140.0 TO 160.0	9	8	5	9	4	n/a
	9	7	4	9	3	n/a
FROM >160.0 TO 180.0	9	4	n/a	6	n/a	n/a
	9	5	3.5	9	n/a	n/a
FROM >180.0 TO 200.0	9	4.5	3	9	2.5	n/a
	9	3	n/a	4	n/a	n/a
FROM >200.0 TO 220.0	9	4	3	8	n/a	n/a
	9	3.5	2.5	5.5	n/a	n/a
FROM >220.0 TO 240.0	7	n/a	n/a	n/a	n/a	n/a
	9	3	n/a	4.5	n/a	n/a
FROM >240.0 TO 260.0	8.5	2.5	n/a	3.5	n/a	n/a
	5	n/a	n/a	n/a	n/a	n/a
FROM >260.0 TO 280.0	7	n/a	n/a	3.5	n/a	n/a
	6	n/a	n/a	2.5	n/a	n/a
FROM >280.0 TO 300.0	4	n/a	n/a	n/a	n/a	n/a
	5.5	n/a	n/a	n/a	n/a	n/a
FROM >300.0 TO 320.0	5	n/a	n/a	n/a	n/a	n/a
	5	n/a	n/a	n/a	n/a	n/a

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No 16-0725.01
Expiration Date 01/19/2022
By *Heidi A. Miller*
Miami Dade Product Control

RS-1 ALUMINUM SHUTTER SYSTEM
HIGH VELOCITY SHUTTER SYSTEM

ROLLINGSHIELD INC.
PHONE (305) 436-6661 FAX (305) 436-5523
9875 NW 79th AVE
Hialeah Gardens, FL 33016
www.rollingshield.com

REV. No	DESCRIPTION	DATE
1	GENERAL	9-30-00
2	ADDENDUM/ NEW COMPONENTS 21 & 22	11/10/06
3	RENEWAL AS PER FBC 2007	5-14-09
4	RENEWAL AS PER FBC 2010	12-26-2011
5	RENEWAL AS PER FBC 2014	4-22-2015

V.M. Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896


MORGAN VILLANUEVA
160022
STATE OF FLORIDA
PROFESSIONAL ENGINEER
MORGAN VILLANUEVA
160022
MORGAN VILLANUEVA
160022

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0505.01
Expiration Date 01/19/2017
By *Heidi A. Miller*
Miami Dade Product Control


SCALE:
DATE: 4-22-2015
F.B.C.
(High Velocity Hurricane Zone)
DWG No: 01-12 (RS1-06)
SHEET 7 OF 9

NOTE:
ALL WOOD MEMBERS SHALL COMPLY WITH THE
NATIONAL DESIGN SPECIFICATIONS CURRENT
EDITION, MINIMUM OF STRUCTURAL GRADE
Fb=2000 psi AND SPECIFIC GRAVITY OF 0.55


RECOMMENDED INSTALLATIONS AT STRUCTURAL WOOD MEMBERS

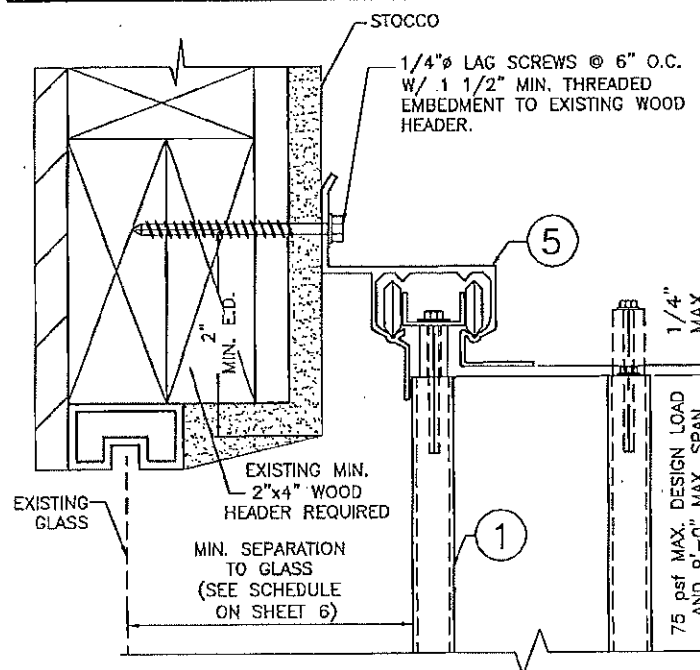


10 WALL CONNECTION AT TOP

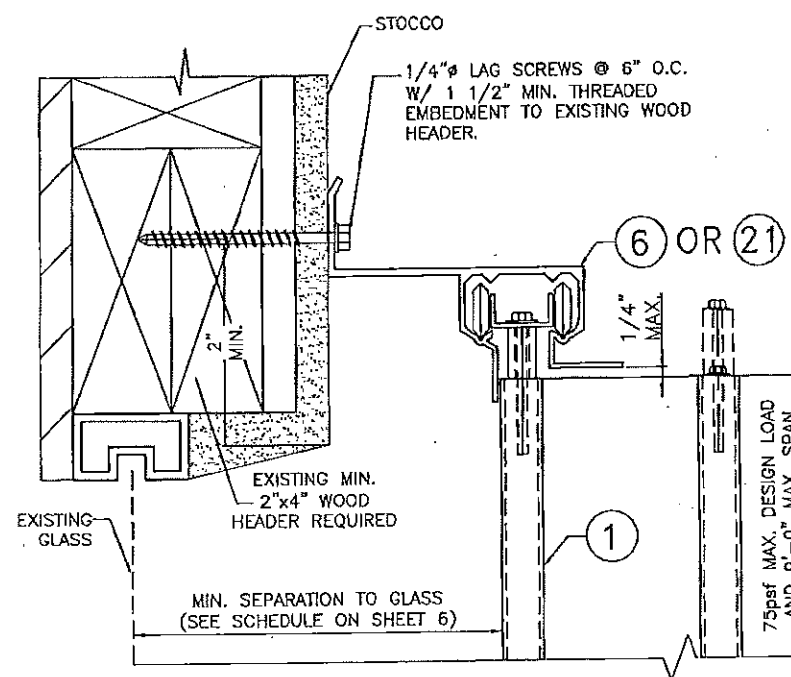


12 WALL CONNECTION AT TOP

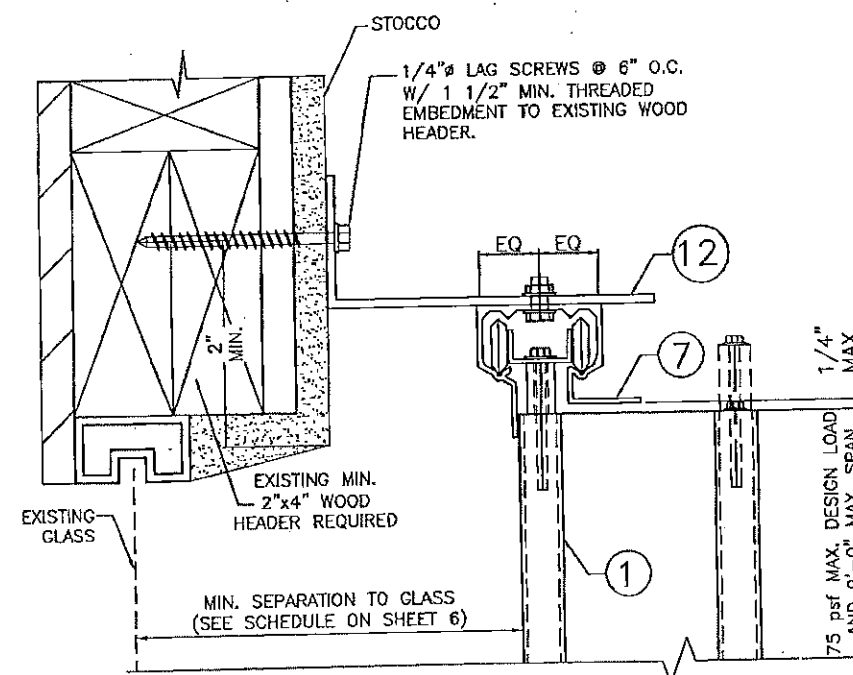


15 B.O WALL CONNECTION AT TOP

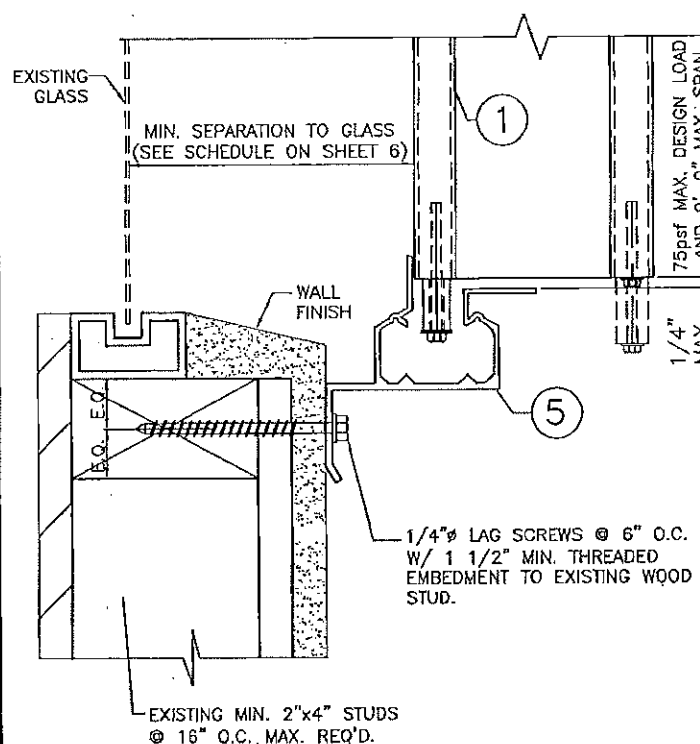

11 WALL CONNECTION AT BOTTOM

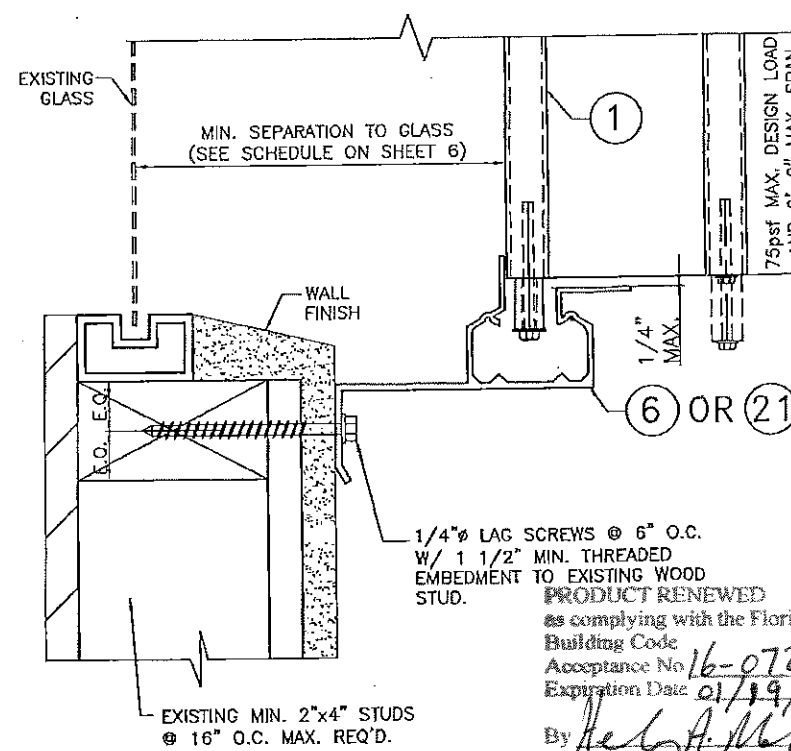

14 WALL CONNECTION AT BOTTOM

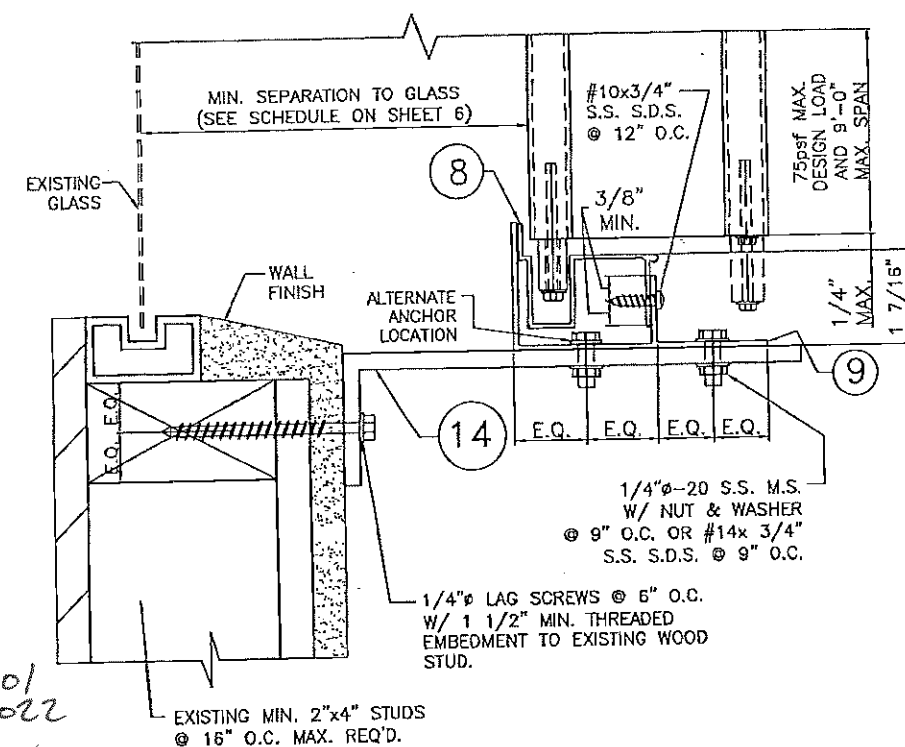


16 B.O WALL CONNECTION AT BOTTOM


RS-1 ALUMINUM SHUTTER
HIGH VELOCITY SHUTTER SYSTEM

ROLLINGSHIELD INC.
PHONE (305) 436-8861 FAX (305) 438-5523
9875 NW 75th AVE
Hialeah Gardens, FL 33016
www.rollingshield.com

REV. NO.	DESCRIPTION	DATE
1	GENERAL	9-30-06
2	ADDITION/ NEW COMPONENTS 21 & 22	11/10/08
3	RENEWAL AS PER FBC 2007	5-14-09
4	RENEWAL AS PER FBC 2010	12-26-2011
5	RENEWAL AS PER FBC 2014	4-22-2015



V.M.
Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6968
TEL: 305-383-5896

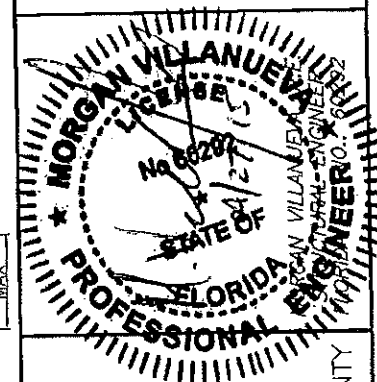

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 15-0505.01
Expiration Date 01/19/2017
By *[Signature]*
Miami Dade Product Control

SCALE:
DATE: 4-22-2015

F.B.C.
(High Velocity Hurricane Zone)


DWG No: 01-12 (RS1-06)

SHEET 8 OF 9


MIAMI-DADE COUNTY

NOTE:
ALL WOOD MEMBERS SHALL COMPLY WITH THE
NATIONAL DESIGN SPECIFICATIONS CURRENT
EDITION, MINIMUM OF STRUCTURAL GRADE
Fb=2000 psi AND SPECIFIC GRAVITY OF 0.55


RECOMMENDED INSTALLATIONS AT STRUCTURAL WOOD MEMBERS

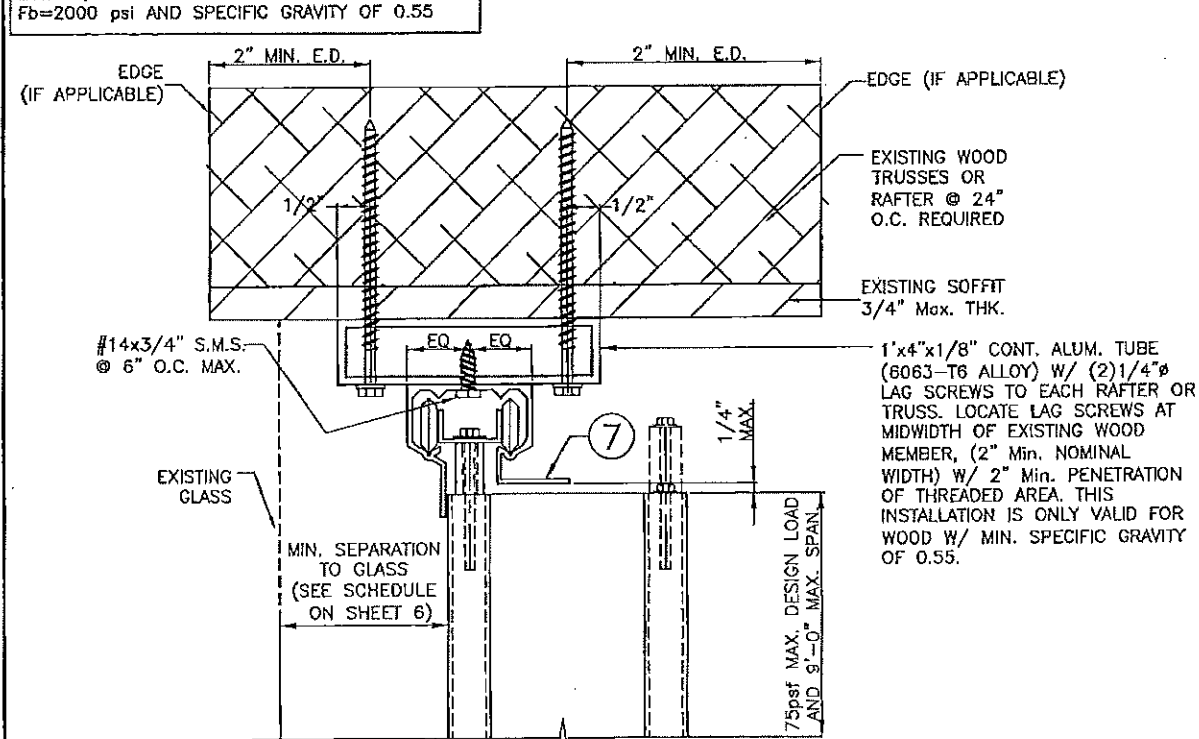


10 HOLLOW CEILING MOUNTING INSTALLATION

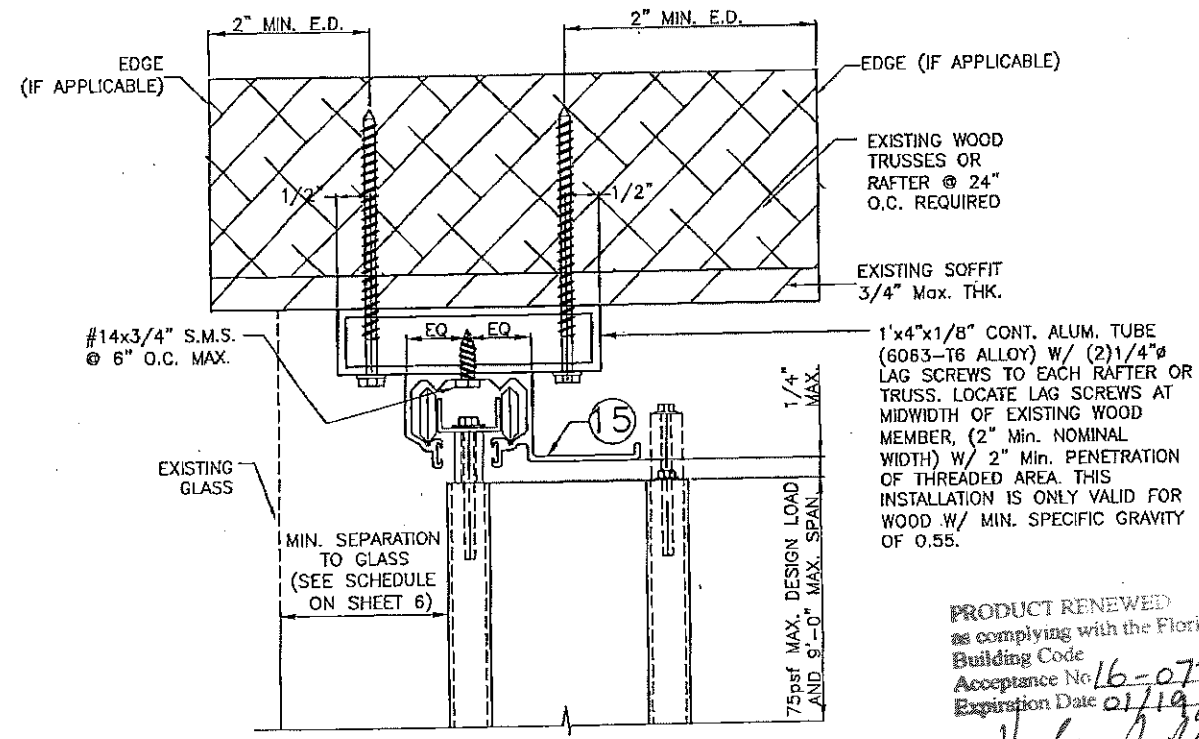


12 HOLLOW CEILING MOUNTING INSTALLATION

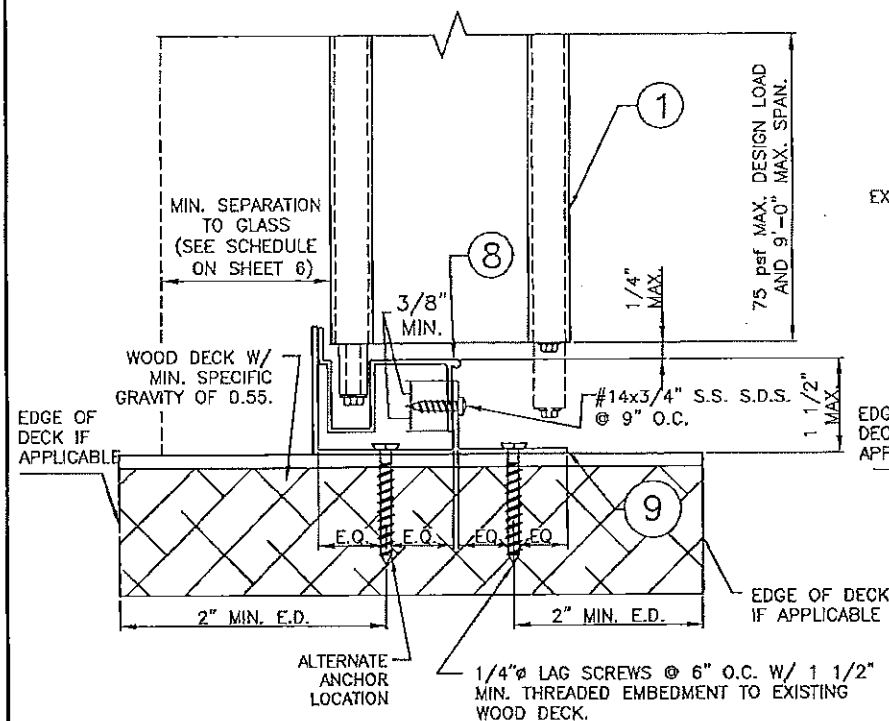

11 SILL & ADJUSTABLE FLOOR MOUNTING INSTALLATION

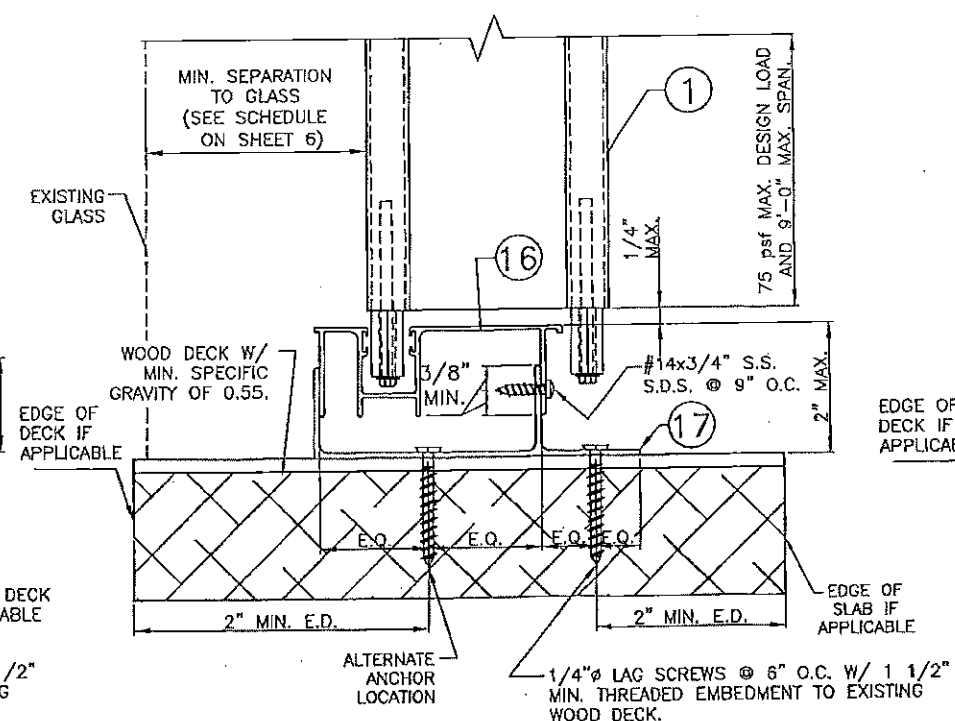


14 SILL & ADJUSTABLE FLOOR MOUNTING INSTALLATION

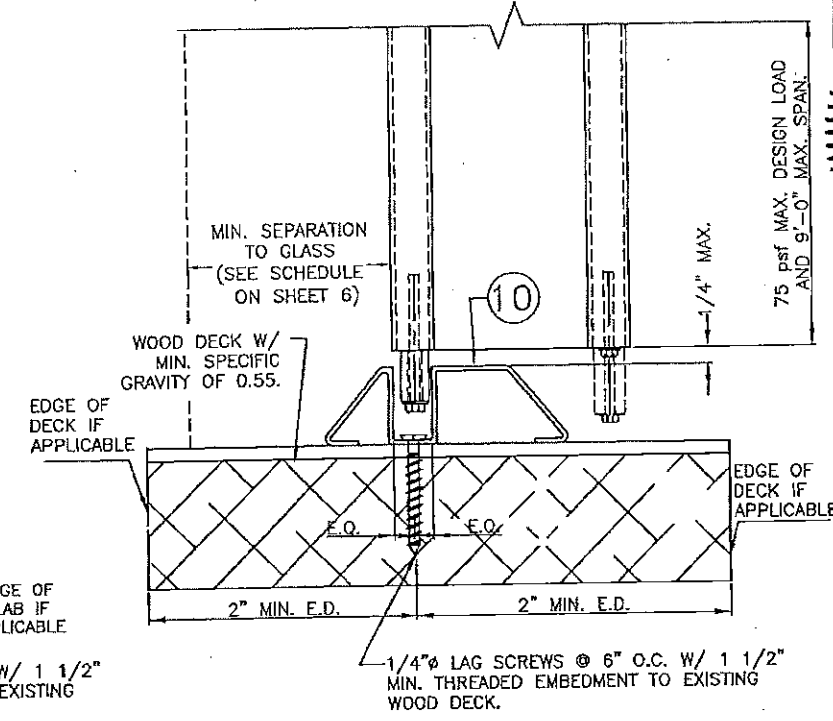


9 THRESHOLD FLOOR MOUNTING INSTALLATION

PRODUCT RENEWED
as complying with the Florida
Building Code
Acceptance No. 16-0725.01
Expiration Date 01/19/2022
By *Heidi A. Miller*
Miami Dade Product Control

RS-1 ALUMINUM SHUTTER SYSTEM		ROLLINGSHIELD INC.		DATE	
PHONE (305) 436-6661 FAX (305) 436-5523		9675 NW 79th AVE		9-30-08	
Hialeah Gardens, FL 33016		www.rollingshield.com		11/10/08	
REV. No.		DESCRIPTION		REVISIONS	
1	GENERAL	ADDITION/ NEW COMPONENTS 21 & 22		2	RENEWAL AS PER FBC 2007
2				3	RENEWAL AS PER FBC 2010
3				4	RENEWAL AS PER FBC 2014
4				5	RENEWAL AS PER FBC 2015



V.M. Engineering Inc.
C. of A. No. 27633
11278 S.W. 153rd Place
MIAMI, FLORIDA 33196
TEL: 786-281-6908
TEL: 305-383-5896

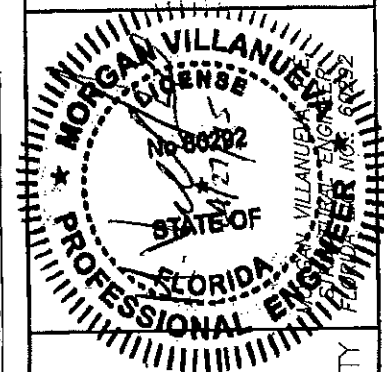

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No. 15-0505.01
Expiration Date 01/19/2017
By *Heidi A. Miller*
Miami Dade Product Control

SCALE:
DATE: 4-22-2015

F.B.C.
(High Velocity Hurricane Zone)

DWG No: 01-12 (RS1-06)

SHEET 9 OF 9