

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

NCI Group, Inc. 7301 Fairview Houston, TX 77041

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: "Superlok-16" (0.024" min.) Structural Galvalume Coated Standing Seam Roof Panel APPROVAL DOCUMENT: Drawing No. none, titled "Superlok Panel Detail", sheets 1 through 7, prepared by NCI Group, Inc., dated December 28, 2023, signed and sealed by Lisa Marie Reimert, P.E., on December 28, 2023, bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each panel shall bear a permanent label with the manufacturer's name or logo, city, state and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises and renews NOA #22-1027.06 and consists of this page 1, evidence submitted pages E-1, E-2, E-3, E-4, E-5 & E-6 as well as approval document mentioned above.

The submitted documentation was reviewed by Helmy A. Makar, P.E., M.S.

MIAMI-DADE COUNTY
APPROVED

Heg A.M.h. 11/07/24

NOA No. 23-1012.06 Expiration Date: 12/10/2028 Approval Date: 11/07/2024

Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 98-0529.06

A. DRAWINGS

1. Drawing No. SL, titled "Superlok Details", prepared by Terrence E. Wolfe, P.E., dated March 25, 1998, last revision #2 dated September 28, 1998, sheets 1, 2, 3, 4, 5, 6, and 7, signed and sealed by Terrence E. Wolfe, P.E.

B. TESTS

- 1. Test report on Large Missile Impact Test, PA 201, on 24 ga. Superlok Roof Panel, prepared by Farabaugh Engineering and Testing, Inc., Report No. FET98001-T107-98, dated 02/12/98, signed and sealed by Daniel G. Farabaugh, P.E.
- 2. Test report on Uniform Static Air Pressure, ASTM 1592-95, on 24 ga. Superlok Roof Panel, prepared by Farabaugh Engineering and Testing, Inc., Report No. FET97005-T167-97, dated 11/26/97, signed and sealed by Daniel G. Farabaugh, P.E.
- 3. Susceptibility to leakage test in accordance with Miami-Dade County Protocol PA 114 Appendix G on 24 ga. Superlok Roof Panel, prepared by Celotex, Report No. 258444 CAE 97129, dated May 1 thru 8, 1998, signed and sealed by R. G. Miller, P.E.
- 4. Wind Driven Rain Test in accordance with Miami-Dade County Protocol PA 100-95 on 24 ga. Superlok Roof Panel, prepared by Celotex, Report No. 258444A CAE 97193, dated March 10, 1998, signed and sealed by R. G. Miller, P.E.

C. CALCULATIONS

1. Calculations titled "Superlok – 24 ga", dated 05/26/98, pages 1 and 2, prepared Terrence E. Wolfe, P.E., signed and sealed by Terrence E. Wolfe P.E.

D. MATERIAL CERTIFICATIONS

- 1. Mill Certified Test Report issued by Bethlehem Steel Corporation, dated 06/22/98, with chemical composition and mechanical properties of galvalume painted structural steel coils ASTM A792-96 SS Grade 50B.
- 2. Tensile Test File No. WP-9048 Report No. 055, prepared by West Penn Testing Laboratories, Inc., dated 12/12/97, signed Todd A. Ault (M.E.T.).

2. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 01-0814.04

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 23-1012.06

Expiration Date: 12/10/2028 Approval Date: 11/07/2024

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

- D. MATERIAL CERTIFICATIONS
 - 1. None.
- 3. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #06-0612.02
- A. DRAWINGS
 - 1. None.
- B. TESTS
 - 1. None.
- C. CALCULATIONS
 - 1. None.
- D. QUALITY ASSURANCE
 - 1. By Miami-Dade County Building Code Compliance Office.
- E. MATERIAL CERTIFICATIONS
 - 1. None.
- 4. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 07-1025.04
- A. DRAWINGS
 - 1. None.
- B. TESTS
 - 1. Test report on Large Missile Impact Test, PA 201, on 24 ga. Superlok Roof Panel, prepared by Farabaugh Engineering and Testing, Inc., Report No. FET98001-T107-98, dated 02/12/98, signed and sealed by Daniel G. Farabaugh, P.E.
 - 2. Test report on Uniform Static Air Pressure, ASTM 1592-95, on 24 ga. Superlok Roof Panel, prepared by Farabaugh Engineering and Testing, Inc., Report No. FET97005-T167-97, dated 11/26/97, signed and sealed by Daniel G. Farabaugh, P.E.
 - 3. Susceptibility to leakage test in accordance with Miami-Dade County Protocol PA 114 Appendix G on 24 ga. Superlok Roof Panel, prepared by Celotex, Report No. 258444 CAE 97129, dated May 1 thru 8, 1998, signed and sealed by R. G. Miller, P.E.
 - 4. Wind Driven Rain Test in accordance with Miami-Dade County Protocol PA 100-95 on 24 ga. Superlok Roof Panel, prepared by Celotex, Report No. 258444A CAE 97193, dated March 10, 1998, signed and sealed by R. G. Miller, P.E.

Helmy A. Makar, P.E., M.S.

Product Control Section Supervisor

NOA No. 23-1012.06 Expiration Date: 12/10/2028

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

- C. CALCULATIONS
 - 1. None.
- D. QUALITY ASSURANCE
 - 1. By Miami-Dade County Building Code Compliance Office.
- E. MATERIAL CERTIFICATIONS
 - 1. None.
- 5. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 11-0810.06
- A. DRAWINGS
 - 1. Drawing No. none, titled "Superlok Panel Detail", sheets 1 through 7, prepared by NCI Group, Inc., dated July 27, 2011, signed and sealed by Mark Detwiler, P.E., on July 27, 2011.
- B. TESTS
 - 1. None.
- C. CALCULATIONS
 - 1. None.
- D. **OUALITY ASSURANCE**
 - 1. By Miami-Dade County Department of Permitting, Environment, and Regulatory Affairs.
- E. MATERIAL CERTIFICATIONS
 - 1. None.
- F. OTHERS
 - 1. Bill of Sale.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 23-1012.06

Expiration Date: 12/10/2028

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

6. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 12-0123.07

A. DRAWINGS

1. Drawing No. none, titled "Superlok Panel Detail", sheets 1 through 7, prepared by NCI Group, Inc., dated June 06, 2012, signed and sealed by Mark Detwiler, P.E.

B. TESTS

1. Test report on Uniform Static Air Pressure, ASTM 1592-95, on 24 ga. Superlok Roof Panel, prepared by Force Engineering & Testing, Inc., Report No. 07-0212T-07A, B, dated 07/10/2007, signed and sealed by Terrence E. Wolfe, P.E.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATIONS

1. None.

7. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 17-0626.04

A. DRAWINGS

1. Drawing No. none, titled "Superlok Panel Detail", sheets 1 through 7, prepared by NCI Group, Inc., dated August 01, 2017, signed and sealed by Mark Detwiler, P.E., on August 01, 2017.

B. TESTS

None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. FBC, 2014 Edition Compliance Letter prepared by NCI Group, Inc., dated August 08, 2017, signed and sealed by Jason Allen, P.E.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 23-1012.06

Expiration Date: 12/10/2028 Approval Date: 11/07/2024

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

8. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL # 18-0312.09

A. DRAWINGS

1. Drawing No. none, titled "Superlok Panel Detail", sheets 1 through 7, prepared by NCI Group, Inc., dated February 23, 2018, signed and sealed by Mark Detwiler, P.E., on February 23, 2018.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. FBC, 2017 Edition Compliance Letter prepared by NCI Group, Inc., dated February 23, 2018, signed and sealed by Mark Detwiler, P.E.

9. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #21-0615.05

A. DRAWINGS

1. Drawing No. none, titled "Superlok Panel Detail", sheets 1 through 7, prepared by NCI Group, Inc., dated June 10, 2021, signed and sealed by Mark Detwiler, P.E., on June 10, 2021.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. **OUALITY ASSURANCE**

1. By Miami-Dade County Department of Regulatory and Economic Resources.

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. FBC, 2020 Edition Compliance Letter prepared by NCI Group, Inc., dated June 10, 2021, signed and sealed by Mark Detwiler, P.E.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 23-1012.06

Expiration Date: 12/10/2028


NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED


- 10. EVIDENCE SUBMITTED UNDER PREVIOUS APPROVAL #22-1027.06
- A. DRAWINGS
 - 1. None.
- B. TESTS
 - 1. None.
- C. CALCULATIONS
 - 1. None.
- D. QUALITY ASSURANCE
 - 1. By Miami-Dade County Department of Regulatory and Economic Resources.
- E. MATERIAL CERTIFICATIONS
 - 1. None.
- F. STATEMENTS
 - 1. FBC, 2020 Edition Compliance Letter prepared by NCI Group, Inc., dated June 10, 2021, signed and sealed by Mark Detwiler, P.E.
- 11. NEW EVIDENCE SUBMITTED
- A. DRAWINGS
 - 1. Drawing No. none, titled "Superlok Panel Detail", sheets 1 through 7, prepared by NCI Group, Inc., dated December 28, 2023, signed and sealed by Lisa Marie Reimert, P.E., on December 28, 2023.
- B. TESTS
 - 1. None.
- C. CALCULATIONS
 - 1. None.
- D. OUALITY ASSURANCE
 - 1. By Miami-Dade County Department of Regulatory and Economic Resources.
- E. MATERIAL CERTIFICATIONS
 - 1. None.
- F. STATEMENTS
 - 1. FBC, 2023 Edition Compliance Letter prepared by Cornerstone Building Brands, dated April 11, 2024, signed and sealed by Lisa Marie Reimert, P.E.

Helmy A. Makar, P.E., M.S.

Product Control Section Supervisor

NOA No. 23-1012.06 Expiration Date: 12/10/2028

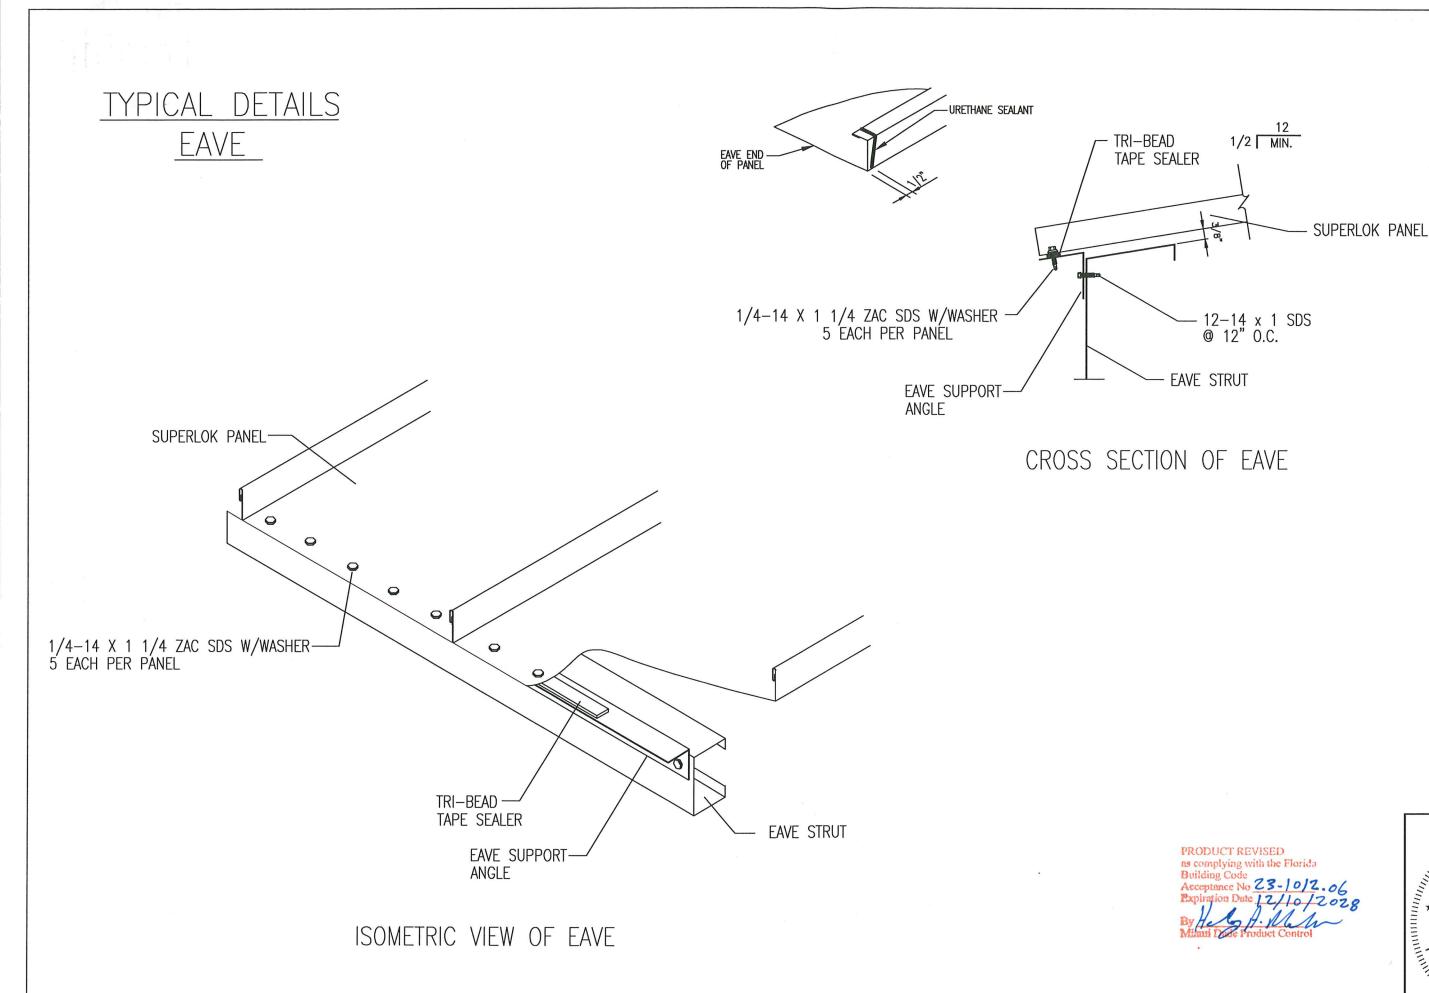

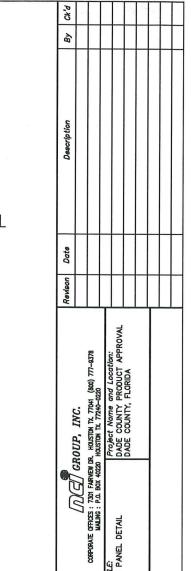


Scale: NOT TO SCALE Drawn by: EH Checked by: JA

Job Number:

Sheet Number: 1 OF 7 Sheet Number: 1 OF 7

THESE DRAWINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIMSION OR AFFILIATE OF NCI GROUP, INC.
- 7301 FAIRWEW DR. HOUSTON TX 77041.
THE ENGINEER WHOSE SEAL APPEARS
HEREON IS EMPLOYED BY NCI GROUP OR
ANOTHER DIVISION OR AFFILIATE OF NCI
GROUP, INC. AND IS NOT THE ENGINEER
OF RECORD FOR THIS PROJECT. THESE
DRAWINGS MUST BE REVIEWED FOR
PROJECT COMPLANCE BY THE ENGINEER
OF RECORD.

TYPICAL DETAILS RAKE

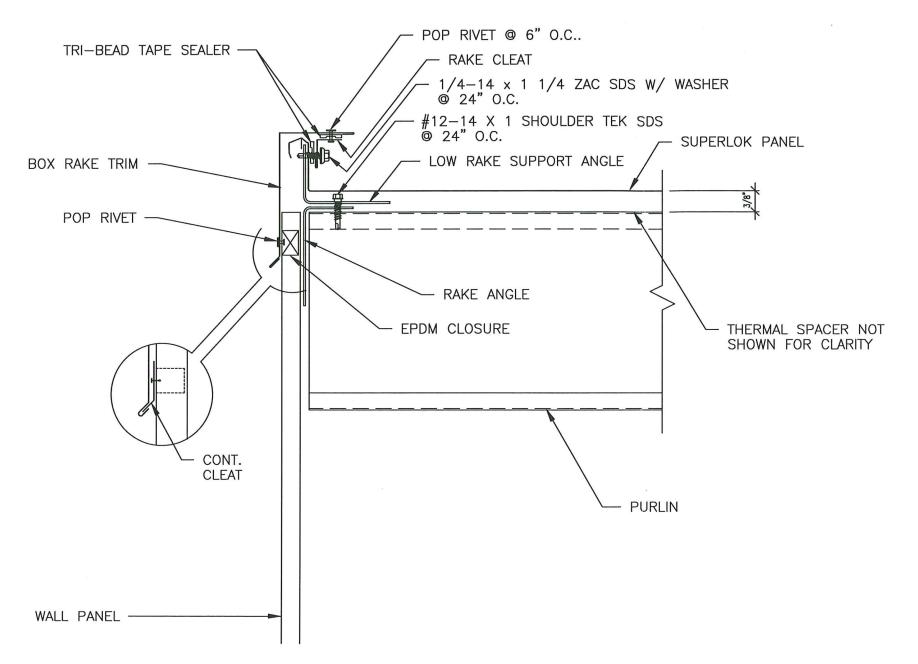

CROSS SECTION OF RAKE

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 23 - 012.06
Expiration Date 12/10/2028
By H. H. M. Miami Dage Product Control

Scale: NOT TO SCALE
Drawn by: EH

Checked by: JA


Job Number:

Sheet Number: 2 OF 7


Sheet Number: 2. OF 7

THESE DRAWINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP, INC.

- 7301 FAIRWEW DR. HOUSTON TX 77041.
THE ENGINEER WHOSE SEAL APPEARS
HOREON IS EMPLOYED BY NCI GROUP OR
ANOTHER DIVISION OR AFFILIATE OF NCI
GROUP, INC. AND IS NOT THE ENGINEER
OF RECORD FOR THIS PROJECT. THESE
DRAWINGS MUST BE REVIEWED FOR
PROJECT COMPULANCE BY THE ENGINEER
OF RECORD.

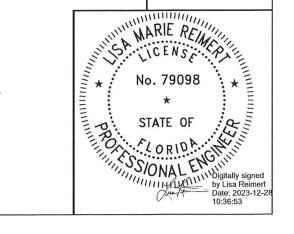

TYPICAL DETAILS RIDGE

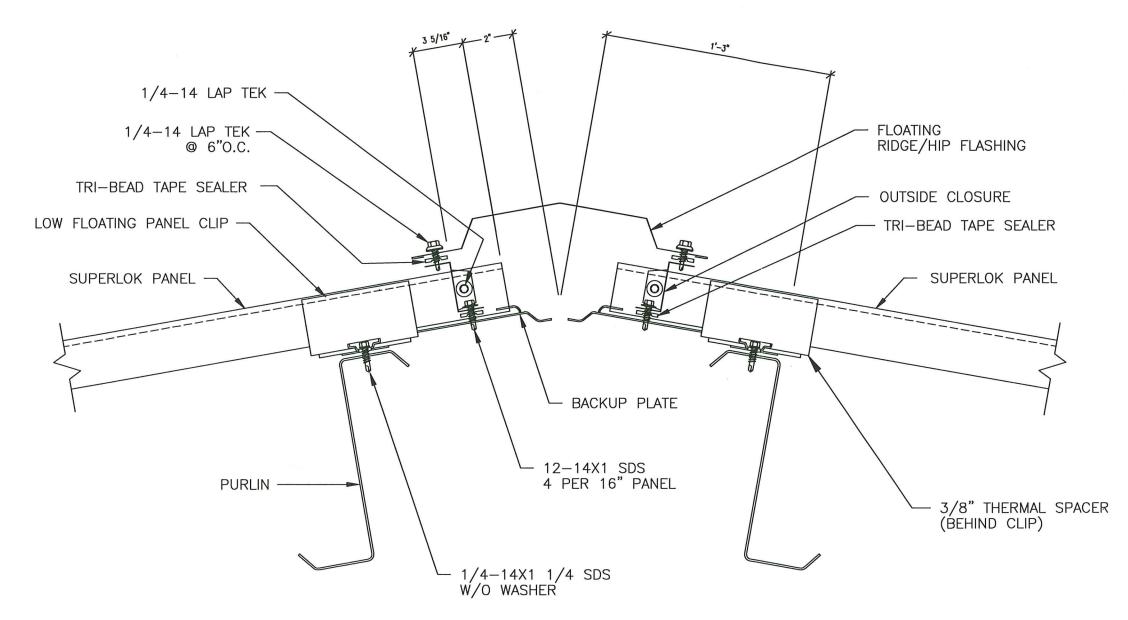

CROSS SECTION OF RIDGE

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 23 - 10/2.06
Expiration Date 12/00/2027
By Hold Hold Market

Scale: NOT TO SCALE
Drawn by: EH


Job Number:

Checked by: JA


Sheet Number: 3 OF 7


Sheet Number: 3 OF 7
THESE DRAWINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIVISION OR AFFILIATE OF NCI GROUP, INC.

7301 FAIRVIEW DR. HOUSTON TX 77041.
THE ENGINEER WHOSE SEAL APPEARS
HERCON IS EMPLOYED BY NCI GROUP OR
ANOTHER DIVISION OR AFFILIATE OF NCI
GROUP, INC. AND IS NOT THE ENGINEER
OF RECORD FOR THIS PROJECT. THESE
DRAWINGS MUST BE REVIEWED FOR
PROJECT COMPLIANCE BY THE ENGINEER
OF RECORD.

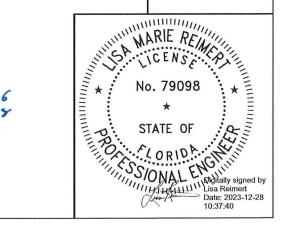


TYPICAL DETAILS VALLEY

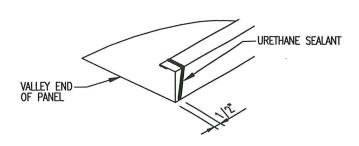

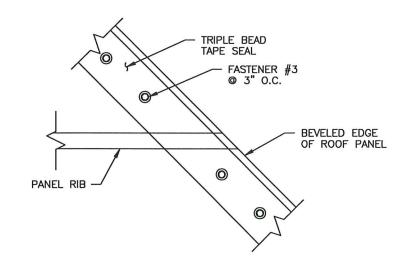


ISOMETRIC VIEW OF VALLEY

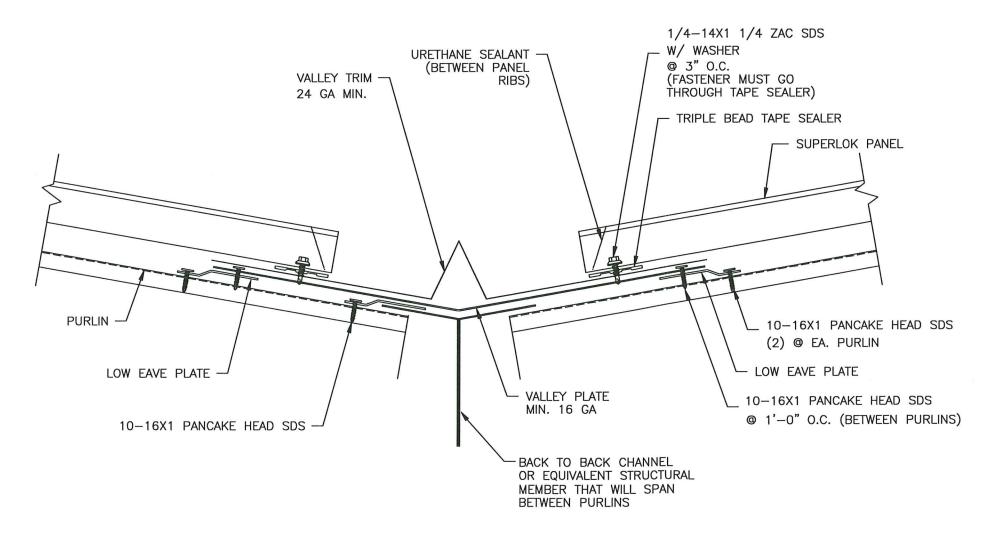

CROSS SECTION OF VALLEY



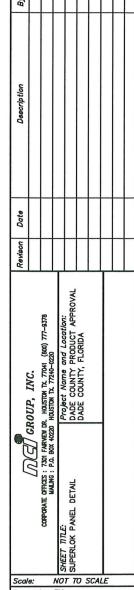

Scale: NOT TO SCALE

Drawn by: EH


Checked by: JA


Job Number:

Sheet Number: 4 OF 7


Sheet Number: 4 OF /
THESE DRAWINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DIMSIGN OR AFFILIATE OF NCI GROUP, INC.

- 7301 FAIRVIEW DR. HOUSTON TX 77041.
THE ENGINEER WHOSE SEAL APPEARS
HEREON IS EMPLOYED BY NCI GROUP OR
ANOTHER DIVISION OR AFFILIATE OF NCI
GROUP, INC. AND IS NOT THE ENGINEER
OF RECORD FOR THIS PROJECT. THESE
DRAWINGS MUST BE REVIEWED FOR
PROJECT COMPUJANCE BY THE ENGINEER
OF RECORD.

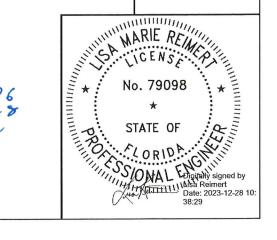


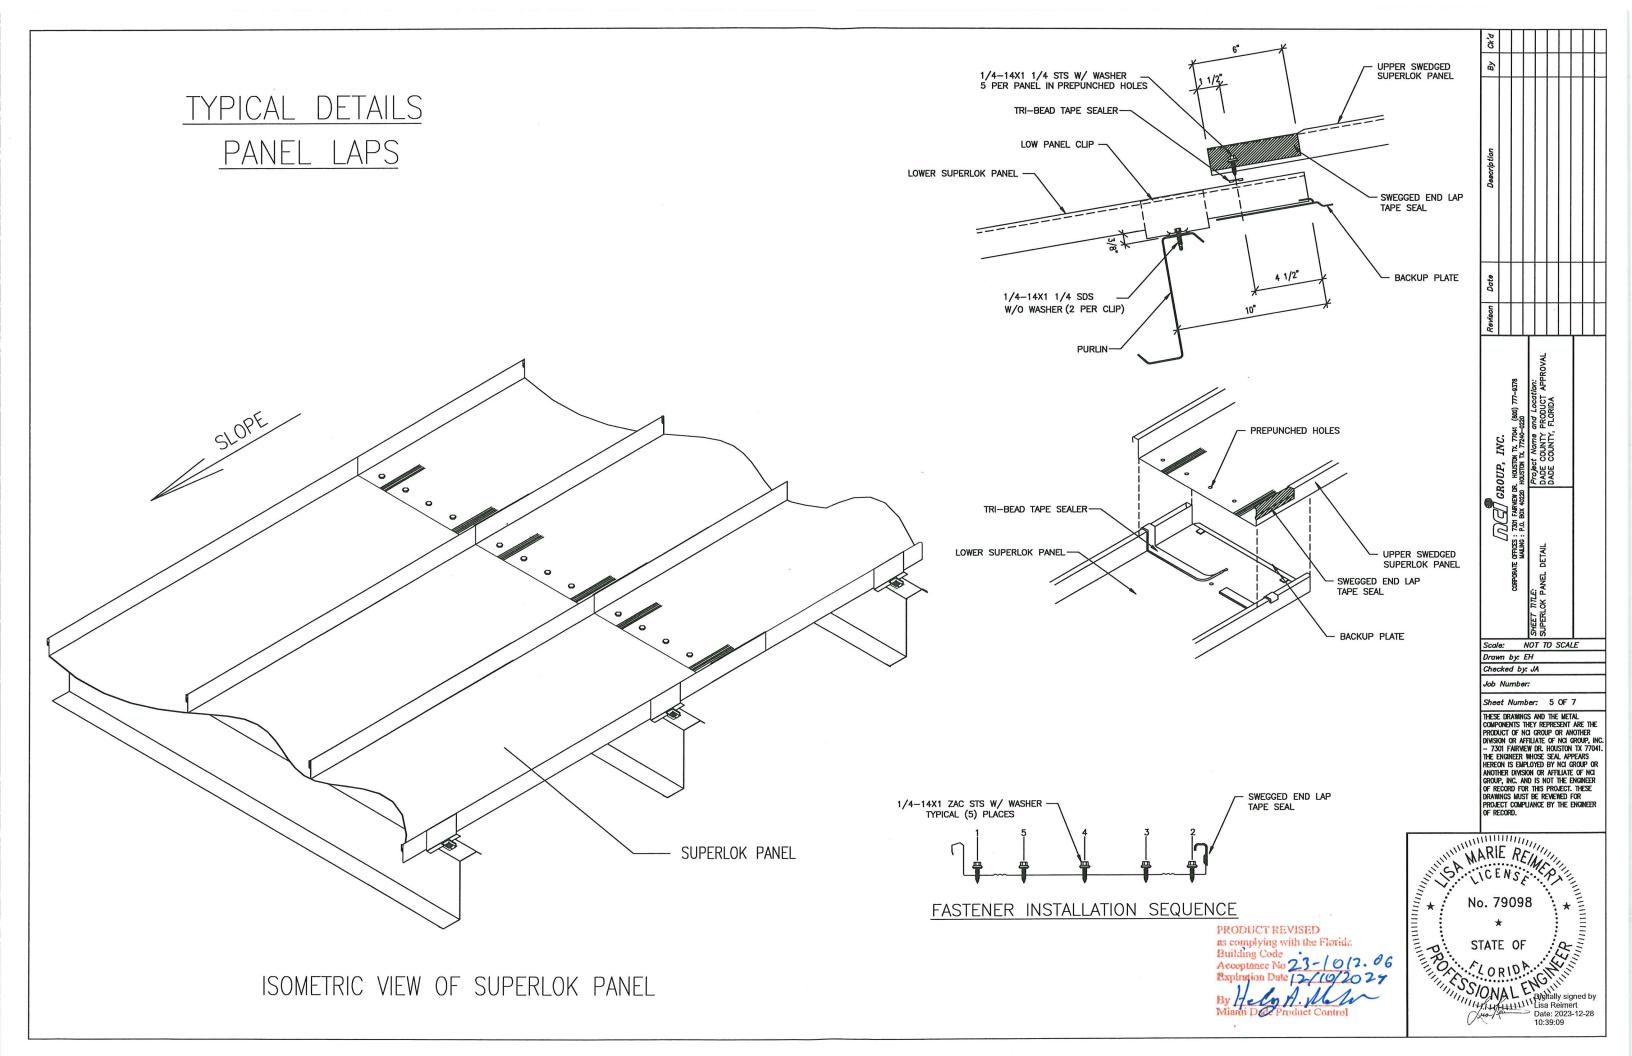

TYPICAL DETAILS FASTENER DIAGRAM

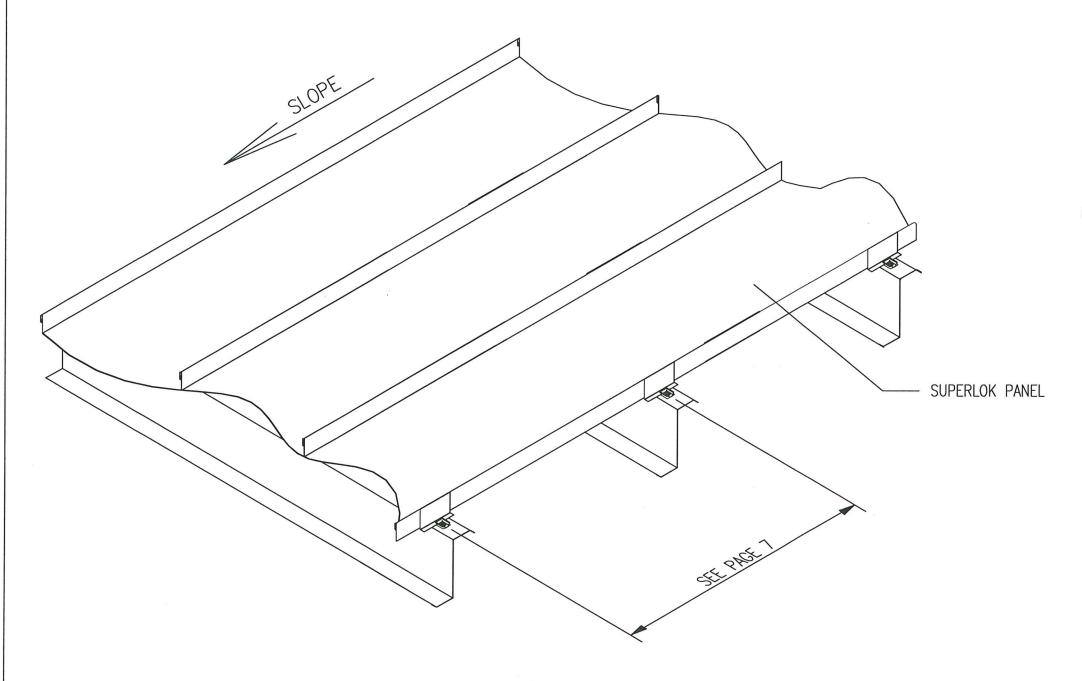

ISOMETRIC VIEW OF SUPERLOK PANEL

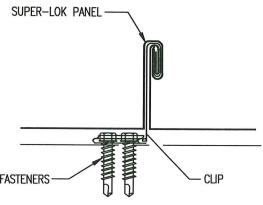

CROSS SECTION AFTER SEAMING

PRODUCT REVISED

CORPORATE DETAIL SUPERLOK PANEL DETAIL CORPORATE TAIL SUPERLOK PANEL CORPORATE CORPOR	_	_	_	_	_	_	_	_	_	_	_	-
Revison Date Description By Revison Date Description By Strain Frager Name and Location: DADE COUNTY, FLORIDA APPROVAL		Ğ,										١
Revieon Date S: 730f FARNEW DR. HOUSTON TX. 77041 (840) 777—9378 S: P.O. BOX 40220 HOUSTON TX. 77041 (840) 777—9378 DADE COUNTY, FLORIDA DADE COUNTY, FLORIDA		Ву										
S: 7301 FARNER DR. HUSTON TX. 77340 (800) 777–9378 S: P.O. BOX 40220 HUSTON TX. 77340–0220 Project Name and Location: Project Name and Location: DADE COUNTY PRODUCT APPROVAL DADE COUNTY, FLORIDA												
S: 7301 FARNER DR. HUSTON TX. 77340 (800) 777–9378 S: P.O. BOX 40220 HUSTON TX. 77340–0220 Project Name and Location: Project Name and Location: DADE COUNTY PRODUCT APPROVAL DADE COUNTY, FLORIDA		Date									3	
(1)(4) (4) (5) (5) (5) (6) (6) (6) (6) (6) (6) (6) (6) (6) (6		Revison										
		DAY GILDED	UNEL GROOM, INC.	CURPORATE GFICES : 7301 FARNEW DR. HOUSTON TX. 77041 (800) 777-9378 MALING : P.O. BOX 40220 HOUSTON TX. 77240-1020		INEL DETAIL	DADE COUNTY, FLORIDA					


Drawn by: EH


Checked by: JA

Sheet Number: 6 OF 7

Sheet Number: 6 OF 7

THESE DRAWINGS AND THE METAL
COMPONENTS THEY REPRESENT ARE THE
PRODUCT OF NCI GROUP OR ANOTHER
DINSON OR AFFILIATE OF NCI GROUP, INC.
- 7301 FARRWEW DR. HOUSTON TX 77041.
THE ENGINEER WHOSE SEAL APPEARS
HEREON IS BUPLOYED BY NCI GROUP OR
ANOTHER DIVISION OR AFFILIATE OF NCI
GROUP, INC. AND IS NOT THE ENGINEER
OF RECORD FOR THIS PROJECT. THESE
DRAWINGS MUST BE REVIEWED FOR
PROJECT COMPLIANCE BY THE ENGINEER
OF RECORD.



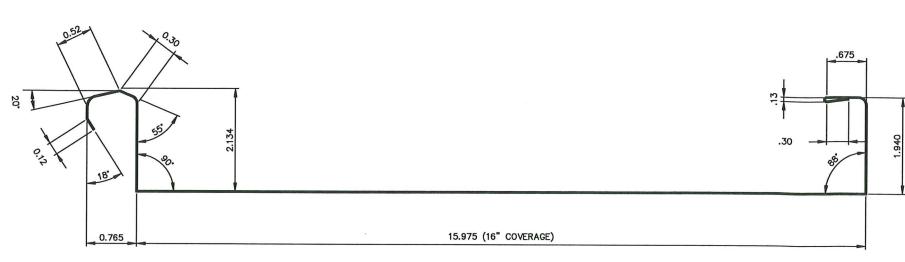

SUPERLOK CROSS SECTION

CONFIDENTIAL FOR OFFICAL USE ONLY

PANEL PROPERTIES								
PANEL GAUGE	PANEL THICKNESS	YIELD STRENGTH	TENSILE STRENGTH	ELONGATION	HARDNESS	STEEL COATING	PAINT COATINGS	
24	.024 MIN.	50 KSI	55-70 KSI	20-36%	50-65 HRB	AZ 55	SIG 300 KYNAR	
22	.029 MIN.	50 KSI	55-70 KSI	20-36%	50-65 HRB	AZ 55	SIG 300 KYNAR	

PANEL ACCESSORIES

CONSTRUCTION FASTENERS INC. SPRING STREET AND VAN REED ROAD P.O. BOX 6326, WYOMISSING PA 19610

#14 X 7/8" LAP TEK W/BOND SEAL WASHER

1/4-14 X 1 1/4 SDS W/ WASHER

#12-14 X 1 SDS

1/4-14 X 1 1/4 SDS #2 PT. W/O WASHER

#10-16 PANCAKE HEAD SDS

1/4-14 X 1 ZAC STS W/ WASHER

#12-14 X 1 SHOULDER TEK SDS

GULF—SEAL SPECIALTIES, INC.
P.O. BOX 508

TRI—BEAD SOUTH HOUSTON, TX 77587

TAPE SEALER MB—10A (POLYISOBUTYLENE—ISOPLENE)

TAPE SEALER MB-10A (POLYISOBUTYLENE-ISOPLENE)

STEGGED END LAP TAPE SEAL

TAPE SEALER MB-10A (POLYISOBUTYLENE-ISOPLENE)

SCHNEE-MOREHEAD, INC. 111 NORTH NURSERY ROAD IRVING, TX 75060

-()

PERMATHANE URETHANE CAULK

NOTES:

- 1. THE 24 GAGE SUPERLOK STANDING SEAM ROOF PANELS SHALL BE USED FOR ROOF CONSTRUCTION ONLY.
 THE ACTUAL ROOF PROJECT SHALL BE CONSTRUCTED USING THE SAME DETAILS SHOWN ON THESE DRAWINGS INCLUDING:
 - a. DETAILS OF ALL PANEL MATERIAL CHARACTERISTICS AND SECTIONS WITH DIMENSIONS AND THICKNESS.
 - b. ASSEMBLY DETAILS INCLUDING ALL CONNECTION'S FASTENERS DIAGRAM WITH SIZE AND LOCATION.
 - c. PANEL MAXIMUM SPAN AND PRESSURE FOR THE FIELD, PERIMETERS AND CORNERS SHOWN.
- 2. THE MAXIMUM ALLOWABLE SPANS AND PRESSURES FOR THE 24 GAGE STEEL ROOF PANEL ARE AS FOLLOWS:

	MAXIMUM PANEL SPAN	MAXIMUM PRESSURE(psf)
FIELD ZONE	5'-0"	48.36
	2'-6"	66.00
EDGE ZONE	1'-0"	83.84

- 3. All PANELS SUBMEMBERS SHALL BE STEEL WITH 16 GA. MINIMUM THICKNESS.
- 4. THIS STRUCTURAL ROOF PANEL SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH FLORIDA BUILDING CODE (FBC) FOR USE WITH THE 8TH EDITION (2023) FBC, AND THE 2020 FBC AS APPLICABLE THE DESIGN PRESSURES AS DETERMINED FROM SECTION 1620 MUST BE MULTIPLIED BY .060.

Revison Date Description By CK'd

CORPORATE GENCES : 7301 FARNEN DR MALING : P.A. BOX 40220	SUPERLOK PANEL DETAIL DADE COUNTY PRODUCT APPROVAL DADE COUNTY FLORIDA DADE COUNTY, FLORIDA	
Scale: NO	OT TO SCAL	_

Scale: NOT TO SCALE
Drawn by: EH

Checked by: JA
Job Number:

Sheet Number: 7 OF 7

THESE DRAWINGS AND THE METAL COMPONENTS THEY REPRESENT ARE THE PRODUCT OF ICI GROUP OR ANOTHER DIMISION OR AFFILIATE OF ING GROUP, INC. — 7301 FARWEW DR. HOUSTON TY 77041 THE ENGINEER WHOSE SEAL APPEARS HEREON IS BINHOYED BY INCI GROUP OR ANOTHER DISSON OR AFFILIATE OF NOT GROUP, INC. AND IS NOT THE ENGINEER OF RECORD FOR THIS PROJECT. THESE DRAWINGS MUST BE REVIEWED FOR PROJECT COMPLIANCE BY THE ENGINEER OF RECORD AND THE ENGINEER OF RECORD AND THE ENGINEER OF RECORD.

PRODUCT REVISED
as complying with the Florida
Building Code
Acceptance No 2.3 - (0/2.06
Expiration Date 12 / (0/2028)
By

