



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

Tremco CPG, Inc.
3735 Green Road
Beachwood, OH 44122

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Dryvit Outsulation and Outsulation Plus MD EIF Systems over Concrete/Concrete Blocks

APPROVAL DOCUMENT: Drawing No. **OSOPLCONCBLK**, titled "Dryvit Outsulation System or Outsulation Plus MD System over Concrete or Concrete Block", sheets 1 through 3 of 3, dated 10/08/2009 and last revised on 01/31/2023, prepared by the manufacturer, signed and sealed by Scott Wolters, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein. Each container (bucket or drum) needs to be labeled. Unit is further defined as each roll of reinforcing mesh.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA # 22-0914.12** and consists of this page 1 and evidence pages E-1, E-2, E-3 and E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by **Ishaq I. Chanda, P.E.**

MIAMI-DADE COUNTY
APPROVED

Ishaq I. Chanda

NOA No. 23-1101.11
Expiration Date: August 15, 2028
Approval Date: November 30, 2023
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOAs

A. DRAWINGS “Submitted under NOA # 10-0209.11”

1. Drawing No. **OSOPLCONCBLK**, titled “Outsulation System or Outsulation Plus MD System over Concrete or Concrete Block”, sheets 1 through 3 of 3, dated 10/08/2009, prepared by Dryvit Systems, Inc, signed and sealed by Scott Wolters, P.E.

B. TESTS “Submitted under NOA # 10-0209.11”

1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of Dryvit Outsulation Plus MD System over Concrete Masonry, prepared by Hurricane Test Laboratory, LLC, Test Report No. **G387-0701-09**, dated 12/01/2009, signed and sealed by Vinu J. Abraham, P.E.

“Submitted under NOA # 08-0729.13”

2. Test report on Tensile Bond per ASTM C297 of Dryvit Primus (P) Mixture to Various Substrates, prepared by ETC Laboratories, Test Report No. **ETC-06-1059-18353.1**, dated 12/01/2006, signed and sealed by Joseph L. Doldan, P.E.
3. Test report on Tensile Bond per ASTM C297 of Dryvit Primus (P) Mixture to Dryvit Backstop NT, prepared by ETC Laboratories, Test Report No. **ETC-06-1059-18354.1**, dated 12/05/2006, signed and sealed by Joseph L. Doldan, P.E.
4. Test report on Tensile Bond per ASTM C297 of Dryvit Genesis (G) Mixture to Various Substrates, prepared by ETC Laboratories, Test Report No. **ETC-06-1059-18355.1**, dated 12/01/2006, signed and sealed by Joseph L. Doldan, P.E.
5. Test report on Tensile Bond per ASTM C297 of Dryvit Genesis (G) Mixture to Dryvit Backstop NT, prepared by ETC Laboratories, Test Report No. **ETC-06-1059-18356.1**, dated 12/05/2006, signed and sealed by Joseph L. Doldan, P.E.
6. Test report on Tensile Bond per ASTM C297 of Dryvit Genesis DM (GDM) Mixture to Various Substrates, prepared by ETC Laboratories, Test Report No. **ETC-06-1059-18357.1**, dated 12/05/2006, signed and sealed by Joseph L. Doldan, P.E.

“Submitted under NOA # 08-0729.13”

7. Test report on Tensile Bond per ASTM C297 of Dryvit Genesis (DM) to Dryvit Backstop NT to Various Substrates, prepared by ETC Laboratories, Test Report No. **ETC-06-1059-18358.1**, dated 12/05/2006, signed and sealed by Joseph L. Doldan, P.E.
8. Test report on Tensile Bond per ASTM C297 of Dryvit Backstop NT to Various Substrates, prepared by ETC Laboratories, Test Report No. **ETC-06-1059-18360.1**, dated 12/05/2006, signed and sealed by Joseph L. Doldan, P.E.

Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 23-1101.11
Expiration Date: August 15, 2028
Approval Date: November 30, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS “Submitted under NOA # 17-0807.13”

1. Statement letter of code conformance to the 6th Edition (2017) FBC issued by Wolters Engineering, dated 07/12/2017, signed and sealed by Scott Wolters, P.E.
2. Email from Dryvit system Inc. requesting one year renewal while retest & name change is processed, dated 05/24/2022, signed by John Croyle, Tech Specialist (Tremco).

“Submitted under NOA # 15-0929.20”

3. Statement letter of code conformance to the 5th edition (2014) FBC issued by Wolters Engineering, dated 09/10/2015, signed and sealed by Scott Wolters, P.E.

“Submitted under NOA # 12-0703.03”

4. Statement letter of code conformance to 2010 FBC issued by Wolters Engineering, dated 06/27/2012, signed and sealed by Scott Wolters, P.E.

Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 23-1101.11
Expiration Date: August 15, 2028
Approval Date: November 30, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. EVIDENCE SUBMITTED under #22-0225.01

A. DRAWINGS

1. Drawing No. **OSOPLCONCBLK**, titled “Dryvit Outsulation System or Outsulation Plus MD System over Concrete or Concrete Block”, sheets 1 through 3 of 3, dated 10/08/2009, with revision dated 12/07/2022, prepared by the manufacturer, signed and sealed by Scott Wolters, P.E. on 01/31/2023.

B. TESTS

1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of Dryvit Outsulation EIFS over C MU Block, prepared Intertek, Test Report No. **P1512.01-109-18**, dated 07/18/2023, signed and sealed by Tanya A. Dolby, P.E.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Test Reports on Tensile Bond Adhesion Performance per ASTM C297 of the Backstop NTX, prepared by Twining Consulting Inc. dba Radco, Test Report No. **216063.R**, dated 06/02/2022, signed by Lester Arauz and Fernando Ardila.

F. STATEMENTS

1. Statement letter issued by **Dryvit System Inc.**, stating that they have legally sold all its assets, including the necessary machinery, equipment and the know-how, to **Tremco CPG, Inc.**, so they no longer manufacture the products and giving up all rights and requesting that the NOAs be rescinded, dated 06/22/2022, signed by Jeff Grodecki.
2. Letter from **Tremco CPG, Inc.** stating that they manufacture the product described in this NOA at their facilities, with no change, dated June 22, 2022, signed by Mr. John Croyle, Technical Application Specialist.
3. Agreement and plan of Merger made on 03/01/2022 by **Tremco Acquisition, LLC** and **Dryvit Systems, Inc.**, signed by Tracy D. Crandall and Edward W. Moore respectively, filed with the State of Rhode Island on 02/24/2022, signed by Nellie M. Gorbea, Secretary of State.
4. Certificate of Conversion, issued by State of Delaware, changing the name of **Tremco Acquisition, LLC** to **Tremco CPG, Inc.**, dated 02/18/2022, signed by Jeffrey W. Bullock, Secretary of State.

Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 23-1101.11
Expiration Date: August 15, 2028
Approval Date: November 30, 2023

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No. **OSOPLCONCBLK**, titled “Dryvit Outsulation System or Outsulation Plus MD System over Concrete or Concrete Block”, sheets 1 through 3 of 3, dated 10/08/2009 last revised on 01/31/2023, prepared by the manufacturer, signed and sealed by Scott Wolters, P.E.

B. TESTS

1. Test reports on 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of Dryvit Outsulation EIFS over C MU Block, prepared Intertek, Test Report No. **P1512.01-109-18**, dated 07/18/2023, signed and sealed by Tanya A. Dolby, P.E.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Test Reports on Tensile Bond Adhesion Performance per ASTM C297 of the Backstop NTX, prepared by Twining Consulting Inc. dba Radco, Test Report No. **216063.R**, dated 06/02/2022, signed by Lester Arauz and Fernando Ardila.

F. STATEMENTS (items # 2 thru 5 submitted under previous approval)

1. Statement letter of code conformance to the 8th Edition (2023) FBC issued by Wolters Engineering, Inc, dated September 25, 2023, signed and sealed by Scott Wolters, P.E.
2. Statement letter issued by **Dryvit System Inc.**, stating that they have legally sold all its assets, including the necessary machinery, equipment and the know-how, to **Tremco CPG, Inc.**, so they no longer manufacture the products and giving up all rights and requesting that the NOAs be rescinded, dated 06/22/2022, signed by Jeff Grodecki.
3. Letter from **Tremco CPG, Inc.** stating that they manufacture the product described in this NOA at their facilities, with no change, dated June 22, 2022, signed by Mr. John Croyle, Technical Application Specialist.
4. Agreement and plan of Merger made on 03/01/2022 by **Tremco Acquisition, LLC** and **Dryvit Systems, Inc.**, signed by Tracy D. Crandall and Edward W. Moore respectively, filed with the State of Rhode Island on 02/24/2022, signed by Nellie M. Gorbea, Secretary of State.
5. Certificate of Conversion, issued by State of Delaware, changing the name of **Tremco Acquisition, LLC** to **Tremco CPG, Inc.**, dated 02/18/2022, signed by Jeffrey W. Bullock, Secretary of State.

G. OTHER

1. This NOA revises NOA # 22-0914.12, expiring 08/15/28.

Ishaq I. Chanda


Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 23-1101.11
Expiration Date: August 15, 2028
Approval Date: November 30, 2023

PRODUCT REVISED
as complying with the Florida
Building Code

NOA-No. 23-1101.11

Expiration Date 08/15/2028

By Ishaq I. Chande
Miami-Dade Product Control

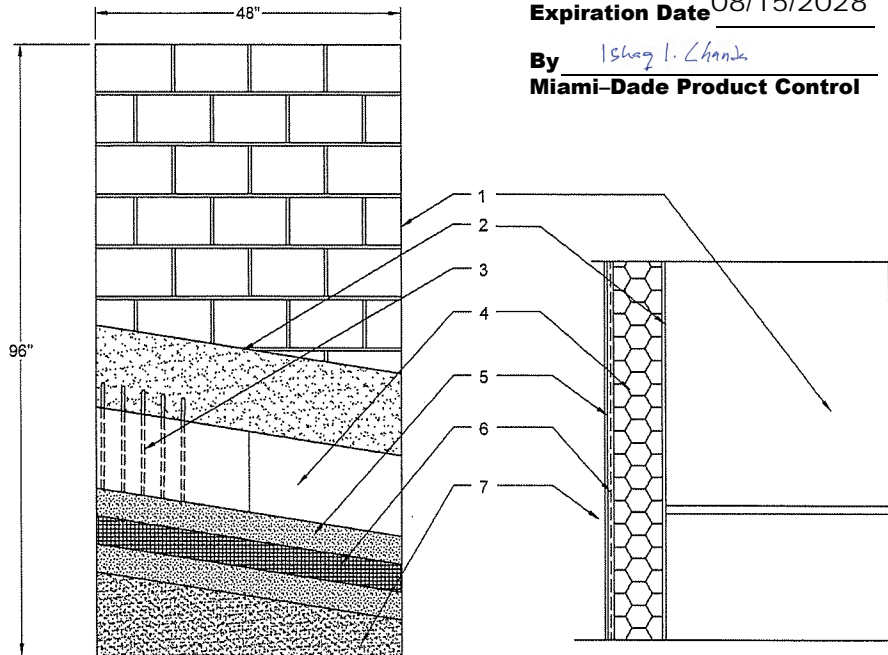

MATERIAL LIST

1) CONCRETE WALL (ACI 318) CONCRETE MASONRY STRUCTURE (ASTM C90) AND TYPE S MORTAR (ASTM C270) COMPLYING WITH F.B.C.

2) DRYVIT BACKSTOP® NT OR DRYVIT BACKSTOP® NTX REQUIRED FOR OUTSULATION PLUS MD SYSTEM.

3) ADHERE THE EXPANDED POLYSTYRENE (EPS) INSULATION BOARD WITH DRYVIT'S PRIMUS®, GENESIS® OR GENESIS® DM MIXTURE. PRIMUS IS AN ACRYLIC MODIFIED PRODUCT AND GENESIS IS AN ACRYLIC MODIFIED FIBER REINFORCED BASED PRODUCT. THEY ARE MIXED 1:1 BY WEIGHT WITH PORTLAND CEMENT AND WATER. GENESIS DM IS A DRYMIX POLYMER MODIFIED CEMENTITIOUS FIBER REINFORCED MATERIAL WHICH IS MIXED WITH WATER. THE ADHESIVE IS APPLIED WITH A 3/8" X 1/2" NOTCHED TROWEL WITH NOTCHES SPACED A MAXIMUM OF 1 1/2" O.C. THE ADHESIVE SHALL BE APPLIED TO THE BACK OF THE INSULATION BOARD SO THAT THE BEADS RUN VERTICALLY WHEN THE INSULATION BOARD IS PLACED ON THE WALL.

4) MINIMUM 1" THICK INSULATION BOARD MEETING THE FBC SECTION 2612. INSULATION BOARD SUPPLIER SHALL POSSESS A CURRENT NOA WITH MIAMI DADE COUNTY.

5) DRYVIT BASE COAT: PRIMUS®, GENESIS®, OR GENESIS® DM; PRIMUS OR GENESIS IS MIXED 1:1 BY WEIGHT WITH PORTLAND CEMENT AND WATER. PRIMUS AND GENESIS ARE 100 PERCENT ACRYLIC MODIFIED PRODUCTS. GENESIS DM IS A DRY MIX THAT IS MIXED WITH WATER.

6) DRYVIT'S STANDARD REINFORCING MESH: 4.3 OZ/SQ. YD FIBERGLASS REINFORCING MESH EMBEDDED IN THE DRYVIT BASE COAT. THE STANDARD REINFORCING MESH SHALL BE LAPPED A MINIMUM OF 2 1/2" AT ALL EDGES.

7) DRYVIT FINISH: A 100 PERCENT ACRYLIC BASED MATERIAL AVAILABLE IN VARIOUS TEXTURES.

GENERAL NOTES

1. THE SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH THE LATEST EDITION OF THE FLORIDA BUILDING CODE INCLUDING THE LATEST SUPPLEMENTS.

2. THIS SYSTEM SHALL BE APPLIED BY A LICENSED PLASTERING CONTRACTOR FOLLOWING THIS NOTICE OF ACCEPTANCE THE RECOMMENDATION OF DRYVIT SYSTEMS, INC. AND THE APPLICABLE SECTIONS OF THE FLORIDA BUILDING CODE.

3. THE ENGINEER AND/OR ARCHITECT OF RECORD FOR EACH PROJECT USING THE SYSTEM SHALL DESIGN THE CONCRETE OR BLOCK WALL TO ENSURE CONFORMANCE WITH ALL GOVERNING CODES AND THIS DOCUMENT.

4. INSULATION BOARDS SHALL BE POSITIONED IN A RUNNING BOND PATTERN.

5. THE CONCRETE OR BLOCK WALL SURFACE SHALL BE DRY CLEAN AND FREE OF ALL LOOSE DEBRIS PRIOR TO PLACING THE SYSTEM.

6. DETAILS ON SHEETS 2 AND 3 OF 3 ARE TYPICAL AND SHOW INTENT TO PREVENT WATER INFILTRATION INTO AND BEHIND THIS SYSTEM. ALTERNATE DETAILS AND SPECIFIC CONDITIONS NOT COVERED BY THE TYPICAL DETAILS ARE THE RESPONSIBILITY OF THE LICENSED DESIGN PROFESSIONALS.

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 22-0914.12

Expiration Date 08/15/2028


By Ishaq I. Chande
Miami-Dade Product Control

DESIGN PRESSURE

±160 PSF

SCOTT WOLTERS
FL PE# 62354

WOLTERS ENGINEERING
(COA# 27194)
15211 97TH ROAD N
WEST PALM BEACH, FL. 33412
PH: (561) 225-1982





TREMCO
Construction Products Group
Tremco CPG Inc.
3735 Green Road
Beechwood, Ohio 44122

DWG. NO.: OSOPLCONCBLK

SHEET NO.: 1 OF 3
ISSUE DATE: 10/08/09
REV / DATE: 12/7/22

DRYVIT OUTSULATION® SYSTEM OR OUTSULATION® PLUS MD SYSTEM® OVER CONCRETE OR CONCRETE BLOCK

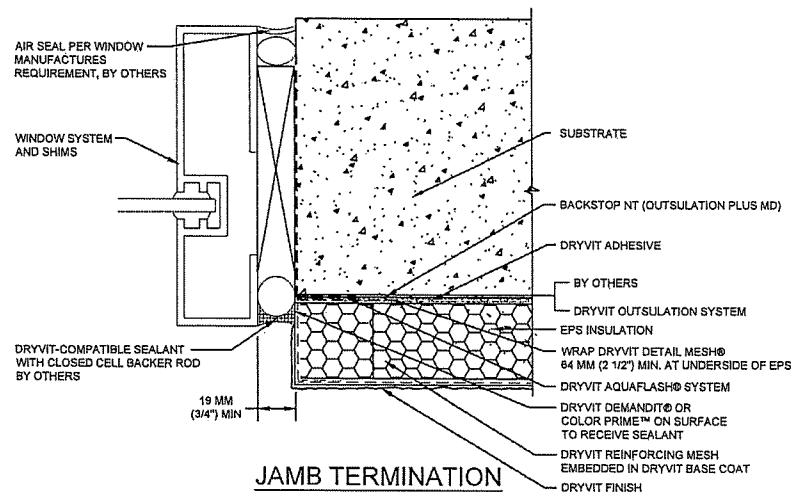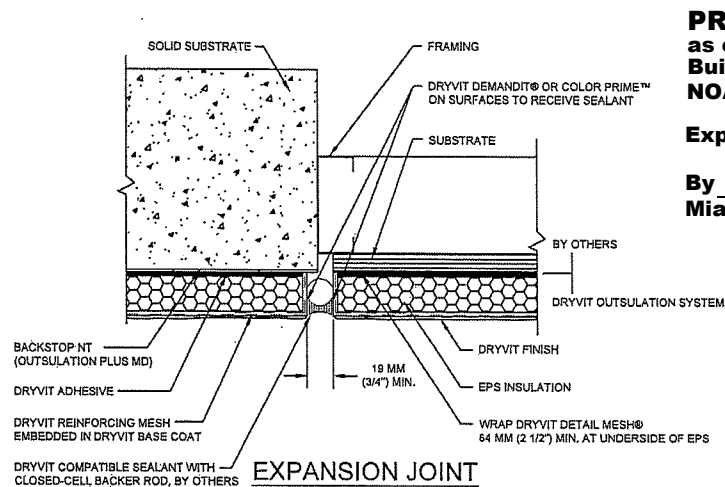


PRODUCT REVISED
as complying with the Florida
Building Code

NOA-No. 23-1101.11

Expiration Date 08/15/2028

By Ishaq I. Chande
Miami-Dade Product Control

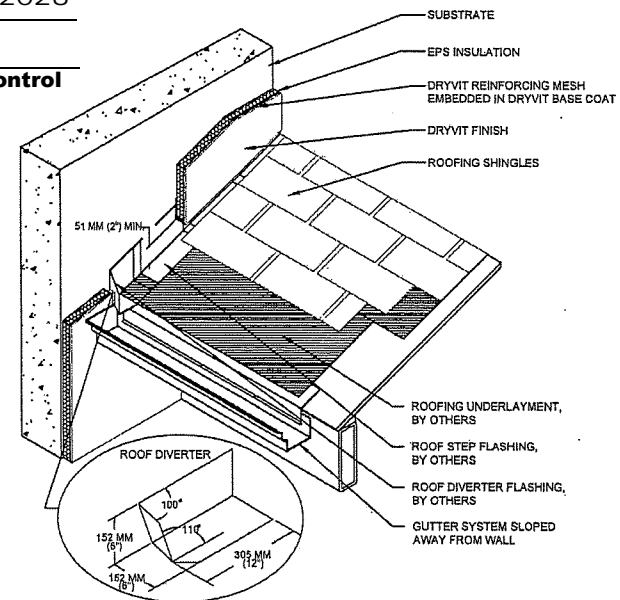

TERMINATION AT SLOPED ROOF

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 22-0914.12

Expiration Date 08/15/2028


By Ishaq I. Chande
Miami-Dade Product Control


DESIGN PRESSURE


±160 PSF

SCOTT WOLTERS
FL PE# 62354


WOLTERS ENGINEERING
(COA# 27194)
15211 97TH ROAD N
WEST PALM BEACH, FL. 33412
PH: (561) 225-1982




 TREMCO Construction Products Group		Tremco CPG Inc. 3735 Green Road Beechwood, Ohio 44122	
DWG. NO.: OSOPLCONCBLK			
SHEET NO: 2 OF 3	ISSUE DATE: 10/08/09	REV / DATE: 12/7/22	
DRYVIT OUTSULATION® SYSTEM OR OUTSULATION® PLUS MD SYSTEM® OVER CONCRETE OR CONCRETE BLOCK			

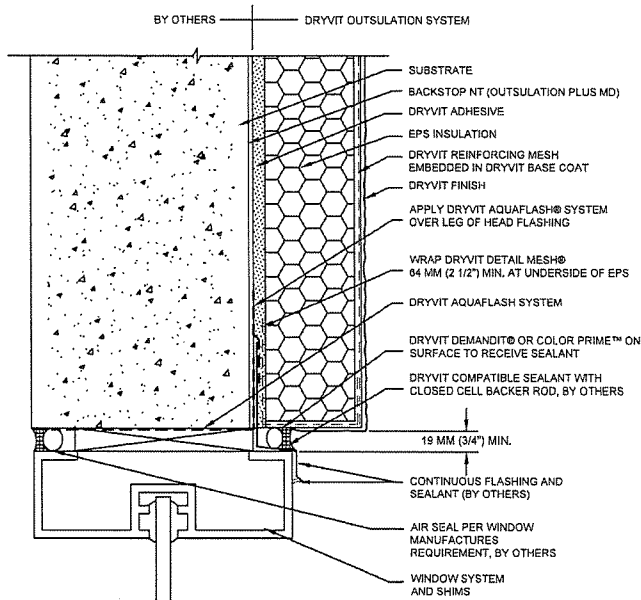


HEAD TERMINATION

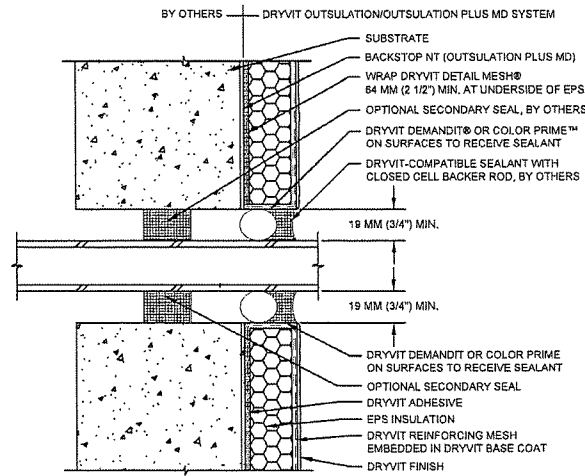

PENETRATIONS

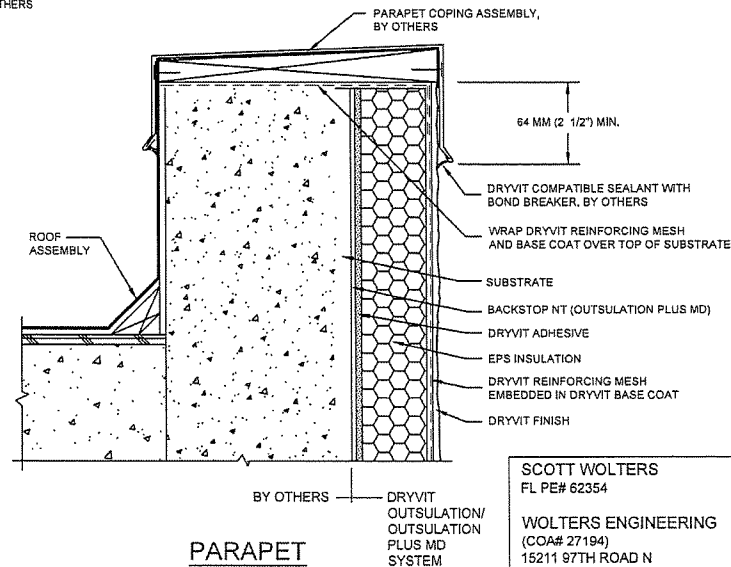

PARAPET

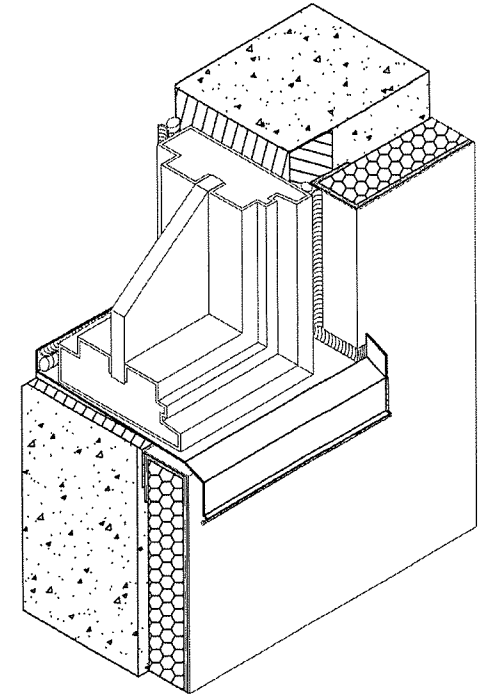

WINDOW OPENING

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. **22-0914.12**

Expiration Date **08/15/2028**


By *[Signature]*
Miami-Dade Product Control

DESIGN PRESSURE

±160 PSF

SCOTT WOLTERS
FL PE# 62354

WOLTERS ENGINEERING
(COA# 27194)
15211 97TH ROAD N
WEST PALM BEACH, FL 33412
PH: (561) 225-1982



TREMCO
Construction Products Group

Tremco CPG Inc.
3735 Green Road
Beachwood, Ohio 44122

DWG. NO.: OSOPLCONCBLK

SHEET NO:
3 OF 3

ISSUE DATE: 10/08/09

REV / DATE: 12/7/22

DRYVIT OUTSULATION® SYSTEM OR OUTSULATION® PLUS MD SYSTEM® OVER CONCRETE OR CONCRETE BLOCK