

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Nucor Corp. (Nucor Buildings Group) 305 Industrial Parkway Waterloo, IN 46793

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER- Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: 0.024" (min.) Structural Loc-Seam 360 Steel Roof Panel

APPROVAL DOCUMENT: Drawing No. MD-LOC, titled "Loc Seam 360 roof Panels", sheets 1 through 6 of 6, prepared by Bala Sockalingam, P.E., last revision #1 dated July 21, 2023, signed and sealed by Bala Sockalingam, P.E. on July 21, 2023, bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each panel shall bear a permanent label with the manufacturer's name or logo, Terrell, TX or Swansea, SC and the following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA # 23-0821.12 and consists of this page 1, evidence submitted pages E-1 and E-2 as well as approval document mentioned above.

The submitted documentation was reviewed by Helmy A. Makar, P.E., M.S.

MIAMI-DADE COUNTY
APPROVED

HSA. Mehr 05/08/25

NOA No. 25-0401.10 Expiration Date: 04/13/2028 Approval Date: 05/08/2025

Page 1

Nucor Corp. (Nucor Buildings Group)

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA #22-1019.01

A. DRAWINGS

1. Drawing No. MD-LOC, titled "Loc Seam 360 roof Panels", sheets 1 through 6 of 6, prepared by Bala Sockalingam, P.E., last revision dated September 07, 2022, signed and sealed by Bala Sockalingam, P.E. on March 01, 2023.

B. TESTS

- 1. Test report on Accelerated Weathering Testing of Coating 2000 hours per ASTM G152, prepared by PPG Industrial Coil Coatings.
- 2. Test report on Salt Spray Testing of Coating 1000 hours per ASTM B117-95, prepared by PPG Industrial Coil Coatings.
- 3. Test report for Uniform Static Air Pressure on 24 ga. Loc-Seam 360 Roof Panel, prepared by Force Engineering & Testing, per TAS 125-03 per ASTM E 1592-05, Report No. 534-0047T-22A-D, dated September 12, 2022, signed and sealed by Johnathan Green, P.E.
- 4. Susceptibility to leakage test in accordance with FM 4471, Appendix G on 24 ga. Loc-Seam 360 Roof Panel, prepared by FET, Report No. T272-22, dated August 09, 2022, signed and sealed by Daniel G. Farabaugh, P.E.
- 5. Wind Driven Rain Test in accordance with Miami-Dade County Protocol TAS 100-95 on 24 ga. Loc-Seam 360 Roof Panel, prepared by FET, Report No. T274-22, dated August 15, 2022, signed and sealed by Daniel G. Farabaugh, P.E.
- 6. Impact test per TAS 201-94, test report #534-0047T-22E, dated September 12, 2022, signed and sealed by Johnathan Green, P.E.

C. CALCULATIONS

1. Calculations titled "Loc-Seam 360, 24 ga. Roof Panel Calculations", dated March 01, 2023, pages 1 through 3 of 3, prepared by Bala Sockalingam, P.E., signed and sealed by Bala Sockalingam, P.E.

D. QUALITY ASSURANCE

1. By Miami Dade County Department of Regulatory and Economic Resources

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Florida Building Code, 2020 Edition, compliance letter, dated September 21, 2022, prepared by Bala Sockalingam, P.E., signed and sealed by Bala Sockalingam P.E. on September 21, 2022

Helmy A. Makar, P.E., M.S.

Product Control Section Supervisor NOA No. 25-0401.10

Expiration Date: 04/13/2028 Approval Date: 05/08/2025

Nucor Corp. (Nucor Buildings Group)

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. EVIDENCE SUBMITTED UNDER PREVIOUS NOA #23-0821.12

A. DRAWINGS

1. Drawing No. MD-LOC, titled "Loc Seam 360 roof Panels", sheets 1 through 6 of 6, prepared by Bala Sockalingam, P.E., last revision #1 dated July 21, 2023, signed and sealed by Bala Sockalingam, P.E. on July 21, 2023.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. **QUALITY ASSURANCE**

1. By Miami Dade County Department of Regulatory and Economic Resources

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Florida Building Code, 2020 Edition and 2023 Edition, compliance letter, dated July 21, 2023, prepared by Bala Sockalingam, P.E., signed and sealed by Bala Sockalingam P.E. on July 21, 2023.

3. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. By Miami Dade County Department of Regulatory and Economic Resources

E. MATERIAL CERTIFICATIONS

1. None.


F. STATEMENTS

1. Florida Building Code, 2023 Edition, compliance letter, dated July 21, 2023, prepared by Bala Sockalingam, P.E., signed and sealed by Bala Sockalingam P.E. on July 21, 2023.

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor

NOA No. 25-0401.10

Expiration Date: 04/13/2028 Approval Date: 05/08/2025

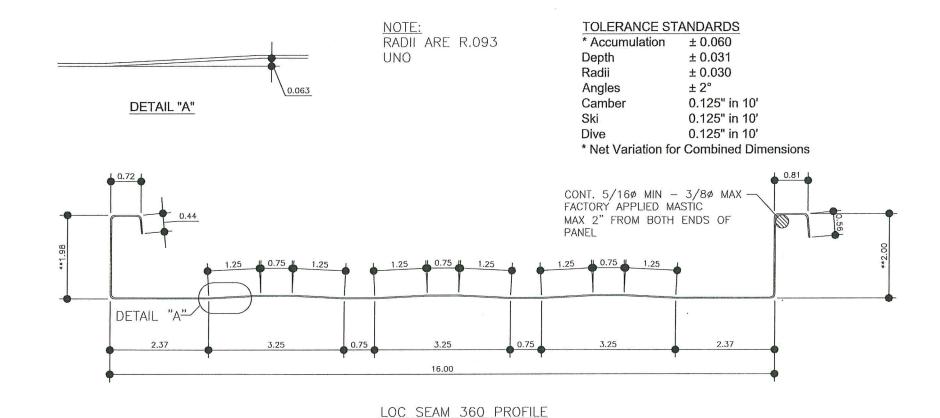

GENERAL NOTES:

- 1. MATERIAL: 24 GA (0.024" MIN), AZ55 WITH MIN. NOM Fy = 50 KSI (58 KSI TESTED) 1a. ALT MATERIAL: 22 GA, AZ55 WITH MIN. Fy = 50 KSI
- 2. COIL WIDTH: 22.00"
- 3. MATERIAL IS ASTM A-792

AZ55 FOR GALVALUME

AZ50 FOR PAINTED

- 4. MASTIC SHALL BEGIN AND END A MAXIMUM OF 2" FROM PANEL ENDS ON UN-SWAGED PANELS. 2" MAXIMUM FROM END OF SWAGE, ON SWAGED PANELS.
- 5. MINIMUM ALLOWABLE ROOF SLOPE 1/4:12


DESIGN NOTES:

- 1. THIS STRUCTURAL ROOF PANEL SYSTEM HAS BEEN DESIGNED IN ACCORDANCE WITH 2023 FLORIDA BUILDING CODE (F.B.C.). THE DESIGN PRESSURES AS DETERMINED FROM SECTION 1620 AND ASCE 7-22 MUST BE MULTIPLIED BY 0.6.
- 2. THIS ROOF PANEL IS DESIGNED FOR SPANS UP TO 5'-0" MAXIMUM
- 3. DEFLECTION SHALL BE LIMITED TO L/180
- 4. THIS ROOF PANEL IS APPROVED FOR GRAVITY (POSITIVE) PRESSURE OF 70.25 PSF.
 5. THIS ROOF PANEL IS APPROVED FOR UPLIFT (NEGATIVE) PRESSURE AS SHOWN IN THE TABLE BELOW, FOR PANEL SPANS BETWEEN 1'-0" AND 5'-0" THE MAXIMUM UPLIFT PRESSURE CAN BE DETERMINED BY INTERPOLATION.

MAXIMUM PANEL SPAN	MAXIMUM UPLIFT PRESSURE (PSF)
5'0"	44.2
4' 6"	49.1
4'0"	55.3
3' 6"	63.2
3, 0,,	73.7
2' 6"	88.4
2' 0"	110.5
1' 6"	136.7
1'0"	150.9

PRODUCT REVISED as complying with the Florida


NO DESIRETON IV. and and a local	REVISE DESIGN NOT			OCK,	O NOTE TO SEAM 360 ROOF PANEL	<i>(</i> 0,
элиндээс мис.	inis:	BALA SOCKALINGAM PR.D.P.E.	STATE REGISTRATION NUMBER:	*	305 INDUSTRIAL PARKWAY WATERLOO, IN 46793 PHONE: (260) 837-7891 FAX: (260) 837-7384	1 of 6 REVISION NUMBER 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
DA PE	DAIE	09-07-22	超		-	DRAWING #: MD-LOC SEAM 360 24 GA Pg.
TATE: NOT TO OFFI		CHECKED BY:	C	ntr Oc	NUCOR BUILDINGS GROUP	
	Sa Sa Ac	comp ilding cepta thatic He	JCT (olying 3 Cod	(EVISI	ED ne Florida	·/Z

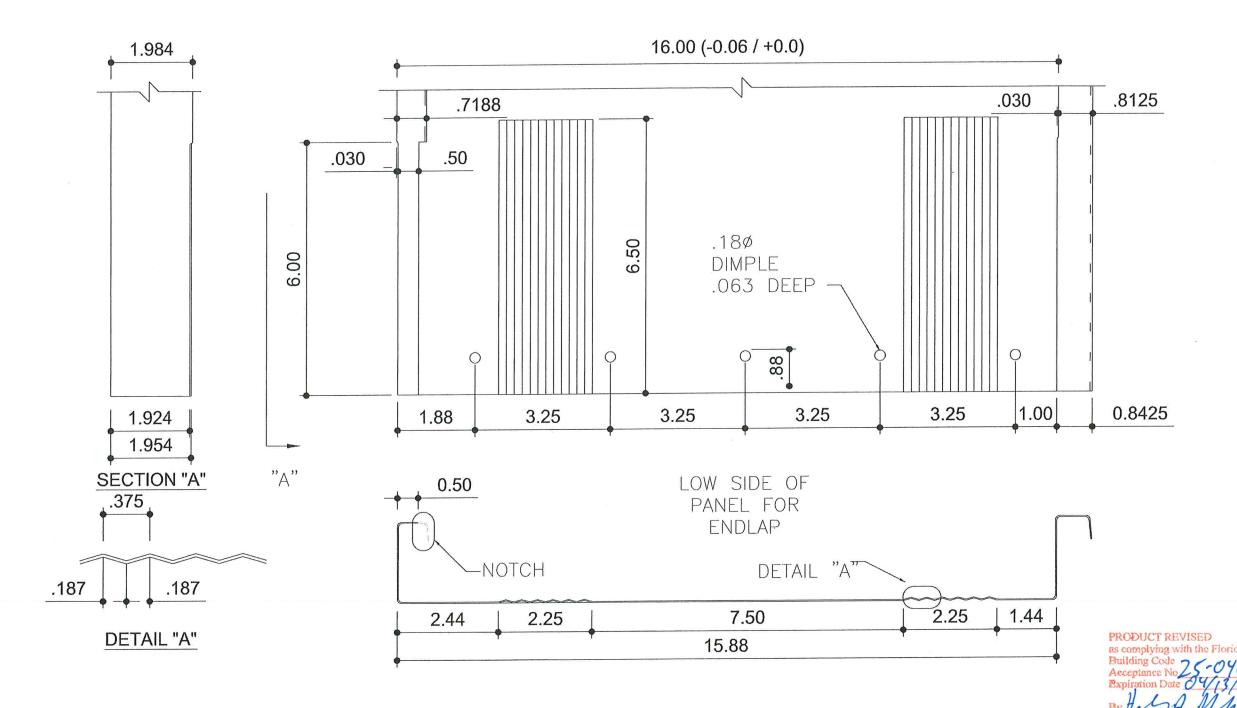



NOTES:

- 1) MATERIAL IS ASTM A-792 AZ55 FOR GALVALUME AZ50 FOR PAINTED
- 2) SWAGE IS THE PROCESS OF CRIMPING PANEL TO NARROW IT ALLOWING IT TO NEST INSIDE ANOTHER PANEL
- 3) SWAGE & DIMPLES ARE ON THE LOW SIDE OF THE UP-SLOPE PANEL ONLY.
- 4) PANEL COLORS: ALL STANDARD PVDF COLORS & GM.


	ATE								
	MADE CK'D. DATE				EL				
	MA				PAN				
				360 ROOF PANEL					
	7				360				
	REVISION				SEAM				
					TOC				
	NO.					1			
	E OCKAL								
	50CKAL/NG/								
	HIIII	*	No	. 622	240	*			
	111111		ST	* ATE	OF .	11111			
	IIII.	200	:	ORI	: :1	1377			
	ì	DROKE,	SSI	2NA	ENIS	2			
			IBER:	AT L PERMY		JER .			
		CALINGAM PH. D., P.E.	FATE REGISTRATION NUMBER:		L PARKWAY 46793 PHONE: (260) (260) 837-7884	revision number 0			
		FAM PI	EGISTRA		WAY PHONE 837-78				
	NAME:	KALING	l čo	_	PARKWAY 46793 PHON (260) 837-	2 of 6			
	ENGINEER'S	A SOCK	ENGINEER'S	62240	STRIAI 5, IN 4	A. Pg.			
	ENG	BALA BALA	ENGI		305 INDUSTRIAI WATERLOO, IN 4 837-7891 FAX	10 24 G			
	DATE	09-01-22 09-07-22				DRAWING #: MD-LOC SEAM 360 24 GA. Pg.			
	SCALE	EGB			UCOR CORP	ID-LOC			
0	NOT TO	Y: I			OR (NG #: M			
	SCALE: NOT TO SCALE	DRAWN BY			NUCOR	DRAWII			
	Fo		Cou	nty Of	fice Use	Only			
		PROD	UCT	REVI:	SED				
		69 con Buildi Accep	ng Co	de	the Florid	a ,			
	Explantion Date 04/13/2028 By Helpf. M.								
		™iami Miami •	Opto	Frodu	et Control	\sim			
						-			

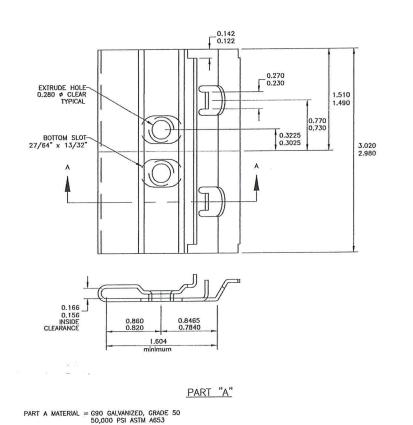



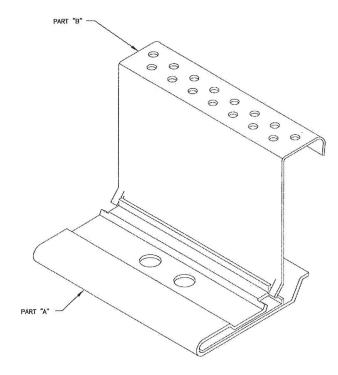





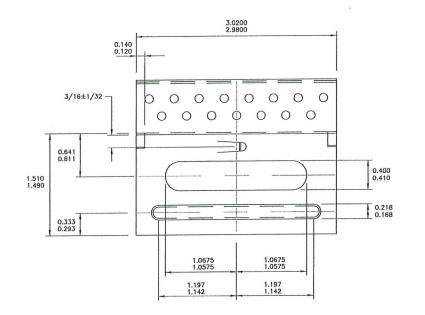

R0.0620 ±1/32

1.50 REF.





EXTRUDED HOLE TO REST ON PURLIN WHEN INSTALLED. EXTRUSION WILL BE SUFFICIENT TO HOLD MATERIAL APART TO AVOID BINDING WHEN CLIPS ARE SCREWED DOWN.

SECTION "A-A"

ALL DIMENSIONS \pm .020 UNLESS NOTED WGT. = 0.238#

THICKNESS = 0.048" ± 0.002"

PART "B" PART B MATERIAL = G90 GALVANIZED, GRADE 50 50,000 PSI ASTM A653 THICKNESS = 0.026" ± 0.002"

2.327 LSEC-1

3.452 LSEC-2T

PRODUCT REVISED as complying with the Florida

PANEL ROOF 360 SEAM TOC SOCKALWGALLONG No. 62240

*
No. 62240


*
STATE OF

ORIDA

AND ALEMONIC STATE


ORIDA


AND ALEMONIC STAT D., PH. SOCKALINGAM DRAWING #: MD-LOC SEAM 360 24 GA. Pg. 3 of 6 NUCOR CORP NUCOR BUILDINGS GROUP For Dade County Office Use Only PRODUCT REVISED as complying with the Florida

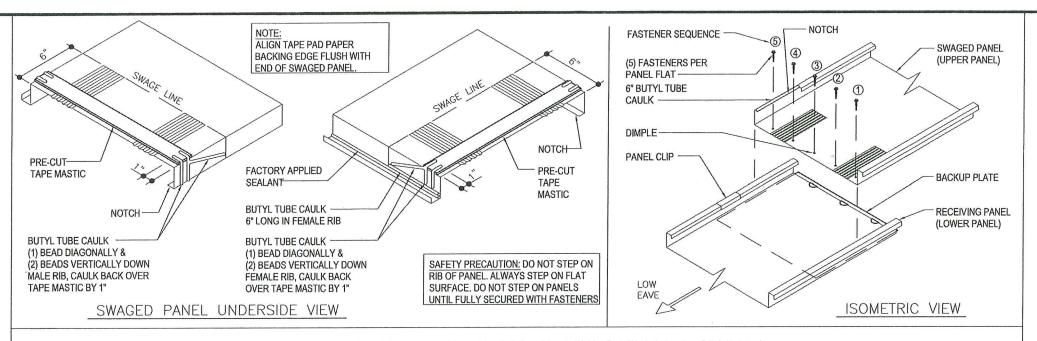

NOTE: ALL AREAS ON ALUMINUM COATED PANELS THAT REQUIRE MASTIC SHOULD BE WIPED CLEAN WITH A MILD ALL PURPOSE DETERGENT CLEANER BEFORE MASTIC APPLICATION.

- 1) WHEN ENDLAPS ARE REQUIRED THE LOWER 6 INCHES OF THE UPPER PANEL ARE SWAGED, WHICH ALLOWS FOR A BETTER LAP ON TO THE LOWER RECEIVING PANEL. THIS LAP WILL OCCUR APPROXIMATELY 12 INCHES UPSLOPE FROM A PURLIN OR JOIST RUN.
- 2) PRIOR TO SETTING THE SWAGED PANEL, INSTALL THE BACKUP PLATE ONTO THE LOWER RECEIVING PANEL AS SHOWN.
- 3) NEXT INSTALL A PIECE OF PRE-CUT TAPE MASTIC ACROSS THE WIDTH OF THE UNDERSIDE OF THE SWAGED PANEL BEGINNING AND ENDING AT THE VERTICAL SEAMS (LEGS). ALSO APPLY TUBE CAULK ON THE MALE AND FEMALE RIBS OF THE SWAGED PANEL AS SHOWN IN DETAIL ABOVE.
- 4) NEXT APPLY TUBE CAULK ALONG BOTH PANEL RIBS OF THE LOWER RECEIVING PANEL AS SHOWN IN THE ENDLAP CAULKING DETAIL.
- 5) INSTALL THE UPPER SWAGED PANEL. BOW PANEL IN THE MIDDLE DURING INSTALLATION TO AVOID SWIPING CAULK FROM THE VERTICAL LEGS OF THE PANEL AT THE ENDLAP.
- 6) NEXT SECURE THE LAP WITH (5) ROOF FASTENERS IN THE PRE-DIMPLED LOCATIONS.
- 7) HAND SEAM PANEL RIBS TOGETHER AT ENDLAP PRIOR TO MECHANICALLY SEAMING.

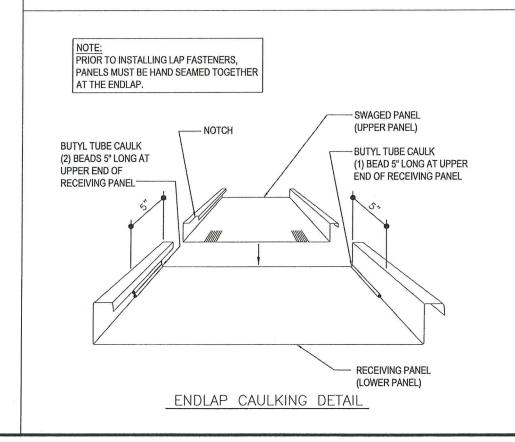


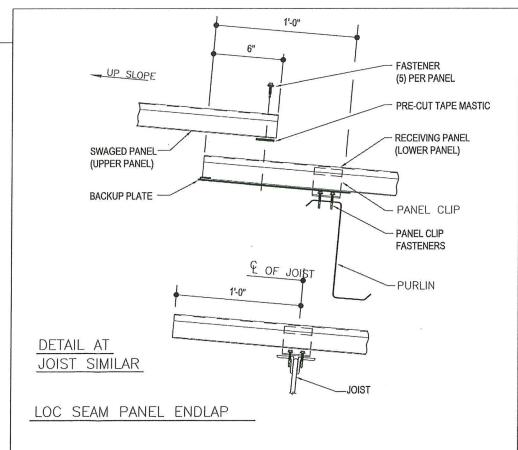


PANEL ROOF 360 SEAM SOCKALING No. 62240 STATE OF SIONAL ENGLISHED GA. 24 360 NUCOR CORP NUCOR BUILDINGS GR DRAWING For Dade County Office Use Only PRODUCT REVISED as complying with the Florida

PRODUCT REVISED as complying with the Florida Building Code Acceptance No

A. M. A. Product Control

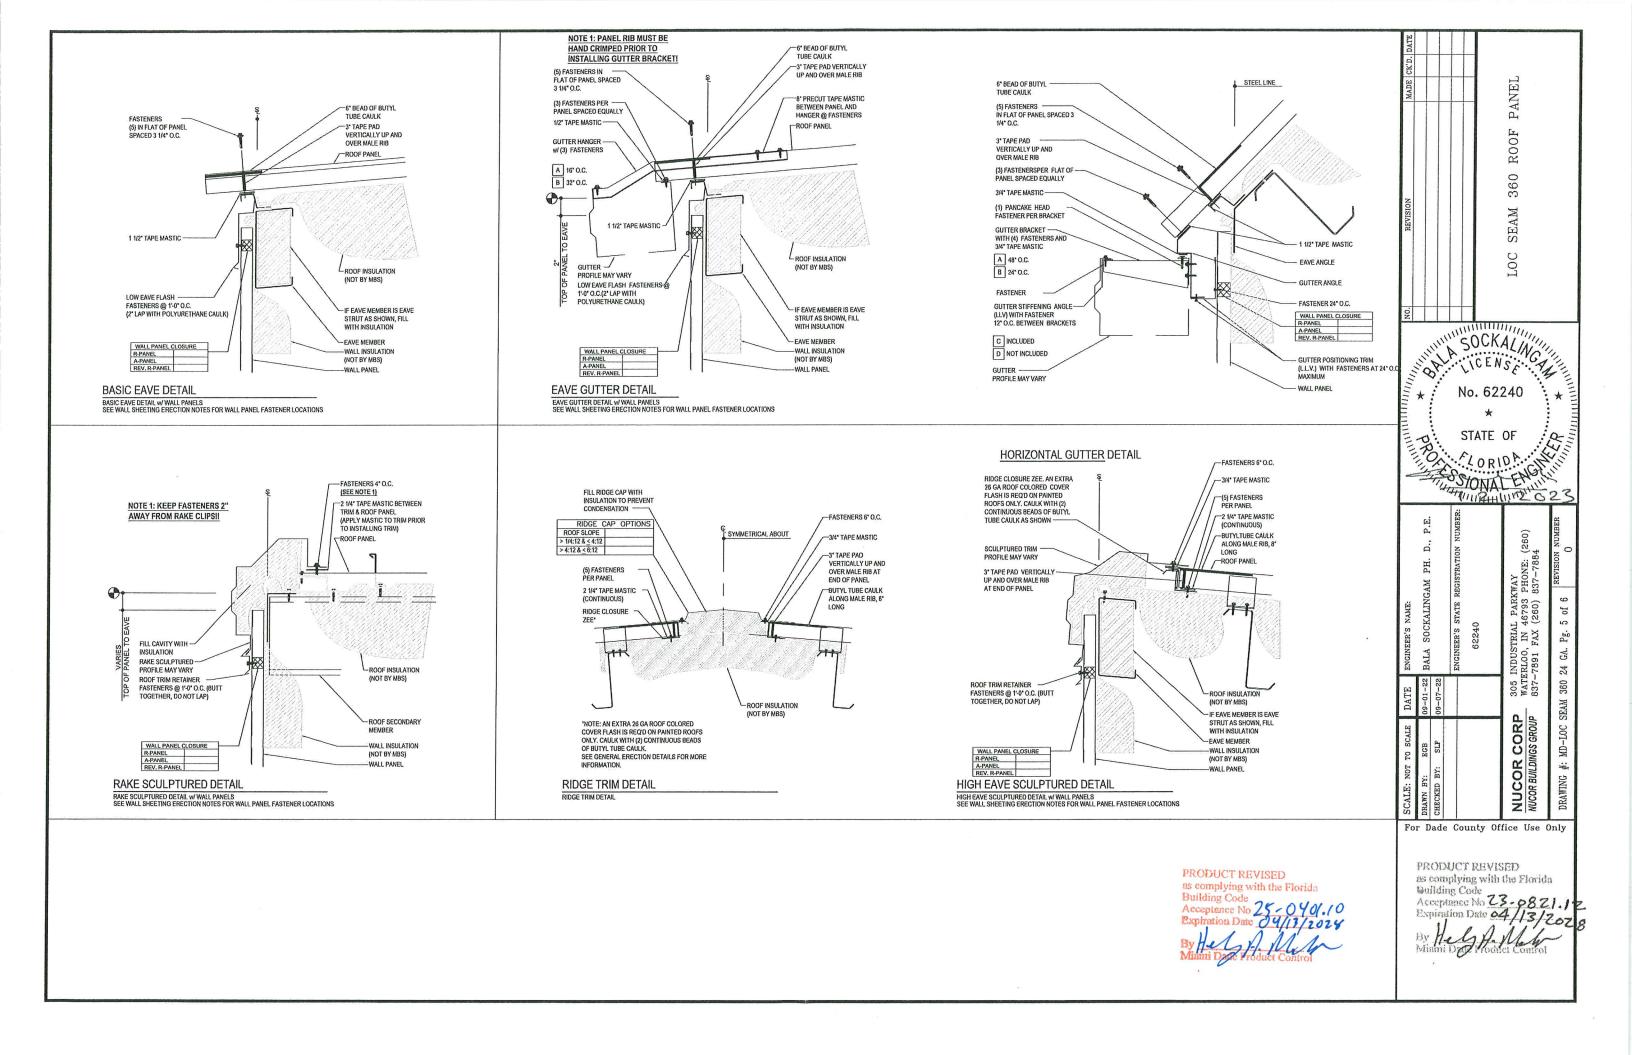

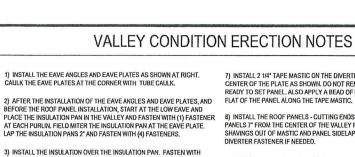

7) INSTALL 2 1/4" TAPE MASTIC ON THE DIVERTER FLASH 7 1/2" FROM THE CENTER OF THE PLATE AS SHOWN, DO NOT REMOVE PAPER BACKING UNTIL READY TO SET PANEL. ALSO APPLY A BEAD OF BUTYL TUBE CAULK FOR THI

8) INSTALL THE ROOF PANELS - CUTTING ENDS AT THE ANGLE REQUIRED, CUT PANELS 7* FROM THE CENTER OF THE VALLEY PLATE. (NOTE; KEEP METAL SHAVINGS OUT OF MASTIC AND PANEL SIDELAP.) REMOVE TEMPORARY

9) BEFORE THE NEXT PANEL IS INSTALLED, APPLY A 3° PIECE OF TAPE MASTIC AND A BEAD OF TUBE CAULK TO THE MALE SIDE OF THE PANEL FROM THE LOW END OF THE PANEL UP 12" TO ENSURE WEATHERTIGHTNESS, AS SHOWN

DIVERTER FLASH


10) FASTEN WITH SCREWS, 3° O.C. OVER THE TAPE MASTIC, (8 1/4° FROM THE CENTER OF THE DIVERTER FLASH TO THE CENTER OF THE FASTENERS). TAKE SPECIAL CARE AT THIS POINT TO MAINTAIN PANEL MODULARITY


SCREWS AND INSULATION WASHERS AS REQUIRED. 4) BEFORE ROOF PANEL INSTALLATION, START AT THE LOW EAVE AND PLACE THE HAT CHANNEL SECTIONS ON BOTH SIDES OF THE VALLEY, 1-8* FROM THE CENTERLINE AS SHOWN, FASTEN TO EACH PURLIN WITH (2)

5) CENTER THE VALLEY PLATE OVER THE HAT SECTIONS, AT THE EAVE & RIDGE, EXTEND THE PLATE TO THE EDGE OF THE ROOF PANEL, FIELD CUTTING AS REQUIRED FASTEN VALLEY PLATE TO HAT CHANNEL INSIDE PANEL RIB WITH (1) FASTENERA & SHOWN BELOW. LAP THE VALLEY PLATE 2* & FASTEN WITH (2) FASTENERS.

6) PLACE THE DIVERTER FLASH OVER THE VALLEY PLATE AND TEMPORARILY FASTEN WITH (1) SCREW AT THE OUTSIDE CORNERS OF THE VALLEY PLATE. (DO NOT USE THE VALLEY AS A WALKWAY OR A WORK

3" TAPE PAD VERTICALLY UP AND

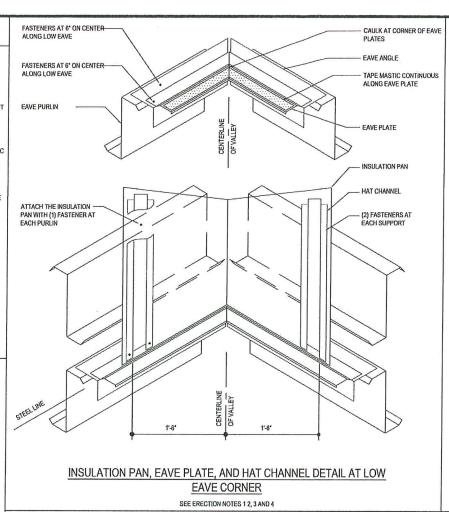

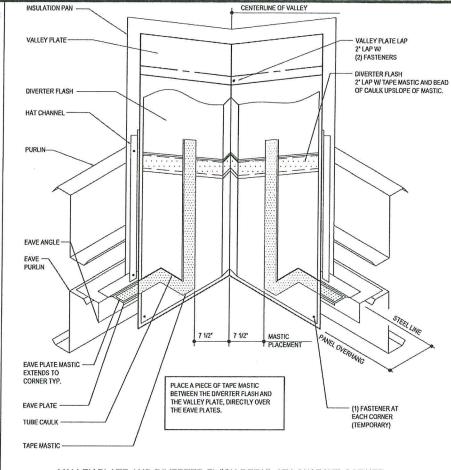

VALLEY PLATE FASTENERS (3° O.C.) -TUBE CAULK ALONG MALE RIB. 12" LONG LOC SEAM 360 HAT CHANNEL WITH (2) (1) PAN HEAD FASTENER SCREWS AT EACH INSULATION PAN 2 1/4" TAPE MASTIC TUBE CAULK LOC SEAM 360 VALLEY FINAL ASSEMBLY DETAIL

VALLEY PLATE AND DIVERTER FLASH DETAIL AT LOW EAVE CORNER


SEE ERECTION NOTES 5, 6 AND 7


CENTERLINE OF VALLEY

END OF PANEL

PRODUCT REVISED

as complying with the Florida

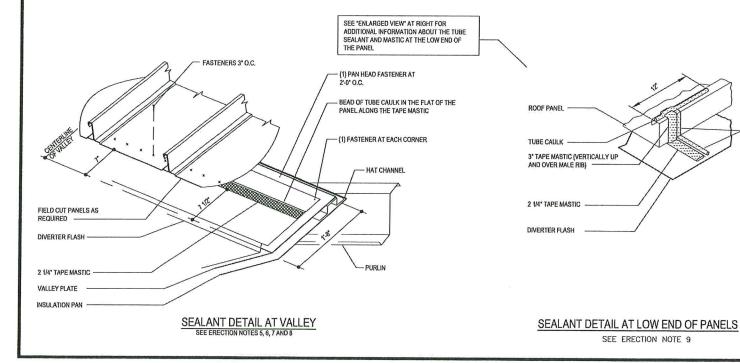

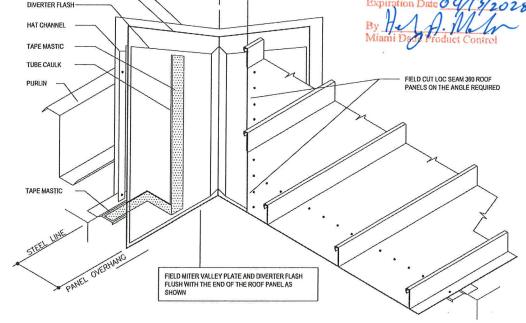

SONAL ENGLISHED 25 of G. 24 360 SEAM COR MD-LOC NUCORBINION DRAWING For Dade County Office Use Only PRODUCT REVISED

as complying with the Florida

Acceptance No 23
Expiration Date 04

PANEL

ROOF

360

SEAM

SOCKALING

No. 62240

STATE OF

ROOF PANEL CUT DETAIL

INSULATION PAN

VALLEY PLATE