



BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908
www.miamidade.gov/buildingcode

NOTICE OF ACCEPTANCE (NOA)

ITW Building Components Group, Inc.
1950 Marley Drive.
Haines City, FL 33844

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone.

DESCRIPTION: Alpine Wave Connector Plate

APPROVAL DOCUMENT: Drawing No. WaveDade, titled "Alpine Wave Truss Plate ", sheets 1 of 1, dated 06/21/01, with last revision dated 08/16/07, prepared by ITW Building Components Group, Inc., signed and sealed by Stuart L. Lewis, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: None

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved or MDCPCA", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews** NOA # **06-0510.05** and consists of this page 1, evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



Signature
9/21/07

NOA No 07-0525.02
Expiration Date: May 14, 2011
Approval Date: September 20, 2007
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

A. DRAWINGS

1. Drawing No. WaveDade, titled "Alpine Wave Truss Plate", sheets 1 of 1, dated 06/21/01, with last revision dated 08/16/07, prepared by ITW Building Components Group, Inc., signed and sealed by Stuart L. Lewis, P.E.

B. TESTS

1. Test Report on Lateral Resistance Test, Tension and Shear Strength Tests per ANSI/TPI 1-2002, along with marked-up drawings and Tensile Test per ASTM E8-04, prepared by PFS Corporation, Report No. 06-54, dated 07/18/07, signed and sealed by James A. Rothman, P.E.

C. CALCULATIONS

1. Calculations for Lateral Resistance Values per ANSI/TPI 1-2002, dated 08/16/07, signed and sealed by Stuart L. Lewis, P.E.

D. QUALITY ASSURANCE

1. Building Code Compliance Office (BCCO).

E. STATEMENTS

1. No change and code conformance statement, dated May 9, 2007, signed and sealed by Stuart L. Lewis, P.E.
2. Certificate of Merger between Alpine Engineered Products, Inc. and Truswal Systems Corporation, dated 01/05/07, signed by Harriet Smith Windsor, Secretary of State of Delaware.
3. Certificate of Amendment, Name Change from Truswal Systems Corporation to ITW Building Components Group, Inc., dated 01/05/07, signed by Harriet Smith Windsor, Secretary of State of Delaware.



Carlos M. Utrera, P.E.

Product Control Examiner

NOA No. 07-0525.02

Expiration Date: May 14, 2011

Approval Date: September 20, 2007

ALPINE WAVE TRUSS PLATE

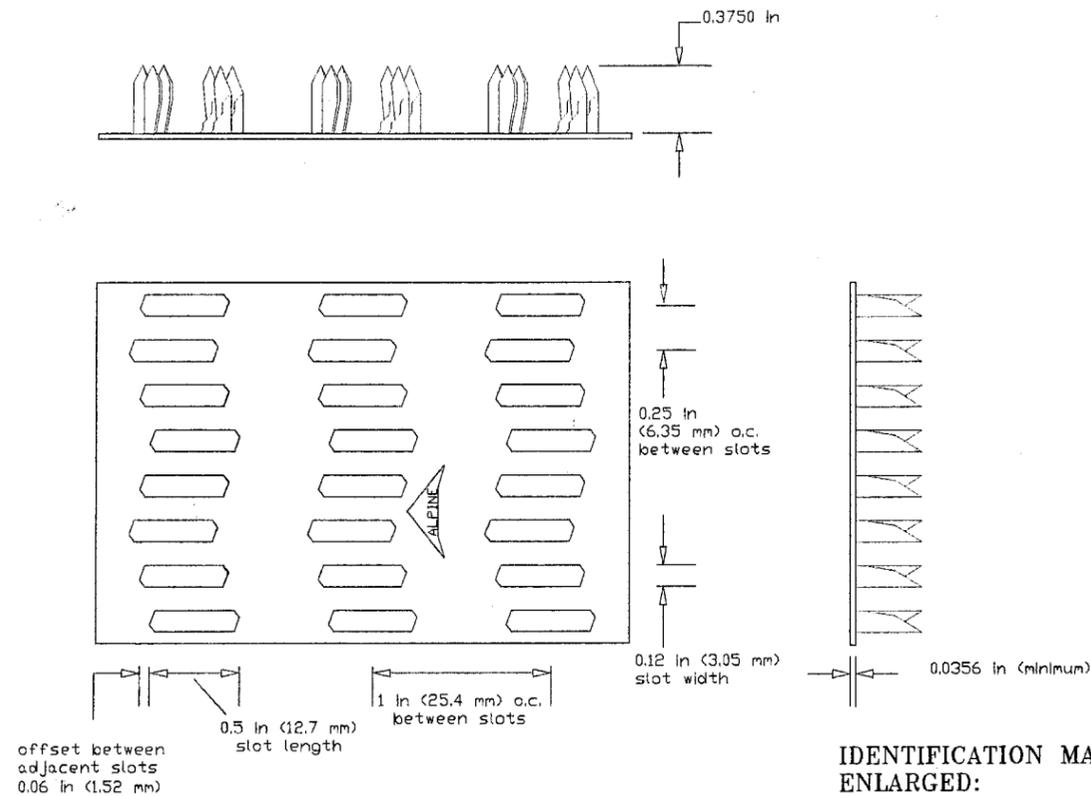


PLATE SHOWN ABOVE IS A 2X3 (2 IN X 3 IN).

TRUSS PLATE CHARACTERISTICS

Thickness: 0.0356 inches (20 gage)
Steel Grade: ASTM A653 SS Grade 40
Coating: G60 per ASTM A653
Teeth: 8 Teeth/sq. in.
Size: Increments of 1" width and length
Other: Slots are 0.12 in wide x 0.50 in long aligned parallel to the plate length and spaced 0.25 in o.c. across the width of the plate and 1.0 in o.c. along the length of the plate. Adjacent slots are staggered 0.06 inches along the length of the plate from each other in a double alternating pattern, as shown above.

LATERAL RESISTANCE

Allowable Loads in lb/sq.in. of plate area.

Species	End Distance	Direction of Grain & Load with Respect to Length of Plate			
		AA	EA	AE	EE
Doug.Fir-Larch & Southern Pine	0"	195	162	139	178
	1/2"	270	210	139	178
Spruce-Pine-Fir & Hem-Fir	0"	179	138	121	128
	1/2"	183	141	121	128

- Notes: 1. Design values are based on end distances shown above and 0" edge distance.
 2. Standard values apply to hydraulic, pneumatic and multiple pass roller presses.
 3. Roller values applying to single pass roller presses with 18" or greater diameter rollers shall use the following percentates of the above values:
 Qr = 85.0% for SPF/HF. 78.7% for DFL/SP.

SHEAR LOAD EFFICIENCY

Direction of Load With Respect to Length of Plate	Shear Resistance Effectiveness Ratio
0 degrees	60.0%
30 degrees	66.1%
60 degrees	77.7%
90 degrees	52.1%
120 degrees	42.9%
150 degrees	41.5%

TENSION LOAD EFFICIENCY

Parallel	Perpendicular
52.0%	52.5%

PRODUCT REVIEWED
 as complying with the Florida
 Building Code
 Acceptance No. 07-0525.02
 Expiration Date 05/14/2011
 By *[Signature]*
 Miami-Dade Product Control
 Division

<i>Stuart L. Lewis</i> 8/17/07	MANUFACTURER: ITW Building Components Group Inc. 1950 Marley Dr. Haines City, FL 33844 (ph# 863-422-8685)	
	TITLE: Alpine Wave Truss Plate	
	DRAWING NUMBER: WaveDade	DRAWING DATE: 06/21/01
	SHEET NUMBER: 1	REVISION DATE: 08/16/07
	FL-ENG: Stuart L. Lewis, P.E. Number 45927	