



BUILDING CODE COMPLIANCE OFFICE (BCCO)
PRODUCT CONTROL DIVISION

MIAMI-DADE COUNTY, FLORIDA
METRO-DADE FLAGLER BUILDING
140 WEST FLAGLER STREET, SUITE 1603
MIAMI, FLORIDA 33130-1563
(305) 375-2901 FAX (305) 375-2908

NOTICE OF ACCEPTANCE (NOA)

www.miamidade.gov/buildingcode

Napco, Inc.
303 W. Major
Kearney, MO 64060

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Vinyl Siding & Soffit

APPROVAL DOCUMENT: Drawing No. 1150008, 9, 10, 11 & 12, titled "Vinyl Siding Soffit", sheets 1 through 5 of 5, prepared by Napco, Inc, dated 08/2002, with no revisions, signed and sealed by Richard Boyette, P.E., bearing the Miami-Dade County Product Control renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Division.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **renews** NOA # **02-0610.03** and consists of this page 1, evidence page E-1 as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



Signature
10/21/07

NOA No 07-1002.05
Expiration Date: October 31, 2012
Approval Date: November 15, 2007
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE PAGE

A. DRAWINGS

1. Drawing No.1150008, 9, 10, 11 & 12, titled "Vinyl Siding Soffit", sheets 1 through 5 of 5, prepared by Napco, Inc, dated 08/2002, with no revisions, signed and sealed by Richard Boyette, P.E.
(*Evidence Submitted under NOA # 02-0610.03*)

B. TESTS

	Laboratory Report	Test	Date	Signature
1.	01-44749.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
2.	01-44739.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
3.	01-44750.02	TAS 202 & 203	03/10/04	J. A. Reed, P.E.
4.	50437.01-106-18	ASTM G155	12/06/04	J. A. Reed, P.E.
5.	50437.01-106-18	ASTM D638	12/06/04	J. A. Reed, P.E.

(*Evidence Submitted under NOA # 02-0610.03*)

C. CALCULATIONS

1. None

D. QUALITY ASSURANCE

1. Building Code Compliance Office (BCCO)

E. MATERIAL CERTIFICATION

1. None

F. STATEMENTS

1. Code Compliance letter issued by R. Boyette, dated 10/23/98, signed and sealed by R. Boyette, PE.
2. Commencement letter issued by Architectural Testing on 03/29/04, signed and sealed by J. A. Reed PE.
(*Evidence Submitted under NOA # 02-0610.03*)


G. OTHER

1. NOA renewal request letter issued by Variform, Inc., dated 09/07/07, signed by Alan F. Hoying.
2. This NOA is a **Private Label** of NOA # 07-1002.04.




Carlos M. Utrera, P.E.
Product Control Examiner
NOA No 07-1002.05

Expiration Date: October 31, 2012
Approval Date: November 15, 2007

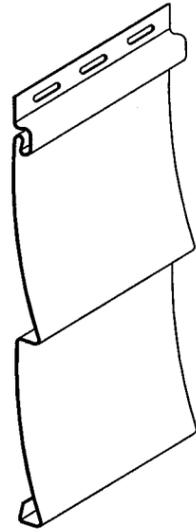

D/4
TRADITIONAL LAP


APPROVED MODELS

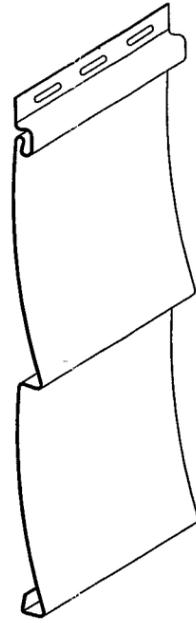

D/5
TRADITIONAL LAP

APPROVED MODELS

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

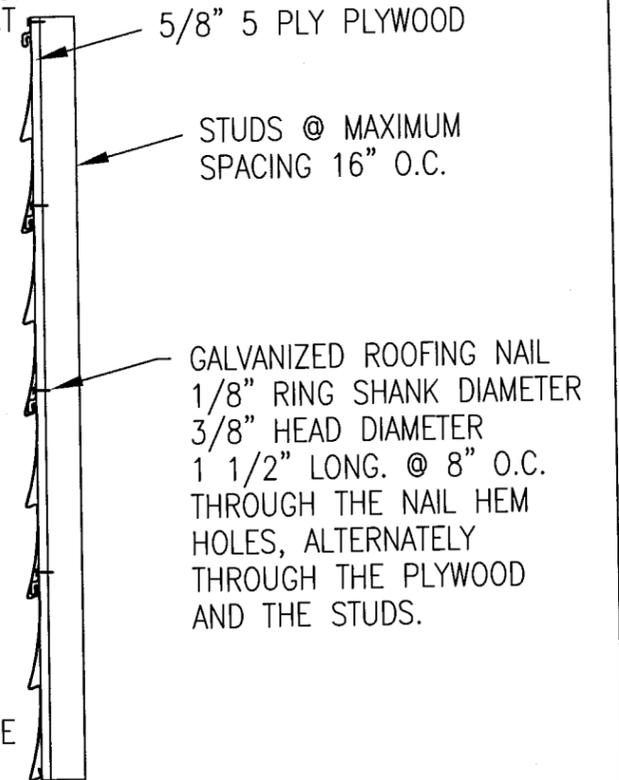

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.	NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
AMERICAN TRADITION	01	DOUBLE 4	.042	46.6	AMERICAN TRADITION	03	DOUBLE 5	.042	40.0
AMERICAN SPLENDOR	42	DOUBLE 4	.046	46.6	AMERICAN SPLENDOR	44	DOUBLE 5	.046	40.0
AMERICAN HERALD	50	DOUBLE 4	.044	46.6	AMERICAN HERALD	52	DOUBLE 5	.044	40.0
SUNNY BROOK	56	DOUBLE 4	.044	46.6	SUNNY BROOK	58	DOUBLE 5	.044	40.0
OLDE PROVIDENCE	60	DOUBLE 4	.040	46.6	OLDE PROVIDENCE	62	DOUBLE 5	.040	40.0
AMERICAN COMFORT	63	DOUBLE 4	.040	46.6	AMERICAN COMFORT	64	DOUBLE 5	.040	40.0
AMERICAN 76 COLLECTION	67	DOUBLE 4	.044	46.6					

07-1902-05
10/31/2012
[Signature]


Approved as complying with the
Florida Building Code
Date 02-0610.03
NOA# 11/07/02
Miami-Dade Building Control
Division
By *[Signature]*

RICHARD BOYETTE
FL Civil PE #42485
4031 Coconut Blvd
Royal Palm Bch FL 33411
(561) 790-5766 Voice / Fax
[Signature]
10/26/02 02-1014

NOTE 1.- NAPCO INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2704.6 (b) OF THE SFBC


4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE SFBC AND THE REQUIREMENTS OF THESE NOA
5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE SFBC

NAPCO INC. 150 BONNIE DRIVE BUTLER, PA. 16002		COMPANY NAME NAPCO INC.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ± .010 ANGULAR ± 1° XXX ± .005 DO NOT SCALE DRAWING		DRAWN LRB	DATE 8/02
DESIGN ACTIVITY		TITLE VINYL SIDING SOFFIT	
SIZE B	DWG NO. 1150008	SHEET	

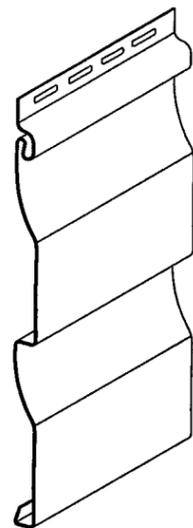

D/4
DUTCH LAP


APPROVED MODELS

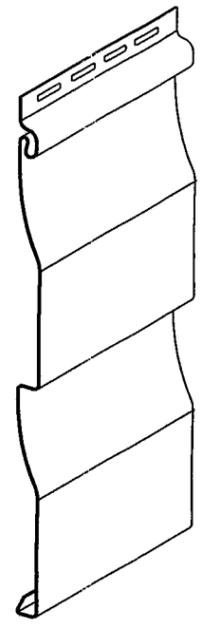

D/5
DUTCH LAP

APPROVED MODELS

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

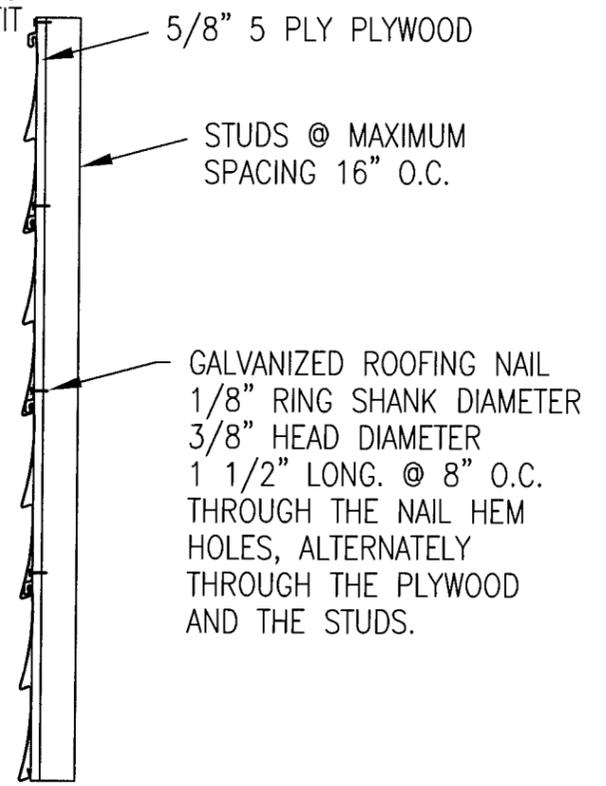

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.	NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
SUNNY BROOK	04	DOUBLE 4	.044	46.6	SUNNY BROOK	05	DOUBLE 5	.044	40.0
AMERICAN HERALD	53	DOUBLE 4	.044	46.6	AMERICAN HERALD	54	DOUBLE 5	.044	40.0

APPROVED
DATE 07-10-02
10/31/2012


Approved as complying with the
Florida Building Code
Date 02-06-03
NOA# 11/07/02
Miami Date Product Control

RICHARD BOYETTE
FL Civil PE #42485
4031 Coconut Blvd
Royal Palm Bch FL 33411
709-5766 Voice / Fax

NOTE 1.- NAPCO INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2704.6 (b) OF THE SFBC


4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE SFBC AND THE REQUIREMENTS OF THESE NOA
5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE SFBC

NAPCO INC. 150 BONNIE DRIVE BUTLER, PA. 16002		DRAWN LRB DATE 8/02		COMPANY NAME NAPCO INC.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS .010 XXX ± .005 DO NOT SCALE DRAWING		TITLE VINYL SIDING SOFFIT		SIZE B	
DESIGN ACTIVITY		DWG NO. 1150009		SHEET	

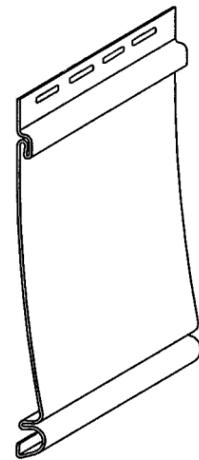

6 1/2"
HORIZONTAL


APPROVED MODELS

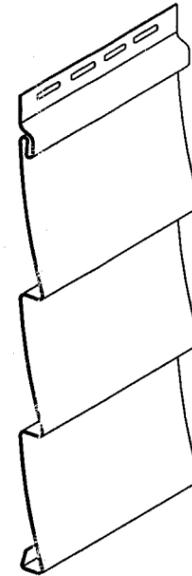

T/3
HORIZONTAL

APPROVED MODELS

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

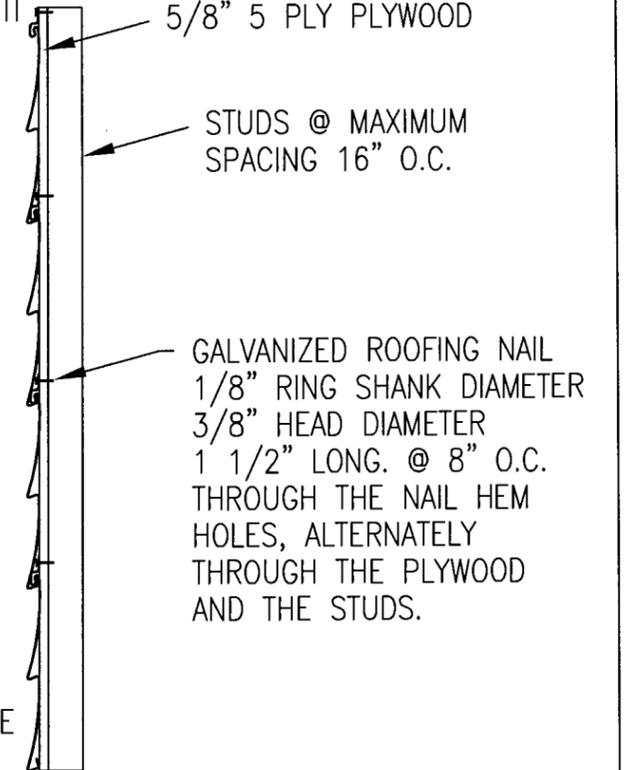

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.	NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
AMERICAN 76 COLLECTION	68	SINGLE 6 1/2	.044	60.0	OLDE PROVIDENCE	40	TRIPLE 3	.040	40.0
					AMERICAN COMFORT	41	TRIPLE 3	.040	40.0
					AMERICAN 76 SMOOTH	66	TRIPLE 3	.044	40.0

07-1002.05
10/31/2012

NOTE 1.- NAPCO INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
 2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
 3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2704.6 (b) OF THE SFBC


4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE SFBC AND THE REQUIREMENTS OF THESE NOA
 5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE SFBC

Approved as complying with the
 Florida Building Code
 Date 02-06-10-03
 NOA# 11/07/02
 National Data Control
 Division

RICHARD BOYETTE
 FL Civil PE #42485
 4031 Coconut Blvd
 Royal Palm Bch FL 33411
 5766 Voice / Fax


Richard Boyette
10/31/12

NAPCO INC. 150 BONNIE DRIVE BUTLER, PA. 16002		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES DECIMALS ± .010 ANGULAR ± 1° XXX ± .005 DO NOT SCALE DRAWING		COMPANY NAME NAPCO INC.
DRAWN LRB	DATE 8/02	TITLE VINYL SIDING SOFFIT		
DESIGN ACTIVITY	SIZE B	DWG NO. 1150010		
		SHEET		

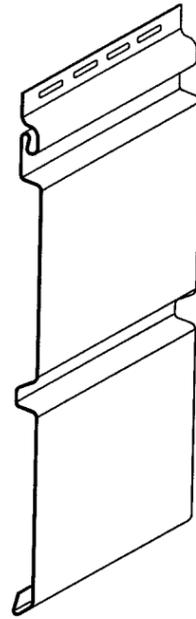

D/5
VERTICAL/SOFFIT


APPROVED MODELS

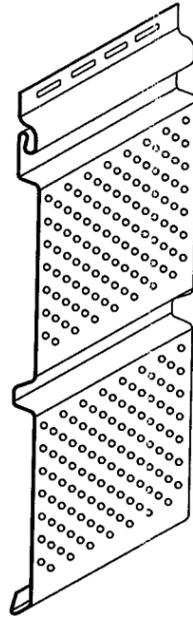

.D/5
LANCED
SOFFIT

APPROVED MODELS

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

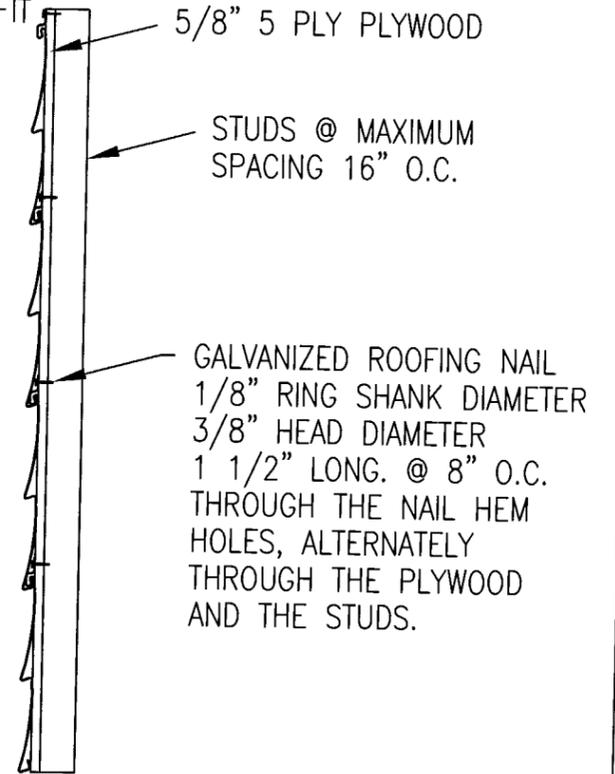

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
SVS AMERICAN SPLENDOR	70 1120400	DOUBLE 5 DOUBLE 5	.044 .046	40.0 40.0

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
LVS	71	DOUBLE 5	.044	40.0

NOTE 1.- NAPCO INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
 2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
 3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2704.6 (b) OF THE SFBC

4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE SFBC AND THE REQUIREMENTS OF THESE NOA
 5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE SFBC


07-1002.05
10/31/2012

Approved as complying with the Florida Building Code
 Date 02-0610-03
 NOA# 11/07/02
 Division
 By

RICHARD BOYETTE
 FL Civil PE #42485
 4031 Coconut Blvd
 Royal Palm Beach FL 33411
 561-5766 Voice / Fax

Richard Boyette
10/9/02

NAPCO INC. 150 BONNIE DRIVE BUTLER, PA. 16002		COMPANY NAME NAPCO INC.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES DECIMALS TOLERANCES ANGULAR XX ± .010 ± 1° XX ± .005 DO NOT SCALE DRAWING		DRAWN LRB	DATE 8/02
TITLE VINYL SIDING SOFFIT		SIZE B	DWG NO. 1150011
DESIGN ACTIVITY		SHEET	

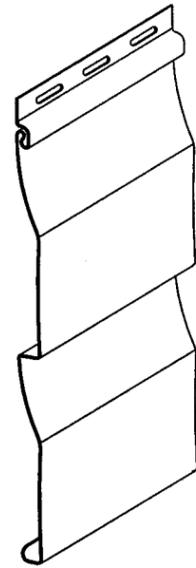


D/4.5
DUTCH LAP

APPROVED MODELS

NAME	DWG#	EXPOSURE INCHES	THICKNESS -0.001 INCHES	DESIGN PRESSURE P.S.F.
AMERICAN TRADITION	02	DOUBLE 4.5	.042	40.0
AMERICAN SPLENDOR	43	DOUBLE 4.5	.046	40.0
OLDE PROVIDENCE	61	DOUBLE 4.5	.040	40.0
AMERICAN COMFORT	65	DOUBLE 4.5	.040	40.0

TYPICAL INSTALLATION
VINYL SIDING/SOFFIT

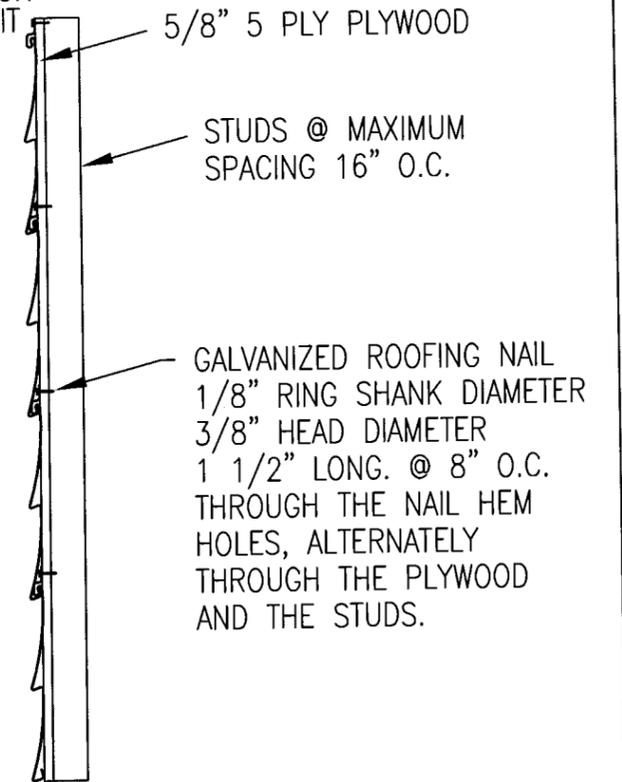

07-1002.05
10/31/2012
[Signature]

Approved as complying with the
Florida Building Code
Date 02-0610.03
NOA# 11/07/02
Division [Signature]

RICHARD BOYETTE
FL Civil PE #42485
4031 Coconut Blvd
Royal Palm Bch FL 33411
700-3766 Voice / Fax

NOTE 1.- NAPCO INC. VINYL SIDING/SOFFIT IS MANUFACTURED FROM A FORMULATED P.V.C. POWDER COMPOUND MEETING THE SPECIFICATIONS OF ASTM D3679
2.- WALLS AND SOFFIT RECEIVING VINYL SIDING/SOFFIT SHALL BE CHECKED FOR STRUCTURAL ADEQUACY CRACKS OR DEFECTS THAT SHALL BE ELIMINATED
3.- WALLS SHALL BE WATER PROOFED WITH EQUIVALENT OF 15 POUND FELT AS DESCRIBED IN SECTION 2704.6 (b) OF THE SFBC

4.- WALLS AND SOFFIT WHERE VINYL SIDING/SOFFIT WILL BE INSTALLED SHALL BE DESIGNED BY AN ENGINEER OR ARCHITECT PER THE SFBC AND THE REQUIREMENTS OF THESE NOA
5.- INSTALLATION OF SIDING/SOFFIT ACCESORIES SUCH AS CORNER POSTS, STARTER STRIPS, TRIMS AROUND OPENINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUFACTURES INSTRUCTIONS AND THE SFBC

NAPCO INC. 150 BONNIE DRIVE BUTLER, PA. 16002		DATE 8/02		COMPANY NAME NAPCO INC.	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: DECIMALS ± .010 ANGULAR ± 1° XXX ± .005 DO NOT SCALE DRAWING		DRAWN LRB	DATE 8/02	TITLE VINYL SIDING SOFFIT	
DESIGN ACTVITY		SIZE B	DWG NO. 1150012		SHEET