



**BUILDING CODE COMPLIANCE OFFICE (BCCO)  
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908**

**NOTICE OF ACCEPTANCE (NOA)**

**Metal Sales Manufacturing Corporation  
7800 State Road 60  
Sellersburg, IN 47172**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION: Image II Metal Roofing System**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This renews NOA # 07-0118.08 and consists of pages 1 through 4.  
The submitted documentation was reviewed by Alex Tigera.



**NOA No 08-0229.12  
Expiration Date: 08/08/13  
Approval Date: 05/15/08  
Page 1 of 4**

**ROOFING SYSTEM APPROVAL:**

Category: Roofing  
Sub-Category: Metal, Panels (Non-Structural)  
Material: Steel  
Deck Type: Wood  
Maximum Design Pressure See Table A herein

**TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:**

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Image II Metal Roof	l = varies' w = 12" and 16" h = 1" min. Thickness 0.019 inch	TAS 110	Corrosion resistant, galvanized, preformed, coated, prefinished, metal panels.
Trim Pieces	l = varies w = varies min. Thickness 0.019 inch.	TAS 110	Standard flashing and trim pieces. Manufactured for each panel width.

**EVIDENCE SUBMITTED:**

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
Akzo Coatings		ASTM G 23 ASTM B 117	
Valspar Corporation		ASTM G 23 ASTM B 117	
PRI Construction Materials	MSMS-006-02-01 MSMS-006-02-02	Sealant Weathering	09/12/07 11/14/07
Architectural Testing	01-43798.01	TAS 100	03/05/03
PRI Construction Materials	MSMC-005-02-01	TAS-100	06/06/07
Farabaugh Engineer & Testing, Inc.	T183-05	TAS 125	08/09/05
Farabaugh Engineer & Testing, Inc.	T241-07	TAS 125	07/23/07



**APPROVED ASSEMBLIES:**

**SYSTEM A:** IMAGE II Metal Roof Panel 12” or 16” wide panel.  
**Deck Type:** Wood, Non-insulated  
**Deck Description:** New Construction <sup>19</sup>/<sub>32</sub>” or greater plywood or wood plank.  
**Maximum Uplift Pressure:** See **Table A** below

**Deck Attachment:** In accordance with applicable Building Code, but in no case shall it be less than 8d ring shank nails spaced 6” o.c. In reroofing, where the deck is less than <sup>19</sup>/<sub>32</sub>” thick (Minimum <sup>15</sup>/<sub>32</sub>”) the above attachment method must be in addition to existing attachment.

**Underlayment:** Minimum underlayment shall be an ASTM D 226 Type II installed with a minimum 4” side-lap and 6” end-laps. Underlayment shall be fastened with corrosion resistant tin-caps and 12 gauge 1 ¼” annular ring-shank nails, spaced 6” o.c. at all laps and two staggered rows 12” o.c. in the field of the roll. Or, any approved underlayment having a current NOA.

**Valleys:** Valley construction shall be in compliance with Roofing Application Standard RAS 133 and with Metal Sales Manufacturing Corporation’s current published installation instructions.

**Fire Barrier Board:** Any approved fire barrier having a current NOA. Or for class A or B fire rating, install minimum ¼” thick Georgia Pacific “Dens Deck” (with current NOA) or minimum 4mm thick of Tritex, RockRoof (with current NOA) or 5/8” water resistant type X gypsum sheathing with treated core and facer.

**Metal Panels and Accessories:** Install the "IMAGE II Panels" and accessories in compliance with Metal Sales Manufacturing Corporation’s current, published installation instructions and details. Flashing, penetrations, valley construction and other details shall be constructed in compliance with the minimum requirements provided in Roofing Application Standards RAS 133.

Panels shall be fastened to substrate at the male end with one corrosion resistant #10 PHWS fasteners sufficient length (but not less than 1”) to penetrate through the sheathing a minimum of <sup>3</sup>/<sub>16</sub>”, at a spacing not exceed 6” o.c (See detail herein). Fasteners shall be placed parallel to the roof slope.


<b>TABLE A</b>		
	<b>Field</b>	<b>Perimeter and Corner<sup>1</sup></b>
<b>Maximum Design Pressure</b>	<b>-102.7 psf</b>	<b>-139.1 psf</b>
<b>Enhanced Fastening</b>	<b>None</b>	<b>3/8” bead of Schnee-Morehead SM9200 JAWS adhesive in the sidejoint. (See detail herein)</b>
1. Extrapolation shall not be allowed		



## SYSTEM LIMITATIONS


1. Fire Classification is not part of this acceptance. Refer to an Approved Roofing Material Fire Directory for fire classification of this product.
2. Neither rational analysis, nor extrapolation shall be permitted for the maximum design pressures listed in the "Perimeter and Corner" roof areas as noted in Table "A" herein.
3. Panel shall be roll formed in continuous lengths from eave to ridge. Maximum lengths shall be described in the Roofing Application Standard RAS 133.
4. All panels shall be permanently labeled with the manufacturer's name and/or logo, and the following statement: "Miami-Dade County Product Control Approved."

### PROFILE DRAWING:

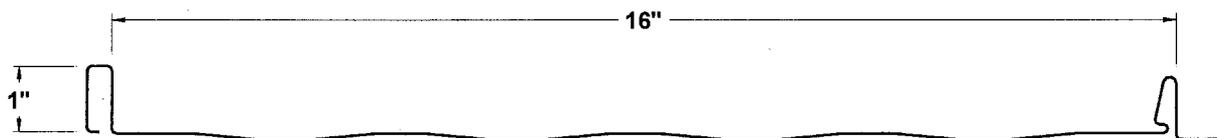


### IMAGE II METAL ROOF PANEL

#### DETAIL A 16" WIDE PANEL

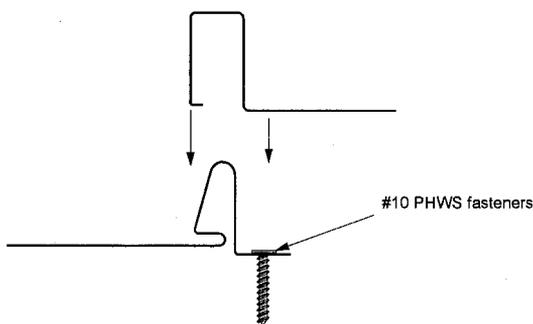

16" Wide Panel  
Field Condition Details

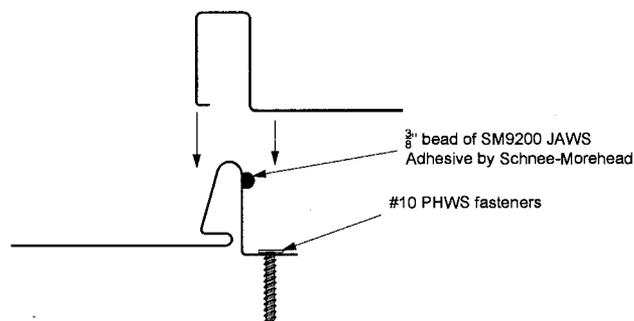

16" Wide Panel  
Perimeter and Corner Condition Details

END OF THIS ACCEPTANCE



NOA No 08-0229.12  
Expiration Date: 08/08/13  
Approval Date: 05/15/08  
Page 4 of 4