



**BUILDING CODE COMPLIANCE OFFICE (BCCO)  
PRODUCT CONTROL DIVISION**

**MIAMI-DADE COUNTY, FLORIDA  
METRO-DADE FLAGLER BUILDING  
140 WEST FLAGLER STREET, SUITE 1603  
MIAMI, FLORIDA 33130-1563  
(305) 375-2901 FAX (305) 375-2908**

**NOTICE OF ACCEPTANCE (NOA)**

**Titan Manufacturing, Inc.  
2460 Sandlake Road  
Orlando, FL. 32809**

**SCOPE:**

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed by Miami-Dade County Product Control Division and accepted by the Board of Rules and Appeals (BORA) to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Division (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. BORA reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Division that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

**DESCRIPTION: Old World Spanish A4 Composite Tile**

**LABELING:** Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA consists of pages 1 through 7.  
The submitted documentation was reviewed by Alex Tigera.



**NOA No.: 08-0709.03  
Expiration Date: 09/18/13  
Approval Date: 09/18/08  
Page 1 of 7**

## ROOFING ASSEMBLY APPROVAL

**Category:** Roofing  
**Sub-Category:** Roofing Tile  
**Materials:** Composite  
**Deck Type:** Wood  
**Maximum Design Pressure** -114.25 psf

### TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Old World Spanish A4 Composite Tile	Length: 16-1/2" Width: 13" Height: 2-1/8"	TAS 125	Barrel shaped composite tile for use in mechanically attached systems.

### EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
ETC Laboratories	ETC-06-718-18391.0	ASTM D 2843 ASTM D 1929 ASTM D 635	11/28/06
PRI Construcion Materials Technologies	TMIC001-02-01	ASTM G 155	06/29/07
Southwest Research Institute	01.12694.01.306a	ASTM E 108	02/12/07
PRI Construcion Materials Technologies	TMIC-007-02-01	TAS 100	10/05/07
Hurricane Test Laboratory, LLC.	0497-0201-08	TAS 125	05/16/08

**APPROVED ASSEMBLIES:**

**SYSTEM A:** Old World Spanish A4 Composite Tile  
**Deck Type:** Wood, Non-insulated  
**Deck Description:** 19/32" or greater plywood or wood plank  
**Slope Range:** 2":12" or greater  
**Maximum Uplift** See **Maximum Design Pressures Below**

---

**Deck Attachment:** In accordance with applicable building code, but in no case shall it be less than # 8d annular ring shank nails spaced 6" o.c. In reroofing, where the deck is less than 19/32" thick (Minimum 15/32") the above attachment method must be in addition to existing attachment.

**Underlayment:** Minimum underlayment shall be an ASTM D 226 Type II installed with a minimum 4" side-lap and 6" end-laps. Underlayment shall be fastened with corrosion resistant tin-caps and 12 gauge 1 1/4" annular ring-shank nails, spaced 6" o.c. at all laps and two staggered rows 12" o.c. in the field of the roll. Or, any approved underlayment having a current NOA.

**Valleys:** Valley construction shall be in compliance with Roofing Application Standard RAS 118 and with Titan Manufacturing LLC's current published installation instructions.

**Fire Barrier Board:** Any approved fire barrier having a current NOA. Or for class A or B fire rating, install minimum 1/4" thick Georgia Pacific "Dens Deck" (with current NOA) or minimum 4mm thick of Tritex, RockRoof (with current NOA) or 5/8" water resistant type X gypsum sheathing with treated core and facer.

**Starter:** Install starter over the 1" thick cant strip and fasten with two (2) #10 screws in the designated nail holes.

**Tile Installation (Field Condition):** Install the "Old World Spanish A4 Composite Tile" and accessories in compliance with the current published installation instructions and details in Titan Manufacturing LLC's Installation Manual. Flashings, penetrations, valley construction and other details shall be constructed in compliance with Roofing Application Standard RAS 133.

Each panel is installed with (2) two 1/8" diameter corrosion resistant roofing nails of sufficient length to penetrate through the sheathing a minimum 3/16" of an inch, through the designated nail holes. **(See Detail A)**

The adjoining tile is laid next to the existing tile overlapping the edge. The next row is laid with a 13" exposure. **(See Detail B)**

**Maximum Design Pressure (Field Condition):** -91.75psf (See General Limitaiton #2)



**Tile Installation  
(Perimeter and  
Corner Condition):**

Install the "Old World Spanish A4 Composite Tile" and accessories in compliance with the current published installation instructions and details in Titan Manufacturing LLC's Installation Manual. Flashings, penetrations, valley construction and other details shall be constructed in compliance with Roofing Application Standard RAS 133.

Each panel is installed with (2) two corrosion resistant #10 screws of sufficient length to penetrate through the sheathing a minimum 3/16" of an inch, through the designated nail holes. (See Detail A)

The adjoining tile is laid next to the existing tile overlapping the edge. The next row is laid with a 13" exposure. (See Detail B)

**Maximum Design  
Pressure  
(Perimeter and  
Corner Condition):**

**-114.25psf (See General Limitaiton #2)**



## SYSTEM LIMITATIONS


1. Fire classification is not part of this acceptance; refer to a current approved Roofing Materials Directory for fire rating of this product.
2. The maximum designed pressure listed herein shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners).
3. All tiles shall be permanently labeled with the manufacturer's name and/or logo, and the following statement: "Miami-Dade County Product Control Approved" or with the Miami-Dade Product Control Seal as seen below.



4. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 9B-72 of the Florida Administrative Code.




**PROFILE DRAWINGS  
DETAIL A**

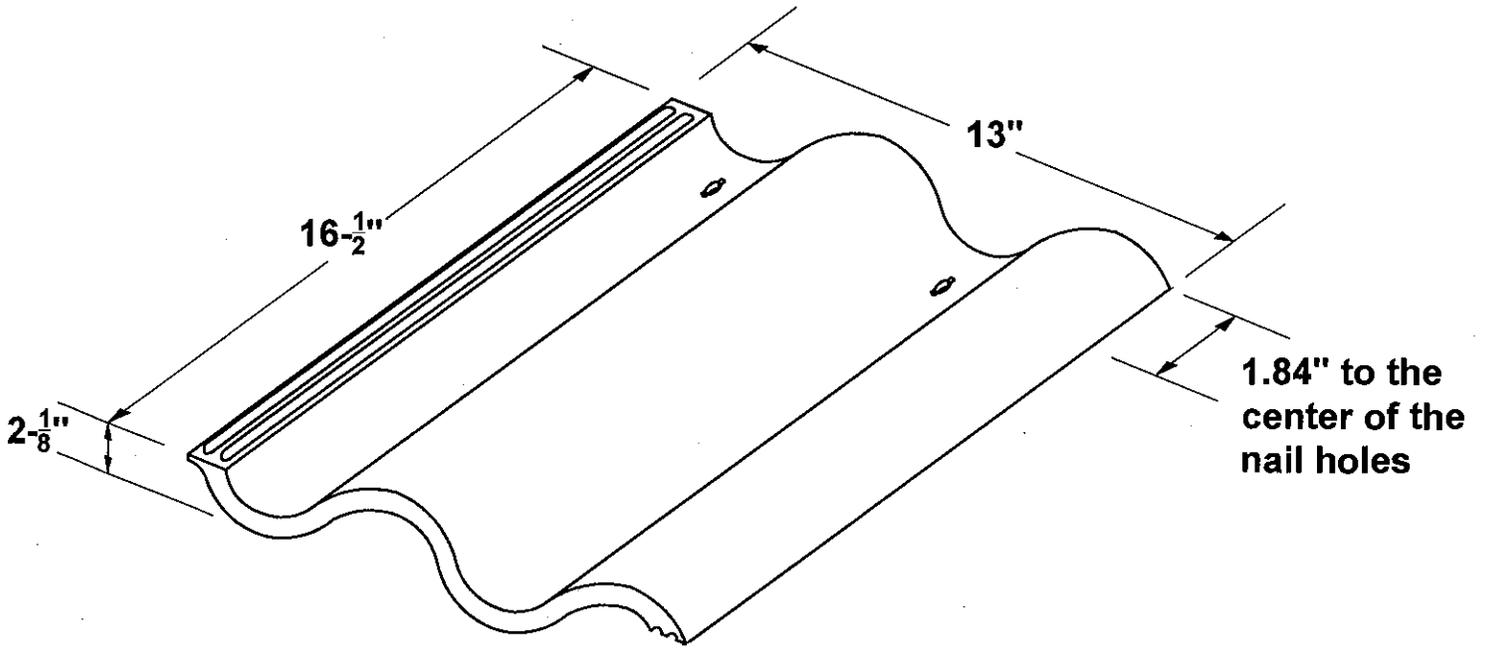

**OLD WORLD SPANISH A4 COMPOSITE TILE**



**DETAIL B**

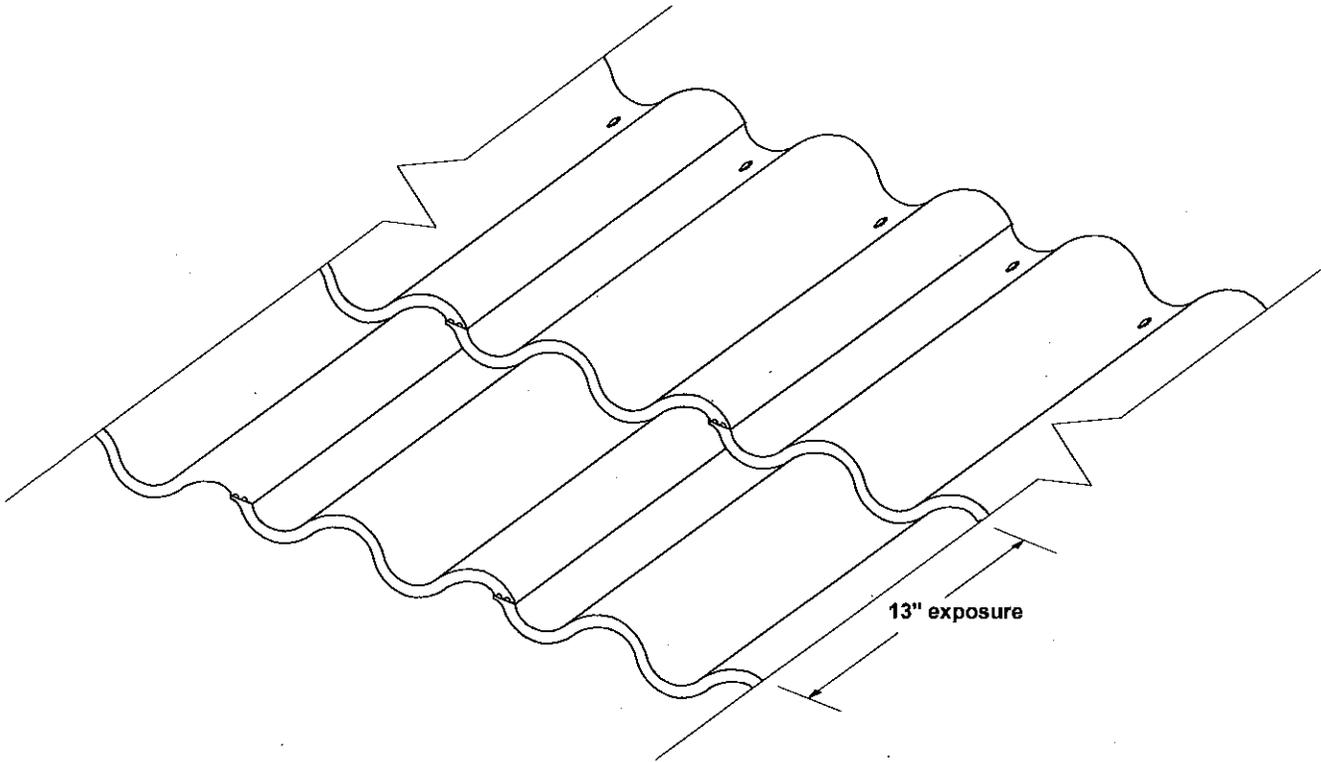

**END OF THIS ACCEPTANCE**