



June 24, 2022

RESPONSE LETTER NO. 2 TO REQUEST FOR INFORMATION

Project Title: **Improvements to SW 87 Avenue Bridge Over Canal C-100**
Project No.: **20220010**

Email received from Mr. Nicholas F. Souchon, P.E., Condotte America, Inc.; on June 10, 2022, at 10:42 AM (Email Attached).

QUESTION: 1) Please provide final drawings showing new relocation of aerial power lines (FPL poles) and guywire from Sta. 16+00 to Sta. 22+00.

RESPONSE: 1) New poles and FP&L pole locations are shown on Sheet 11 of 81 under Revised Sheets for Addendum No. 2.

QUESTION 2) Please advise when, and how long will take the FPL power lines relocation work.

RESPONSE: 2) The plan is to relocate ahead of construction. Exact dates and time frame for FP&L relocation will be provided as soon as available.

QUESTION: 3) Please provide additional information for existing underground watermain 48": years on service, pipe material.

RESPONSE: 3) WASD 48in Water Main Information can be found under 48in Water Main for Addendum No. 2.

QUESTION: 4) Please provide drawing showing temporary support if it needs to support the 48" water main at sta. 24+37.5. Underneath excavation is needed to cross 24" pipe between manhole, S-16 and manhole, S-17. Please advise.

RESPONSE: 4) To be responded under RFI no. 3

QUESTION: 5) Please provide allowed work hours, and days of the week for construction.

RESPONSE: 5) Work to be performed on weekdays between 9:00 p.m. to 5:00 a.m. Work must not be carried out during the night or on Saturdays, Sundays or on County holidays.

QUESTION: 6) Please show on the plans where is located the concrete sidewalk (6" thick)? Under pay item notes, says "522-1 includes the cost of pedestrian ramps."

RESPONSE: 6) To be responded under RFI no. 3



QUESTION: 7) Please advise if there are additional test for the auger-cast-pile foundation such as: Lateral Load Test, Static Load Test, and Proof Load Test. If the tests are needed, how many, and where is allocated the cost.

RESPONSE: 7) Auger Cast pile construction shall follow FDOT Developmental Specification Dev455ACP. Plans along with the bid form have been revised under Addendum No. 2.

QUESTION: 8) Is going to be a public information officer for this job? After a field visit, some houses shown signs opposing to this bridge.

RESPONSE: 8) To be responded under RFI no. 3

QUESTION: 9) The job advertisement indicates the anticipated start date September 12th, 2022. For how long the County can hold the execution of the contract. Our understanding is up to six months. Please advise.

RESPONSE: 9) The County requires the contractor to submit a bid bond along with the price submittal and to hold the prices for up to 180 days.

Email received from Mr. Steve McNamara, ANZAC CONTRACTORS, INC.; on June 14, 2022, at 11:31 AM (Email Attached).

QUESTION: 1) Are there any load tests required on the Auger Cast Piles for the Bridge?

RESPONSE: 1) Yes. Plans along with the bid form have been revised under Addendum No. 2.

QUESTION: 2) Are there any Special Provisions for the Auger Cast Piles?

RESPONSE: 2) The Auger Cast pile construction shall follow FDOT Developmental Specification Dev455ACP.

QUESTION: 3) Please provide details on Bid Item 548-12 Retaining Wall System.

RESPONSE: 3) Bid Item 548-12 Retaining Wall System is to pay for the bridge abutment wingwalls.

QUESTION: 4) Please provide the specific areas on the Bridge for Bid Item 400-7-1 and Bid Item 400-9-1

RESPONSE: 4) Bid Item 400-7-1 is for the bridge deck area inside the traffic separator and Item 400-9-1 is for the area between the traffic separator and sidewalk.



Email received from Mr. Ariel Rodilla, EBSARY Foundation Co.; on June 15, 2022, at 7:28 AM (Email Attached).

QUESTION: 1) Is Vibration & Settlement monitoring required for this project? If it is, would it be covered by the County or Contractor?

RESPONSE: 1) Pay item 108-1 has been added. See Revised Bid Form for Addendum No. 2 and Revised Sheets for Addendum No. 2.

QUESTION 2) Can the bid due date be pushed back one week?

RESPONSE: 2) Please refer to Addendum No. 1

Email received from Mr. YASSIR EL-KHAMLI, MCMC- US.; on June 16, 2022, at 3:08 PM (Email Attached).

QUESTION: 1) Please confirm that all utilities relocation are scheduled to be done prior to NTP.

RESPONSE: The plan is to have all utilities relocated ahead of construction. Exact dates and time frame will be provided as soon as available.

QUESTION 2) Please confirm that User Access Program Fee (2% of total price) is required for this project.

RESPONSE: 2) Yes, User Access Program Fee is required for this project.

QUESTION: 3) Please confirm that Inspector General Fee (0.25% of total price) is not required for this project.

RESPONSE: 3) No, Inspector General Fee is required for this project. It is a 0.25% of the total price.

QUESTION: 4) Please confirm that an Engineer's Field Office is Mandatory for this project.

RESPONSE: 4) Yes, please refer to article 2.01 of the Special Provisions.

QUESTION: 5) Please confirm that all permit fees are reimbursable by the Department?

RESPONSE: 5) Yes, permits fees are reimbursable at invoice cost.

QUESTION: 6) Is there any indication of any contaminated water or soils for this project?

RESPONSE: 6) To be responded under RFI no. 3



QUESTION: 7) The plans call for Guardrail Bridge Connections and End Treatments, but no bid items were provided for this work. Please address.

RESPONSE: 7) Cost of Guardrail Bridge Connections and End Treatments to be included in costs of item 536-1-1.

QUESTION: 8) Note on Roadway Plan Sheet 5 of 81 calls for including the cost of Type II Skimmer under bid item 425-1-319A. This bid item does not exist, please address.

RESPONSE: 8) Bid item is 425-1-541A. Please refer to the revised sheets for Addendum No. 2.

QUESTION: 9) Note on Roadway Plan Sheet 5 of 81 calls for including the cost of Metal Pipe Encasement under Drainage Structures bid items 425-1 to 425-2. Please indicate where this encasement applies.

RESPONSE: 9) Note has been deleted under Addendum No. 2. Pay items 425-1 and 425-2 are not applicable for this project.

Email received from Mr. Ariel Rodilla, EBSARY Foundation Co.; on June 22, 2022, at 3:07 PM (Email Attached).

QUESTION: 1) The thickness of the Articulating Concrete Block Revetment System is to be 9", per bid items. However, the attached cross section shows the ACB system being 6" thick. Would you please clarify what thickness is to be used?

RESPONSE: 1) The thickness should be 6 inches. Please Refer to Addendum No. 2.

END OF REQUEST FOR INFORMATION No. 2

Sincerely,

Alfredo E. Muñoz, P.E.
Chief, Capital Improvements Division
Department of Transportation and Public Works (DTPW)

AM:kf

c:

Katherine Fernandez, DTPW
Miguel Soria, P.E., DTPW
Laurie Johnson, ISD

Roxana Bayarre, P.E., DTPW
Ryan Fisher, P.E., DTPW
Jhonnatan Escalante ISD

Jacqueline Alcina, P.E., DTPW
Clerk of the Board
Project File

Fernandez, Katherine (DTPW)

From: Nicholas Souchon <nsouchon@condotteamerica.com>
Sent: Friday, June 10, 2022 10:42 AM
To: Fernandez, Katherine (DTPW)
Cc: Clerk of the Board (COC); Annie Jacob; Raul Graupera
Subject: MCC 7360 Plan- CICC 7360-0/08, RPQ No. 20220010 Improvements to SW 87th Ave. Bridge Over Canal C-100. Condotte America, LLC. RFI-001

EMAIL RECEIVED FROM EXTERNAL SOURCE

Good Morning Katherine,

Condotte America, LLC wants to post the first request for information- 001 in reference above subject job:

- 1) Please provide final drawings showing new relocation of aerial power lines (FPL poles) and guywire from Sta. 16+00 to Sta. 22+00.
- 2) Please advise when, and how long will take the FPL power lines relocation work.
- 3) Please provide additional information for existing underground watermain 48": years on service, pipe material.
- 4) Please provide drawing showing temporary support if it needs to support the 48" water main at sta. 24+37.5. Underneath excavation is needed to cross 24" pipe between manhole, S-16 and manhole, S-17. Please advise.
- 5) Please provide allowed work hours, and days of the week for construction.
- 6) Please show on the plans where is located the concrete sidewalk (6" thick)? Under pay item notes, says "522-1 includes the cost of pedestrian ramps."
- 7) Please advise if there are additional test for the auger-cast-pile foundation such as: Lateral Load Test, Static Load Test, and Proof Load Test. If the tests are needed, how many, and where is allocated the cost.
- 8) Is going to be a public information officer for this job? After a field visit, some houses shown signs opposing to this bridge.
- 9) The job advertisement indicates the anticipated start date September 12th, 2022. For how long the County can hold the execution of the contract. Our understanding is up to six months. Please advise.

Any question, please don hesitate to contact me.

Respectfully,

Nicholas F. Souchon, P.E.
Chief Estimator

Condotte America, Inc.
10790 NW 127th St.
Medley, FL 33178
Phone: 305-670-7585, Ext. 117
Mobile: 412-527-9964
Email: nsouchon@condotteamerica.com
www.condotteamerica.com

Fernandez, Katherine (DTPW)

From: Steve McNamara <Steve@anzaccontractors.com>
Sent: Tuesday, June 14, 2022 11:31 AM
To: Fernandez, Katherine (DTPW)
Cc: Vivien Baltodano
Subject: RE: SW 87 Ave (RFI)

EMAIL RECEIVED FROM EXTERNAL SOURCE

We have the following Prebid RFI's:

- Are there any load tests required on the Auger Cast Piles for the Bridge?
- Are there any Special Provisions for the Auger Cast Piles?
- Please provide details on Bid Item 548-12 Retaining Wall System
- Please provide the specific areas on the Bridge for Bid Item 400-7-1 and Bid Item 400-9-1

Steven R. McNamara
President

ANZAC CONTRACTORS, INC.
7475 SW 50th Terrace
Miami, FL 33155

305.669.1986 Office
305.986.0480 Cell
305.669.1180 Fax

Steve@AnzacContractors.com
www.AnzacContractors.com



From: Steve McNamara
Sent: Tuesday, June 14, 2022 11:16 AM
To: katherine.fernandez@miamidade.gov
Subject: SW 87 Ave

We are attending the precon

Thanks,

Steven R. McNamara
President

ANZAC CONTRACTORS, INC.
7475 SW 50th Terrace
Miami, FL 33155

Fernandez, Katherine (DTPW)

From: Ariel Rodilla <arodilla@ebsaryfoundationco.com>
Sent: Wednesday, June 15, 2022 7:28 AM
To: Fernandez, Katherine (DTPW)
Cc: Clerk of the Board (COC)
Subject: Questions - Improvements to SW 87th Ave Bridge Over Canal C-100

EMAIL RECEIVED FROM EXTERNAL SOURCE


Good morning Katherine,

Please see questions below for the subject project:

Is Vibration & Settlement monitoring required for this project? If it is, would it be covered by the County or Contractor?
Can the bid due date be pushed back one week?

Thanks,

Ariel Rodilla, P.E.
Project Manager/Estimator

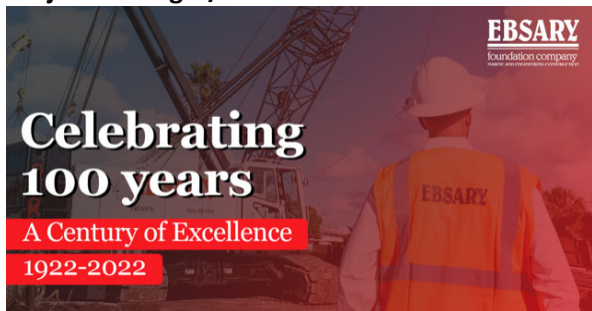

2154 Northwest North River Drive
Miami, Florida 33125
Phone: (305) 325-0530 ext. 110
Mobile: (305) 986-7414
Email: arodilla@ebsaryfoundationco.com
Website: www.ebsaryfoundationco.com

Confidentiality Note: This message (including any attachments) is intended for use only by the individual or entity to which it is addressed and may contain information that is privileged, confidential, and exempt from disclosure under applicable law. If the reader of this message is not the intended recipient or the employee or agent responsible for delivering the message to the intended recipient, you are hereby notified that any dissemination, distribution or copying of this communication is strictly prohibited. If you have received this communication in error, please contact the sender immediately and destroy the material in its entirety, whether electronic or hard copy. Thank you.



Please consider the environment before printing this email.

Fernandez, Katherine (DTPW)

From: Yassir El-Khamlichi <yassir@mcm-us.com>
Sent: Thursday, June 16, 2022 3:08 PM
To: Fernandez, Katherine (DTPW)
Cc: Clerk of the Board (COC)
Subject: Project Number 20220010 - Improvements to SW 87 Avenue Bridge Over Canal C-100

EMAIL RECEIVED FROM EXTERNAL SOURCE

Good Afternoon, Katherine,

We have some RFI's for the above referenced project:

- 1- Please confirm that all utilities relocation are scheduled to be done prior to NTP.
- 2- Please confirm that User Access Program Fee (2% of total price) is required for this project.
- 3- Please confirm that Inspector General Fee (0.25% of total price) is not required for this project.
- 4- Please confirm that an Engineer's Field Office is Mandatory for this project.
- 5- Please confirm that all permit fees are reimbursable by the Department?
- 6- Is there any indication of any contaminated water or soils for this project?
- 7- The plans call for Guardrail Bridge Connections and End Treatments, but no bid items were provided for this work. Please address.
- 8- Note on Roadway Plan Sheet 5 of 81 calls for including the cost of Type II Skimmer under bid item 425-1-319A. This bid item does not exist, please address.
- 9- Note on Roadway Plan Sheet 5 of 81 calls for including the cost of Metal Pipe Encasement under Drainage Structures bid items 425-1 to 425-2. Please indicate where this encasement applies.

Thank you,



YASSIR EL-KHAMLICH

PH: 305-541-3050 | M: 786-899-3560 | yassir@mcm-us.com
6201 SW 70 St., 1 Floor, Miami, FL 33143 | www.mcm-us.com



Please consider the environment before printing.
A reminder from MCM, Building Excellence.

Follow Us !



Fernandez, Katherine (DTPW)

From: Ariel Rodilla <arodilla@ebsaryfoundationco.com>
Sent: Wednesday, June 22, 2022 3:07 PM
To: Fernandez, Katherine (DTPW)
Subject: Question on Bridge Project 20210098 SW 87th Ave Over C-100 Canal
Attachments: ACB Mat Detail 6inch thick.pdf

EMAIL RECEIVED FROM EXTERNAL SOURCE


Good afternoon Katherine,

Here is a question for the subject project regarding quantities:

- The thickness of the Articulating Concrete Block Revetment System is to be 9", per bid items. However, the attached cross section shows the ACB system being 6" thick. Would you please clarify what thickness is to be used?

Thanks,

Ariel Rodilla, P.E.
Project Manager/Estimator

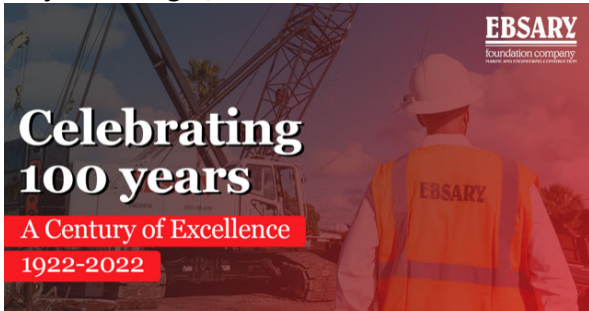


2154 Northwest North River Drive
Miami, Florida 33125
Office: (305) 325-0530 ext. 110
Mobile: (305) 986-7414
Email: arodilla@ebsaryfoundationco.com
Website: www.ebsaryfoundationco.com

Confidentiality Note: This message (including any attachments) is intended for use only by the individual or entity to which it is addressed and may contain information that is privileged, confidential, and exempt from disclosure under applicable law. If the reader of this message is not the intended recipient or the employee or agent responsible for delivering the message to the intended recipient, you are hereby notified that any dissemination, distribution or copying of this communication is strictly prohibited. If you have received this communication in error, please contact the sender immediately and destroy the material in its entirety, whether electronic or hard copy. Thank you.



Please consider the environment before printing this email.

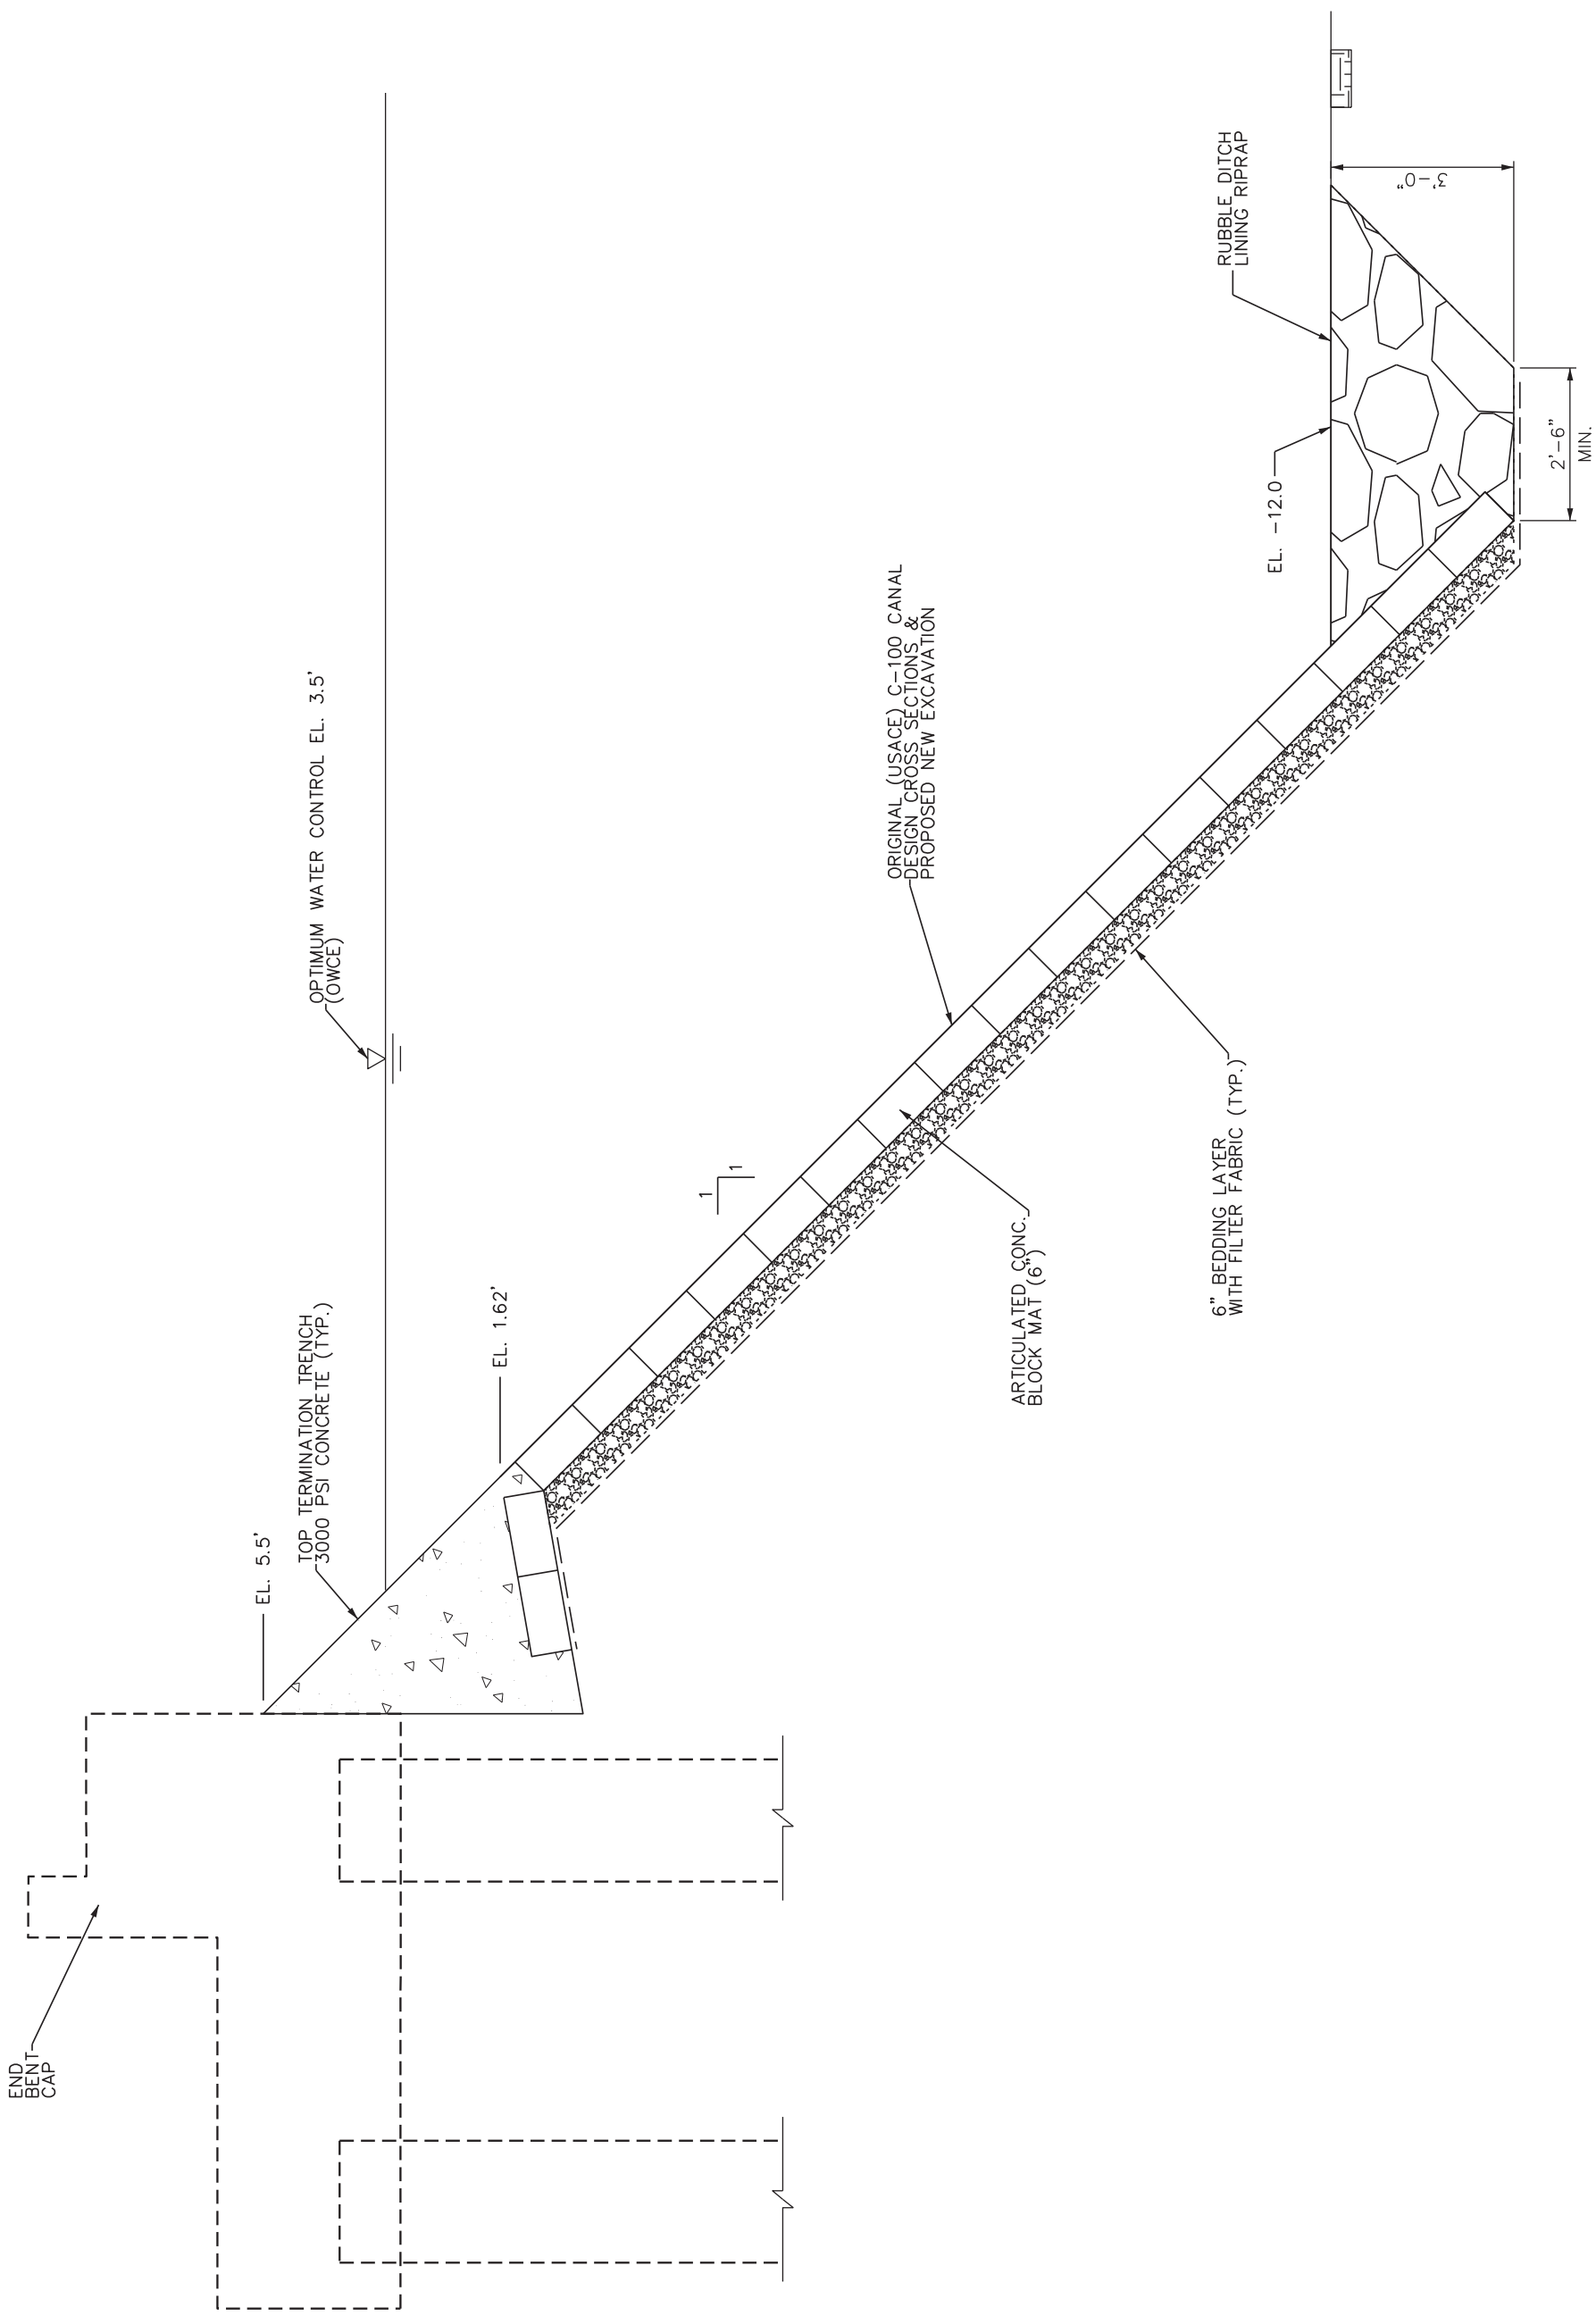[illegible]

R.J. Behar & Company, Inc.
Engineers • Planners
6861 SW 196 Avenue, Suite 302
Pembroke Pines, Florida 33332

DESIGNED BY	NAME	DATE	DRAWN BY	NAME	DATE
CHECKED BY			CHECKED BY		

SUPERVISED BY:

DESIGNED BY	NAME	DATE	DRAWN BY	NAME	DATE
CHECKED BY			CHECKED BY		

SUPERVISED BY:

DEPARTMENT OF TRANSPORTATION
AND PUBLIC WORKS
HIGHWAY DIVISION
STEPHEN P. CLARK CENTER
111 NW 1 ST
MIAMI, FLORIDA 33126



SLOPE PROTECTION DETAIL