

MIAMI-DADE COUNTY  
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)

---

ADDENDUM NO. 4  
April 25, 2022

PROJECT: Intersection Improvements to Old Cutler Rd. at SW 136 St. and SW 67 Ave.  
Project No. 20220017

BID DUE DATE: May 4, 2022; 02:00 P.M.

FROM: Miami-Dade County DTPW  
Capital Improvements Division  
111 NW First Street, 14<sup>th</sup> Floor  
Miami, FL 33128  
305.375.2930

TO: Prospective Bidders and Interested Parties

This Addendum forms part of the project solicitation documents and will be incorporated into the Contract Documents, as applicable. Insofar as the Original Contract Documents, Drawings and Specifications are inconsistent, this Addendum shall govern. Please acknowledge receipt of this Addendum, at the time of bid submittal to Miami-Dade County, in the space provided on the "Acknowledgement of Addenda Form" provided with the project solicitation documents. Failure to acknowledge receipt of all addenda may be cause for disqualification.

Changes to the Invitation to Bid:

1. Estimated Value change from \$ 2, 294,031 to \$ 2, 278,332.14

Changes to the Bid Form

2. Delete Bid Form dated 23/10/2022 under Section 2 of the Solicitation Documents, in its Entirely and replace it with attached Revised Bid Form for Addendum No.4 dated 4/25/2022. The changes performed to the Bid Form are as follows:
  - a. Add item 425-73 "Adjust and/or Relocate Existing Fire Hydrants", EA, Quantity 2
  - b. Add item 711-11-141B "Thermoplastic, STD (White) (10/30 Skip) (6") LF, Quantity 1524
  - c. Remove Pay Item 711-16-231
  - d. Add item 711-11-141 "Thermoplastic (White)(Skip)(6") LF, Quantity 596
  - e. Add item 711-11-241 "Thermoplastic (Yellow)(Skip)(6") LF, Quantity 1274
  - f. Change item 715-1-113E "Conductor-Furnish and Install Three Conductor set of 2 #6 RHW-XLP Stranded Black a White with 1-#6 THWN Green, LF, Quantity 4401

Changes to the Construction Specification

3. The following Basis of payments under the Construction Specifications have been affected:
  - a. Article 711-I, 2:
    - 1.Add Pay Item 711-11-141B
    - 2.Add Pay Item 711-11-141
    3. Remove Pay Item 711-16-231
    4. Add Pay Item 711-11-241

MIAMI-DADE COUNTY  
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)

---

ADDENDUM NO. 4  
April 25, 2022

- b. Article 425,D,2:
  - 1. Add Pay Item 425-73
- c. Article 715,Q,2:
  - 1. Change Pay Item 715-11-114 to Pay Item 715-11-113E

Changes to the Plans:

- 3. Replace on project plans dated 2/17/2022 the following revised sheets:
  - a. Key Sheet (1 of 117):  
Revised Standard Index Sheet numbers.  
Revised total number of sheets in set to 117.
  - b. Summary of Quantities (3 of 117):  
Added items 528-70-1, 550-74-3  
Deleted Items 102-60A, 102-71-14, 102-71-24, 102-74-1, 102-74-2, 102-76A, 102-77,  
102-81, 102-99, 102-91-1, 102-91, 121-70-2 and 400-1-15
  - c. Signing & Pavement Markings Summary of Quantities (44 of 117)  
Added item 710-90  
Substituted item 711-16-231 with 711-11-241  
Removed item 711-11-160A
  - d. Lighting Sheets (50-54,58-62)  
Lighting Plans revised. Please refer to revision 1 clouds on sheets 50 thru 54 and 58 thru  
62 of 117.  
Plans are available at the following link:  
[Addenda](#)

Changes To the Special Provisions:

- 1. Add Section 3, Field Office as follows:
  - A. Description:
    - 1. This section specifies the furnishing, installing, and maintaining of a field office for the exclusive use of the Engineer and Miami-Dade County (MDC) in the administration of the Contract. The aforementioned office shall be separated from, but in close proximity to the Contractor's office. The Contractor shall not use this office or its equipment, in particular the telephone.
    - 2. In the event a mobile office unit cannot be used, the Engineer may direct the Contractor to forgo the aforementioned mobile office unit and instead provide a Field Office located in available commercial space within close proximity to the project site. It shall be the responsibility of the Contractor to identify said availability and to secure the required office space upon the Engineers written approval. All of the requirements and conditions, set forth herein regarding the Field Office Article, shall remain unless otherwise specifically provided in writing from the Engineer.

MIAMI-DADE COUNTY  
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)


ADDENDUM NO. 4  
April 25, 2022

3. Contractor will provide a proposed field office layout and location to the Engineer for his review within 5 days of the issuance of the "Notice to Proceed." The location of the field office shall be as directed by the Engineer. The Field Office shall be located within one (1) mile from the project site.
4. Utilities, potable water and telephone connection, use and service charges shall be paid by the Contractor during the term of the contract. Long distance calls, made by MDC personnel, will be the responsibility of MDC. (Telephone calls to Monroe, Broward and Palm Beach Counties will not be considered as long distance).
5. No work shall commence until the Field Office is completely set up. Including electricity, functioning telephone/internet and air conditioning along with the appropriate Certificate of Occupancy. No exception will be made unless specifically authorized by the Engineer.

B. Products

1. Field Office

- a. Furnish and install one (1) new, factory manufactured, mobile field office unit not less than 10'X36'. Floor space shall be divided and shall include no less than one restroom and one private office. The private office shall be approximately 120 square feet. The Mobile Unit layout shall be consistent with either of the diagrams below. The private office will be located at an end of the mobile unit.
- b. Layout:

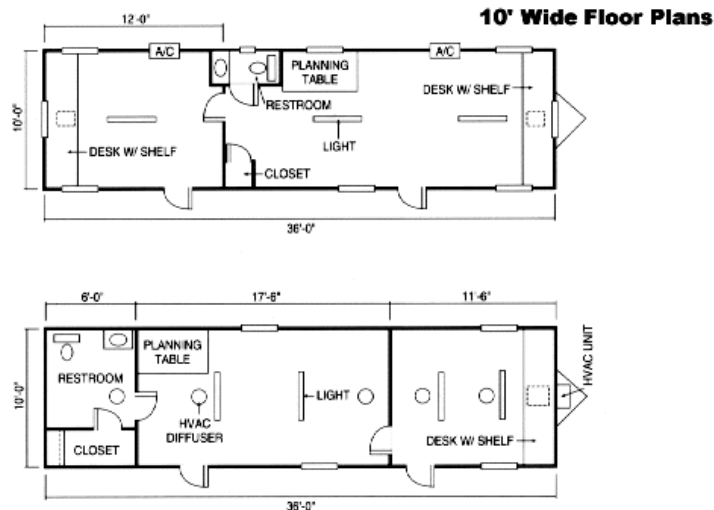

- c. The following items, materials and services shall be included and/or provided:
  - 1) The Field Office shall be weather tight and have a structurally sound foundation and superstructure;
  - 2) Exterior walls, floors, and ceilings shall be insulated;
  - 3) Interior walls and ceilings shall be refinished plywood paneling;
  - 4) Interior Floors shall have resilient flooring;

MIAMI-DADE COUNTY  
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)

---

ADDENDUM NO. 4  
April 25, 2022

- 5) Restroom furnishings shall include: Water closet, lavatory with hot and cold water supply, mirror, soap holder, toilet tissue dispenser, and paper towel dispenser;
- 6) The interior lighting shall not be less than 100 foot candles at desk height except in the restroom. The restroom lighting shall be adequate. Exterior lighting shall be located over each entrance door;
- 7) Electrical receptacles shall be of the duplex receptacle type, not more than 10 feet from center-to-center, on all interior walls except in the restroom;
- 8) An electrical water cooler shall be provided with hot and cold taps, bottled water, and a supply of drinking cups and cup disposal as needed by the Engineer and Staff;
- 9) An electrical refrigerator, with a capacity of no less than 1.7 c.f. and of energy efficient design shall be provided;
- 10) The Field Office shall include a Hot Water Heater with no less than a 20 gallon capacity;
- 11) The Field Office shall have a heating and air-conditioning, thermostatically controlled, system capable of maintaining office spaces at an ambient temperature between 68 and 78 degrees Fahrenheit;
- 12) The exterior doors to the private office and any interconnecting doors between offices shall be fitted with door locks and keyed alike. Three sets of keys shall be provided to the Engineer. Any door between the central space and the restroom shall have privacy locks;
- 13) The Field Office shall have one telephone with an answering machine. Additionally, provide a dedicated phone line for a fax machine; and one jack for Internet broadband access;
- 14) The private office within the Field Office shall be equipped with Broadband Internet service, no less than 1 GB of speed, including e-mail capabilities for the duration of the Contract;
- 15) Contractor will provide a laptop computer having the following minimum configuration or better:
  - a) Processor - Intel® Core i5-5200U CPU (or equivalent)
  - b) Graphics Processor - Intel HD Graphics 5500 GPU
  - c) Display - 15.4 inch 16:9 format, 1920 x 1080 Pixels, IPS, matte finish
  - d) Storage - 250 GB SSD
  - e) Memory - 8.0 GB RAM
  - f) USB 3.0 Ports (Minimum of 2)
  - g) LAN - Gigabit Ethernet Port
  - h) WLAN - Dual Band Wireless-AC (802.11 a/b/g/n/ac)
  - i) Backlit QWERTY Keyboard
  - j) Operating System - Windows 7 Professional Series (or newer)
  - k) Replaceable Battery (Not Built-in)
  - l) Kensington Lock/Security Locking Cable (Combination Lock)
  - m) Three years Manufacturer's Warranty (parts/labor/on site)

MIAMI-DADE COUNTY  
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)

---

ADDENDUM NO. 4  
April 25, 2022

- n) Carrying case
- 16) Contractor will deliver laptop computer specified above to the County Project Manager no later than 5 days from their receipt of the Notice to Proceed. The Project Manager will submit the laptop to the Information Technology Department (ITD) for certification that it meets the minimum specifications set forth herein. The Project Manager will provide a written confirmation to the Contractor upon certification by ITD;
  - 17) Contractor will provide one fax machine, of the plain paper type. The Contractor shall supply an adequate supply of ink/toner for the fax machine, as needed by the Engineer;
  - 18) Contractor will provide one color printer and scanner to be operational in conjunction with the aforementioned computer. The Contractor to provide adequate supply of ink for the referenced printer, as needed by the Engineer;
  - 19) Contractor will provide six Reams (500 count) of standard plain white letter paper to be used with the color printer and the fax machine;
  - 20) Contractor will provide all cables, power cords, surge protector and software required to properly connect and operate the computer, printer, scanner and fax machine;
  - 21) The fax machine and color printer and scanner may be combined into one unit, as long as it is operational in conjunction with the referenced computer;
  - 22) The laptop computer, fax machine, color printer, scanner and all accessories shall remain the property of Miami-Dade County upon completion of the contract. Said equipment shall be delivered to the Department as instructed by the Engineer.
  - 23) The Field Office shall have an operational burglar alarm system, maintained and monitored by a qualified monitoring service for the duration of the contract or until such time the Engineer approves its termination. In the event the monitoring service receives an alert from the alarm, the Engineer shall be notified immediately;
  - 24) The Field Office shall be equipped and secured with hurricane tie-downs, complying with current Miami-Dade County Ordinances;
  - 25) The Field Office shall have ADA compatible steps, landings, and a handicap ramp with handrails. The steps, landings, decks and ramps shall all be constructed utilizing pressure treated lumber and hot dipped galvanized nails and bolts. A sketch design and layout of the aforementioned items shall be provided along with the proposed location and layout described in subarticle B above and will be subject to the approval of the Engineer;
  - 26) Furnishings for the Field Office shall be supplied by the Contractor and shall include the following:
    - a) Two desks, having a surface area of 3x5 feet.
    - b) Two desk chair
    - c) One lockable wooden or metal locker of a size suitable for storing field testing and surveying equipment.

C. Execution

1. Access and Parking

- a. Field Office shall be located as to provide clear access from public streets including parking spaces for not less than five vehicles immediately adjacent to the field office. Signs shall

MIAMI-DADE COUNTY  
DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)

---

ADDENDUM NO. 4  
April 25, 2022

be posted indicating that these spaces are reserved for the Engineer and/or Miami-Dade County personnel only. The parking area will be graded for drainage and surfaced with gravel, asphalt paving, or concrete paving.

2. Restroom Sewer Connection

- a. Restroom in the Field Office shall be connected to two 700 gallon chemical holding tanks. The holding tanks shall be serviced as often as necessary to prevent accumulation of wastes and unsanitary conditions, but no less than two times per week.

3. Maintenance

- a. Contractor must clean and service the Field Office and parking area three times per week during normal working hours. Cleaning and servicing includes complete janitorial services, soap, paper towels, and toilet tissue. Contractor will made all repairs in a timely manner at no additional compensation.

D. Measurement and Payment

1. Measurement

- a. The work under this Section will not be measured separately for payment. No separate payment will be made for the Engineer's Field Office, and it is to be included by the Contractor in prices bid for the various items of the work.

**END OF ADDENDUM NO. 4**



Alfredo E. Muñoz, P.E.

Chief Capital Improvements Division

Department of Transportation and Public Works (DTPW)

AM:lh

c: Laura Hernandez, DTPW

Alejandro Sauleda, DTPW

Alejandro Barrios, DTPW

Jonathan Escalante, ISD

Miguel Soria, P.E, DTPW

Jacqueline Fusel, ISD

Project File

Roxana Bayarre, P.E., DTPW

Laurie Johnson, ISD

Rene Idarraga, P.E, DTPW

Marcia Martin, ISD

Leo Oña, P.E, DTPW

Rene Idarraga

Clerk of the Board

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

Item No	Quantity	Unit	Description	Written Unit Amount	Unit Price	Total
102-1A	1.0	L.S.	MAINTENANCE OF TRAFFIC			
104-10-3	360.0	L.F.	Sediment Barrier			
104-18	26.0	EA.	Inlet Protection System			
110-1-1B	1.0	L.S.	CLEARING AND GRUBBING			
110-4-10	1,043.0	S.F.	REMOVE AND DISPOSE OF EXISTING CURB AND GUTTER, SIDEWALKS INCLUDING RAMPS AND MISCELLANEOUS CONCRETE IN AREAS NOT INCLUDED IN THE CLEARING AND GRUBBING ITEM			
110-7-1B	3.0	EA	RELOCATE MAIL BOX			
120-1	7,922.0	C.Y.	REGULAR EXCAVATION			
120-6	1,568.0	C.Y.	EMBANKMENT (This item is contingent upon field conditions and may be increased, decreased or eliminated by the Engineer)			
160-4	17,612.0	S.Y.	TYPE "B" STABILIZATION (12" Thick) (Min. C.B.R. 30)			
200-1-3	1,737.0	S.Y.	LIMEROCK BASE (4" Thick, Primed)			
200-1-10	15,875.0	S.Y.	LIMEROCK BASE (8" Thick, Primed)			
327-70-01	383.0	S.Y.	MILLING, 1" AVERAGE DEPTH			

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

Item No	Quantity	Unit	Description	Written Unit Amount	Unit Price	Total
334-2-11	128.0	TON	HOT MIX ASPHALT, TRAFFIC A			
334-2-13-2	2,154.0	TON	Hot Mix Asphalt, Traffic C, SP-12.5			
337-8-42	1,185.0	TON	Hot Mix Asphalt Friction Course, Traffic C, FC-9.5, PG 76-22			
350-30-13	649.0	S.Y.	Concrete Pavement for Roundabout Apron, 12" Depth			
400-0-11	25.0	C.Y.	CONCRETE CLASS NS, GRAVITY WALL.			
415-1-3	571.0	LB	REINFORCEING STEEL (Retaining Wall)			
425-1-321	2.0	EA.	INLETS (CURB)(TYPE P-2) < 10'			
425-1-361	8.0	EA.	INLET, CURB (Type P-6) < 10'			
425-1-351	6.0	EA.	INLET CURB ( TYPE P-5) < 10'			
425-1-204A	1.0	EA	INLETS (Curb) Type 9 (< 10')			
425-1-903A	3.0	EA.	INLET CURB TYPE P-11<10'			
425-1-400A	6.0	EA	Inlets (Curb) Type D-3			

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

Item No	Quantity	Unit	Description	Written Unit Amount	Unit Price	Total
425-2-42E	1.0	EA	MANHOLE (Type P-7T) (> 10')			
425-6	18.0	EA.	ADJUST EXISTING VALVE BOXES (MIAMI-DADE COUNTY ONLY) (This item is contingent upon field conditions and may be increased, decreased or eliminated by the Engineer)			
430-175-115	131.0	L.F.	PIPE CULVERT OPTIONAL MATERIAL, Round Shape, 15"			
443-70-4-3	1,190.0	L.F.	French Drain (24" diameter perforated pipe; trench depth 15 ft. BLS)			
425-73	2.0	EA.	ADJUST AND/OR RELOCATE EXISTING FIRE HYDRANTS (Dade County-owned Only)			
430-175-118	2,050.0	L.F.	PIPE CULVERT OPTIONAL MATERIAL, Round Shape, 18"			
515-1-2A	210.0	L.F.	PIPE HANDRAIL - GUIDERAIL (Aluminum)			
520-1-7(1)	1,245.0	L.F.	CONCRETE MEDIAN CURB (TYPE "E")			
520-1-10B	5,333.0	L.F.	CONCRETE CURB AND GUTTER (Type F)			
520-2-8A	617.0	L.F.	CONCRETE CURB & GUTTER (Type RA)			
520-2-12	431.0	L.F.	CONCRETE CURB (Type "D")			
522-1(1)	2,099.0	S.Y.	CONCRETE SIDEWALK [4" THICK, 3,000 P.S.I. CONCRETE AT 28 DAYS (Includes the cost of pedestrian ramps and sidewalk curbs)			

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

Item No	Quantity	Unit	Description	Written Unit Amount	Unit Price	Total
522-2(1)	174.0	S.Y.	CONCRETE SIDEWALK (6" THICK) (Includes driveways)			
528-70-1	1.0	L.S.	Concrete Wall			
550-74-3	200.0	L.F.	CHAIN LINK FENCE RELOCATION (Includes new post and miscellaneous hardware)			
526-70-2F	211.0	S.Y.	Brick Driveway			
570-1-2	14,432.0	S.Y.	PERFORMCE TURF (Sodding)			
527-2	855.0	S.F.	DETECTABLE WARNING ON WALKING SURFACE			
580-3	6,750.0	L.F.	Tree protection barricades			
580-322-2A	40.0	EA.	TREE REMOVAL AND DISPOSAL (6" to 12" Dia.)			
580-322-4A	5.0	EA	TREE REMOVAL AND DISPOSAL (12" TO 24")			
580-322-5A	21.0	EA	TREE REMOVAL AND DISPOSAL (24" to 36" Dia.)			
580-322-6	2.0	EA	TREE REMOVAL AND DISPOSAL (36" to 55" Dia.)			
639-1-620	2.0	AS.	Electrical Power Service, Remove Underground			

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

Item No	Quantity	Unit	Description	Written Unit Amount	Unit Price	Total
649-26-3	7.0	EA.	Steel Mast Arm Assembly, Remove, Shallow Foundation-Bolt on Attachment			
670-5-600	2.0	AS.	Traffic Controller Assembly, Remove controller with cabinet			
700-3-501	13.0	EA.	SIGN PANEL, RELOCATE, UP TO 12 SF			
700-1-60	5.0	AS.	SINGLE POST SIGN, REMOVE			
700-1-11B	57.0	AS.	SINGLE POST SIGN, F&I Ground Mount, Up to 12 SF			
706-1-12A	257.0	EA.	REFLECTIVE PAVEMENT MARKERS PERMANENT (BI-Directional) amber/amber			
706-1-12B	144.0	EA.	REFLECTIVE PAVEMENT MARKERS PERMANENT (Clear and Red)			
710-90	1.0	L.S.	PAINTED PAVEMENT MARKINGS- FINAL SURFACE			
711-11-121	9,237.0	L.F.	THERMOPLASTIC (White) (Solid) (6")			
711-11-123	471.0	L.F.	THERMOPLASTIC (White) (Solid) (12")			
711-11-124	580.0	L.F.	THERMOPLASTIC (White) (Solid) (18")			
711-11-125	460.0	L.F.	THERMOPLASTIC (White) (Solid) (24")			

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

Item No	Quantity	Unit	Description	Written Unit Amount	Unit Price	Total
711-11-141	596.0	L.F.	THERMOPLASTIC (White) (Skip) (6")			
711-11-160	15.0	EA.	THERMOPLASTIC (White) (Message)			
711-11-170	41.0	EA	THERMOPLASTIC (White) (Arrows)			
711-11-221	7,873.0	L.F.	THERMOPLASTIC (Yellow) (Solid) (6")			
711-11-224	245.0	L.F.	THERMOPLASTIC (Yellow) (Solid) (18")			
711-11-241	1,274.0	L.F.	THERMOPLASTIC (Yellow) (Skip) (6")			
711-11-141B	1,524.0	L.F.	THERMOPLASTIC, STD (White) (10/30) (Skip) (6")			
711-14-160	6.0	EA.	Thermoplastic, Preformed, White, Message			
711-1A	944.0	L.F.	SKIP TRAFFIC STRIPE[(10' STRIPE, 30' SPACE ) (6" WIDE)( YELLOW, THERMOPLASTIC)			
715-1-113E	4,401.0	L.F.	CONDUCTOR - Furnish and Install three Conductor set of 2- # 6 RHW-XLP Stranded Black and White with 1- # 6 THWN Green.			
715-0-69	1.0	L.S.	MAINTENANCE OF EXISTING LIGHTING OR TEMPORARY LIGHTING SYSTEM			
715-4-13	23.0	EA	LIGHT POLE COMPLETE, Furnish & Install Standard Pole Standard Foundation, 40' Mouting Height			

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

Item No	Quantity	Unit	Description	Written Unit Amount	Unit Price	Total
715-2-11A	4,005.0	L.F.	LIGHTING CONDUIT, (F & I)(Underground) (2" PVC Schedule 40)			
715-95-2	1.0	AS.	ELECTRIC SERVICE & COORDINATION			
715-2-215	396.0	L.F.	CONDUIT (2" PVC-Schedule 40) (Underpavement)			
715-500-1C	23.0	EA.	POLE CABLE DISTRIBUTION SYSTEM (FURNISH AND INSTALL)			
715-7-11F	1.0	L.S.	Load Center			
715-14-12	33.0	EA.	PULL BOX ( Includes ground rod, ground wire, rocks and clamps)			

**Total:** \_\_\_\_\_

The bidder understands and agrees that the above total is inclusive of all work necessary to complete the job as described in the plans and specifications.

Quantities are established and are included only for the purpose of facilitating the uniform comparison of bids submitted. The County shall not be held responsible if the quantities are not accurate and all computations for compensation shall be based upon the actual work performed, whether greater or less than estimated quantities.

Tax Identification Number: \_\_\_\_\_

D.C. Certificate of competency No: \_\_\_\_\_

Bidder's Name: \_\_\_\_\_

Bidder's telephone Number: \_\_\_\_\_

Bidder's address: \_\_\_\_\_

# Bid Form

**PROJECT TITLE:** Intersection Improvements to Old Cutler Rd at SW 136 St and SW 67 Avenue

**PROJECT NO:** 20220017

IF THIS PROPOSAL IS ACCEPTED, THE UNDERSIGNED AGREES TO COMPLETE ALL WORK UNDER THIS CONTRACT WITHIN THREE HUNDRED SIXTY FIVE (365) CALENDAR DAYS AFTER THE EFFECTIVE DATE ESTABLISHED IN THE "NOTICE TO PROCEED WITH CONTRACT WORK".

BIDDER ACKNOWLEDGES THAT INCLUDED IN THE VARIOUS ITEMS OF THE PROPOSAL AND IN THE TOTAL BID PRICE ARE COSTS FOR COMPLYING WITH THE FLORIDA TRENCH SAFETY ACT (90-96), LAWS OF FLA. EFFECTIVE OCTOBER 1st, 1990. THE BIDDER FURTHER IDENTIFIES THE COSTS TO BE SUMMARIZED BELOW:

	Trench Safety Measure (Description)	Units of Measure (LF, SY)	Unit (Quantity)	Unit Cost	Extended Cost
A.	_____	_____	_____	_____	_____
B.	_____	_____	_____	_____	_____
C.	_____	_____	_____	_____	_____
D.	_____	_____	_____	_____	_____

FAILURE TO COMPLETE THE ABOVE MAY RESULT IN THE BID BEING DECLARED NON-RESPONSIVE