WS-


PLANS FOR PROPOSED DRAINAGE IMPROVEMENTS TO

INDEX OF SHEETS

SHT. No.	SHEET DESCRIPTION
1	COVER SHEET
2	GENERAL NOTES
3	SURVEYOR'S NOTES, KEY SHEET, LEGEND AND ABBREVIATIONS
4	DRAINAGE PLAN
5	PROPOSED DRAINAGE STRUCTURE TABLE, CONFLICT TABLE AND
	SUMMARY OF QUANTITIES
6	STANDARD DETAILS
7	STANDARD DETAILS
8	SEDIMENT BARRIERS DETAILS
9	INLET PROTECTION SYSTEMS DETAILS
10	STORMWATER POLLUTION PREVENTION PLAN

SW 50 ST FROM SW 59 AVE TO SW 58 AVE

MIAMI-DADE COUNTY PROJECT NO.20220171 FUNDING SOURCE: STORMWATER UTILITY

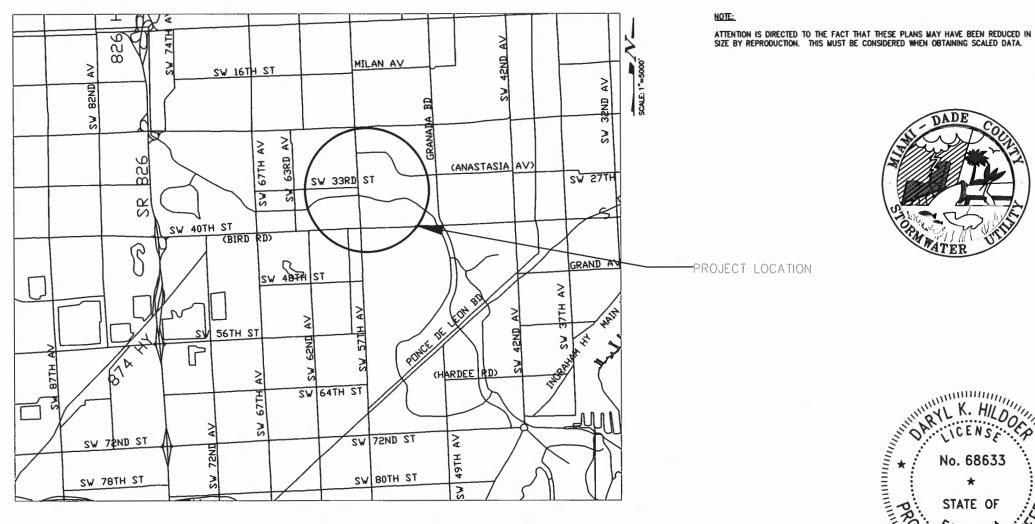

PREPARED BY



MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS ROADWAY ENGINEERING AND RIGHT OF WAY DIVISION STORMWATER DRAINAGE DESIGN SECTION

> STEPHEN P. CLARK CENTER 111 NW 1 ST, SUITE 1510 MIAMI, FLORIDA 33128



THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DARYL K. HILDOER, P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

DESIGN R.D.	CHECK	CHECK F.G.		
	DRAWN		L.C.P.	
DATE 8-30-2023	SHEET	1	OF	10



- IT IS THE INTENT THESE PLANS TO BE IN ACCORDANCE WITH APPLICABLE CODES AND AUTHORITIES HAVING JURISDICTION. ANY DISCREPANCIES BETWEEN THERE PLANS AND APPLICABLE CODES SHALL BE IMMEDIATELY BROUGHT TO THE ATTENTION OF THE ENGINEER.
- CATCH BASINS, SEEPAGE DRAINS, PAVEMENT RESTORATION AND PAVEMENT AROUND CATCH BASINS TO BE ACCORDING TO THE DETAILS AND APPLICABLE REQUIREMENTS OF THE MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS.
- 5. WHERE NEW PAVEMENT MEETS EXISTING, CONNECTION SHALL BE MADE IN A NEAT STRAIGHT LINE AND FLUSH WITH EXISTING PAVEMENT.
- 6. CONTRACTOR IS TO VERIFY THE EXACT LOCATION OF ALL EXISTING TREES. STRUCTURES, AND UTILITIES WITH MAY NOT BE SHOWN ON PLANS. ANY EXISTING STRUCTURE, PAVEMENT, TREES OR OTHER EXISTING IMPROVEMENT NOT SPECIFIED FOR REMOVAL WHICH IS TEMPORARLY DAMAGED, EXPOSED OR IN ANY WAY DISTURBED BY CONSTRUCTION PERFORMED UNDER THIS CONTRACT, SHALL BE REPAIRED, PATCHED OR REPLACED AT NO ADDITIONAL COST TO THE OWNER.
- 7. THE LOCATION AND SIZE OF ALL EXISTING UTILITIES SHOWN ON THESE DRAWINGS ARE APPROXIMATE; ADDITIONAL UTILITIES MAY EXIST WHICH ARE NOT SHOWN ON THESE DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE LOCATION OF ALL EXISTING UTILITIES. THE CONTRACTOR SHALL VERIFY ALL UTILITIES BY ELECTRONIC METHODS AND BY HAND EXCAVATION IN COORDINATION WITH ALL UTILITY COMPANIES; PRIOR TO BEGINNING ANY CONSTRUCTION OPERATION, ANY AND ALL CONFLICTS OF EXISTING UTILITIES WITH PROPOSED IMPROVEMENTS MUST BE RESOLVED BY THE ENGINEER AND THE OWNER. THIS WORK BY THE CONTRACTOR SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT AND NO ADDITIONAL COMPENSATION SHALL BE ALL OWED.
- 8. CONTRACTOR SHALL CONTACT THE SUNSHINE STATE ONE CALL OF FLORIDA, INC. AT 1 (800) 432-4770 AT LEAST 48 HOURS PRIOR TO PERFORMING ANY DIGGING TO VERIFY THE EXACT LOCATION OF EXISTING UTILITIES.
- 9. EXISTING TREES SHALL BE REMOVED ONLY IF REQUIRED FOR CONSTRUCTION. THOSE TREES NOT INTERFERING WITH CONSTRUCTION SHALL BE PROTECTED IN PLACE. THE CONTRACTOR IS ADVISED THAT A TREE PERMIT MAY BE REQUIRED FOR TREE REMOVAL. CONTRACTOR SHALL NOTIFY REGULATORY AND ECONOMIC RESOURCES DEPARTEMENT AND MUNICIPALITIES WITH JURIDICTION PRIOR TO REMOVING ANY TREES.
- 10. EXISTING GRADES WERE TAKEN FROM THE BEST AVAILABLE DATA AND MAY NOT ACCURATELY REFLECT PRESENT CONDITIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR FAMILIARIZING HIMSELF WITH CURRENT SITE CONDITIONS, AND SHALL REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO STARTING WORK.
- 11. THE CONTRACTOR SHALL PREPARE AND SUBMIT SHOP DRAWINGS FOR ALL ITEMS LISTED IN PROJECT SPECIFICATION.
- 12. UNDER NO CIRCUMSTANCES SHALL THE CONTRACTOR LEAVE EXCAVATED TRENCHES, OR PARTS OF, EXPOSED OR OPEN AT THE END OF THE WORKING DAY, WEEKENDS, HOLIDAYS OR OTHER TIMES. WHEN THE CONTRACTOR IS NOT WORKING, UNLESS OTHERWISE DETERMINED, ANY TRENCH SHALL BE COVERED, FIRMLY SECURED AND MARKED ACCORDINGLY FOR PEDESTRIAN TRAFFIC.
- 13. THE CONTRACTOR SHALL MAINTAIN ACCESS TO ALL ADJACENT PROPERTIES AT ALL TIMES.
- 14. ALL EXCAVATED MATERIAL REMOVED FROM THIS PROJECT SHALL BE DISPOSED OF PROPERLY BY THE CONTRACTOR AT THE CONTRACTOR'S EXPENSE.
- 15. CAST IRON PRODUCTS: HEAVY-DUTY CLASSIFICATION SUITABLE FOR HIGHWAY TRAFFIC LOADS, OR 16,000 LB. WHEEL LOADS.
- 16. STEEL GRATING AND COVERS: TRAFFIC CLASSIFICATION H-20 AASHTO H20: 16,000 LBS. OVER 8" X 20" AREA.
- 17. ALL STRUCTURES MUST BE CAPABLE OF SUSTAINING HEAVY TRAFFIC LOADS.
- 18. ALL GRASS AREAS AFFECTED BY CONSTRUCTION SHALL BE RE-SODDED
- 19. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROVISION, INSTALLATION AND MAINTENANCE OF ALL TRAFFIC CONTROL AND SAFETY DEVICES, IN ACCORDANCE WITH SPECIFICATIONS OUTLINED IN SECTION C2 AND SECTION R19 OF THE PUBLIC WORKS DEPARTMENT MANUAL. IN ADDITION, THE CONTRACTOR IS RESPONSIBLE FOR THE RESETTING OF ALL TRAFFIC CONTROL AND INFORMATION SIGNING REMOVED DURING CONSTRUCTION
- EXCAVATED OR OTHER MATERIAL STORED ADJACENT TO OR PARTIALLY UPON A ROADWAY PAVEMENT SHALL BE ADEQUATELY MARKED FOR TRAFFIC SAFETY AT ALL TIMES.
- 21. TEMPORARY PATCH MATERIAL MUST BE ON THE JOB SITE WHENEVER PAVEMENT IS CUT, OR THE INSPECTOR WILL SHUT THE JOB DOWN.
- 22. CONTRACTOR SHALL MAINTAIN TRAFFIC ACCORDING TO CORRESPONDING TYPICAL CONTROL DETAIL AS OUTLINED IN MIAMI-DADE COUNTY PUBLIC WORKS MANUAL.
- 23. CONTRACTOR SHALL MAINTAIN AT LEAST THE FOLLOWING NUMBER OF TRAFFIC LANES FOR CORRESPONDING TIME PERIODS: MONDAY FRIDAY 7-9 A.M. AND 4-6 P.M.; NO INTERRUPTION TO TRAFFIC IS PERMITTED.
- A) MAINTAIN ONE LANE FOR TWO-WAY OPERATION WITH FLAGMEN.
- B) MAINTAIN ONE LANE IN EACH DIRECTION FOR TRAFFIC
- 24. CONTRACTOR MUST PROVIDE FLASHER ARROW BOARD FOR ANY LANE THAT IS CLOSED OR DIVERTED.
- 25. CONTRACTOR SHALL NOTIFY LAW ENFORCEMENT AND FIRE PROTECTION SERVICES TWENTY-FOUR (24) HOURS IN ADVANCE OF THE DETOUR IN ACCORDANCE WITH SECTION 336.07 OF FLORIDA STATUTES.
- 26. COMPLETE AS-BUILT INFORMATION RELATIVE TO LOCATION AND DEPTH OF PIPES, MANHOLES, ETC. SHALL BE ACCURATELY RECORDED BY THE CONTRACTOR. THREE (3) SETS LABELED "AS-BUILT" MUST BE SUBMITTED, SIGNED AND SEALED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF FLORIDA, TO THE ENGINEER OF RECORD PRIOR TO FINAL ACCEPTANCE OF THE WORK.
- 27. IT IS RESPONSIBILITY OF THE CONTRACTOR TO SELECT AND OBTAIN THE APPROPRIATE PERMISSION FROM MIAMI-DADE COUNTY OR APPLICABLE AGENCY THAT HAS JURISDICTION ON THE "PROPOSED" STAGING AREAS.

28. DRAINAGE/UTILITY TRENCHES SHALL NOT BE LEFT OPEN OVERNIGHT. A TEMPORARY COVER WITH A CAPACITY OF H-20 LOADING SHALL BE PLACED AS DIRECTED BY THE ENGINEER AT NO EXTRA COST TO MIAMI-DADE COUNTY.

29. PROVIDE FLOWABLE FILL OVER PIPE AS COVER WHERE MINIMUM PIPE COVER OF 2 FEET CANNOT BE ACCOMPLISHED UNDER PAVED AREAS. HOWEVER, THE COVER WITH FLOWABLE FILL SHALL BE NO LESS THAN 12

- 30. ALL STATIONS AND OFFSETS REFER TO [CENTERLINE]/ [BASELINE] OF CONSTRUCTION, UNLESS OTHERWISE STATED.
- 31. CONTRACTOR SHALL COMPLY WITH THE REQUIREMENTS OF THE EPA AND THE NATIONAL POLLUTION DISCHARGE ELIMINATION SYSTEM (NPDES).
- 32. MIAMI-DADE WATER AND SEWER DEPARTMENT REQUIRES THAT ACCESS TO ALL WATER AND SEWER VALVES, SANITARY MANHOLES, AND OTHER CONTROL MECHANISMS BE MAINTAINED THROUGHOUT CONSTRUCTION IN THE EVENT OF AN EMERGENCY TO ENSURE THE PUBLIC HEALTH AND SAFETY. COVERING VALVE BOXES AND MANHOLES CAN BE CONSIDERED UNAUTHORIZED CONSTRUCTION OF AND TAMPERING WITH DEPARTMENT UTILITIES. ALL REQUESTS FOR UTILITY ADJUSTMENTS MUST BE MADE IN WRITING AT LEAST TWO (2) WEEKS IN ADVANCE. FOR MANHOLE AND VALVES, CONTACT UTILITY COORDINATOR PATRICK CHONG AT 786-268-3255. THE DEPARTMENT WILL MAKE ONE FINAL AND PERMANENT ADJUSTMENT AT NO COST TO THE REQUESTING AGENCY. FOR THE ADJUSTMENT OF WATER METERS, CONTACT THE CHIEF OF METER OPERATIONS AND MAINTENANCE: 786-268-5469. FOR ANY FIRE HYDRANTS THAT ARE DAMAGED OR BUMPED DURING CONSTRUCTION, CONTACT THE MDWASD HYDRANT SHOP AT 305-552-4926, BEFORE POURING CONCRETE FOR THE SIDEWALK. IN THE EVENT OF A WATER OR SEWER EMERGENCY, WASD EMERGENCY NUMBER 305-552-9901. THIS LINE IS OPEN 24 HOURS, 7 DAYS A WEEK.
- 33. THE CONTRACTOR IS ADVISED THAT PROPERTIES ADJACENT TO THE PROJECT HAVE ELECTRIC, TELEPHONE, GAS, WATER AND/OR SEWER SERVICE LATERALS WHICH MAY NOT BE SHOWN IN PLANS. THE CONTRACTOR MUST REQUEST THE LOCATION OF THESE LATERAL SERVICES FROM THE UTILITY COMPANIES. THE ADDITIONAL COST OF EXCAVATING, INSTALLING, BACKFILLING, AND COMPACTING AROUND THESE SERVICES MUST BE INCLUDED IN THE BID RELATED ITEM FOR THE WORK BEING DONE.
- 34. THE CONTRACTOR SHOULD TAKE SPECIAL NOTE OF SOIL CONDITIONS THROUGHOUT THIS PROJECT. ANY SPECIAL SHORING, SHEETING OR OTHER PROCEDURES NECESSARY TO PROTECT ADJACENT PROPERTY, PUBLIC OR PRIVATE, DURING THE EXCAVATION OF SUBSOIL MATERIAL AND EXFILTRATION TRENCH, OR FILLING OF ANY AREA, OR FOR ANY OPERATION DURING CONSTRUCTION, SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- 35. IF SHEETING, SHORING OR DEWATERING, INCLUDING WELL POINTS ARE NECESSARY, THE CONTRACTOR MUST MONITOR AND CONTROL ALL WORK THAT MAY CAUSE CRACKING TO ANY ADJACENT BUILDING, STRUCTURE, OR PROPERTY AREA. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGES CAUSED BY THESE OPERATIONS. COST OF SHEETING, SHORING, OR DEWATERING, SHALL BE INCLUDED IN THE RELATED BID ITEM
- 36. ALL DITCH EXCAVATIONS SHALL BE PERFORMED IN FULL COMPLIANCE WITH THE PROVISIONS OF THE TRENCH SAFETY ACT.
- 37. ANY KNOWN OR SUSPECTED HAZARDOUS MATERIAL FOUND ON THE PROJECT BY THE CONTRACTOR SHALL BE IMMEDIATELY REPORTED TO THE PROJECT ENGINEER, WHO SHALL DIRECT THE CONTRACTOR TO PROTECT THE AREA OF KNOWN OR SUSPECTED CONTAMINATION FROM FURTHER ACCESS. THE ENGINEER WILL ARRANGE FO INVESTIGATION, IDENTIFICATION, AND REMEDIATION OF THE HAZARDOUS MATERIAL. THE CONTRACTOR SHALL NOT RETURN TO THE AREA OF CONTAMINATION UNTIL APPROVAL IS PROVIDED BY THE PROJECT ENGINEER.
- 38. THE CONTRACTOR SHALL USE A STREET SWEEPER (USING WATER) OR OTHER EQUIPMENT CAPABLE OF CONTROLLING AND REMOVING DUST. APPROVAL OF THE USE OF SUCH EQUIPMENT IS CONTINGENT UPON ITS DEMONSTRATED ABILITY TO DO THE WORK.
- 39. WHEN DISSIMILAR MATERIAL CONNECTIONS ARE MADE, SUCH AS CONCRETE TO METAL, THE DISSIMILAR MATERIAL SHALL BE SEPARATED BY COATING THE CONTACT SURFACE WITH BITUMASTIC MATERIAL.
- 40. PRIOR TO CONSTRUCTION THE CONTRACTOR WILL INSPECT ALL EXISTING STRUCTURES WHICH ARE TO REMAIN AND NOTIFY THE ENGINEER OF ANY OBVIOUS STRUCTURAL DEFICIENCIES.
- WHERE CONNECTIONS TO EXISTING SIDEWALKS AND DRIVEWAYS ARE NOT INDICATED ON PLANS, PROPER CONNECTIONS ARE TO BE MADE AS DIRECTED BY THE ENGINEER. DROP CURB AND DRIVEWAY CONNECTIONS SHALL BE PROVIDED FOR ACCESS TO ALL PRIVATE PROPERTIES ADJACENT TO THE PROJECT. PAYMENT SHALL BE INCLUDED IN THE COST OF RELATED BID ITEMS.
- 42. CONTRACTOR TO INSTALL 1/4" PERFORMED EXPANSION JOINT WHEN PROPOSED SIDEWALK IMPROVEMENTS IS IMMEDIATELY ADJACENT TO EXISTING CONCRETE SLAB AND/OR BUILDING.
- 43. THE SIDEWALK AT DRIVEWAY TURNOUTS SHALL BE 6"CONCRETE.
- 44. ALL BUS STOP SIGNS TO BE FURNISHED BY MIAMI-DADE TRANSPORTATION AND PUBLIC WORKS DEPARTMENT. ENGINEER TO CONTACT MIAMI-DADE COUNTY TRANSPORTATION AND PUBLIC WORKS DEPARTMENT AT (305) 637-3753 ONE (1) WEEK PRIOR TO POURING SIDEWALKS AND COORDINATE THE REMOVAL AND REPLACEMENT OF BUS STOP SIGNS AND BENCHES.
- 45. THE INFORMATION PROVIDED IN THESE DRAWINGS IS SOLELY TO ASSIST THE CONTRACTOR IN ASSESSING THE NATURE AND EXTENT OF CONDITIONS WHICH WILL BE ENCOUNTERED DURING THE COURSE OF WORK. THE CONTRACTORS ARE DIRECTED, PRIOR TO BIDDING, TO CONDUCT WHATEVER INVESTIGATIONS THEY DEEM NECESSARY TO ARRIVE AT THEIR OWN CONCLUSION REGARDING THE ACTUAL CONDITIONS THAT WILL BE ENCOUNTERED AND UPON WHICH BIDS WILL BE BASED.
- 46. ANY SURVEY MONUMENT, BENCH MARK, ETC., FOUND DURING CONSTRUCTION ACTIVITIES ARE TO BE RESTORED TO IT IS ORIGINAL LOCATION AND COORDINATES AS DEPICTED IN COUNTY RECORDS PLAT AND BOOK. RESTORATION WILL BE AT NO ADDITIONAL COST AND MUST BE SHOWN ON AS-BUILT PLANS.
- 47. FOR THE INSTALLATION OF SOD IN SWALE AREAS ADJACENT TO ROADWAYS, SIDEWALKS, DRIVEWAY APPROACHES OR ANY OTHER PAVED SURFACES, THE SWALE MUST BE RESTORED TO FORM A "V" SHAPE AS PER THE DETAILS INCLUDED IN THE MIAMI DADE COUNTY PUBLIC WORKS MANUAL. SPECIFICALLY, THE ELEVATION OF THE TOP OF THE SOD MUST MATCH THE ABUTTING AREAS (EDGE OF PAVEMENT, SIDEWALK OR DRIVEWAY APPROACH) AND THE CENTERLINE OF THE SWALE SHALL BE ON AVERAGE 3 INCHES BELOW THE ROADWAY EDGE OF PAVEMENT ELEVATION UNLESS OTHERWISE DIRECTED BY THE ENGINEER.

WILL K. HILDE ORRILLENS ENSE CENSE No. 68633 PROF STATE OF LORIDA GIA ALORIDA. 10/11/2023

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DARYL K. HILDOER, P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

REVISIONS DATE DATE

SW 50 ST FROM SW 59 AVE TO SW 58 AVE


R.O. L.C.P.

MIAMI-DADE COUNTY

AND PUBLIC WORKS ROADWAY ENGINEERING AND RIGHT OF WAY DIVISION

- -Survey performed by DTPW Survey Section.
- -Survey Date: 00-00-2022 -Survey as per
- F.B. 2986 Page 56-59
- SW 48 ST= 35' NORTH OF C/L.
- SW 62 AVE= 135' WEST OF C/L
- CORAL LAKE DR=25'EAST OF C/L
- -The elevations are based on NGVD 1929, Miami Dade County BM Name P-5005 BM Elev= 12.84'
- -PK nail and alum. washer set on conc.sidewalk
- -Section 25, Township 54, Range 40.
- -Benchmark for vertical control information was recorded by DTPW Survey Section.
- -Right-of-Way Lines shown hereon as per existing plats.

LOCATION MAP & KEY MAP

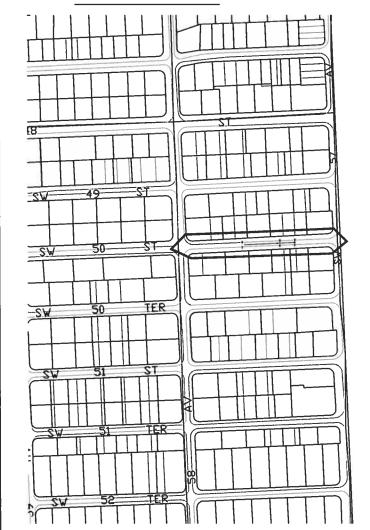


SW 50 SR

ΚĒΥ

58

AS.



(M) = MEASURES (P) = By PLAT F; Fd = FOUND = CONCRETE NAIL & DISK = PK NAIL FOUND = CONCRETE NAIL & DISK FOUNI = CONCRETE NAIL & DISK FOUNI = CONCRETE NAIL CUT = DRILL HOLE FOUND = NAIL FOUND = PK NAIL & DISK FOUND RBAC = ROCK BASE ASPHALT COMPOUN = BASE LINE = CENTER LINE = RADIUS = LENGTH OF CURVE C&G = CURB & GUTTER = VALLEY GUTTER E/P = EDGE OF PAVEMENT T/B = TOP OF BANK E/W = EDGE OF WATER PCP = PERMANENT CONTROL POINT RLS = REGISTERED LAND SURVEYOR PLS = PROFESSIONAL LAND SURVEYOR = ALUM. FLASHING SCHOOL LIGH = MAILBOX = DECORATIVE LIGHT POLE = METAL LIGHT POLE = METAL TRAFFIC LIGHT POLE = METAL POWER POLE = CONCRETE LIGHT POLE \boxtimes = CONCRETE POWER POLE 0 = WOOD LIGHT POLE \otimes = WOOD POWER POLE = WOOD TELEPHONE POLE = FIBERGLASS LIGHT POLE = WATER MANHOLE = SANITARY MANHOLF = SANITARY SEWER VALVE (FM) = CABLE TV PEDESTRIAN \square = TV CABLE RISER BOX = TV CONTROL BOX 88 = CABLE BOX = TELEPHONE HANDHOLE = TELEPHONE MANHOLE = TELEPHONE UTILITY BOX = TELEPHONE RISER BOX = TELEPHONE RISER CONTROL B = TELEPHONE CONTROL BOX = BOX = CROSSING SIGN = POST = INTERCOM = GAS VALVE = PVC POST = GUY WIRE = SPRINKLE HEAD = CENTRAL ANGLE OF CURVE = MONITORING WELL = PETROLEUM PIPELINE E = ELECTRIC HANDHOLE

= ELECTRIC MANHOLE

= TRAFFIC SIGH HANDHOLE

= ELECTRICAL CONTROL BOX = RAIL ROAD CROSSING (LIGHT)

= TRAFFIC CONTROL BOX

= TRAFFIC SIGNAL BOX


= FIRE HYDRANT = WATER VALVE


= WATER METER = TRAFFIC SIGH MANHOLE

= CONCRETE = ASPHALT = UNIMPROVED DRIVEWAY 2000 = GRAVEL = BRICK = STAMPED CONCRETE DHOHOHOHO = CONCRETE BLOCK FENCE = TREE DIAMETER = EXISTING CATCH BASIN = EXISTING STORMWATER MANHOLE \odot = PROPOSED CATCH BASIN 0 = PROPOSED STORMWATER MANHOLE = EXISTING SOLID PIPE = PROPOSED SOLID PIPE = PROPOSED FRENCH DRAIN = RIGHT-OF-WAY LINE = WOOD FENCE ----- = EXISTING SIDEWALK = F.P.L. UNDERGROUND ---- = WATER LINE MAIN — a — a — a — a — = GAS MAIN ---- = FORCE MAIN ----- = CABLE TV --- ATAT ----- -- BELL SOUTH TELEPHONE CONDUIT ----- = BASELINE = SANITARY SEWER

ARECA TREE AUST. PINE TREE ALMOND TREE BLACK OLIVE TREE BOTTLE BRUSH TREE BISMARCK PALM BUSH TREE BISCHOFIA TREE BOTTLE PALM BANANA TREE BANYAN TREE BRAZILIAN PEPPER CABBAGE TREE COCONUT TREE CLUSTER PALM CYPRESS TREE CANARY PALM COCOS PLUMOSA CACTUS DATE PALM FICUS TREE FLORIDA ORCHID TREE FOX TAIL TREE GUMBO LIMBO TREE HIBISCUS TREE IXORA TREE JUNIPER TREE JARACANDA TREE KAPOK TREE



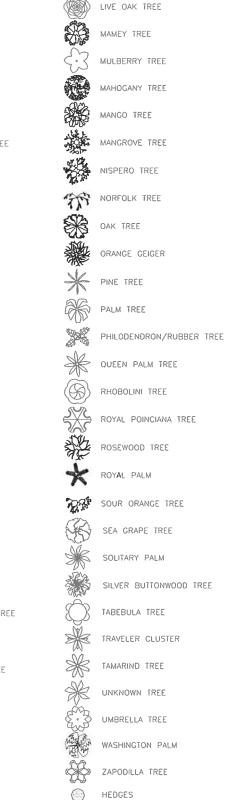



AND SEALED BY DARYL K. HILDOER, P.E ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

SW 50 ST FROM SW 57 AVE TO SW 58 AVE

R.D.


MIAMI-DADE COUNTY

DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS ROADWAY ENGINEERING AND RIGHT OF WAY DIVISION

SURVEYOR'S NOTES, KEY SHEET LEGEND AND ABBREVIATIONS



PROJECT NO. 20220171

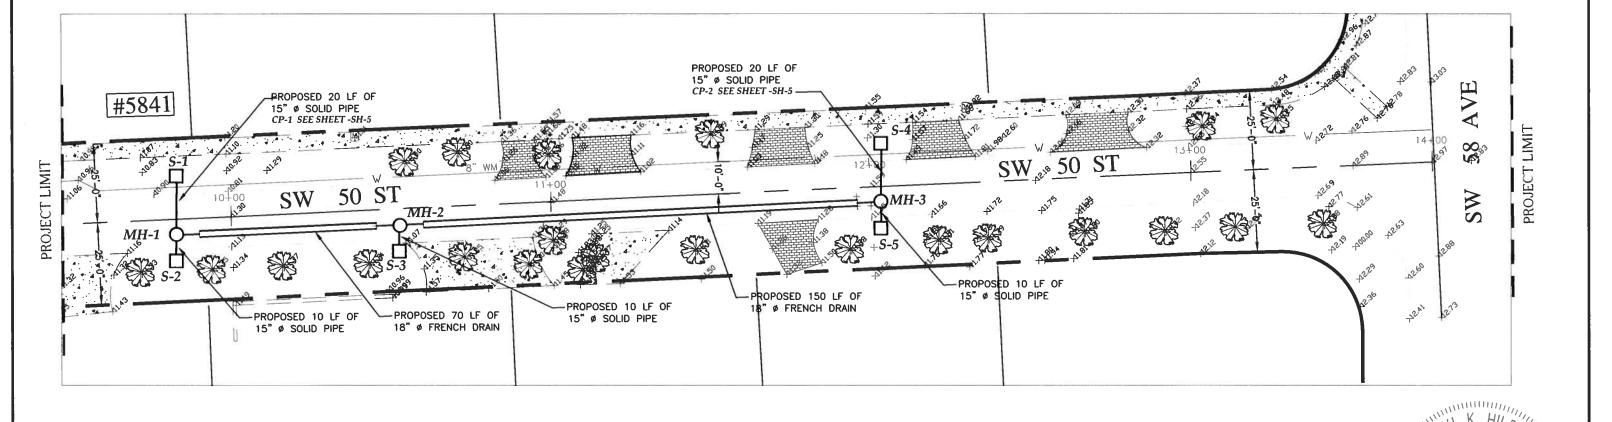

10/11/2023

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DARYL K. HILDOER, P.E. ON THE DATE ADJACENT TO THE SEAL.

No. 68633

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED

ON ANY ELECTRONIC COPIES.

	REVISIONS												
DATE	BY	DESCRIPTION	DATE	BY	DÉSCRIPTION	DATE	BY	DESCRIPTION					
_													
	1 1			l									
				l			l						

SW 50 ST	FROM SW 59 AVE	TO SW 58 AVE

	NAME	DATE		NAME	DATE	
DESIGNED 9Y	R.D.	9-22-2023	DRAWN BY	LCP.	9-22-2023	MIAMI-D
BA CHECKED	D.H.	9-22-2023	BY CHECKED	R.D.	9-22-2023	COLINTY
SUPERVISED B	Y:					COUNTY

	DEPARTMENT OF TRANSPORTATIO
	AND PUBLIC WORKS
DADE	ROADWAY ENGINEERING AND
DAUL	RIGHT OF WAY DIVISION
	STEPHEN P. CLARK CENTER 111 MM 1 ST

DRAINAGE PLAN

SUMMARY OF QUANTITIES								
Item No.	Description	Unit	Quantity					
102-74-1	Barricades (temporary - Types I, II, VP and Drum)	E.A./day	2400					
102-76A	Advance Warning Arrow Panel	E.A./day	240					
104-10-3	Sediment Barrier	L.F.	100					
104-18	Inlet Protection System	E.A.	6					
327-70-01	Milling, I" Average Depth	S.Y.	536					
331-72-10B-HMA	Inlet Pavement (Includes 6" Limerock Base and 1" thick of HMA, Asphalt Work Category 2)	S.Y.	33					
334-2-13-1	Hot Mix Asphalt, Traffic C, SP-9.5	Ton	50					
331-72-10A-HMA	Roadway Pavement Restoration (Replace and match existing base thickness and asphalt course with 8" minimum, primed Limerock Base and 1" thick of HMA, Asphalt Work Category 3)	S.Y	193					
400-1-15	Class I Concrete [(Miscellaneous) (Trench build-up, collars, pipe plugs, structure plugs etc.) (This item is contingent upon field conditions and may increased decreased or eliminated by the Engineer)]	C,Y,	5					
425-1-1	Swale Inlet Type D-3 (36" Dia.) (Less than 10 feet deep)	E.A.	5					
425-2-41	Manhole (Type P-7T, Any dimension, maximum 15' deep)	E.A.	3					
425-82	Modify Structure- Cut to enlarge openning as needed in order to accommodate pipe due to utility conflict(s), brick and mortar as needed	E.A.	2					
430-171-123	Pipe Culvert - 15" Diameter	L.F.	70					
443-70-3-2	French Drain (18" diameter pipe, trench depth 10 ft bls)	L,F.	220					
575-2A	Sodding - St Augustine, or match existing, includes watering and maintenance. Contingent item based on field conditions, may be increased, or decreased by the engineer.	S,Y,	556					

		Conflict Table		
	Drain	Wa	ter	
Conflict Point	Invert Elevation	Pipe Dia.	Top of Pipe	Pipe Dia.
CP-1	4.60	15"	7.10	8"
CP-3	4.60	15"	7.10	8"

Elevation of pipes were not provided by the Utility Company, therefore standard cover were assumed. Assumed top and pipe diameter are preceded by an "A". Elevation on table are in NGVD

		PR	OPOSED S	TRUCI	TURES	SCHEI	DULE			
							Pipe Inve	ert Elevation		
Ch	Tour of Chimatour	Station	Inside	Rim	Bottom Elevatio	N	S	E	W	Remarks
Structure	Type of Structure	Station	Dimensions	Elevation	n	IN		E	VV	Kemarks
S-1	D-3	10+80 (15.0'LT)	36"	10.50	2.60		4.60			
MH-1	P-7T	10+80 (5.0'RT)	42"	11.30	2.60	4.60	7.60	6.80		
S-2	D-3	10+80 (13.0'RT)	36"	10.90	5.60	7.60				
S-3	D-3	11+50 (15.0'RT)	36"	10.80	5.60	7.60				
MH-2	P-7T	11+50 (10.0'RT)	42"	11.40	4.80		7.60	6.80	6.80	
S-4	D-3	13+00 (13.0'LT)	36"	11.00	2.60		4.60			
MH-3	P-7T	13+00 (5.0'RT)	42"	11.60	2.60	4.60	7.80		6.80	
S-5	D-3	13+00 (13.0'LT)	36"	11.10	5.80	7.80				

MIAMI-DADE

DEPARTMENT OF TRANSPORTATION
AND PUBLIC WORKS
ROADWAY ENGINEERING AND
RIGHT OF WAY DIVISION
STEPMEN P. GAME GUSTE
MAN PORTAL STATE
MAN PORTAL

PROPOSED DRAINAGE STRUCTURE TABL CONFLICT TABLE AND SUMMARY OF QUANTITIES

10/11/2023

THIS ITEM HAS BEEN DIGITALLY SIGNAND SEALED BY DARYL K. HILDOER, ON THE DATE ADJACENT TO THE SE


PRINTED COPIES OF THIS DOCUMENT NOT CONSIDERED SIGNED AND SEAL AND THE SIGNATURE MUST BE VERIF ON ANY ELECTRONIC COPIES.


SW 50 ST FROM SW 59 AVE TO SW 58 AVE

NAME DATE R.D. 8-30-2023 NAME D.H. 8-30-2023

DATE BY DATE BY

SHEET 6 OF 1

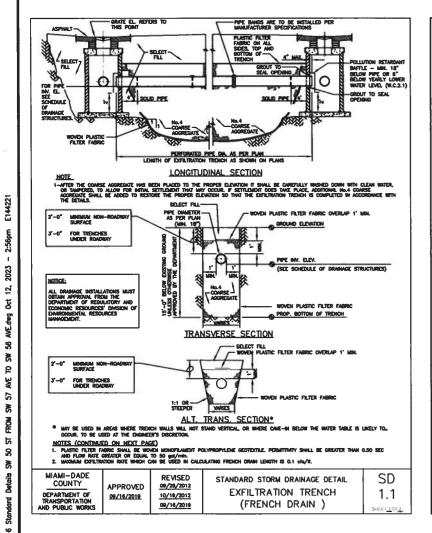

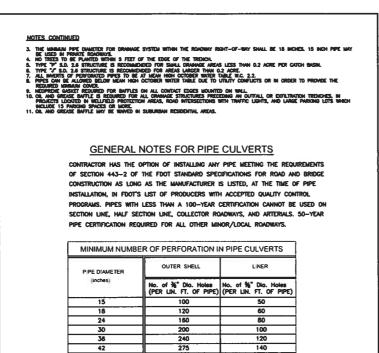

PERFORATIONS SHALL BE UNIFORMLY SPACED AROUND THE FULL PERIPHERY OF THE PIPE TO WITHIN 4" OF EACH END OF EACH LENGTH OF PIPE. THE NUMBER OF PERFORATIONS PER LINEAR FOOT OF PIPE AND THE DIAMETER

STANDARD STORM DRAINAGE DETAIL

EXFILTRATION TRENCH

(PIPE CULVERT NOTES)

REVISED

06-04-88 10-22-13


NOTE:


APPROVED

04/16/2015

MIAMI-DADE COUNTY

DEPARTMENT OF TRANSPORTATION UND PUBLIC WORK

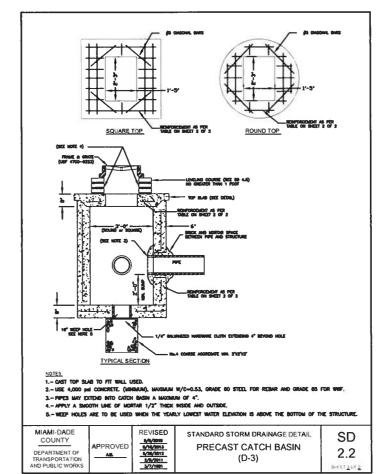



	ROUND STRUCTURE											
Standard Detail	Dia. (ft)	Height (ft)	Wall Thickness (in)	Wall Steel	Top Slab Thickness (in)	Top Slab Steel	Bottom Slab Thickness (in)	Bottom Slab Stee				
2.2	3	0.0 - 5.0	6	8 X 8 W 20 #4@10 E, W,	8	#4@5" E.W.	8	#4@10" E.W.				
2.2	3	5.1 - 15.0	6	8 X 8 W20 #4@10"E.W.	8	#4@5" E.W.	8	#4@10" E.W.				

MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION		REVISED	STANDARD STORM DRAINAGE DETAIL	SD
	APPROVED	<u>8/6/3010</u>	PRECAST CATH BASIN	2.2
AND PUBLIC WORKS			(TYPE D-3)	SHEET 2 OF 2



THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DARYL K. HILDOER, P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE
NOT CONSIDERED SIGNED AND SEALED
AND THE SIGNATURE MUST BE VERIFIED
ON ANY ELECTRONIC COPIES.

ш														
L	DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION					
Г														
ı					l			1						
ı				i	ŀ		ļ .							

SW 50 ST FROM SW 59 AVE TO SW 58 AVE

SD

1.1


		NAWE	DATE		NAME	DATE	
	DE SIGNED BY	0.9	8-30-2023	DRAWN BY	LCP	8-30-2023	1 мі
	CHECKED BY	F.C.	8-30-2023	CHECKED	R D	8-30-2023	IVII)
1	dibernal b	lY.					60

DEPARTMENT OF TRANSPORTATI
AND PUBLIC WORKS

ROADWAY ENGINEERING AND
RIGHT OF WAY DIVISION
STEPPEN FOR COURT


MANA (TORON AUTO)


STANDARD DETAILS

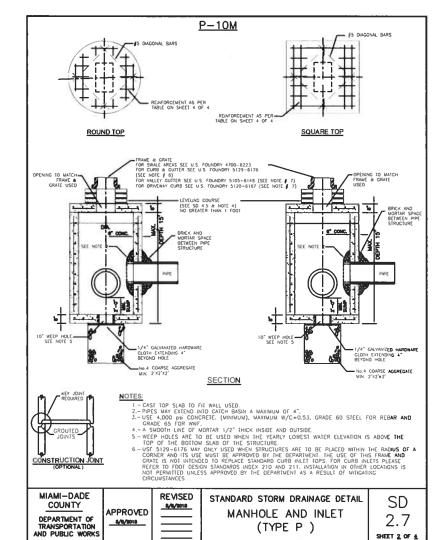

8/9/2018

					RE STRUCTUR				
Standard Detail	Width (ft)	Length (ft)	Height (ft)	Wall Thickness (in)	Wall Steel	Top Slab Thickness (in)	Top Slab Steel	Bottom Slab Thickness (in)	Bottom Slab Stee
2.7	3,5	3.5	0.0 - 5.0	6.0	#4@10"H #4@10"V	8.0	#4@7" E.W.	8.0	#4@10" E.W.
2.7	3.5	3.5	5.1 - 10.0	6.0	#4@9"H #4@10"V	8.0	#4@6" E.W.	8.0	#4@10" E.W.
2.7	3.5	3.5	10.1-15.0	6.0	#5@6"H #4@10"V	8.0	#4@6.5" E.W.	8.0	#4@10" E.W.
Detail	(ft) Min.	(ft) Max.	Height (ft)	Thickness (in)	Wall Steel	Thickness (in)	Steel	Thickness (in)	Slab Stee
Standard	Dia.	Dia.		ROU:	ND STRUCTUR	E Top Slab	Top Slab	Bottom Slab	Bottom
Detail	1		ricigit (re)	100	8 x 8 W20 or		Steel #4@7"		
2.7	3.5	4.0	0.0 - 5.0	6,0	#4@10"E.W	8.0	E.W.	8.0	#4@10" E.W.
2.7	3.5	4.0	5.1 - 10.0	6.0	8 x 8 W20 or #4@10"E.W	8.0	#4@6" E.W.	8.0	#4@10" E.W.
2.7	3.5	4.0	10.1 - 15.0	6.0	8 x 8 W20 or #4@10"E.W	8.0	#4@6.5" E.W.	8.0	#4@10" E.W.

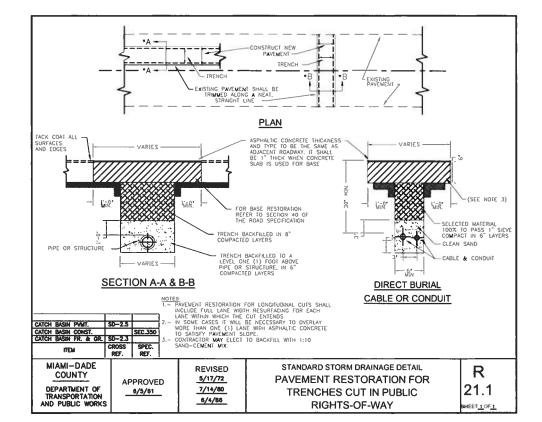



PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

					W F A L 2 L O M 2			
DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION	DATE	BY	DESCRIPTION
	1		1				1	
	1	ł					1	

(TYPE P)

SHEET 2 OF 4


DATE SW 50 ST FROM SW 59 AVE TO SW 58 AVE R 0 8-30-2023 PRAWN LCP 8-30-2023 F.G. 8-30-2023 CHECKEO RD 3-30-2023



LCP 8-30-2023

DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS
ROADWAY ENGINEERING AND
RIGHT OF WAY DIVISION

STANDARD DETAILS

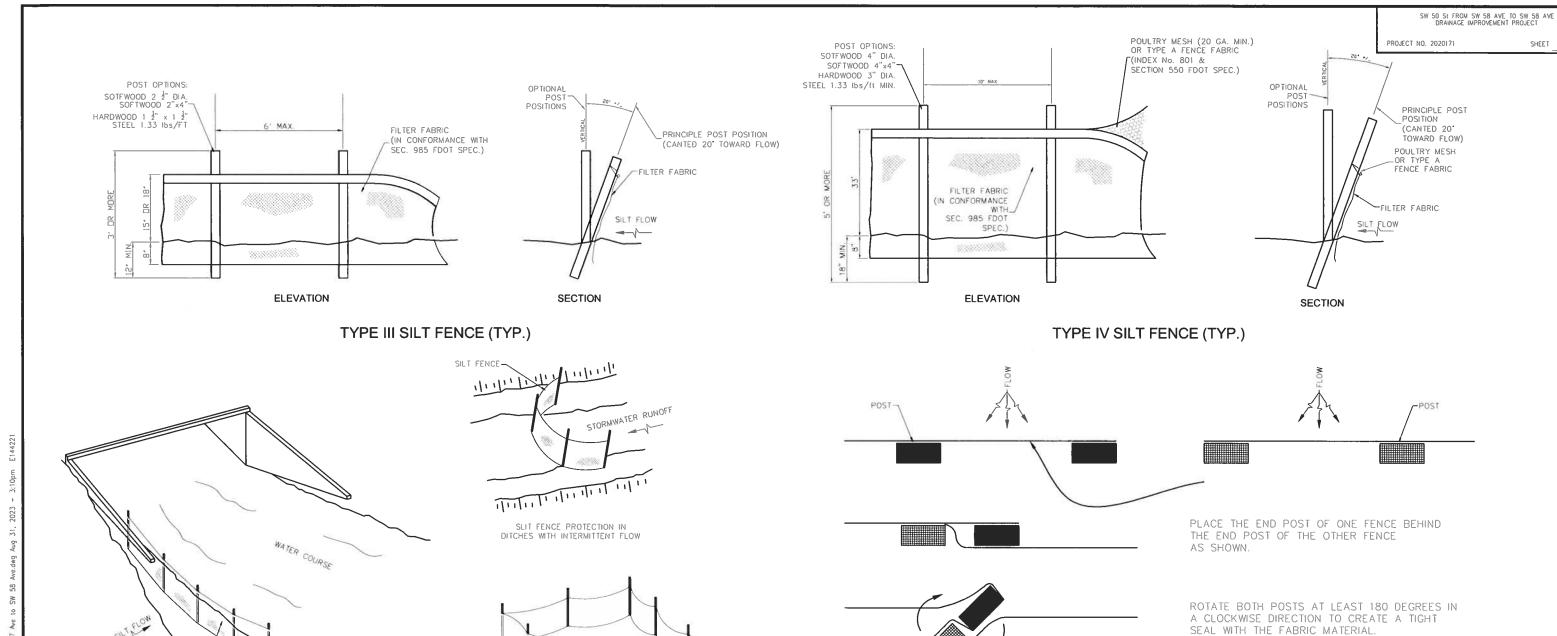

SLIT FENCE PROTECTION AROUND DITCH BOTTOM INLETS

SILT FENCE APPLICATIONS (TYP.)

NOTES FOR SILT FENCES:

- 1- TYPE III SILT FENCE TO BE USED AT MOST LOCATIONS. WHERE USED IN DITCHES, THE SPACING FOR TYPE III SILT FENCE SHALL BE IN ACCORDANCE WITH CHART 1, SHEET 1 OF 2010 FDOT DESIGN STANDARDS INDEX 102.
- 2- TYPE IV SILT FENCE TO BE USED WHERE LARGE SEDIMENT LOADS ARE ANTICIPATED. SUGGESTED USE IS WHERE FILL SLOPE IS 1:2 OR STEEPER AND LENGTH OF SLOPE EXCEEDS 25 FEET. AVOID USE WHERE THE DETAINED WATER MAY BACK INTO TRAVEL LANES OR OFF THE RIGHT OF WAY.
- 3- DO NOT CONSTRUCT SILT FENCES ACROSS PERMANENT FLOWING WATERCOURSES. SILT FENCES ARE TO BE AT UPLAND LOCATIONS AND TURBIDITY BARRIERS USED AT PERMANENT BODIES OF WATER.
- 4- WHERE USED AS SLOPE PROTECTION, SILT FENCE IS TO BE CONSTRUCTED ON 0% LONGITUDINAL GRADE TO AVOID CHANNELIZING RUNOFF ALONG THE LENGTH OF THE FENCE.

SEDIMENT BARRIERS (TYP.) OR APPROVED ALTERNATIVE

DIRECTION OF RUNOFF WATER

> 10/11/2023 THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DARYL K. HILDOER, P.E. ON THE DATE ADJACENT TO THE SEAL.

WINNING K TO

No. 68633

STATE OF

SSIONAL ENGINE

SHEET 8 OF 10

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

SW 50 ST FROM SW 59 AVE TO SW 58 AVE

R.D. 8-30-2023

F.G. 8-30-2023 CHECKED

MIAMI-DADE

AND PUBLIC WORKS ROADWAY ENGINEERING AND RIGHT OF WAY DIVISION

DRIVE BOTH POSTS INTO THE GROUND AND

BURY FLAP

SEDIMENT BARRIERS DETAILS

L.C.P. 8-30-2023

PLANT VIEW


JOINING TWO SILT FENCES (TYP.)

_CURB & GUTTER

PROJECT NO. 20220171

SHEET 9 OF 10

PREFABRICATED FILTER INSERT - TYPE 1

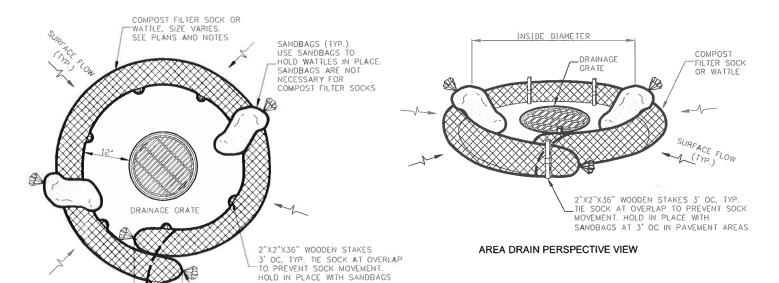

NOTES FOR PREFABRICATED FILTER INSERTS AND FILTER SOCK

AT 3' OC IN PAVEMENT AREAS

TYPE 1 — PREFABRICATED FILTER INSERTS INSTALL PREFABRICATED FILTER INSERTS ACCORDING TO THE PLANS, SPECIAL PROVISIONS, AND MANUFACTURER RECOMMENDATIONS. PREFABRICATED INSERTS WITH PROVISIONS FOR OVERFLOW ARE ALLOWED ONLY WHEN ACCOMPANIED BY ADDITIONAL BMP'S TO PREVENT THE POTENTIAL OF SEDIMENTS ENTERING PROJECT STORM SYSTEMS. FIELD FABRICATED INSERTS ARE NOT ALLOWED.

TYPE 2 — COMPOST FILTER SOCK
DRIVE 2"X2" WOOD STAKES A MINIMUM OF
6" INTO GROUND AND FLUSH WITH THE TOP
OF THE SOCK.
OVERLAP ENDS OF SOCK PER MANUFACTURERS
RECOMMENDATIONS (12" MIN., 36" MAX.).
USE 8" TO 12" DIA SOCK ON CURBSIDE IN
TRAFFIC AREAS.
USE 12" TO 18" DIA SOCK IN NON-TRAFFIC AREAS
OR AREAS WHERE THE LARGER SOCKS CAN BE
USED SAFELY.
USE SYNTHETIC MESH SOCKS FOR TEMPORARY
INSTALLATIONS.



-CURB & GUTTER

ROCK BAGS-

ROCK BAGS

COMPLETED INLET

SWALE INLET


OR APPROVED ALTERNATIVES

NOTES FOR SYNTHETIC BALES OR BALE TYPE BARRIERS:

DITCH BOTTOM INLET

- 1- TYPE I AND II SYNTHETIC BARRIER SHOULD BE SPACED IN ACCORDANCE WITH CHART 1, SHEET 1 OF 2010 FDOT DESIGN STANDARDS INDEX 102.
- 2— BALES SHALL BE ANCHORED WITH TWO (2) 1"x2" (or 1" dia.) x 4' WOOD STAKES. STAKES OF OTHER MATERIAL OR SHAPE PROVIDING EQUIVALENT STRENGTH MAY BE USED IF APPROVED BY THE ENGINEER. STAKES OTHER THAN WOOD SHALL BE REMOVED UPON COMPLETION OF THE PROJECT.
- 3- RAILS AND POSTS SHALL BE 2"x4" WOOD. OTHER MATERIALS PROVIDING EQUIVALENT STRENGTH MAYBE USED IF APPROVED BY THE ENGINEER.
- 4- ADJACENT BALES SHALL BE BUTTED FIRMLY TOGETHER.
- 5- WHERE USED IN CONJUNCTION WITH SILT FENCE, BALES SHALL BE PLACED ON THE UPSTREAM SIDE OF THE FENCE.

INLET PROTECTION SYSTEM (TYP.) OR APPROVED ALTERNATIVE



THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DARYL K. HILDOER, P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

R E V I S I O N S

DATE BY DESCRIPTION DATE BY DESCRIPTION

DATE BY DESCRIPTION

CURB INLET PERSPECTIVE VIEW

COMPOST FILTER SOCK OR WATTLE - TYPE 2

NOT TO SCALE

SW 50 ST FROM SW 59 AVE TO SW 58 AVE

PROPOSED

ROCK BAGS

DITCH

RISER

PARTIAL INLET

	NAME	DATE		NAME	DATE
DESIGNED	R.D.	8-30-2023	DRAWN BY	L.C.P.	8-30-202
CHECKED	F.G.	8-30-2023	CHECKED	R D	8-30-20



EPARTMENT OF TRANSPORTATION
AND PUBLIC WORKS
ROADWAY ENGINEERING AND
RIGHT OF WAY DIVISION
STOPPOLY, CAMP, CONT.

INLET PROTECTION SYSTEMS DETAILS

50 ST FROM SW 57 AVE TO WS 58 AVE\SH-9 TYP INLET PROTECTION- SW 50 ST FROW SW 57 AVE TO S

SECURE WITH ZIP-TIE WHEN STAKING IS

NOT FEASIBLE

COMPOST FILTER SOCK OR WATTLE

USE SANDBAGS TO HOLD WATTLES IN PLACE SANDBAGS ARE NOT

NECESSARY FOR COMPOSTS

FILTER SOCKS

AREA DRAIN PLAN

PLACE A SANDBAG AT

EACH END OF WATTLE AND

3' OC TO HOLD IN PLACE

STORMWATER POLLUTION PREVENTION PLAN

Narrative Description


The Stormwater Pollution Prevention Plan (SWPPP) Narrative Description contains references to the Contract Documents, the State of Florida Erosion and Sediment Control Designer and Reviewer Manual (E&SC Manual), the FDOT Design Standards, and other sheets of these Construction Plans. The complete SWPPP is comprised of several items including: this narrative description, the documents referenced in this narrative, the Contractor's approved Erosion Control (ECP) prepared and submitted in accordance with the Contract Documents, and reports of inspections made during construction. All of which are complementary to the signed and certified SWPPP if one is provided by the Department. Contractor is required to maintain copies of the aforementioned items on site, including all applicable permits.

- 1. Site Description
- a. Nature of Construction Activities: The project consists of retrofitting of drainage infrastructure in a residential roadway.
- b. Sequence of Major Soil Disturbing Activities: The Contractor shall provide in the ECP a detailed sequence of construction for all construction activities, Each construction phase requires the installation of perimeter control, after clearing and grubbing as necessary for the installation of the controls, prior to beginning any work. The Contractor shall follow the sequence of major activities below, unless the Contractor proposes a different sequence that is equal or better at controlling erosion and trapping sediment and is approved by the Engineer.
- 1) Clearing and grubbing, earthwork, drainage improvements construction 2) Final grading and landscaping where necessary.
- c. Area Estimates (Acre)
- 1) Total Site Area:1 72 Ac
- 2) Total Area of the site that is expected to be disturbed: 0.13 Ac.
- d. Existing data describing the soil or the quality of any discharge from the site and an estimate of the size of the drainage area for each discharge point:
- 1) Rational runoff coefficient
- a) Before: 0.44 b) During: 0.54
- After construction 0.44
- 2) Existing data describing the soil or the quality of discharge from the site: According to the United States Department of Agriculture Natural Resources Conservation Services Soil Survey Report of Dade County Area, Florida, the soil encountered on the project are Urban Land 0 to 2 percent slopes 100.00%.
- 3) The size of the drainage area for each outfall: n/a
- 4) The location of each outfall is provided in item 1.f. below:.
- e. Site Map: The associated construction plan sheets will be used as the site map. Locations of the required information are described below. The sheet numbers for all items discussed are identified on the Cover Sheet of the construction plans.
- 1) Drainage patterns and approximate slopes anticipated after major grading activities; The slopes of the site can be seen on
- 2) Areas of Soil Disturbance: The areas to be disturbed are indicated on the construction plan sheets. Any areas where
- 3) An outline of areas which may not be disturbed: These areas of the Project outside the clearing and grubbing and construction activities which comprised of those that are not subject to any soil disturbing activities.
- 4) The location of major structural and nonstructural controls identified in the plan. Temporary sediment control devices shall be installed all locations where disturbance of solids will occur. Additional measures may be required as necessary where stormwater runoff has the potential to reach surface waters or offsite stormwater collection facilities.
- 5) The location of areas where stabilization practices are expected to occur, surface waters, wetlands and locations where stormwater is discharged to a surface water or MS4: Areas of permanent stabilization are shown on the Construction Plan
- f. Discharge point(s): Not applicable to this project.
- a. Erosion and Sediment Controls: The Contractor shall describe in the ECP the proposed stabilization and structural practices. The Contractor may choose to accept the following guidelines or modify them in the ECP, subject to approval by the Engineer. As work progresses, the Contractor shall modify the plan to adapt to seasonal variation, changes in construction activities, and the need for better management practices. For each construction phase install perimeter controls after clearing and grubbing necessary for installation of controls but before beginning other work for the construction phase. Remove perimeter controls only after all upstream areas are stabilized. In addition:
- Furnish and place inlet protection systems to control erosion and siltation
- Install soil tracking prevention devices (STPDs) at all common areas where construction vehicles will be entering and
- Sediment barriers shall be installed and at the toe of slope of embankments and at locations as described in the Erosion and Sediment Control Details and the E&SC Manual.
- Inlet protection systems shall be used for all existing and proposed inlets subject to sediment runoff.
- Clearing and grubbing operations will be controlled so as to minimize unprotected erodible areas exposed to weather. Areas outside the limits of construction shall not be disturbed.
- Excavated material shall not be deposited in locations where the material could be washed away by high water, rain or stormwater runoff. Stockpiles shall be covered or encircle with sediment barriers.

- 1) Stabilization Practices: In the ECP, the Contractor shall describe the stabilization practices proposed to control erosion. The Contractor shall initiate all stabilization measures as soon as practical, but in no case more than 7 days, in portions of the site where construction activities have temporarily or permanently ceased. The stabilization practices shall include at least the following, unless otherwise approved by the Engineer.
- a) Temporary: Includes sod, mulch, and artificial coverings in accordance with the Contract Documents.
- b) Permanent: includes asphalt or concrete surface, sod, roadside swales, and endwalls in accordance with the
- Structural Practices: In the ECP, the Contractor shall describe the proposed structural practices to control trap sediment and otherwise prevent the discharge of pollutants from exposed areas of the site. Sediment controls shall be in place before disturbing soil upstream of the control. The structural practices shall include at least the following.
- a) Temporary: Includes inlet protection systems, sediment barriers, turbidity barriers and soil tracking prevention devices as per the ES&C Manual and the Contract Documents. See Erosion and Sediment Control Details for more information. All sediment controls shall be in place prior to any soil disturbing activity.
- b) Permanent: Includes roadside swales.
- b. Permanent Stormwater Management Controls: Stormwater runoff will be conveyed in a swale systems with inlets and
- Control for Other Potential Pollutants: The Contractor shall practice good housekeeping by instituting a clean, orderly
 construction site. The following controls shall be implemented to further reduce pollution at the project site:
- Waste Disposal. In the ECP, the Contractor shall describe the proposed methods to prevent the discharge of solid materials, including building materials, to waters of the United States. The proposed methods shall include at least the following, unless otherwise approved by the Engineer:
- a) The Contractor shall demonstrate the proper disposal of all construction waste generated within the project limits. Waste may include, but not be limited to, vegetation from clearing and grubbing activities, packaging materials, scrap building materials, litter from traveling public, sewage from sanitary facilities, herbicides and pesticides and their containers, and hydrocarbon products. Contractor shall designate a waste collection area onsite and delineate the area on the SWPPP Site Map.
- b) Sanitary/septic facilities shall be provided and maintained in a neat and sanitary condition, for the use of the Contractor's employees as necessary to comply with the requirements and regulations of the State and local boards of health. A licensed Sanitary Waste Management Contractor as required by State Regulations will collect all sanitary waste from portable units.
- c) The Contractor will provide litter control and collection within the Project limits during construction activities. Contractor will provide an adequate number of litter containers with fids at the staging, stockpile and field office areas (as applicable). Waste collection will be scheduled so that containers are emptied prior to overflow. Spilled litter containers will be scheduled so that containers are emptied prior to overflow.
- 2) Off-Site Vehicle Tracking & Generation of Dust: In the ECP, the Contractor shall describe the proposed methods for minimizing offsite vehicle tracking of sediments and generating dust. The proposed methods shall include at least the following, unless otherwise approved by the Engineer.
- a) Stabilizing construction entrances as necessary according to the E&SC Manual and the Contract Documents.
- b) The Contractor shall take measures to insure the cleanup of sediments that have been tracked by vehicles or have been transported by wind or stormwater about the site or onto nearby roadways.
- c) Removing excess dirt from roads daily
- d) Using roadway sweepers during dust generating activities such as excavation and milling operations.
- e) Stabilized construction entrances and construction roads, if appropriate, shall be implemented in order to reduce off-site tracking.
- f) Loaded haul trucks shall be covered with tarpaulin. Excess dirt on the road shall be removed daily.
- 3) State or Local Regulations: In the ECP, the Contractor shall describe the proposed procedures to comply with applicable State and local regulations for waste disposal, and sanitary sewer or septic systems.
- 4) Application of Fertilizer and Pesticides
- a) The application and handling of herbicides and pesticides shall be in compliance with the manufacture recommended nethod and in accordance with FDOT Standard Specifications for Road and Bridge Construction as modified by the
- b) Herbicides and pesticides shall be stored on site in their original containers with product label intact.
- 5) Toxic Substances and Materials
- a) In the ECP, the contractor shall provide a list of toxic substances and materials that are likely to be used on the job and provide a plan addressing the generation, application, migration, storage, and disposal of these substances.
- b) Contractor shall provide equipment necessary to contain and clean up spills of hazardous materials, including petroleum products. Spills shall be contained and cleaned up immediately after they occur. Spilled material and the equipment used to clean up the spill shall not come in contact with surface waters or be introduced into stormwater. Disposal of surplus product will be done according to manufacturer recommended method.
- c) Contractor shall provide a project specific Hazardous Materials Spill Control Plan in order to address the handling of hydrocarbon and hazardous materials.

- d) Petroleum products shall be stored in covered areas with secondary containment surrounding container.
- e) Toxic/hazardous materials exposed during construction activities shall be handled per the FDOT Standard Specifications for Road and Bridge Construction as modified by the Contract Documents.
- d. Approved State and Local Plans and Permits
- 3. Maintenance: In the ECP, the Contractor shall provide a plan for maintaining all erosion and sediment controls throughout construction. The maintenance plan shall at a minimum, comply with the following:
- a. Sediment Barriers: Twelve (12) months, or as required, replacement interval in accordance with Contract's Specifications
- b. Inlet Protection Systems at inlets-Check after rainfall events. Clean if clogging occurs.
- c. The maintenance of these devices shall occur until the Engineer has deemed an area permanently stabilized. It will be the responsibility of the Contractor to remove erosion and sediment control devices once they have served their purpose.

- a. The Contractor shall be required to conduct daily visual inspections of all temporary and permanent erosion control measures along the project comdor. The Contractor shall maintain, repair and/or replace these items as necessary
- b. The Engineer shall have an Inspector review the project's temporary and permanent erosion control measures for the items listed below at least once every seven (7) calendar days and/or within 24 hours of the end of a storm that is 0.5 inches or greater. A written inspection report (form attached) is required every seven calendar days or within 24 hours of the end of a storm that deposits 0.5
- 1) Outfalls into the waters of the United States
- 2) Points of discharge to municipal separated storm sewer systems
- 3) Disturbed areas of the site that have not been stabilized
- 4) Areas used for storage of materials that are exposed to precipitation
- 5) Structural controls
- 6) Stormwater management systems
- 7) Locations where vehicles enter or exit this site
- 8) Check that the approved or revised Erosion Control Plan is followed
- 9) Where sites have been stabilized, inspections shall be conducted at least once every month.
- c. The Contractor shall initiate repairs within 24 hours of inspections that indicate items are not in good
- d. If inspections indicate that the installed stabilization and structural practices are not sufficient to minimize erosion, retain sediment, and prevent discharging pollutants, the Contractor shall provide additional measures, as approved by the Engineer.
- 5. Non-Stormwater Discharges
- a. In the ECP, the Contractor shall identify all anticipated non-stormwater discharges (except flows from fire fighting activities). The Contractor shall describe the proposed measures to prevent pollution from these non-stormwater discharges.
- b. If contaminated soil or groundwater is encountered during construction, the Contractor is to cease operations in that area. The Contractor shall contact the Miami-Dade County, Regulatory and Economic Resource (R.E.R.) Compliance Desk, at (305) 372-6955.



THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY DARYL K. HILDOER, P.E. ON THE DATE ADJACENT TO THE SEAL.

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED. ON ANY ELECTRONIC COPIES.

SW 58 AVE

R.D. 8-30-2023 L.C.P. 8-30-2023 F.G. 8-30-2023 R.D.



DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS RIGHT OF WAY DIVISION

STORMWATER POLLUTION PREVENTION PLAN