MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)

ADDENDUM NO. 1 March 20. 2025

PROJECT: Roadway Improvements to NE 151st Street - Phase 1.

Project No. 20240269

MCC 7360 Plan- CICC 7360-08/8

BID DUE

04-02-2025; 02:00 P.M.

DATE:

FROM: Miami-Dade County DTPW

Capital Improvements Section 111 NW First Street, 14th Floor

Miami, FL 33128 305.375.2930

TO: Prospective Bidders and Interested Parties

This Addendum forms part of the project solicitation documents and will be incorporated into the Contract Documents, as applicable. Insofar as the Original Contract Documents, Drawings and Specifications are inconsistent, this Addendum shall govern. Please acknowledge receipt of this Addendum, at the time of bid submittal to Miami-Dade County, in the space provided on the "Acknowledgement of Addenda Form" provided with the project solicitation documents. Failure to acknowledge receipt of all addenda may be cause for disqualification.

A. CHANGES TO ENGINEERING DRAWING & PLANS:

1. The following Table (Table no.1) below describes the changes made to Engineering Plans. Also, see attached pages at the end of document.

Table No.1:

Sheet Number	Revision Date	Description
32	3/13/25	Added Pre-Phase Note
41	3/13/25	Added Pre-Phase title. Temporary Pedestrian Path and plan note
42	3/13/25	Added Pre-Phase title, update pavement design and labels, removed sod
43	3/13/25	Added Pre-Phase title
44	3/13/25	Added Pre-Phase title, updated gore area, removed pay item call outs

END OF ADDENDUM NO. 1

MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS (DTPW)

ADDENDUM NO. 1 March 20, 2025

Tiondra Wright, Division Chief.

Capital Improvements Division

Department of Transportation and Public Works (DTPW)

AM:tw

cc: Marco Movilla, DTPW
Leandro Ona, Chief, DTPW
Alejandro Sauleda, DTPW

Katherine Fernandez, DTPW Barbara Mesa Valdes, DTPW Maylin Torres, SBD Project File Laurie Johnson, SBD Caesar Suarez, SBD Eric Perez, SBD Clerk of the Board

DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS

Roadway Improvements to NE 151st Street - Phase 1

RPQ NO. 20240269

ADDENDUM NO.1


ENGINEERING DRAWINGS/PLANS

INDEX OF SHEETS

וווט	EX OF SHEETS	PLANS FOR PROPOSED		
SHT. No.	SHEET DESCRIPTION			
1	KEY SHEET	IMPROVEMENTS TO		
2	TYPICAL SECTION	NE AEA L OTDEE		
3	SUMMARY OF QUANTITIES AND PAY ITEM NOTES	NF 151st STRFF		
4	SUMMARY OF DRAINAGE STRUCTURES	THE TOTAL STREET		
5	PROJECT LAYOUT			

FROM EAST OF RAILROAD TRACKS TO SOLE MIA WAY

MIAMI-DADE COUNTY PROJECT NO. 20150052

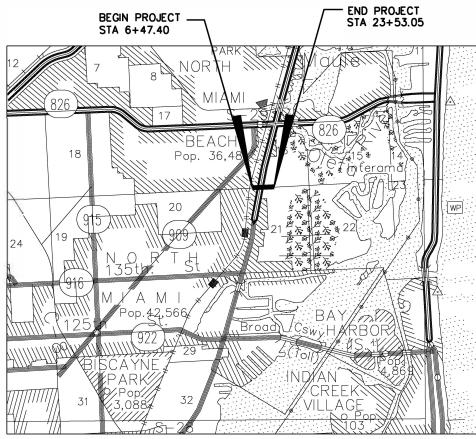

PREPARED FOR



MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS HIGHWAY DIVISION

STEPHEN P. CLARK CENTER 111 NW 1 ST MIAMI, FLORIDA 33128



R.J. Behar & Company, Inc.

Engineers • Planners

6861 SW 196 AV., SUITE 302 PEMBROKE PINE, FLORIDA 33332 CERTIFICATE OF AUTHORIZATION NO. 00008365 Phone; (954) 680-7771

ATTENTION IS DIRECTED TO THE FACT THAT THESE PLANS MAY HAVE BEEN REDUCED IN SIZE BY REPRODUCTION. THIS MUST BE CONSIDERED WHEN OBTAINING SCALED DATA,

REVISIONS:

12/4/24)

ROADWAY SHEETS 32, 41, 42, 43 & 44. (3/13/25)

THIS ITEM HAS BEEN DIGITALLY SIGNED AND SEALED BY

PRINTED COPIES OF THIS DOCUMENT ARE NOT CONSIDERED SIGNED AND SEALED AND THE SIGNATURE MUST BE VERIFIED ON ANY ELECTRONIC COPIES.

ENGINEER OF RECORD:

Robert J. Behar, P.E.

FLORIDA REGISTRATION P.E. No. 21755

LENGTH (F JOB	
	LIN. FT.	MILES
ROADWAY	1,705.7	0.323
BRIDGE	N/A	N/A
GROSS LENGTH OF JOB	1,705.7	0.323
EXCEPTIONS	N/A	N/A
NET LENGTH OF JOB	1,705.7	0.323

APPROVED	COUNTY ENGINEER
RECOMMENDED	
	ASSISTANT DIRECTOR
SUBMITTED	- T
	HIGHWAY DIVISION
PROPOSED	CHECK
DESIGN	DRAWN
DATE	SHEET <u>1</u> OF <u>76</u>


1	KET SHEET
2	TYPICAL SECTION
3	SUMMARY OF QUANTITIES AND PAY ITEM NOTES
4	SUMMARY OF DRAINAGE STRUCTURES
5	PROJECT LAYOUT
6	GENERAL NOTES
7–9	PLAN
	· -· · · ·
10-12	PROFILE
13	DRIVEWAY/SIDESTREET PROFILES
14	INTERSECTION DETAIL
15–18	DRAINAGE CROSS SECTIONS
19-22	DRAINAGE DETAILS
23-28	CROSS SECTIONS
29	SPECIAL GRAVITY WALL DETAIL
30	STORMWATER POLLUTION PREVENTION PLAN
31-40	TEMPORARY TRAFFIC CONTROL PLAN
41	WARREN HENRY AUTO GROUP TEMPORARY PAVEMENT DETAIL
42	PLAN NE 146 ST TEMPORARY ROAD
43	PROFILE NE 146 ST TEMPORARY ROAD
44	SIGNING AND PAVEMENT MARKING PLAN NE 146 ST TEMPORARY ROAD
45	SIGNING AND PAVEMENT MARKING QUANTITIES
46	SIGNING AND PAVEMENT MARKING GENERAL NOTES & DETAILS
47-49	SIGNING AND PAVEMENT MARKING PLANS
50	SIGNALIZATION QUANTITIES
51	SIGNALIZATION GENERAL NOTES
52	SIGNALIZATION PLANS
53	
	MAST ARM TABULATION
54	STANDARD MAST ARM ASSEMBLIES DATA TABLE
55	SPECIAL MAST ARM ASSEMBLIES DATA TABLE
56	CONTROLLER CABINET INSTALLATION DETAIL
57	ELECTRICAL POWER SERVICE DETAIL
58	SUMMARY OF LIGHTING QUANTITIES
59	POLE DATA AND LEGEND
60	LIGHTING GENERAL NOTES
61-63	LIGHTING PLAN
64	SERVICE POINT DETAIL
65	LIGHT POLE PEDESTAL
66	CONVENTIONAL POLE DETAIL
67	SLAB DETAILS FOR INTERMEDIATE PULL BOX LOCATIONS 1
68	SLAB DETAILS FOR INTERMEDIATE PULL BOX LOCATIONS 2
69	MISCELLANEOUS DETAILS 1
70	CONDUIT BURIAL DETAILS
71	GROUND TEST CLAMP-ON METHOD
72	TREE DISPOSITION TABULATION
73-76	TREE DISPOSITION PLAN
SS-1	STANDARD DETAILS
	UTILITY VERIFIED LOCATE
5.V 1 - 01V-2	THE TENTILE EDUNIE

STANDARD INDEX DRAWINGS

INDEX No.	SHEET DESCRIPTION
120-001 400-011 425-001 425-010 425-021 430-001 443-001 443-002 444-T01 515-070 520-001 522-001 522-002	EMBANKMENT UTILIZATION GRAVITY WALL SUPPLEMENTARY DETAILS FOR DRAINAGE STRUCTURES STRUCTURE BOTTOMS — TYPE J AND P CURB INLET TOPS — TYPES 5 AND 6 MISCELLANEOUS DRAINAGE DETAILS FRENCH DRAIN SKIMMERS FOR FRENCH DRAIN OUTLETS DEEP WELL INJECTION BOX PIPE GUIDERAIL (ALUMINUM) CURB AND GUTTER CONCRETE SIDEWALK DETECTABLE WARNINGS AND SIDEWALK CURB RAMPS
570-001	PERMANENT EROSION CONTROL

THESE PLANS HAVE BEEN PREPARED IN ACCORDANCE WITH AND ARE GOVERNED BY THE MIAMI-DADE THESE PLANS HAVE BEEN PREPARED IN ACCURDANCE WITH AND ARE GOVENNED BY THE MIMMIDADE COUNTY PUBLIC WORKS DEPARTMENT STANDARDS AND SPECIFICATIONS PARTS 1, 2 AND 3. THE MANUAL OF UNIFORM MINIMUM STANDARDS FOR DESIGN, CONSTRUCTION AND MAINTENANCE FOR STREETS AND HIGHWAYS. THE FLORIDA DEPARTMENT OF TRANSPORTATION ROADWAY AND TRAFFIC STANDARD PLANS, AND THE FLORIDA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS, AS AMENDED BY CONTRACT DOCUMENTS.



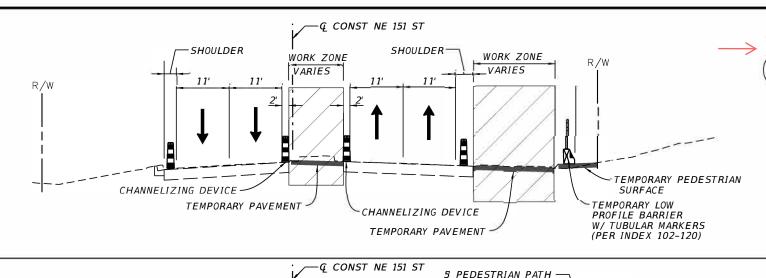

TEMPORARY LANE SEPARATOR

CONST NE 151 ST

LOW PROFILE BARRIER

WORK ZONE

VARIES

WORK ZONE

LOW PROFILE BARRIER

VARIES

LOW PROFILE BARRIER

CHANNELIZING DEVICE

Q CONST NE 151 ST

10'

(PRE-PHASE:

- I AT THE BEGINNING OF OFF-PEAK HOURS, INSTALL TRAFFIC CONTROL DEVICES IN ACCORDANCE WITH INDEX 102-602.
- 2. CONSTRUCT TEMPORARY DRIVEWAY ACCESS TO WARREN HENRY DEALERSHIP.
- 3. CONSTRUCT NE 146TH STREET, TEMPORARY ROAD.

PHASE Y

- 1. AT THE BEGINNING OF OFF-PEAK HOURS, INSTALL TRAFFIC CONTROL DEVICES IN ACCORDANCE WITH TEMPORARY TRAFFIC CONTROL PLAN AND INDEX 102-602.
- P. FOR TEMPORARY LANE CLOSURES REFER TO INDEX 102-613.
- REMOVE CURB & GUTTER IN MEDIAN. CONSTRUCT TEMPORARY PAVEMENT, INCLUDING
 ANY TEMPORARY PAVEMENT NEEDED FOR THE INSTALLATION OF TEMPORARY LANE SEPARATORS.
 CONSTRUCT TEMPORARY PEDESTRIAN SURFACE.
- PROVIDE TEMPORARY SIGNALS FOR WESTBOUND TRAFFIC AT SOUTHEAST CORNER OF BISCAYNE BLVD AND NE 151 STREET INTERSECTION.

PHASE II:

- 1. SET UP WORK ZONE IN ACCORDANCE WITH TEMPORARY TRAFFIC CONTROL PLAN.
- 2. SHIFT WESTBOUND TRAFFIC SOUTH.
- 3. DIVERT EASTBOUND TRAFFIC TO TEMPORARY PAVEMENT.
- . DIVERT PEDESTRIANS TO TEMPORARY PEDESTRIAN PATH.
- 5. CONSTRUCT THE WEST SIDE OF THE CORRIDOR INCLUDING CURB & GUTTER, GRAVITY WALL, GUIDERAIL, SIDEWALK, SOD, DRAINAGE, SIGNALS, LIGHTING AND RECONSTRUCTION.

PHASE II-A:

EMPORARY LOW

TEMPORARY PAVEMENT

WORK ZONE VARIES

CHANNELIZING DEVICE

R/W

PROFILE BARRIER W/ TUBULAR MARKERS

(PER INDEX 102-120)

- . SET UP WORK ZONE IN ACCORDANCE WITH TEMPORARY TRAFFIC CONTROL PLAN.
- 2. DIVERT PEDESTRIANS TO TEMPORARY PEDESTRIAN PATH.
- 5. CONSTRUCT THE NORTHWEST QUADRANT OF US-1/BISCAYNE BLVD. INCLUDING CURB & GUTTER, SIDEWALK, SOD & SIGNALS.

PHASE III:

- 1. SET UP WORK ZONE IN ACCORDANCE WITH TEMPORARY TRAFFIC CONTROL PLAN.
- 2. REDIRECT WESTBOUND TRAFFIC, AS WELL AS PEDESTRIANS TO THE NEWLY CONSTRUCTED NORTH SIDE OF THE CORRIDOR.
- 3. SHIFT EASTBOUND TRAFFIC NORTH.
- 4. CONSTRUCT THE SOUTH SIDE OF THE CORRIDOR, INCLUDING CURB & GUTTER, GUIDERAIL, SOD, DRAINAGE, SIGNALS, LIGHTING AND RECONSTRUCTION.

PHASE III-A:

- 1. SET UP WORK ZONE IN ACCORDANCE WITH TEMPORARY TRAFFIC CONTROL PLAN.
- 2. DIVERT PEDESTRIANS TO TEMPORARY PEDESTRIAN PATH.
- 5. CONSTRUCT THE SOUTHWEST QUADRANT OF US-1/BISCAYNE BLVD. INCLUDING CURB & GUTTER, SIDEWALK AND SIGNALS.

PHASE III-B:

CONSTRUCT DRIVEWAYS.

PHASE IV:

- 1. SET UP WORK ZONE IN ACCORDANCE WITH TEMPORARY TRAFFIC CONTROL PLAN.
- 2. REDIRECT EASTBOUND TRAFFIC TO THE NEWLY CONSTRUCTED SOUTH SIDE OF THE CORRIDOR
- 3. CONSTRUCT MEDIAN INCLUDING RECONSTRUCTION, CURB & GUTTER, LANDSCAPING AND TRAFFIC SEPARATOR.

PHASE IV-A:

1. CONSTRUCT CROSSOVER.

PHASE V:

- 1. SET UP WORK ZONE IN ACCORDANCE WITH STANDARD PLANS INDEX 102-613 AND 615.
- 2. PERFORM MILLING AND PLACE FINAL FRICTION COURSE, PAVEMENT MARKINGS AND SIGNS.

PAGE#32

R E V I S I O N S

DATE BY DESCRIPTION DATE BY DESCRIPTION

DATE BY DESCRIPTION

BADDED PRE-PHASE NOTES.

R.J. Behar & Company, Inc.

Engineers • Planners

6861 SW 196 Avenue, Suite 3032

PROBLEMENT FOR THE STATE OF THE STATE

DESCRED DATE DRAWN BY DATE DATE DEPARTMENT AND BY DEPARTMENT AND B

DEPARTMENT OF TRANSPORTATION
AND PUBLIC WORKS
HIGHWAY DIVISION
STREAM P. QUARK CARRY

MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS HIGHWAY DIVISION

NE 151st Street From Biscoyne Blvd to Sole Mia Way

SHEET 32 OF

TEMPORARY ROAD

ADDENDUM NO.1

ADDED PHASE TITLE