



August 24, 2026

RESPONSE LETTER NO. 1 TO REQUEST FOR INFORMATION

Project Title: Drainage Improvements Multiple Sites

Project No.: 20250133

E-mail from Mr. Modesto Fernandez, RG Underground Engineering; dated Wednesday, August 19, 2026, 11:32 A.M. (attached)

QUESTION: 1) Please clarify the intended location and scope of Pay Item 530-1, Riprap (Sand-Cement), quantity 50 CY. This item appears in the Bid Form and in the Summary of Quantities on Sheet 10 of the plans for SW 216th Street. However, no riprap callout, limits, dimensions, installation detail, or applicable drainage structure could be identified on the drainage plan sheets or standard detail sheets.

Please provide the specific installation location, limits, required thickness, and applicable construction detail for this item.

RESPONSE: 1) Pay Item 530-1, Riprap (Sand Cement), quantity 50 CY, is associated with structures S 15, S 16, and S 17 on Sheet 9 of 16 of the Plans SW 216 Street project. The note on this sheet identifies the riprap placement for these structures. For additional information refer to the Standard Storm Drainage Detail, Proposed Inlet on Existing Slab Covered Trench. (Attached)

E-mail from Mr. Miguel Ocana, Terra Hyle Contractors, Inc.; dated Wednesday, August 19, 2026, 04:09 P.M. (attached)

QUESTION: 1) Bid Item No. 443-70-4-4 describes a 24-inch-diameter perforated pipe French drain with a trench depth of 20 feet. However, Sheet 7 of 10, Standard Storm Drainage Detail SD 1.1 – Exfiltration Trench (French Drain), indicates a depth of 15 feet below existing ground. Please clarify which depth governs for bidding and construction purposes. If both depths are required at different locations, please identify the applicable locations and confirm whether a separate bid item will be added for the 15-foot-deep French drain

RESPONSE: 1) Bid Item No. 443-70-4-4 describes a 24 inch diameter perforated pipe French drain with a trench depth of 20 feet. Based on the geotechnical conditions in the project area, the soils require that the French drain be constructed at a depth of 20 feet. This condition applies to all proposed French drains included in the SW 216 Street project.



Department of Transportation and Public Works
111 NW 1st • Street Suite 1410
Miami, Florida 33128-1970
T 305-375-2930 F 305-375-2931
miamidade.gov

END OF REQUEST FOR INFORMATION No. 1



Sincerely,

A handwritten signature in cursive script that reads "Elva Reyes".

Elva R. Reyes
Engineer 2
Department of Transportation and Public Works (DTPW)

C:

Tiondra Wright, DTPW
Katherine Fernandez, DTPW
Isbelt Roberto, DTPW
Eric Perez, SPD
Clerk of the Board
Project File

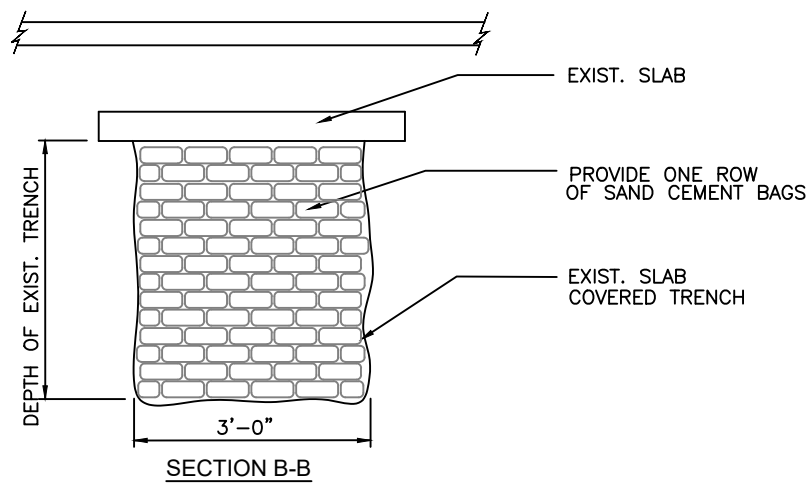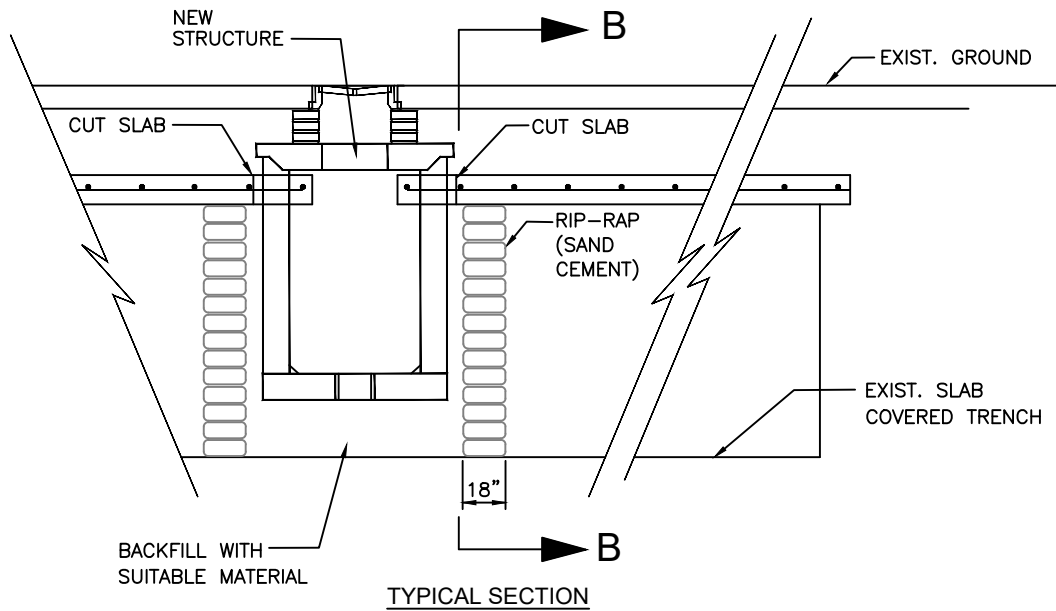

PROPOSED INLET ON EXISTING SLAB COVERED TRENCH

MIAMI-DADE COUNTY DEPARTMENT OF TRANSPORTATION AND PUBLIC WORKS	APPROVED _____	REVISED 0-0-0 _____ _____	STANDARD STORM DRAINAGE DETAIL PROPOSED INLET ON EXISTING SLAB COVERED TRENCH	
---	------------------------------	---	---	--

From: [Modesto- RG Underground](#)
To: [Reyes, Elva \(DTPW\); Clerk of the Board \(COC\)](#)
Cc: [Ricardo Gonzalez- RG Underground](#)
Subject: Drainage Improvements Multiple Sites. RPQ: 20250133
Date: Wednesday, August 19, 2026 11:31:42 AM
Attachments: [image.png](#)

You don't often get email from modesto@rgunderground.com. [Learn why this is important](#)

Good morning,

I am with RG Underground Engineering Inc.

Please clarify the intended location and scope of Pay Item 530-1, Riprap (Sand-Cement), quantity 50 CY. This item appears in the Bid Form and in the Summary of Quantities on Sheet 10 of the plans for SW 216th Street. However, no riprap callout, limits, dimensions, installation detail, or applicable drainage structure could be identified on the drainage plan sheets or standard detail sheets.

Please provide the specific installation location, limits, required thickness, and applicable construction detail for this item.

Thank you.



Modesto Fernandez
Office: 305-386-6293
Email: modesto@rgunderground.com

From: Miguel Ocana <mocanasr@terrahyleinc.com>

Sent: Wednesday, August 19, 2026 4:09 PM

To: Reyes, Elva (DTPW) <elva.reyes@miamidade.gov>; Clerk of the Board (COC) <clerkbcc@miamidade.gov>

Subject: Request for Clarification – Project No. 20250133

You don't often get email from mocanasr@terrahyleinc.com. [Learn why this is important](#)

Good afternoon,

Please provide clarification regarding the following discrepancy:

Bid Item No. **443-70-4-4** describes a **24-inch-diameter perforated pipe French drain with a trench depth of 20 feet**. However, Sheet 7 of 10, Standard Storm Drainage Detail **SD 1.1 – Exfiltration Trench (French Drain)**, indicates a depth of **15 feet below existing ground**.

Please clarify which depth governs for bidding and construction purposes. If both depths are required at different locations, please identify the applicable locations and confirm whether a separate bid item will be added for the 15-foot-deep French drain.

Thank you for your assistance.

Regards

Miguel Ocana



Chief Construction Manager

2140 South Dixie Highway

Suite 202B

Miami, FL 33133

(305) 216-0977

mocanasr@terrahyleinc.com