

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

Westlake Royal Roofing, LLC 7575 Irvine Center Drive, Suite 100 Irvine, CA 92618

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (in Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: Plantation Roof Tile

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

Xunay

This NOA revises NOA# 21-0420.07 and consists of pages 1 through 7. The submitted documentation was reviewed by Alex Tigera.

MIAMI-DADE COUNTY
APPROVED

NOA No.: 22-0331.15 Expiration Date: 12/08/25 Approval Date: 08/11/22 Page 1 of 7

ROOFING ASSEMBLY APPROVAL

Category: Roofing **Sub-Category: Roofing Tiles** Material: Concrete

1. SCOPE

This approves a roofing system using Plantation Concrete Roof Tile, as manufactured by Westlake Royal Roofing, LLC in Okeechobee, FL as described in Section 2 of this Notice of Acceptance, designed to comply with the Florida Building Code for High Velocity Hurricane Zone. For use in locations where the pressure requirements, as determined by applicable Building Code, do not exceed the design pressure values obtain by calculations in compliance with RAS 127 using the values listed in section 4 herein. The attachment calculations shall be prepared as a moment based system.

2. PRODUCT DESCRIPTION

Manufactured by Applicant	Dimensions	Test Specifications	Product <u>Description</u>
Plantation Tile	Length: 16½" Width: 13"	TAS 112	Flat profile concrete roof tile, Type 3a Interlocking, Class III; for direct deck or battened nail-on, mortar or adhesive set applications.
Trim Pieces	L = varies W = varies Varying thickness	TAS 112	Accessory trim, concrete roof pieces for use at hips, rakes, ridges and valley terminations. Manufactured for each tile profile.

MANUFACTURING LOCATION

1. Okeechobee, FL

2.2 PRODUCTS MANUFACTURED BY OTHERS

Product Name	Product Description	<u>Manufacturer</u> (With Current NOA)
ICP Adhesives Polyset® AH-160	Two component polyurethane foam adhesive.	ICP Adhesives and Sealants, Inc.
TILE BOND TM Roof Tile Adhesive	Single component polyurethane foam roof tile adhesive.	The Dow Chemical Company
Touch 'N Seal StormBond® 2 Two- Component Polyurethane Roof Tile Adhesive	Two component polyurethane foam adhesive.	DAP Foam, Inc.
Touch 'N Seal StormBond® One Component Polyurethane Roof Tile Adhesive	One component polyurethane foam adhesive.	DAP Foam, Inc.
Quikrete" Roof Tile Mortar, FL-15	Premixed, pre-bagged gray roof tile mortar.	The Quikrete Companies, Inc.



NOA No.: 22-0331.15 **Expiration Date: 12/08/25** Approval Date: 08/11/22

Page 2 of 7

2.3 SUBMITTED EVIDENCE:

American Test Lab of South RT0624.05-14 TAS 112 07/03/14 Florida RT0817.07-20 TAS 112 08/14/20	Test Agency	Test Identifier	Test Name/Report	<u>Date</u>
Redland Technologies	American Test Lab of South	RT0624.05-14	TAS 112	07/03/14
Appendix III				
Appendix III				
The Center for Applied Engineering, Inc. 94-060B PA 101 (Adhesive Set) Static Uplift Testing PA 101 (Adhesive Set) Static Uplift Testing PA 101 (Mortar Set) May 1994	Redland Technologies			Dec. 1991
Engineering, Inc. 94-084 PA 101 (Adhesive Set) Static Uplift Testing PA 101 (Mortar Set)		Appendix III	PA 102 & PA 102(A)	
Engineering, Inc. 94-084 Static Uplift Testing PA 101 (Adhesive Set) Static Uplift Testing PA 101 (Mortar Set)	The Center for Applied	94-060B	Static Uplift Testing	March 1994
Redland Technologies				
Redland Technologies		94-084		May 1994
Appendix II			PA 101 (Mortar Set)	
Appendix II	Redland Technologies	7161-03	Wind Tunnel Testing	Dec. 1991
Letter Dated Aug. 1, 1994 Wind Tunnel Testing PA 108 (Nail-On) P0631-01 Wind Tunnel Testing PA 108 (Nail-On) P0631-01 Wind Tunnel Testing PA 108 (Mortar Set) P0402 Withdrawal Resistance Testing of screw vs. smooth shank nails P0402 Withdrawal Resistance Testing of screw vs. smooth shank nails P0402 Withdrawal Resistance Testing of screw vs. smooth shank nails P0402 Wind Driven Rain Oct. 1994 P0403 P0404 P0400 Walker Engineering, Inc. Calculations Aerodynamic Multiplier March 1999 April 1999 April 1999 Calculations 25-7183 March 1995 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P0404 P	Rediand Technologies			Dec. 1991
PA 108 (Nail-On) Yuly 1994				Aug. 1994
P0631-01 Wind Tunnel Testing PA 108 (Mortar Set)		8) : :	e e e e e e e e e e e e e e e e e e e	8
P0402 Withdrawal Resistance Testing of screw vs. smooth shank nails		P0631-01	` ,	July 1994
The Center for Applied Engineering, Inc. Project No. 307025 Wind Driven Rain PA 100 Oct. 1994			PA 108 (Mortar Set)	•
Project No. 307025		P0402		Sept. 1993
Engineering, Inc. Test #MDC-76 PA 100			screw vs. smooth shank nails	
Engineering, Inc. Test #MDC-76 PA 100	The Center for Applied	Project No. 307025	Wind Driven Rain	Oct. 1994
Walker Engineering, Inc. Calculations Aerodynamic Multiplier March 1999 April 1999 April 1999 Calculations Calculations 25-7183 March 1995 February 1996 April 1996 April 1996 April 1996 Calculations Calculations 25-78040 April 1996 April 1999 April 1996 April 19		· ·		3 0 1991
Calculations 25-7183 March 1995	6 6,			
Calculations 25-7183 March 1995 25-7094 February 1996 25-7496 April 1996 25-7804b-8 25-7804b-8 25-7804-4 & 5 25-7848-6 Calculations Two Patty Adhesive Set System April 1999 Farabaugh Engineering and Testing Inc. T295-11 TAS-108 10/05/11 Testing Inc. T306-11 TAS-108 10/04/11 T279-11 TAS-108 09/23/11 PRI Construction Material Technologies DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18	Walker Engineering, Inc.	Calculations	Aerodynamic Multiplier	
Calculations				
Calculations 25-7496 April 1996 Calculations 25-7584 December 1996 25-7804b-8 25-7804b-8 25-7804-4 & 5 25-7848-6 Calculations Two Patty Adhesive Set System April 1999 Farabaugh Engineering and T295-11 TAS-108 10/05/11 Testing Inc. T306-11 TAS-108 10/04/11 T279-11 TAS-108 09/23/11 PRI Construction Material DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18		Calculations		
Calculations 25-784 December 1996 25-7804b-8 25-7804-4 & 5 25-7848-6 Calculations Two Patty Adhesive Set System April 1999 Farabaugh Engineering and T295-11 TAS-108 10/05/11 Testing Inc. T306-11 TAS-108 10/04/11 T279-11 TAS-108 09/23/11 PRI Construction Material DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-10 TAS 101 07/26/18				•
Calculations Calculations Calculations Two Patty Adhesive Set System April 1999				
25-7804-4 & 5 25-7848-6 25-7848-6 Two Patty Adhesive Set System April 1999 Farabaugh Engineering and Testing Inc. T295-11 TAS-108 10/05/11 Testing Inc. T306-11 TAS-108 10/04/11 T279-11 TAS-108 09/23/11 PRI Construction Material Technologies DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-10 TAS 101 07/26/18 TAS 101 07/26/18 TAS 101 07/26/18		Calculations		December 1996
25-7848-6 Two Patty Adhesive Set System April 1999 Farabaugh Engineering and Testing Inc. T295-11 TAS-108 10/05/11 Testing Inc. T306-11 TAS-108 10/04/11 T279-11 TAS-108 09/23/11 PRI Construction Material Technologies DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18				
Calculations Two Patty Adhesive Set System April 1999 Farabaugh Engineering and Testing Inc. T295-11 TAS-108 10/05/11 Testing Inc. T306-11 TAS-108 10/04/11 T279-11 TAS-108 09/23/11 PRI Construction Material Technologies DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18				
Farabaugh Engineering and T295-11 TAS-108 10/05/11 Testing Inc. T306-11 TAS-108 10/04/11 T279-11 TAS-108 09/23/11 PRI Construction Material DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18		Calculations		April 1000
Testing Inc. T306-11 T279-11 TAS-108 10/04/11 TAS-108 PRI Construction Material DAPF-004-02-08 DAPF-004-02-09 TAS 101 TAS 101 07/26/18 07/26/18 Technologies DAPF-004-02-10 TAS 101 TAS 101 07/26/18		Calculations	I wo I atty Addiesive Set System	April 1999
T279-11 TAS-108 09/23/11 PRI Construction Material DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18				
PRI Construction Material DAPF-004-02-08 TAS 101 07/26/18 Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18	Testing Inc.			
Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18		T279-11	TAS-108	09/23/11
Technologies DAPF-004-02-09 TAS 101 07/26/18 DAPF-004-02-10 TAS 101 07/26/18	PRI Construction Material	DAPF-004-02-08	TAS 101	07/26/18
DAPF-004-02-10 TAS 101 07/26/18				



NOA No.: 22-0331.15 Expiration Date: 12/08/25 Approval Date: 08/11/22

Page 3 of 7

3. LIMITATIONS

- **3.1** Fire classification is not part of this acceptance.
- **3.2** For mortar or adhesive set tile applications, a static field uplift test shall be performed in accordance with TAS 106.
- 3.3 Applicant shall retain the services of a Miami-Dade County Certified Laboratory to perform quarterly test in accordance with TAS 112, appendix 'A'. Such testing shall be submitted to the Miami-Dade Product Control office for review.
- **3.4** Minimum underlayment shall be in compliance with the applicable Roofing Applications Standards listed section 4.1 herein.
- 3.5 Minimum 4/12 slope requirement for mechanically attached tiles.
- 3.6 30/90 hot mopped underlayment applications may be installed perpendicular to the roof slope unless stated otherwise by the underlayment material manufacturers published literature.
- 3.7 This acceptance is for wood deck applications. Minimum deck requirements shall be in compliance with applicable building code.
- 3.8 All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.

4. Installation

- **4.1 Plantation Roof Tile** and its components shall be installed in strict compliance with Roofing Application Standard RAS 118, RAS 119 and RAS 120.
- **4.2** Data For Attachment Calculations

Table 1: Average Weight (W) and Dimensions (I x w)					
Tile Profile	Weight-W (lbf)	Length-I (ft)	Width-w (ft)		
Plantation Tile	11.6	1.375	1.08		

Table 2: Aerodynamic Multipliers - λ (ft ³)					
Tile Profile	λ (ft ³) Batten Application	λ (ft ³) Direct Deck Application			
Plantation Tile	0.267	0.289			

Table 3: Restoring Moments due to Gravity - M _g (ftlbf)												
Tile Profile	2": 1	12"	3": 1	12"	4": 1	2"	5": 1	12"	6": 1	12"	Greater 7": 1	
	Battens	Direct	Battens	Direct								
		Deck		Deck								
Plantation Tile	N/A	7.91	N/A	7.79	6.75	7.67	6.61	7.52	6.44	7.32	6.26	7.04



NOA No.: 22-0331.15 Expiration Date: 12/08/25 Approval Date: 08/11/22

Page 4 of 7

Tile Profile	Fastener Type	Direct Deck (Min 15/32" plywood)	Direct Deck (Min. 19/32" plywood)	Battens
Plantation Tile	2-10d Ring Shank Nails	30.9	38.1	17.2
	1-10d Smooth or Screw Shank Nail	7.3	9.8	4.9
	2-10d Smooth or Screw Shank Nails	14.0	18.8	7.4
	1 #8 Screw	30.8	30.8	18.2
	2 #8 Screw	51.7	51.7	24.4
	1-10d Smooth or Screw Shank Nail (Field Clip)	24.3	24.3	24.2
	1-10d Smooth or Screw Shank Nail (Eave Clip)	19.0	19.0	22.1
	2-10d Smooth or Screw Shank Nails (Field Clip)	35.5	35.5	34.8
	2-10d Smooth or Screw Shank Nails (Eave Clip)	31.9	31.9	32.2
	2-10d Ring Shank Nails ¹	50.3	65.5	48.3

Table 5: Attachment Resistance Expressed as a Moment M _f (ft-lbf) for Two Paddy Adhesive ² Set Systems					
Tile Profile	Tile Application	Minimum Attachment Resistance			
Plantation Tile	TILE BOND™ Roof Tile Adhesive	31.3 ³			
	ICP Adhesives Polyset® AH-160	31.3 ⁴			
	Touch 'N Seal StormBond® 2	45 ⁵			
	Touch 'N Seal StormBond®	76 ⁶			

- 2 See foam adhesive manufacturer's component approval for installation requirements
- 3 Medium paddy weight of 13.9 grams per paddy of TILE BOND™ Roof Tile Adhesive
- 4 Medium paddy weight of 8 grams per paddy of Polyset® AH-160
- 5 Medium paddy weight of 8 grams per paddy of Touch 'N Seal StormBond ® 2
- 6 Medium paddy weight of 18.7 grams between tile and underlayment, paddy weight of 10.5 grams on overlap of tile of Touch 'N Seal StormBond ® (one-component)



NOA No.: 22-0331.15 Expiration Date: 12/08/25 Approval Date: 08/11/22

Page 5 of 7

Table	6: Attachment Resistance Expressed as a Momen for Single Paddy Adhesive Set Systems	t - M _f (ft-lbf)
Tile Profile	Tile Application	Minimum Attachment Resistance
Plantation Tile	ICP Adhesives Polyset® AH-160	118.9 ⁷
	ICP Adhesives Polyset® AH-160	40.48
	Touch 'N Seal StormBond® 2	73 ⁹
	Touch 'N Seal StormBond® 2	48 ¹⁰

- 7 Large paddy weight of 45 grams of Polyset® AH-160
- 8 Medium paddy weight of 24 grams of Polyset® AH-160
- 9 Large paddy weight of 45 grams of Touch 'N Seal StormBond ® 2
- 10 Medium paddy weight of 24 grams of Touch 'N Seal StormBond ® 2

Table 7: Attachment Resistance Expressed as a Moment - M _f (ft-lbf) for Mortar Set Systems				
Tile Profile	Tile Application	Attachment Resistance		
Plantation Tile	Mortar Set ⁶	39.0		
See spe	cific mortar manufacturer's Notice of Accepta	ance.		

5. LABELING

All tiles shall bear the imprint or identifiable marking of the manufacturer's name or logo as seen below or following statement: "Miami-Dade County Product Control Approved".



OR



PLANTATION ROOF TILE LABEL (LOCATED ON UNDERSIDE OF TILE)

6. BUILDING PERMIT REQUIREMENTS:

- **6.1** Application for building permit shall be accompanied by copies of the following:
 - **6.1.1** This Notice of Acceptance.
 - **6.1.2** Any other documents required by Building Official or Applicable building code in order to properly evaluate the installation of this system.




NOA No.: 22-0331.15 Expiration Date: 12/08/25 Approval Date: 08/11/22

Page 6 of 7

PROFILE DRAWING

PLANTATION FLAT CONCRETE TILE

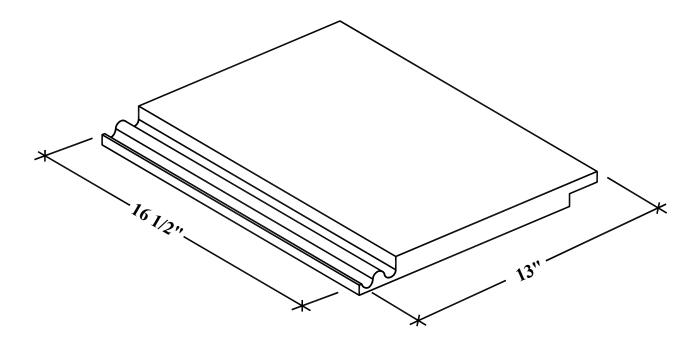

END OF THIS ACCEPTANCE



NOA No.: 22-0331.15 Expiration Date: 12/08/25 Approval Date: 08/11/22

Page 7 of 7