



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

**MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION**

11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Brava Roof Tile
915 E. Tyler Street
Washington, IA 52353

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: **Brava Cedar Shake**

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA# 22-0406.02 and consists of pages 1 through 7.
The submitted documentation was reviewed by Alex Tigera.

08/14/25



NOA No.: 24-0620.07
Expiration Date: 10/19/28
Approval Date: 08/14/25
Page 1 of 7

ROOFING ASSEMBLY APPROVAL

<u>Category:</u>	Roofing
<u>Sub-Category:</u>	Roofing Shake
<u>Materials</u>	Composite
<u>Deck Type:</u>	Wood
<u>Maximum Design Pressure</u>	-195 psf.
<u>Fire Classification</u>	See General Limitation #1

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
Brava Cedar Shake	Length: 22" Width: 12", 7", and 5" Thickness: 0.96" tapered to 0.22" 10" Exposure	TAS 125	Composite shingle for use in mechanically attached systems with a 10" exposure.

MANUFACTURING LOCATION:

1. Washington, IA.

EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
ETC Laboratories	ETC-07-718-20130.0	ASTM D 2843	10/10/07
	ETC-07-718-20130.0	ASTM D 1929	10/10/07
	ETC-07-718-20130.0	ASTM D 635	10/10/07
PRI Construction Materials Technologies	TMIC-006-02-02	ASTM G 155	06/18/08
	TMIC-009-02-01	TAS 100	10/12/07
Southwest Research Institute	01.13537.01.301c	ASTM E 108	01/18/08
Intertek	J4657.02-106-18 RO	Physical Properties	12/02/19
QAI Laboratories	MED2021aR2	TAS 125	01/28/25



APPROVED ASSEMBLIES:

System A:	Brava Cedar Shake
Deck Type:	Wood, Non-Insulated
Deck Description:	New Construction ¹⁹ / ₃₂ " or greater plywood or wood plank, or for re-roofing ¹⁵ / ₃₂ " or greater plywood.
Slope Range:	4": 12" or greater
Maximum Uplift Pressure:	See Maximum Design Pressures in Table B Below

Deck Attachment:	In accordance with applicable building code, but in no case shall it be less than # 8d annular ring shank nails spaced at the distance specified below in Table A . In reroofing, where the deck is less than ¹⁹ / ₃₂ " thick (Minimum ¹⁵ / ₃₂ ") the above attachment method must be in addition to existing attachment.
Underlayment:	Minimum underlayment shall be an ASTM D 226 Type II installed with a minimum 4" side-lap and 6" end-laps. Underlayment shall be fastened with corrosion resistant tin-caps and 12 gauge 1 ¼" annular ring-shank nails, spaced 6" o.c. at all laps and two staggered rows 12" o.c. in the field of the roll. Or, any approved underlayment having a current NOA.
Fire Barrier:	Any approved fire barrier having a current NOA. Refer to a current fire directory listing for fire ratings of this roofing system assembly as well as the location of the fire barrier within the assembly. See Limitation # 1.
Valleys:	Valley construction shall be in compliance with Roofing Application Standard RAS 118 and with Brava Roof Tile's current published installation instructions.
Hips and Ridges:	See Brava Roof Tile's current published installation instructions.
Eave Starter:	See Brava Roof Tile's current published installation instructions.
Shake Installation:	Install the "Brava Cedar Shake" and accessories in compliance with the current published installation instructions and details in Brava Roof Tile's Installation Manual. Flashings, penetrations, valley construction and other details shall be constructed in compliance with Roofing Application Standard RAS 118. Each shake (5", 7" or 12") is installed with fasteners listed below in Table B, through the designated fastener locators. (See Detail A) The adjoining shake is laid next to the existing shake with a 3/8" gap. The next row is laid with an 10" exposure. (See Detail B).

TABLE A
MAXIMUM DESIGN PRESSURES

Roof Areas	Field	Perimeter and Corner¹
Deck Attachment (for plywood deck)	6" o.c. along perimeter and field	3" o.c. along perimeter and field 3" o.c. along the seams
Fastener Type	Two #8 x 2" corrosion resistant coarse thread screws	Two #8 x 2" corrosion resistant coarse thread screws
Maximum Design Pressure	-194.75 psf	-195 psf
1. Extrapolation shall not be allowed		

GENERAL LIMITATIONS:

1. Fire classification is not part of this acceptance; refer to a current Approved Roofing Materials Directory for fire ratings of this product.
2. The maximum designed pressure limitation listed shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners).
3. Each shake shall be permanently labeled with the manufacturer's name and/or logo, and the following statement: "Miami-Dade County Product Control Approved" **or** with the Miami-Dade County Product Control Seal as seen below.




4. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.




PROFILE DRAWINGS

DETAIL A

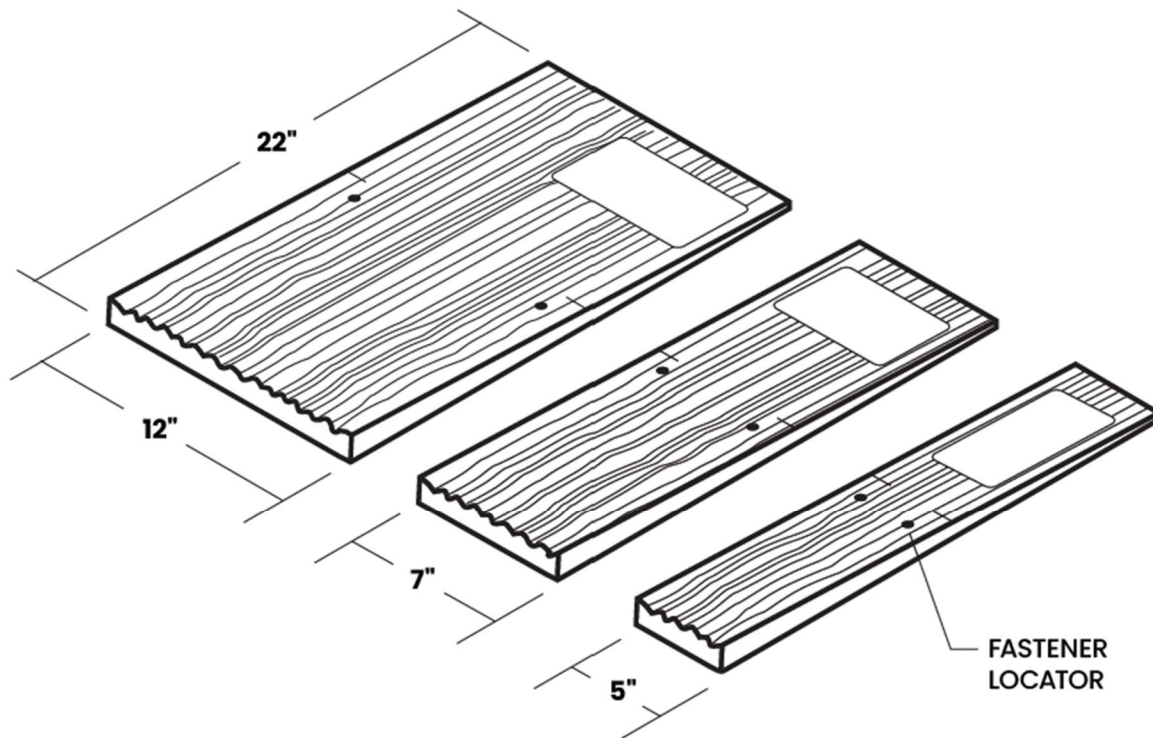

BRAVA CEDAR SHAKE

DETAIL B

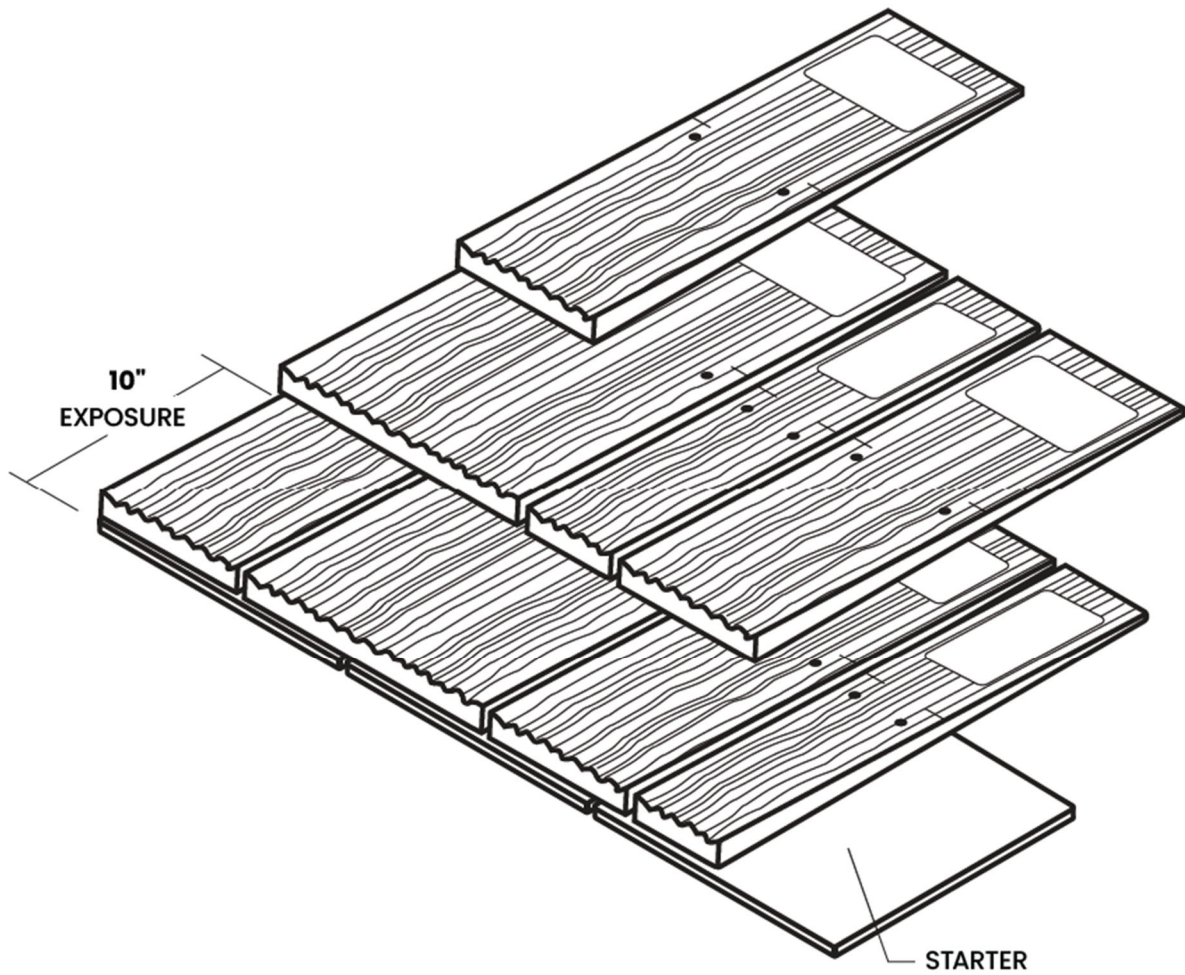

END OF THIS ACCEPTANCE