



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

NOTICE OF ACCEPTANCE (NOA)

Westlake Davinci Roofscapes, LLC.
13890 W 101 St
Lenexa, KS. 66215

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER - Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein, and has been designed to comply with the Florida Building Code including the High Velocity Hurricane Zone of the Florida Building Code.

DESCRIPTION: DaVinci Slate

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA renews NOA# 24-0318.11 and consists of pages 1 through 9.
The submitted documentation was reviewed by Alex Tigera.

07/09/26



NOA No.: 25-0822.03
Expiration Date: 07/12/28
Approval Date: 07/09/26
Page 1 of 9

ROOFING SYSTEM APPROVAL:

Category: Roofing
Sub-Category: Roofing Slate
Material: Plastic
Deck Type: Wood
Maximum Design Pressure: -263 psf (See general limitation #2)

TRADE NAMES OF PRODUCTS MANUFACTURED OR LABELED BY APPLICANT:

<u>Product</u>	<u>Dimensions</u>	<u>Test Specifications</u>	<u>Product Description</u>
DaVinci Slate	18" long 6", 7", 9", 10" & 12" width Tapered 1/2" - 1/8" thick	TAS 110	Slate looking composite shingle with tapered back.

MANUFACTURING LOCATION:

1. Kansas City, KS.

EVIDENCE SUBMITTED:

<u>Test Agency</u>	<u>Test Identifier</u>	<u>Test Name/Report</u>	<u>Date</u>
PRI Asphalt Technologies	DRM-001-02-01	ASTM G 155	12/02/15
PRI Construction Materials Technologies	DRM-054-02-01	ASTM D635	11/16/05
	DRM-054-02-01	ASTM D1929	11/16/05
	DRM-054-02-01	ASTM D 2843	11/16/05
Intertek Testing Services North America, Ltd.	103032787COQ-001A R1	TAS 100	06/26/18
	105228935COQ-003A	TAS 125	02/20/25
Underwriters Laboratories	02NK48105	UL 790	08/27/03
Farabaugh Engineering and Testing Inc.	T257-21(1)	TAS 100	11/03/21



NOA No.: 25-0822.03
Expiration Date: 07/12/28
Approval Date: 07/09/26
Page 2 of 9

APPROVED ASSEMBLIES:

System A:	DaVinci Slate
Deck Type:	Wood, Non-insulated
Deck Description:	Re-roof ¹⁵ / ₃₂ " or greater plywood or wood plank.
Slope Range:	3": 12" or greater
Maximum Uplift Pressure:	See Table A Below (See general limitation #2)

Deck Attachment:	Attached in accordance with applicable Building Code, but in no case shall it be less than #8d ring shank nails spaced 6" o.c. in the field of the plywood and 4" o.c. along the perimeter of the plywood.
Underlayment:	Underlayment shall be applied in accordance with applicable Building Code. Two plies of ASTM D 226 Type II felt overlapped 19" and 6" end lap. Underlayment shall be installed with minimum 12 ga. corrosion resistant ring shank nails and tin caps, spaced 12" o.c. staggered in the field and 6" o.c. at the laps. Or, any approved underlayment having a current NOA.
Valleys:	Valley metal shall be a minimum 16" wide. Valley metal shall be set over a full width one ply of ASTM D 226 Type II felt. Valley metal shall be secure with roofing nails spaced a maximum 4" o.c. at 1" from the flashing edge on each side. Valley detail shall be in accordance with the current published manufacturer's literature.
Ridge & Hips:	See DaVinci's Roofscapes published installation manual for detail.
Starter:	Install required starter over the edge a ¹ / ₄ ". Fasten each starter with a minimum of two corrosion resistant roofing nails located 3-1/2" up from the butt edge of the slate. Nails shall be of sufficient length to penetrate sheathing ³ / ₁₆ ".
Application:	DaVinci Slate shall be installed in accordance with DaVinci Roofscapes LLC. current published installation manual. DaVinci Slate shall have a maximum exposure listed below in Table A. (see Detail 'B') . DaVinci Slate shall be fastened in accordance with Table A (see Detail 'A') and shall penetrate through underlying panel. Fasteners shall be of sufficient length to penetrate through the sheathing a minimum of ³ / ₁₆ ".

TABLE A
MAXIMUM DESIGN PRESSURES

Option 1				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	6	11 ga. 1.75-inch galv. roofing nails	2	-124 psf
Perimeter and Corner¹	6	11 ga. 1.75-inch galv. roofing nails	4	-205 psf
1. Extrapolation shall not be allowed				

Option 2				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	6	11ga. 1.75-inch galv. roofing nails	4	-205 psf
Perimeter and Corner¹	6	#10 2-inch galv.wafer head screws	4	-240 psf
1. Extrapolation shall not be allowed				

Option 3				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	11ga. 1.75-inch galv. roofing nails	2	-86 psf
Perimeter and Corner¹	8	11ga. 1.75-inch galv. roofing nails	4	-200 psf
2. Extrapolation shall not be allowed				

Option 4				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	11ga. 1.75-inch galv. roofing nails	2	-86 psf
Perimeter and Corner¹	8	#10 2-inch galv.wafer head screws	2	-183 psf
1. Extrapolation shall not be allowed				

Option 5				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	11ga. 1.75-inch galv. roofing nails	4	-169 psf
Perimeter and Corner¹	8	#10 2-inch galv.wafer head screws	2	-183 psf
1. Extrapolation shall not be allowed				



Option 6				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	11ga. 1.75-inch galv. roofing nails	4	-169 psf
Perimeter and Corner¹	8	#10 2-inch galv.wafer head screws	4	-240 psf
1. Extrapolation shall not be allowed				

Option 7				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	#10 2-inch galv.wafer head screws	2	-169 psf
Perimeter and Corner¹	8	#10 2-inch galv.wafer head screws	4	-240 psf
1. Extrapolation shall not be allowed				



System B: DaVinci Slate

Deck Type: Wood, Non-insulated

Deck Description: New Construction ¹⁹/₃₂" or greater plywood or wood plank.

Slope Range: 3": 12" or greater

Maximum Uplift Pressure: See Table B Below (See general limitation #2)

Deck Attachment: Attached in accordance with applicable Building Code, but in no case shall it be less than #8d ring shank nails spaced 6" o.c. in the field of the plywood and 4" o.c. along the perimeter of the plywood.

Underlayment: Underlayment shall be applied in accordance with applicable Building Code. Two plies of ASTM D 226 Type II felt overlapped 19" and 6" end lap. Underlayment shall be installed with minimum 12 ga. corrosion resistant ring shank nails and tin caps, spaced 12" o.c. staggered in the field and 6" o.c. at the laps. Or, any approved underlayment having a current NOA.

Valleys: Valley metal shall be a minimum 16" wide. Valley metal shall be set over a full width one ply of ASTM D 226 Type II felt. Valley metal shall be secure with roofing nails spaced a maximum 4" o.c. at 1" from the flashing edge on each side. Valley detail shall be in accordance with the current published manufacturer's literature.

Ridge & Hips: See DaVinci's Roofscapes published installation manual for detail.

Starter: Install required starter over the edge a ¹/₄". Fasten each starter with a minimum of two corrosion resistant roofing nails located 3-1/2" up from the butt edge of the slate. Nails shall be of sufficient length to penetrate sheathing ³/₁₆".

Application: DaVinci Slate shall be installed in accordance with DaVinci Roofscapes LLC. current published installation manual. DaVinci Slate shall have a maximum exposure listed below in **Table B. (see Detail 'B')**. DaVinci Slate shall be fastened in accordance with **Table B (see Detail 'A')** and shall penetrate through underlying panel. Fasteners shall be of sufficient length to penetrate through the sheathing a minimum of ³/₁₆".

TABLE B
MAXIMUM DESIGN PRESSURES

Option 1				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	6	11ga. 1.75-inch galv. roofing nails	2	-190 psf
Perimeter and Corner¹	6	11ga. 1.75-inch galv. roofing nails	4	-263 psf
1. Extrapolation shall not be allowed				



Option 2				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	11ga. 1.75-inch galv. roofing nails	2	-104 psf
Perimeter and Corner¹	8	11ga. 1.75-inch galv. roofing nails	4	-238 psf
1. Extrapolation shall not be allowed				

Option 3				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	11ga. 1.75-inch galv. roofing nails	2	-104 psf
Perimeter and Corner¹	8	#10 2-inch galv.wafer head screws	2	-183 psf
1. Extrapolation shall not be allowed				

Option 4				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	11ga. 1.75-inch galv. roofing nails	4	-226 psf
Perimeter and Corner¹	8	#10 2-inch galv.wafer head screws	4	-240 psf
1. Extrapolation shall not be allowed				

Option 5				
Roof Areas	Maximum Shingle Exposure	Fastener Type	Number of Fasteners	Max Design Pressure
Field	8	#10 2-inch galv.wafer head screws	2	-169 psf
Perimeter and Corner¹	8	#10 2-inch galv.wafer head screws	4	-240 psf
1. Extrapolation shall not be allowed				



LIMITATIONS


1. Fire classification is not part of this acceptance; refer to a current Approved Roofing Materials Directory for fire ratings of this product.
2. The maximum designed pressure listed herein shall be applicable to all roof pressure zones (i.e. field, perimeters, and corners). Neither rational analysis, nor extrapolation shall be permitted for enhanced fastening at enhanced pressure zones (i.e. perimeters, extended corners and corners).
3. All slate shall be permanently labeled with the manufacturer's name and/or logo, and the following statement: "Miami-Dade County Product Control Approved" **or** with the Miami-Dade County Product Control Seal as seen below. All clips shall be permanently labeled with the manufacturer's name and/or logo, and/or model.




4. All products listed herein shall have a quality assurance audit in accordance with the Florida Building Code and Rule 61G20-3 of the Florida Administrative Code.



DRAWINGS DETAIL 'A'

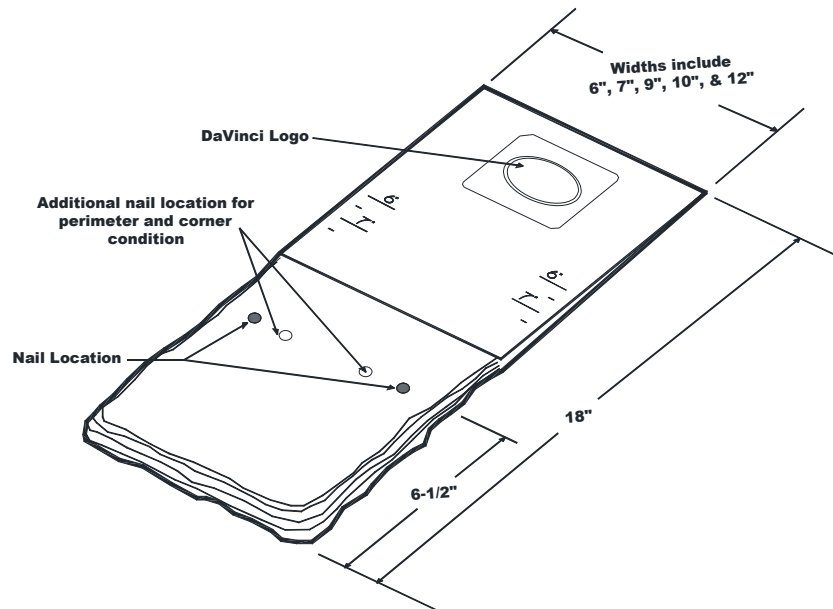

DAVINCI SLATE DETAIL 'B'

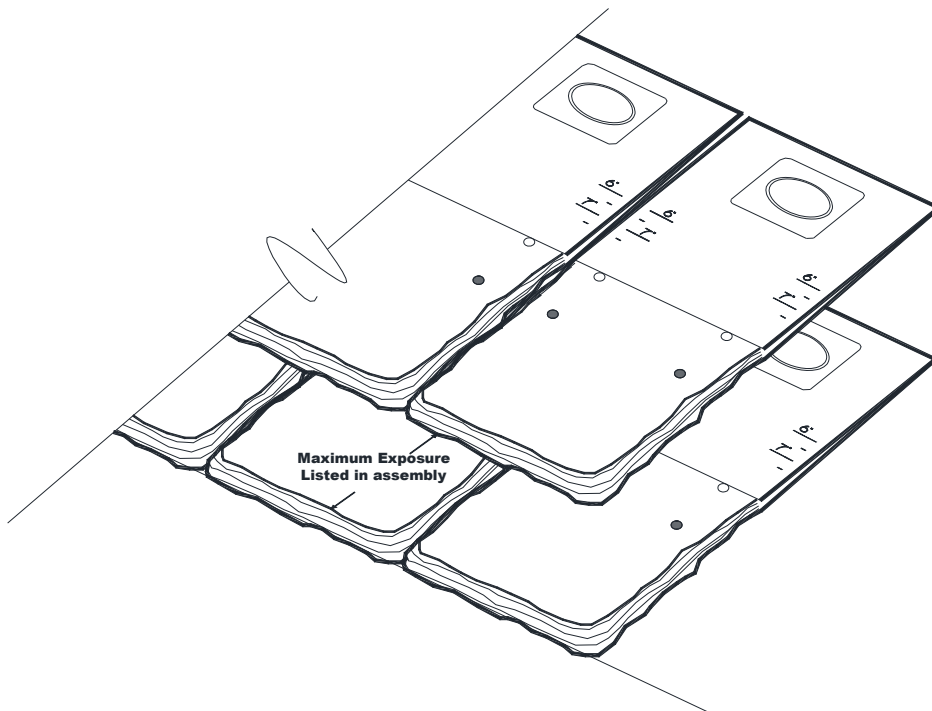

END OF THIS ACCEPTANCE