



MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION
NOTICE OF ACCEPTANCE (NOA)

Sto Corporation
3800 Camp Creek Parkway
Bldg. 1400, Ste. 120
Atlanta, GA 30331

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: StoTherm ci GMG EIFS System SM 18 ga. Steel

APPROVAL DOCUMENT: Drawing titled "StoTherm ci GMG SM", sheets 1 through 4 of 4, dated 02/13/2026, prepared by manufacturer, signed and sealed by William R. Heiden III, P.E., bearing the Miami-Dade County Product Control Revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Small Missile Impact Resistant

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state, model/series and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein. Components of this product come in different size buckets or drums. Each container needs to be labeled. Unit is further defined as each individual board of insulation and roll of reinforcing mesh.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA No. 25-0107.04** and consists of this page 1 and evidence pages E-1, E-2, E-3 and E-4, as well as the approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



04/14/26

NOA No. 26-0305.07
Expiration Date: June 11, 2030
Approval Date: April 23, 2026
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's

A. DRAWINGS

1. Manufacturer's die drawings and sections.
(Submitted under NOA No. 20-0408.02)
2. Drawing titled "StoTherm ci LM/SM 1177-18ga. for Large and Small Missile Impact Resistance", sheets 1 through 6 of 6, dated 04/28/20 and revised on 07/20/21, prepared by manufacturer, signed and sealed by Kurt W. Heinrichs, P.E.
(Submitted under NOA No. 21-0722.07)

B. TESTS

1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
6) Tensile Test, per ASTM E8-16a
along with marked-up drawings and installation diagram of StoTherm ci Large Missile Hurricane Impact Resistant System installed over 5/8" GP DensGlass Glass-Mat Sheathing, prepared by Progressive Engineering Inc, Test Report No. **2019-6336(A)**, dated 01/14/20, signed and sealed by William R. Heiden III, P.E.
(Submitted under NOA No. 20-0408.02)
2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
6) Tensile Test, per ASTM E8-16a
along with marked-up drawings and installation diagram of StoTherm ci LM Hurricane Impact Resistant System installed over 5/8" USG Securock Glass-Mat Sheathing, prepared by Progressive Engineering Inc, Test Report No. **2019-6336(B)**, dated 01/14/20, signed and sealed by William R. Heiden III, P.E.
(Submitted under NOA No. 20-0408.02)



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0305.07
Expiration Date: June 11, 2030
Approval Date: April 23, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

B. TESTS (CONTINUED)

3. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
6) Tensile Test, per ASTM E8-16a 4
along with marked-up drawings and installation diagram of StoTherm ci Small Missile Hurricane Impact Resistant System installed over 5/8" GP DensGlass Glass-Mat Sheathing, prepared by Progressive Engineering Inc, Test Report No. **2019-6336(C)**, dated 01/14/20, signed and sealed by William R. Heiden III, P.E.
(Submitted under NOA No. 20-0408.02)
4. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Large Missile Impact Test per FBC, TAS 201-94
5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
6) Tensile Test, per ASTM E8-16a 4
along with marked-up drawings and installation diagram of StoTherm ci Small Missile Hurricane Impact Resistant System installed over 5/8" GP DensGlass Glass-Mat Sheathing, prepared by Progressive Engineering Inc, Test Report No. **2019-6336(D)**, dated 01/14/20, signed and sealed by William R. Heiden III, P.E.
(Submitted under NOA No. 20-0408.02)

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **18-0504.08**, issued to Carpenter Company, for their Carpenter EPS Block Type Insulation, approved on 05/24/18, and expiring on 04/11/22.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0305.07
Expiration Date: June 11, 2030
Approval Date: April 23, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. EVIDENCE SUBMITTED UNDER PREVIOUS NOA's (CONTINUED)

F. STATEMENTS

1. Statement letter of code conformance, complying to the **FBC 7th Edition (2020)**, dated 06/22/21, issued by NOVA Engineering and Environmental, signed and sealed by Kurt W. Heinrichs, P.E.
(Submitted under NOA No. 21-0722.07)
2. Statement letter dated 06/16/21, issued by Sto requesting Product FBC 2020 update without change, signed by Kevin Schroeder, Senior Tech Rep.
(Submitted under NOA No. 21-0722.07)
3. Successor Engineer statement letter dated 09/08/21, adopting Another Engineer's work as his own per Fla statute 61G15-27.001, signed and sealed by Kurt W. Heinrichs, P.E.
(Submitted under NOA No. 21-0722.07)

G. OTHERS

1. Notice of Acceptance No. **20-0408.02**, issued to Sto Corporation for their StoTherm ci LM1177-18ga. EIFS System over GP 5/8" DensGlass and USG 5/8" Securock - L.M.I. & S.M.I., approved on 06/11/20 and expiring on 06/11/25.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0305.07
Expiration Date: June 11, 2030
Approval Date: April 23, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. EVIDENCE SUBMITTED UNDER NOA # 25-0107.04 AND NEW

A. DRAWINGS

1. Drawing titled “StoTherm ci GMG SM”, sheets 1 through 4 of 4, dated 02/13/2026, signed and sealed by William R. Heiden III, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS


1. Test report on Flatwise Tensile Strength of Sandwich Constructions per ASTM C297-16, prepared by SGS TEC Services, Test Report No. 23-2159, dated 01/18/2024, signed by James G. McCants III.
2. Notice of Acceptance No. **23-0911.01**, issued to Carpenter Company, for their Preformed Block Type EPS Insulation, approved on 12/07/23, and expiring on 04/11/27.

F. STATEMENTS

1. Statement of code conformance, complying to the **FBC 8th Edition (2023)**, dated October 21, 2024, issued by manufacturer, signed and sealed by William R. Heiden III, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0305.07
Expiration Date: June 11, 2030
Approval Date: April 23, 2026

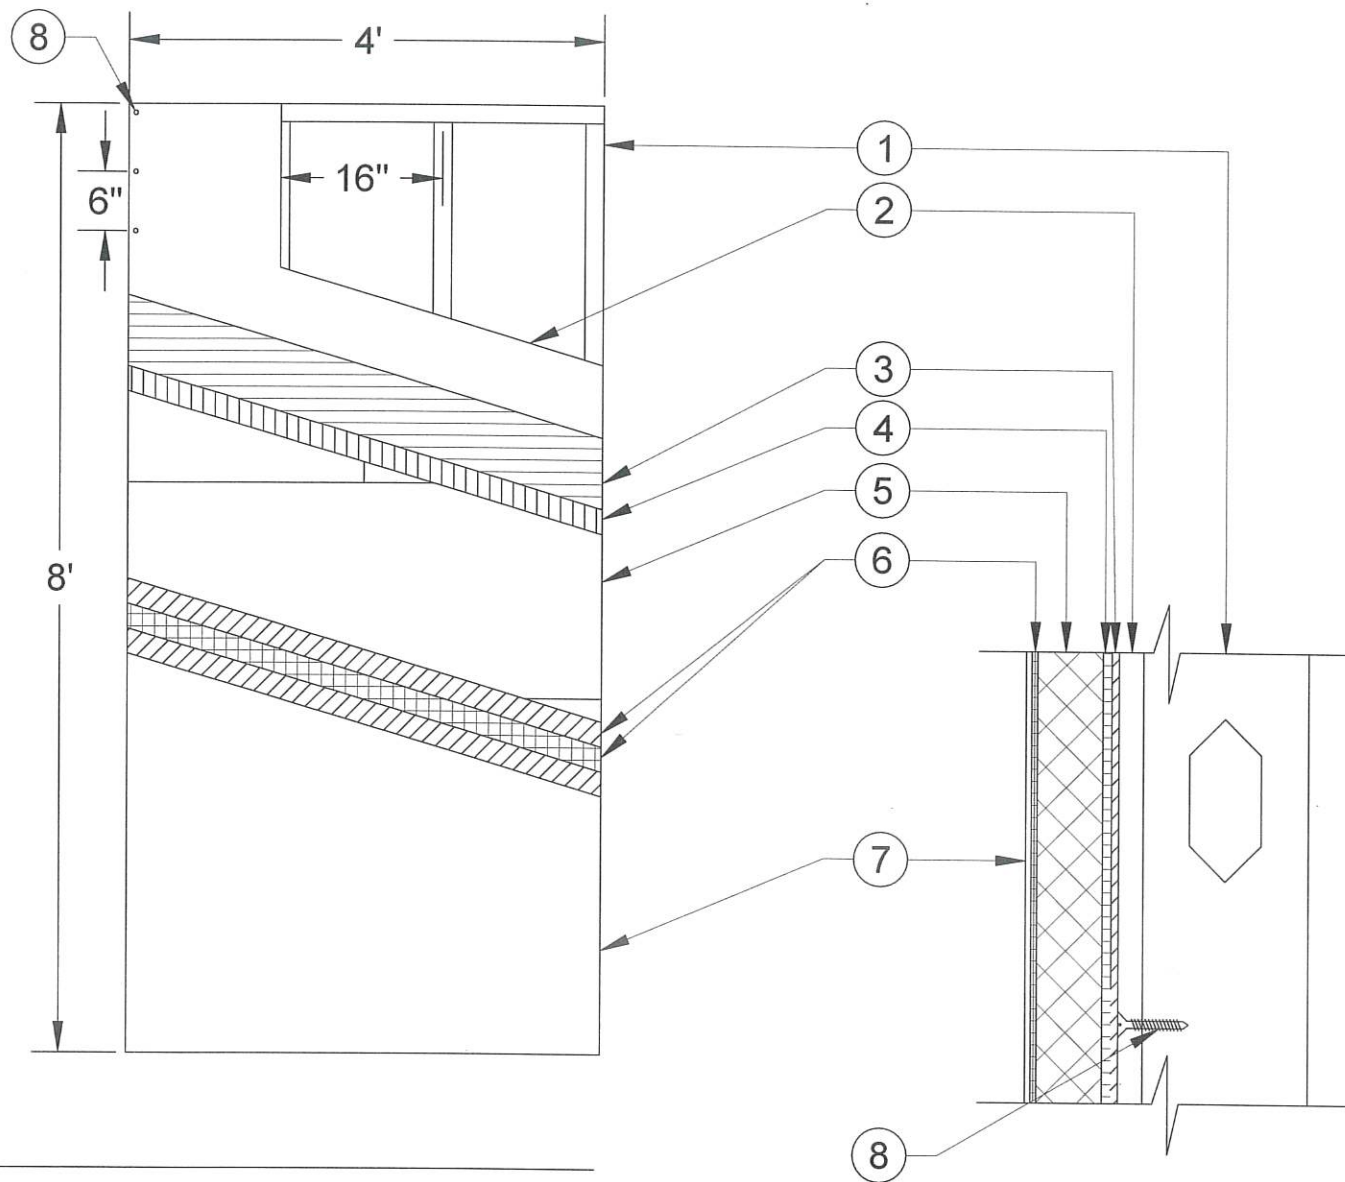

Key

- 1) 6", 18 ga steel studs and track @ 16" O.C.
- 2) 5/8" ASTM C 1177 sheathing
- 3) StoGuard with Sto Gold Coat
- 4) Sto Primer / Adhesive or Sto TurboStick®
- 5) Sto Insulation Board @ minimum 2" thick
- 6) Sto Primer/Adhesive with Sto Mesh (4.5oz/yd²) embedded
- 7) Sto Textured Finishes or StoCast Finishes
- 8) #8, 1-1/4" Wafer Head Self Drill Screws @ 6" O.C. in field and perimeter

Design Pressure Rating		
Sheathing ($\frac{5}{8}$ " thickness)	PEI Report No.	Maximum Design Pressure
Georgia-Pacific DensGlass®	PEI# 2019-6336(A)	±150 p.s.f.
USG Securock®	PEI# 2019-6336(B)	±140 p.s.f.

Description

- 1.1 Substrates and Sto products approved with the system
 - 1.1.1 ASTM C 1177 compliant sheathing over steel 6", 18 ga studs @ 16" O.C. w/ 6", 18 ga steel track. ASTM C 1177 compliant sheathing fastened to the steel studs with #8, 1-1/4" wafer head self drill screws @ 6" O.C. in field and perimeter.
 - 1.1.2 All substrates approved under this Notice of Acceptance shall be designed by a Florida Professional Engineer or Registered Architect according to the current Florida Building Code and supplements. Provisions for diaphragm action are necessary for gypsum wall substrate and the deflection shall be limited to L/240 on all cases.
- 1.2 Components of the System/Application
 - 1.2.2 Sto Gold Coat - A ready mixed flexible waterproof material applied to the dry Sto base coat via roller to approximately 10 wet mils.
 - 1.2.3 Insulation Board - Minimum 2" thick Sto Insulation Board in compliance with ASTM C 578 type 1, 1lb cu ft density meeting the requirements of FBC 2612. Sto Insulation board supplier shall have a current NOA with Miami-Dade County. The Sto Primer / Adhesive mixed with Portland Cement 1:1 by volume is applied to the back of the insulation board using a 1/2" x 1/2" U shaped notched trowel or Sto TurboStick® applied to the back of the Sto insulation board using a dispensing pistol. Uniform ribbons of adhesive are formed on the insulation board parallel to the short dimension of the board. Ribbons are oriented vertically when insulation is installed to provide drainage. The boards shall be placed, applying pressure in a running bond pattern with the long dimension horizontal and from a level base starting line. Butt all joints tightly to avoid thermal breaks. Adhesive should not get between joints.
 - 1.2.4 Sto Mesh is embedded in the wet Sto base coat by troweling from the center of the mesh to the edges of the mesh and the excess Sto base coat is removed to provide a total minimum 1/16" thickness of the reinforced base coat. This process is repeated until the entire exposed area of the insulation board is covered with base coat and mesh which is then allowed to dry for a minimum of 12 hours.
 - 1.2.5 Sto Textured Finishes or StoCast Finishes applied in accordance with manufacturer's published product instructions.

General Notes

- 1) This system has been designed in accordance with the current 2020 and 2023 Florida Building Code and the latest supplement(s).
- 2) This system has been tested in accordance with the Florida Building Code Test Protocols TAS-201, TAS-202, and TAS-203 Large Missile Impact Structural and Cyclic Testing.
- 3) This system shall be installed by a licensed plastering contractor following the recommendations of Sto Corp, this notice of acceptance and the applicable sections of the Florida Building Code.
- 4) The engineer and/or architect of record for each project using this system shall size all stud framing to ensure conformance with stud deflection and stress limitations as required by governing codes and this document.
- 5) Insulation boards shall be placed in a running bond pattern.
- 6) All studs used with this system shall be completely sheathed at the interior flange or bridged at maximum every 5 ft. of stud length or as specified by stud manufacturer.
- 7) All steel studs shall be structural with min 1-5/8" min. flange width and have minimum yield strength of 33000 PSI.
- 8) Details on page No. 2, 3 and 4 are typical and show intent to prevent water infiltration into and behind the system. Alternate detailing and specific conditions not covered by the typical details are the responsibility of the licensed design professional in consultation with Sto Corp.


SHEET	DATE: 02/03/26	REVISIONS				
	SCALE: HORIZ. N/A	NO.	DESCRIPTION	DATE	BY	APPR.
1	PREPARED BY: ZD					
	APPROVED: KS					
OF						
4						
	DWG NAME:					

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.07
Expiration Date 06/11/2030
By *[Signature]*
Miami-Dade Product Control




StoTherm® ci GMG-SM
Small Missile
18 ga Steel


sto
3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com

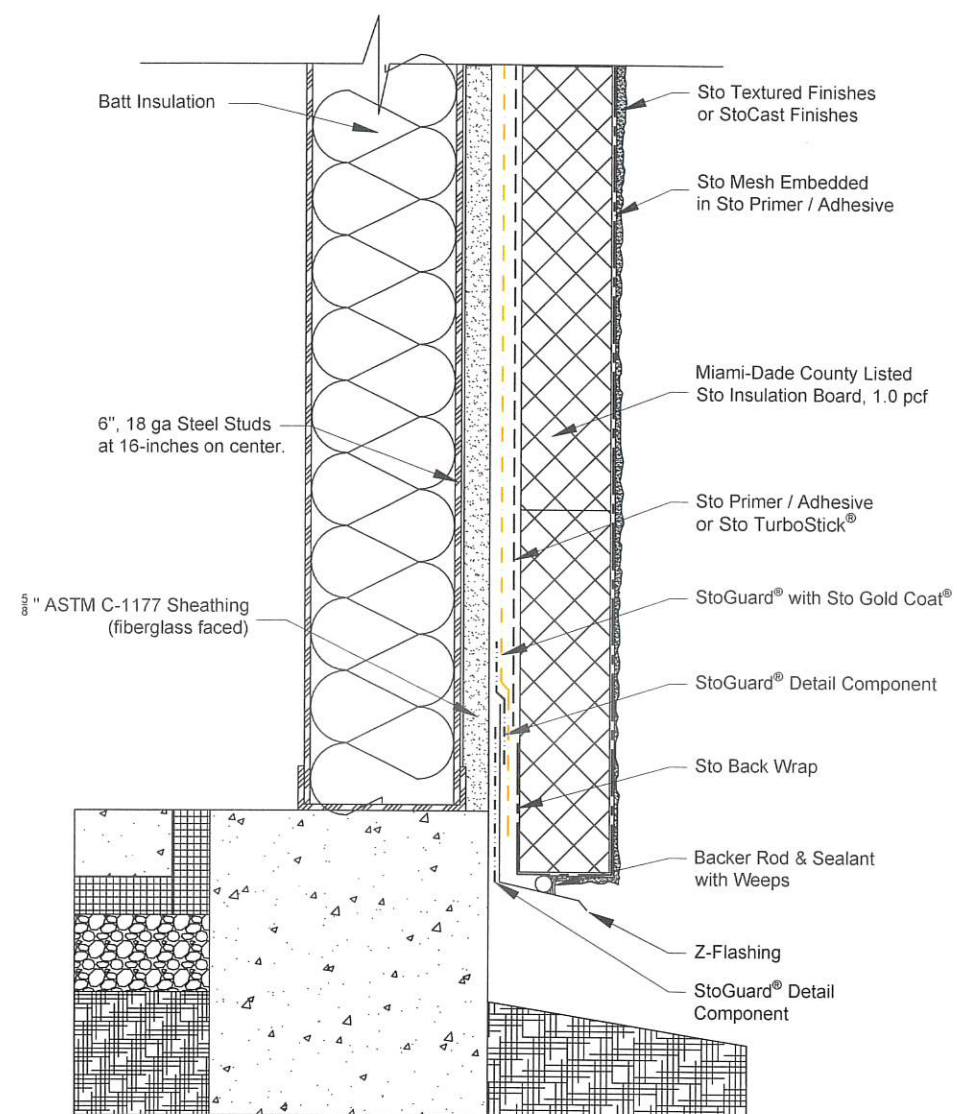

Termination at Grade
Not To Scale

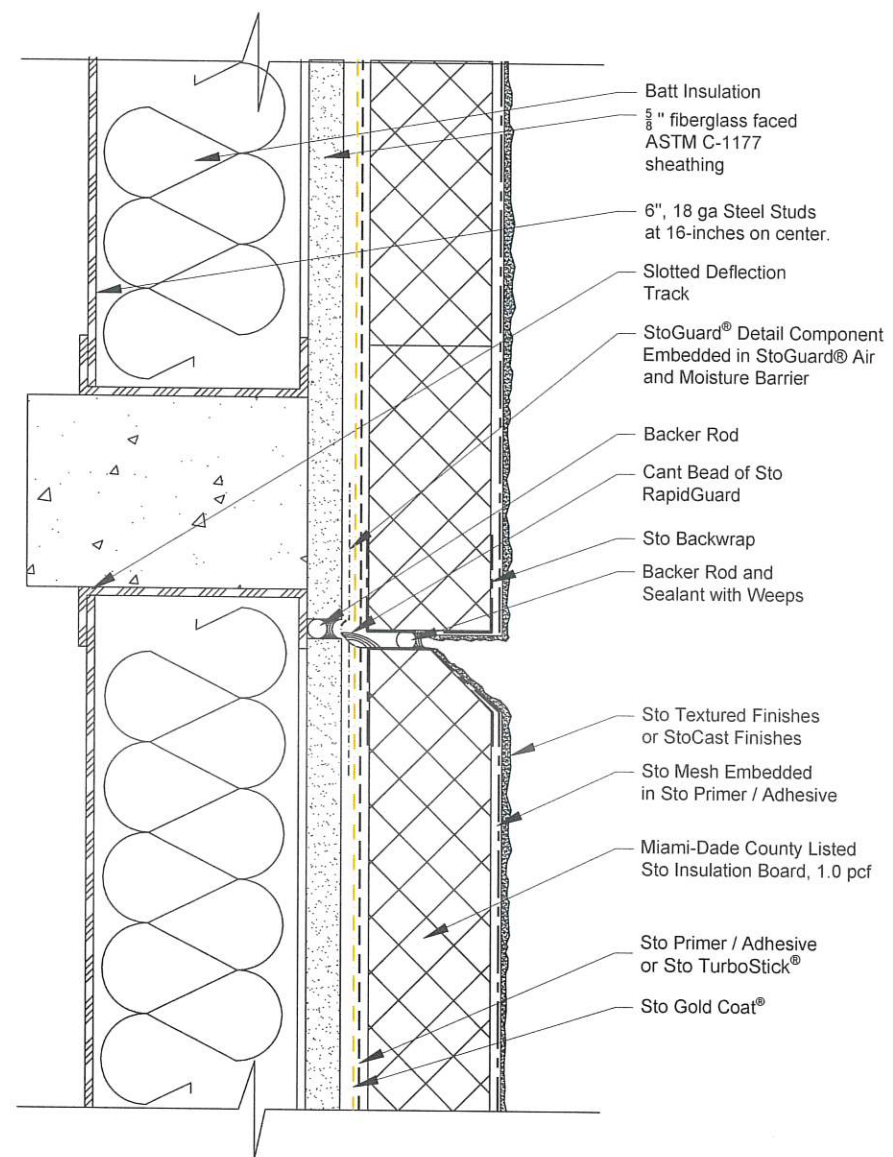


Floor Line With Deflection - Drainage at Floor Line
Not To Scale

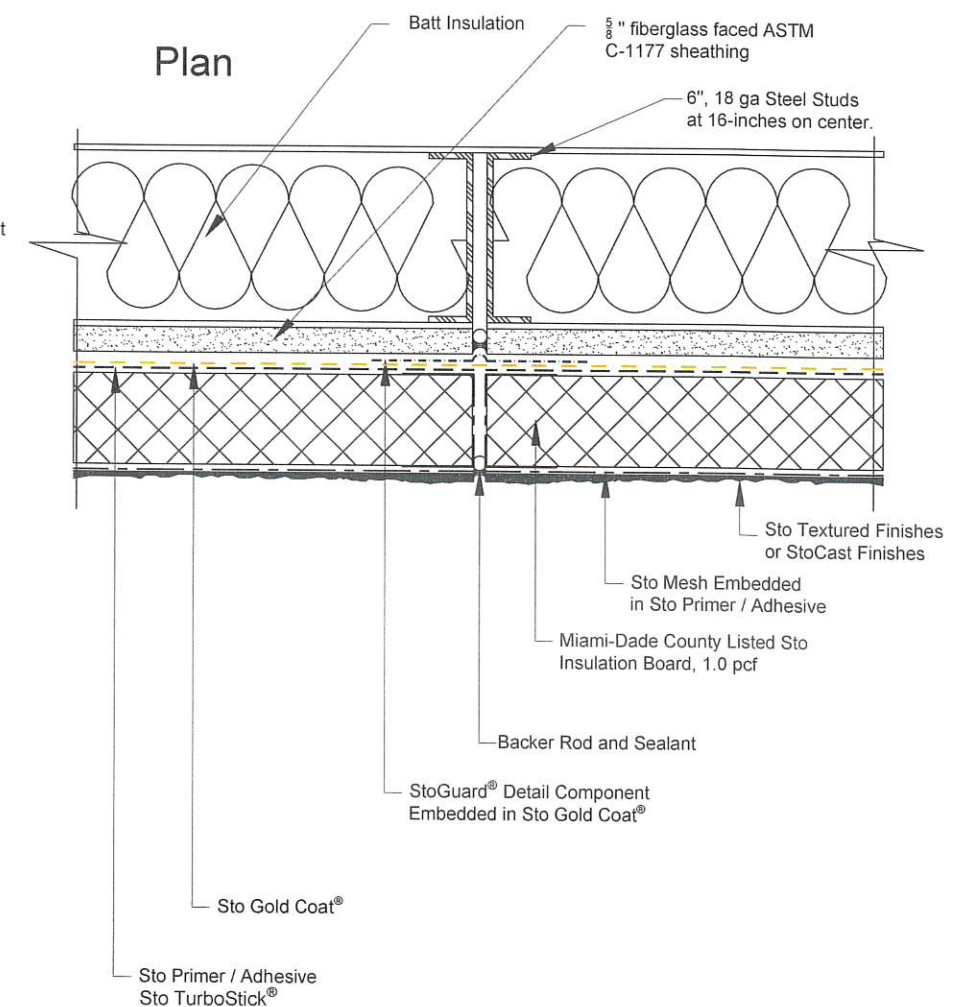

Vertical Expansion Joint In Back-Up Wall

SHEET	DATE: 02/03/26	REVISIONS				
	SCALE: HORIZ. N/A	NO.	DESCRIPTION	DATE	BY	APP.
2	PREPARED BY: ZD					
	APPROVED: KS					
OF						
4						
DWG NAME:		Property of Sta Corp. All Rights Reserved				

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.07
Expiration Date 06/11/2030
By 
Miami-Dade Product Control

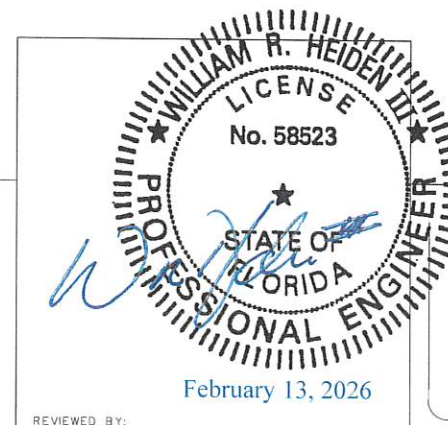

StoTherm® ci GMG-SM
Small Missile
18 ga Steel


sto 

3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com




PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.07
Expiration Date 06/11/2030
By 
Miami-Dade Product Control




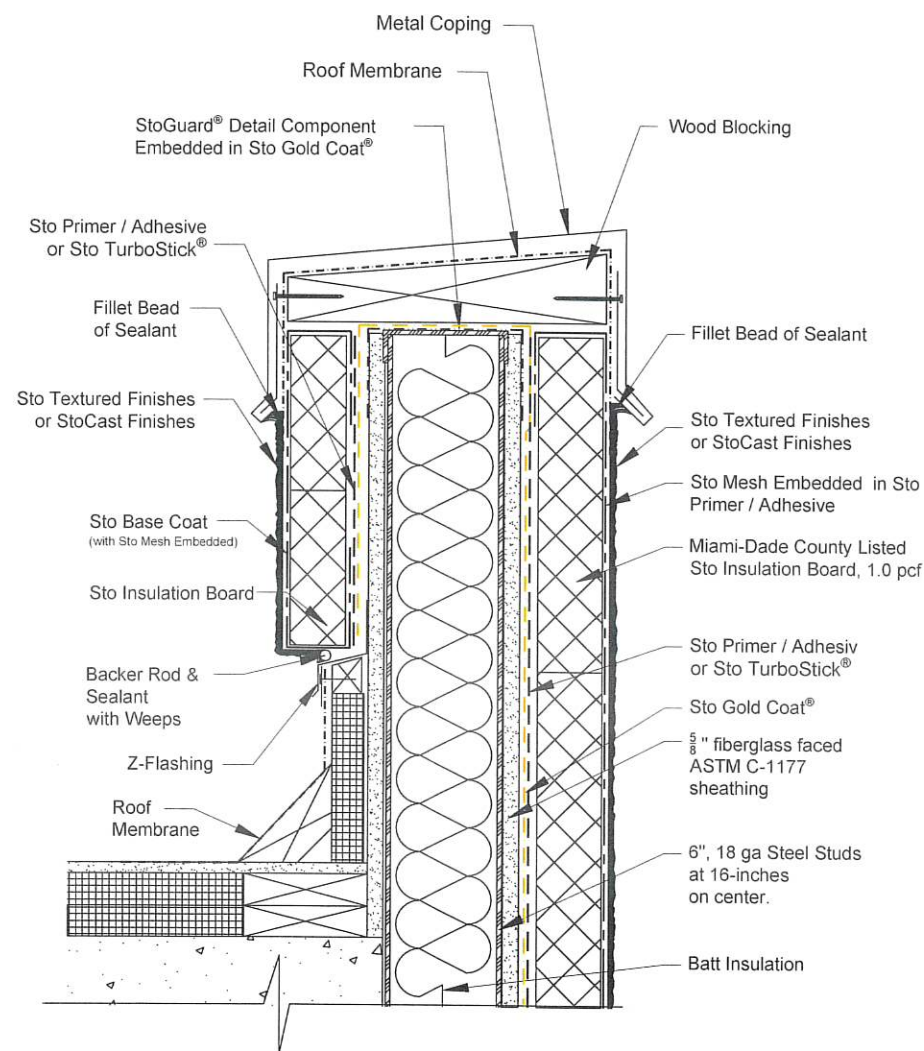

Termination at Parapet
Not To Scale

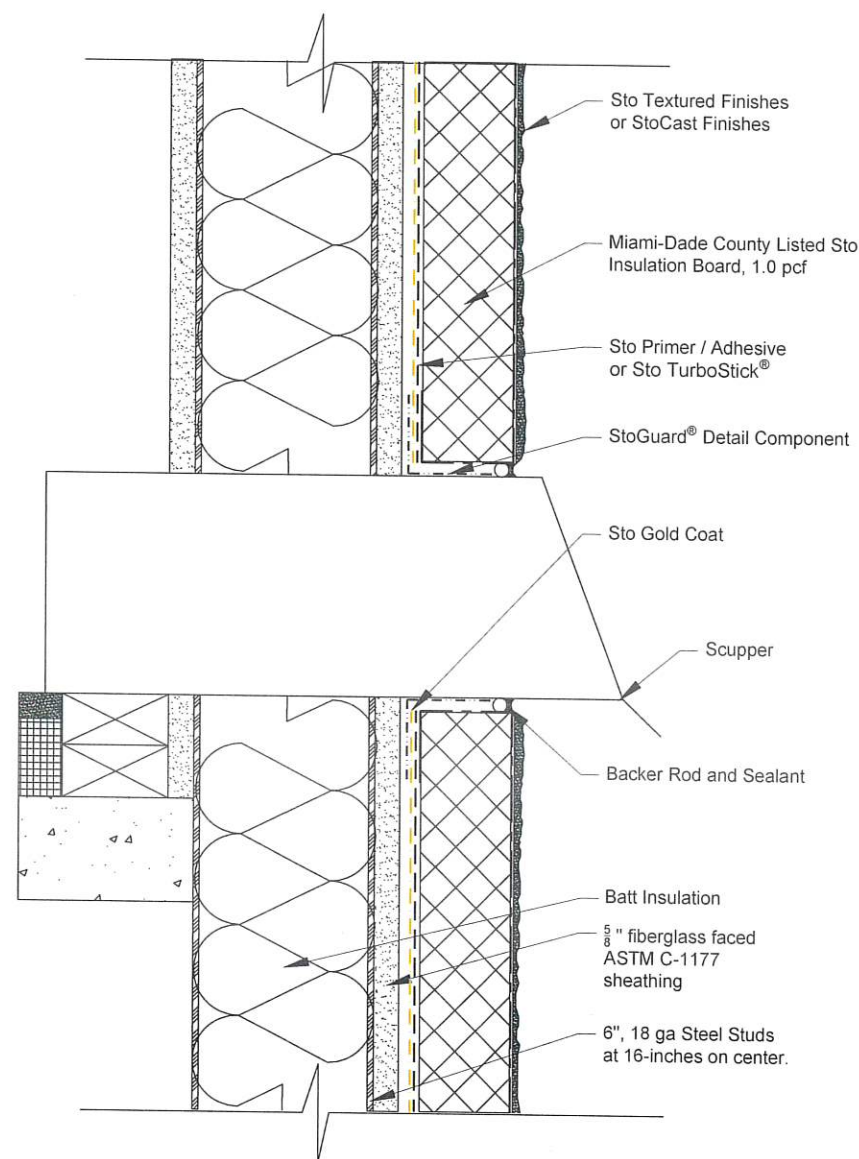


Scupper Penetration
Not To Scale

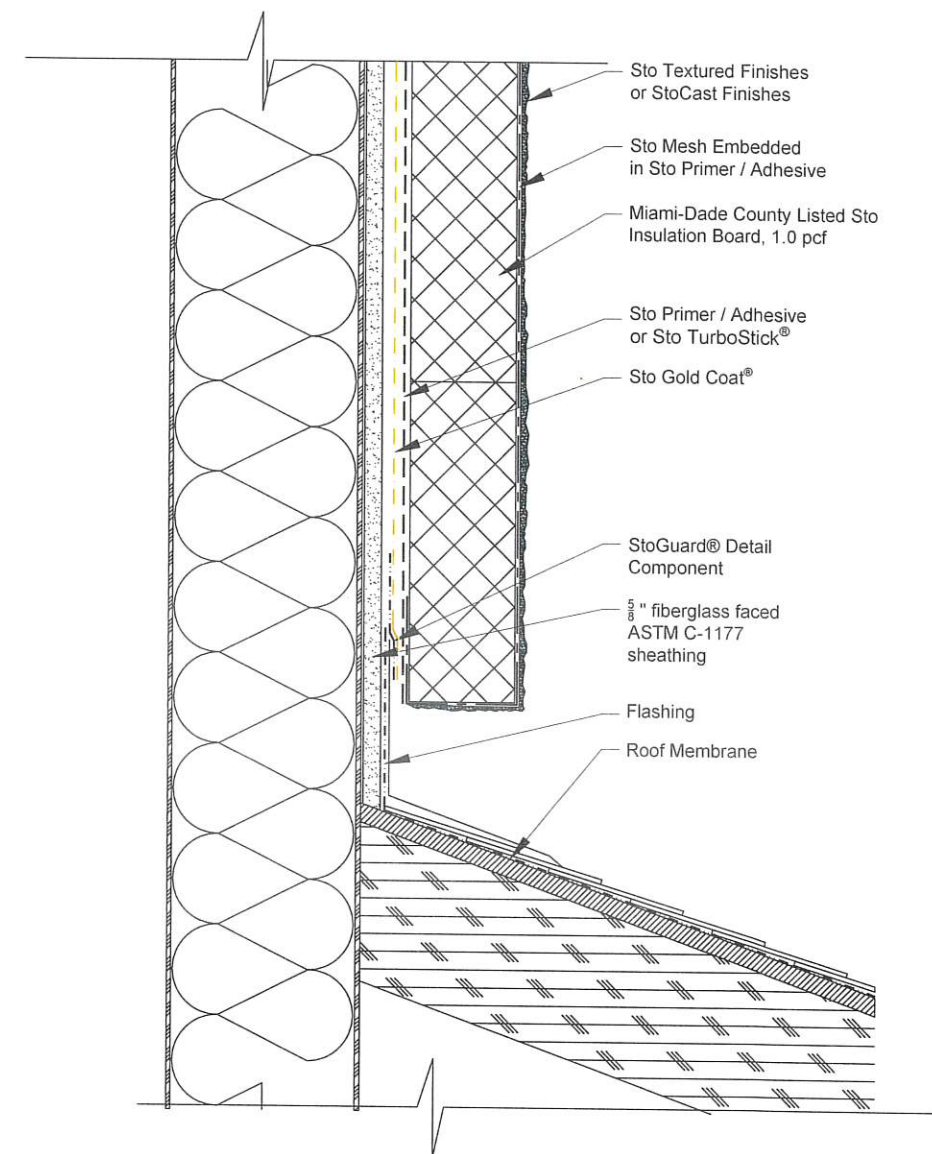

Diverter Flashing at Roof Abutment
Not To Scale

SHEET	DATE: 02/03/26	NO.	DESCRIPTION	DATE	BY	APPR.
4	SCALE: HORIZ. N/A					
OF	PREPARED BY: ZD					
4	APPROVED: KS					
	DWG NAME:					
	Property of Sto Corp. All Rights Reserved.					

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. **26-0305.07**
Expiration Date **06/11/2030**
By *[Signature]*
Miami-Dade Product Control

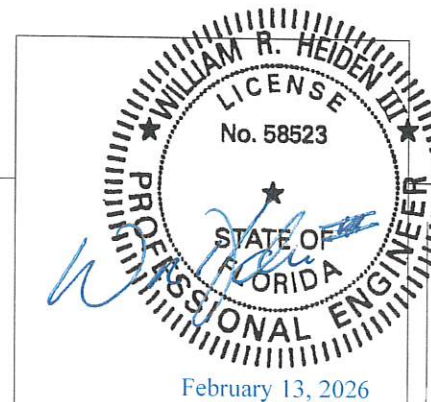

StoTherm®ci GMG-SM
Small Missile
18 ga Steel

sto
3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com