



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

Sto Corporation
3800 Camp Creek Parkway Bldg. 1400 Suite 120
Atlanta, GA 30331

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/ or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: StoTherm ci MVES GMG LM EIF System

APPROVAL DOCUMENT: Drawing titled "StoTherm ci MVES GMG LM", sheets 1 through 4 of 4, dated 02/13/2026, prepared by Sto Corporation, signed and sealed by William R. Heiden III, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large and Small Missile Impact Resistant.

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/ or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises **NOA # 22-1118.01** and consists of this page 1 and evidence page E-1, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



04/15/26

NOA No. 26-0305.09
Expiration Date: March 30, 2028
Approval Date: April 23, 2026
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. Evidence submitted under NOA # 22-1118.01, # 25-1117.02 and new

A. DRAWINGS

1. Drawing titled “StoTherm ci MVES GMG LM”, sheets 1 through 4 of 4, dated 02/13/2026, prepared by Sto Corporation, signed and sealed by William R. Heiden III, P.E.

B. TESTS

1. Test reports on
 - 1) Air Infiltration Test, per FBC, TAS 202-94
 - 2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
 - 3) Water Resistance Test, per FBC, TAS 202-94
 - 4) Large Missile Impact Test per FBC, TAS 201-94
 - 5) Cyclic Wind Pressure Loading per FBC, TAS 203-94along with marked-up drawings and installation diagram of StoTherm ci MVES Masonry Veneer, prepared by Progressive Engineering Inc., Test Report No. **2022-6081(D)**, dated 08/04/2022, signed and sealed by Carl D. Fussner, P.E.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Test report on Flatwise Tensile Strength of Sandwich Constructions per ASTM C297-16, prepared by SGS TEC Services, Test Report No. 23-2159, dated 01/18/2024, signed by James G. McCants III.
2. Notice of Acceptance No. **24-1220.04**, issued to Atlas Molded Products, a div. of Atlas Roofing Corp. for its **ThermalStar GPS EPS Wall Insulation**, approved on 11/13/2025 and expiring on 11/13/2030.

F. STATEMENTS

1. Drawing statement of code conformance to the 7th edition (2020) and 8th edition (2023) of the FBC, prepared by Sto Corp., dated 03/13/2025, signed and sealed by William R. Heiden III, P.E.




Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0305.09
Expiration Date: March 30, 2028
Approval Date: April 23, 2026


sto 

3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com


- 1) This system has been designed in accordance with the current 2020 and 2023 Florida Building Code and the latest supplement(s).
- 2) This system has been tested in accordance with the Florida Building Code Test Protocols TAS-201, TAS-202, and TAS-203 Large Missile Impact Structural and Cyclic Testing.
- 3) This system shall be installed by a licensed plastering contractor following the recommendations of Sto Corp, this notice of acceptance and the applicable sections of the Florida Building Code.
- 4) The engineer and/or architect of record for each project using this system shall size all stud framing to ensure conformance with stud deflection and stress limitations as required by governing codes and this document.
- 5) Insulation boards shall be placed in a running bond pattern.
- 6) All studs used with this system shall be completely sheathed at the interior flange or bridged at maximum every 5 ft. of stud length or as specified by stud manufacturer.
- 7) All steel studs shall be structural with min 1-5/8" min. flange width and have minimum yield strength of 50,000 PSI.
- 8) Details on page No. 2, 3 and 4 are typical and show intent to prevent water infiltration into and behind the system. Alternate detailing and specific conditions not covered by the typical details are the responsibility of the licensed design professional in consultation with Sto Corp.

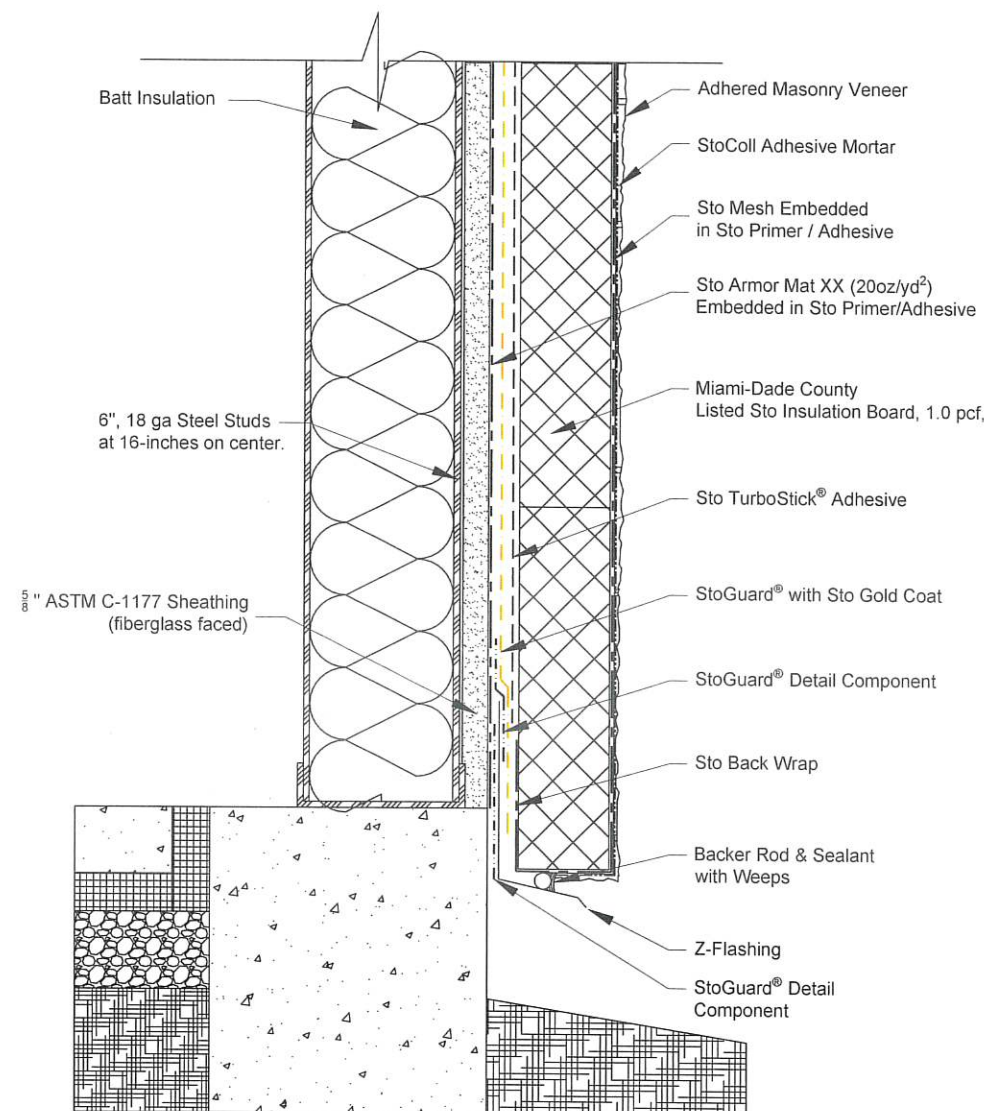

Termination at Grade
Not To Scale

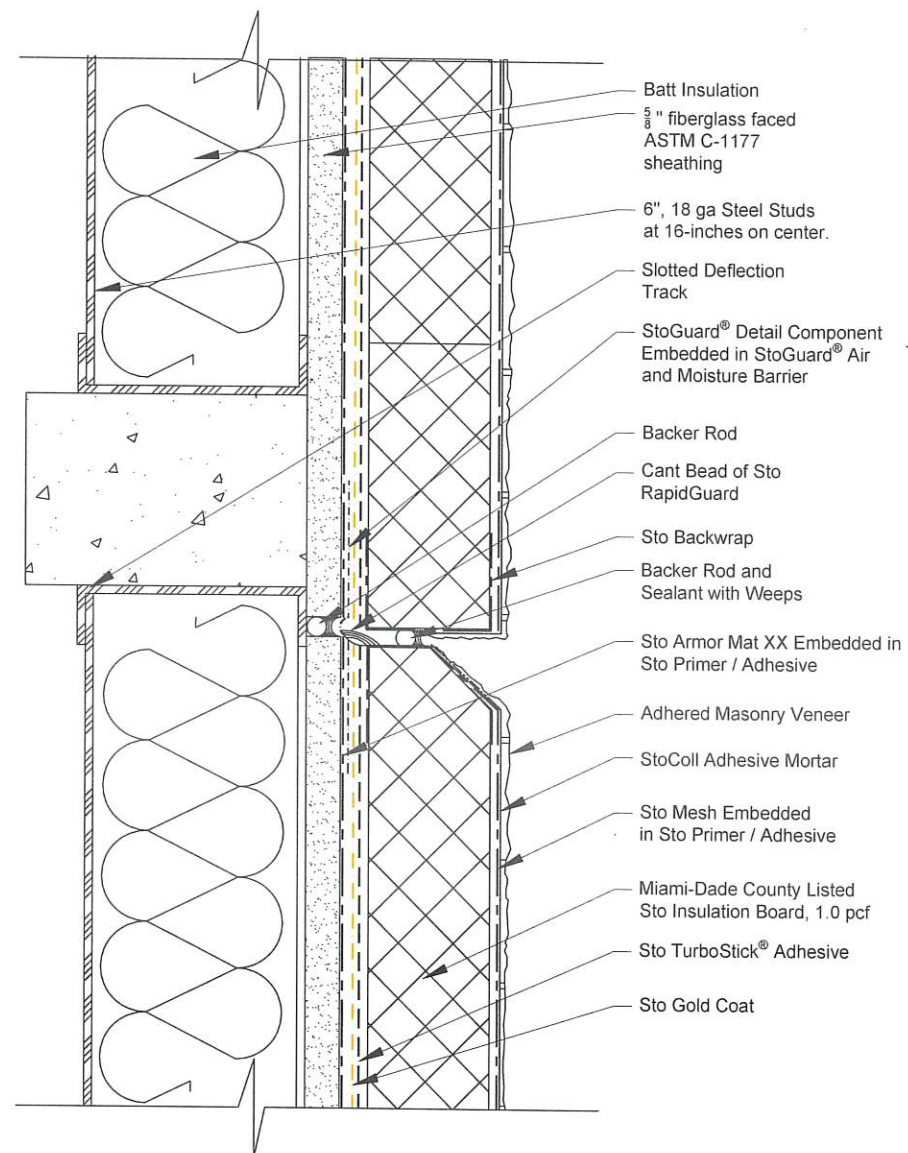

Floor Line With Deflection - Drainage at Floor Line
Not To Scale

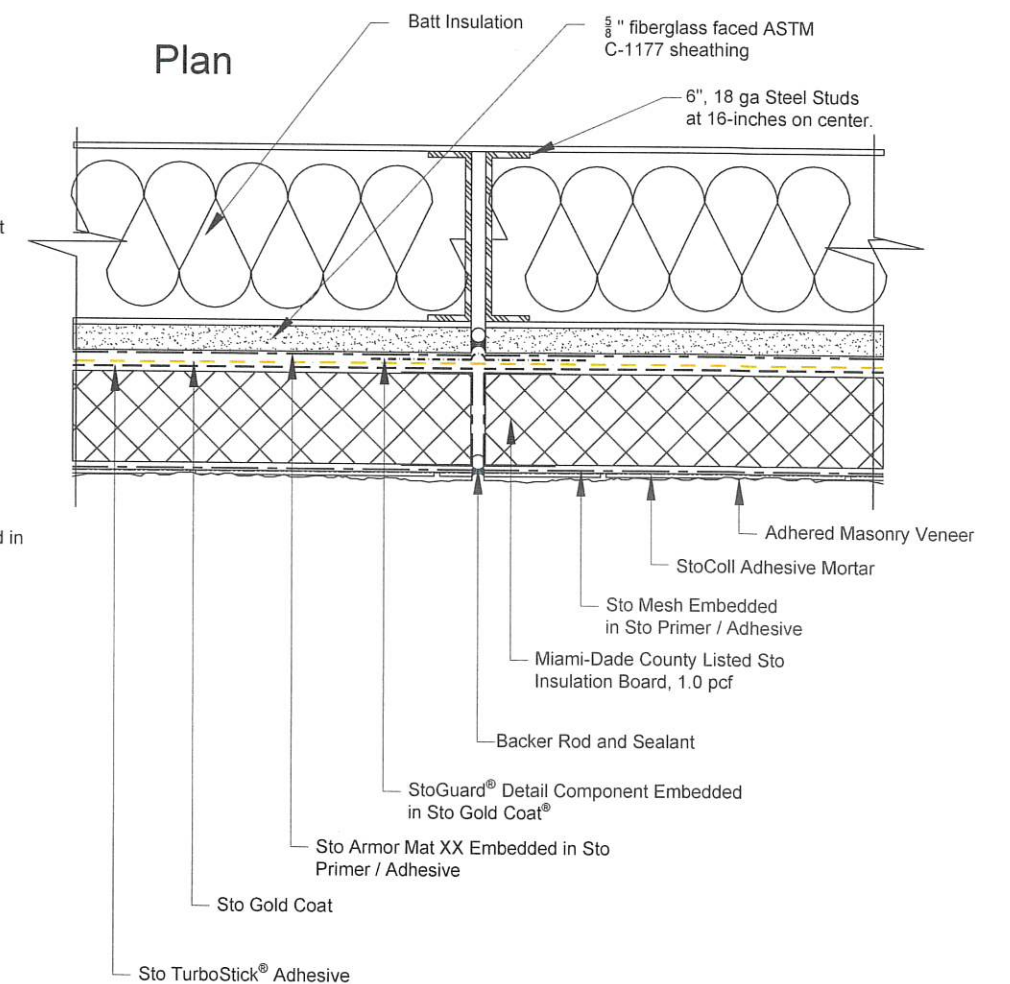

Vertical Expansion Joint In Back-Up Wall

SHEET	DATE: 02/05/26	REVISIONS				
	SCALE: HORIZ. N/A	NO.	DESCRIPTION	DATE	BY	APPR
2	PREPARED BY: ZD					
	APPROVED: KS					
OF						
4						
DWG. NAME:		Property of Sto Com. All Rights Reserved				


PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.09
Expiration Date 03/30/2028
By 
Miami-Dade Product Control




StoTherm® ci
MVES GMG-LM
Large Missile

sto 


3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com

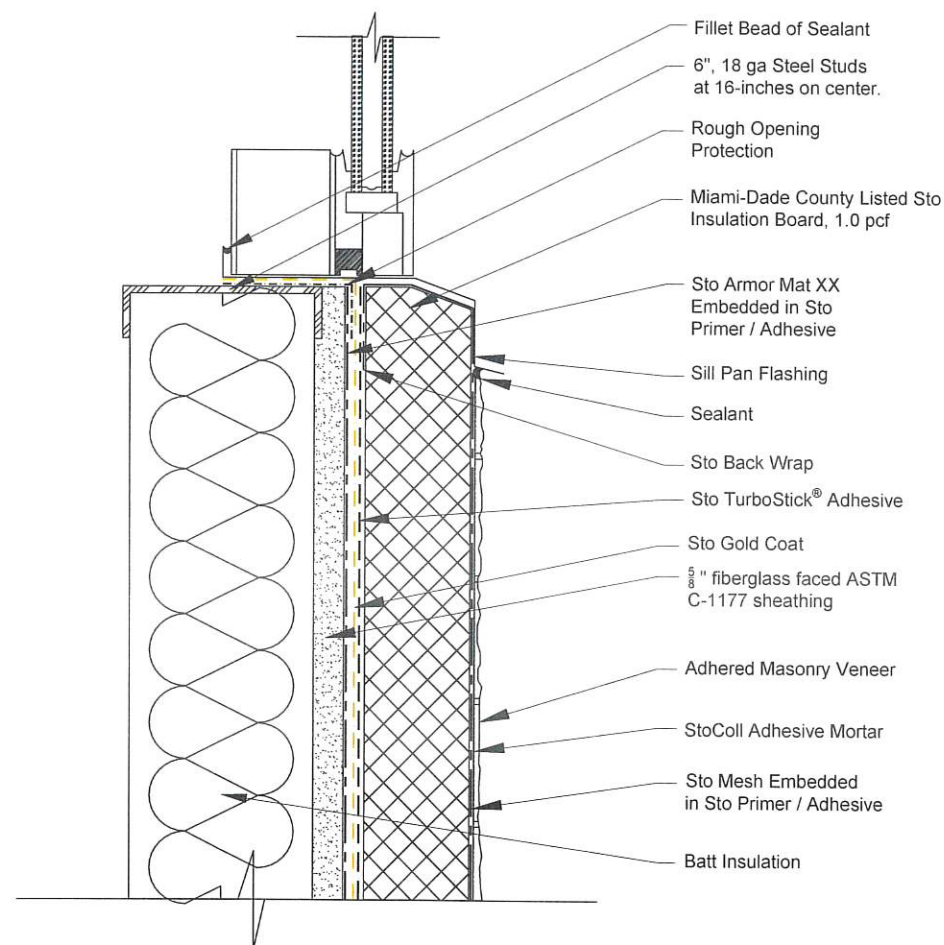

Window Sill / Receptor Style
Not To Scale

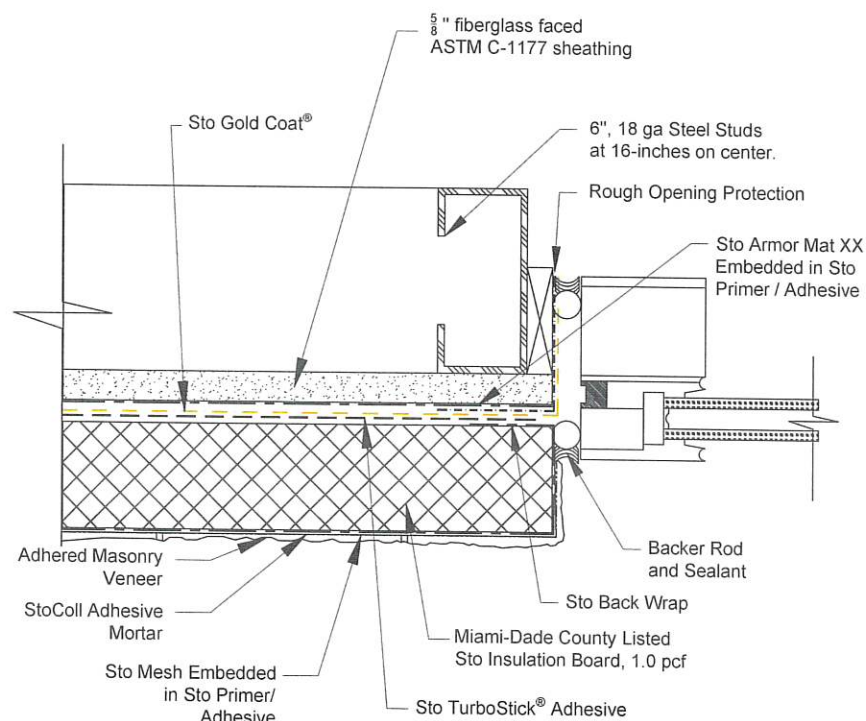

Window Jamb / Receptor Style
Not To Scale

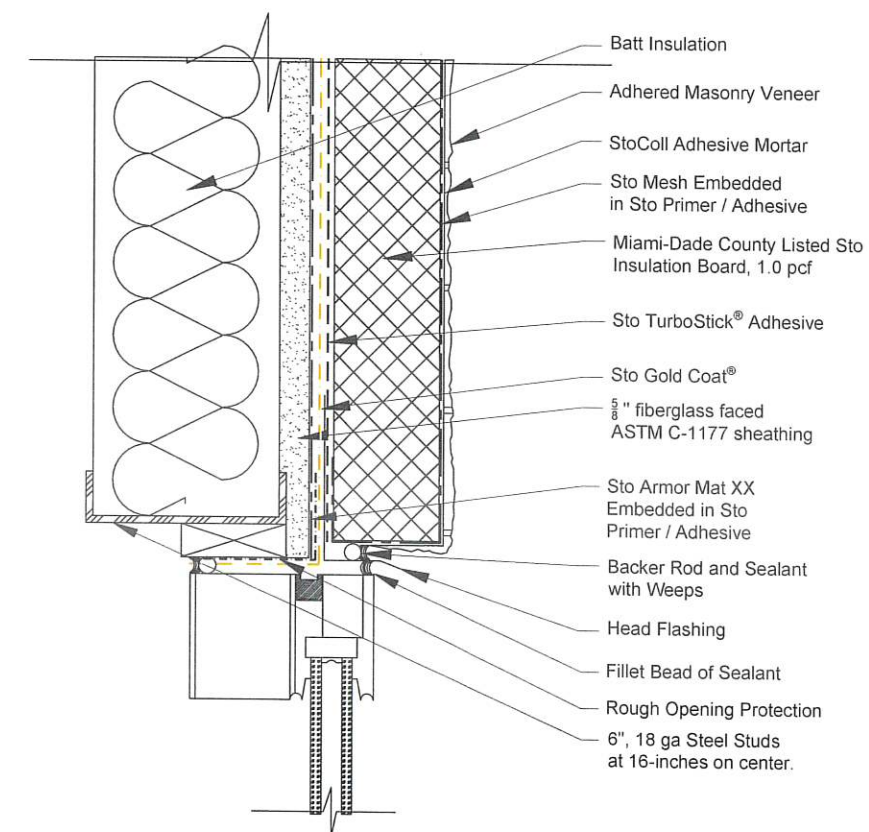


Window Head / Receptor Style
Not To Scale

SHEET	DATE: 02/05/26	REVISIONS				
	SCALE: HORIZ. N/A	NO.	DESCRIPTION	DATE	BY	APP.
3 OF 4	PREPARED BY: ZD					
	APPROVED: KS					

DWG NAME:
Property of Sto Corp. All Rights Reserved


PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.09
Expiration Date 03/30/2028
By 
Miami-Dade Product Control

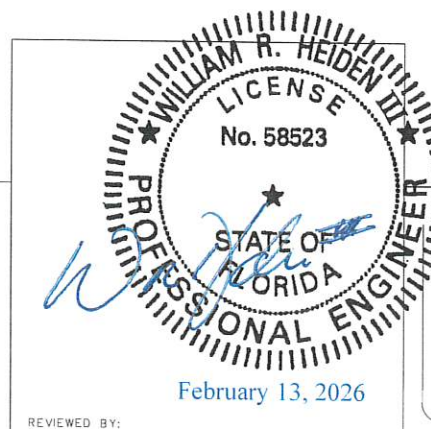


StoTherm® ci
MVES GMG-LM
Large Missile

sto


3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com

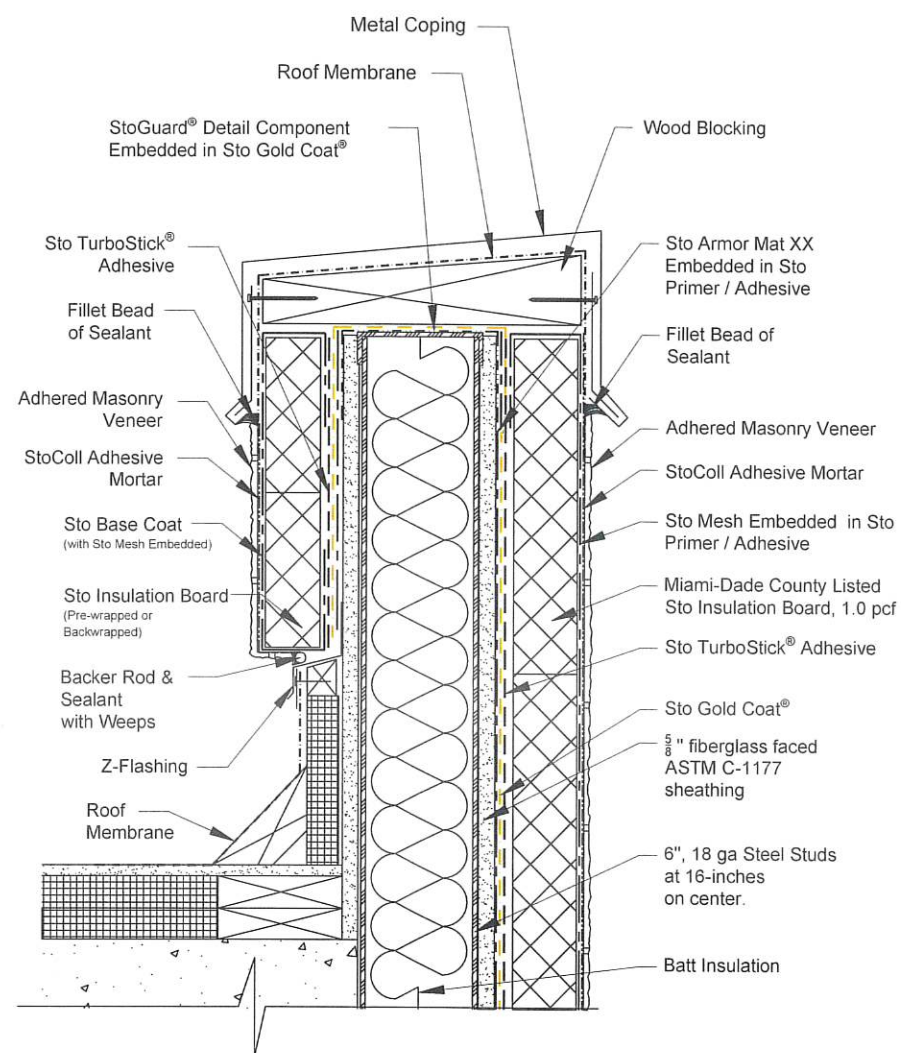

Termination at Parapet
Not To Scale

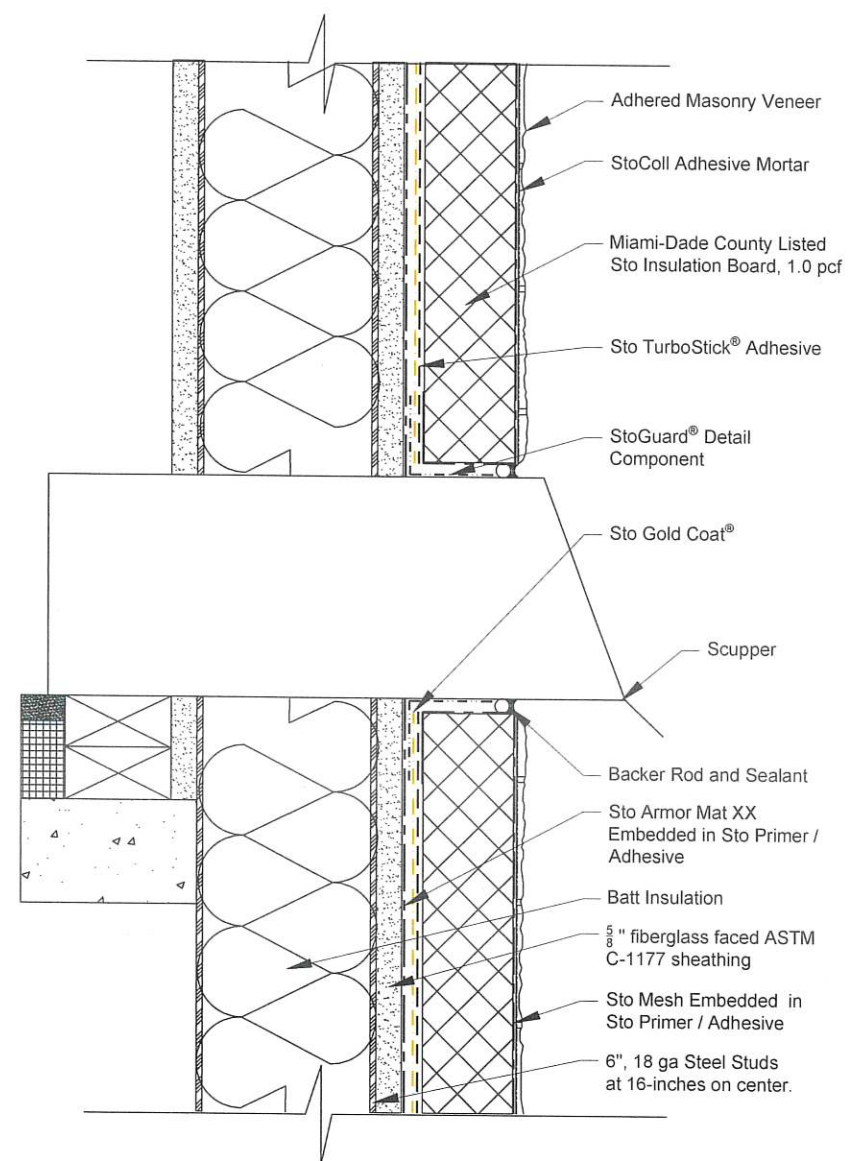


Scupper Penetration
Not To Scale

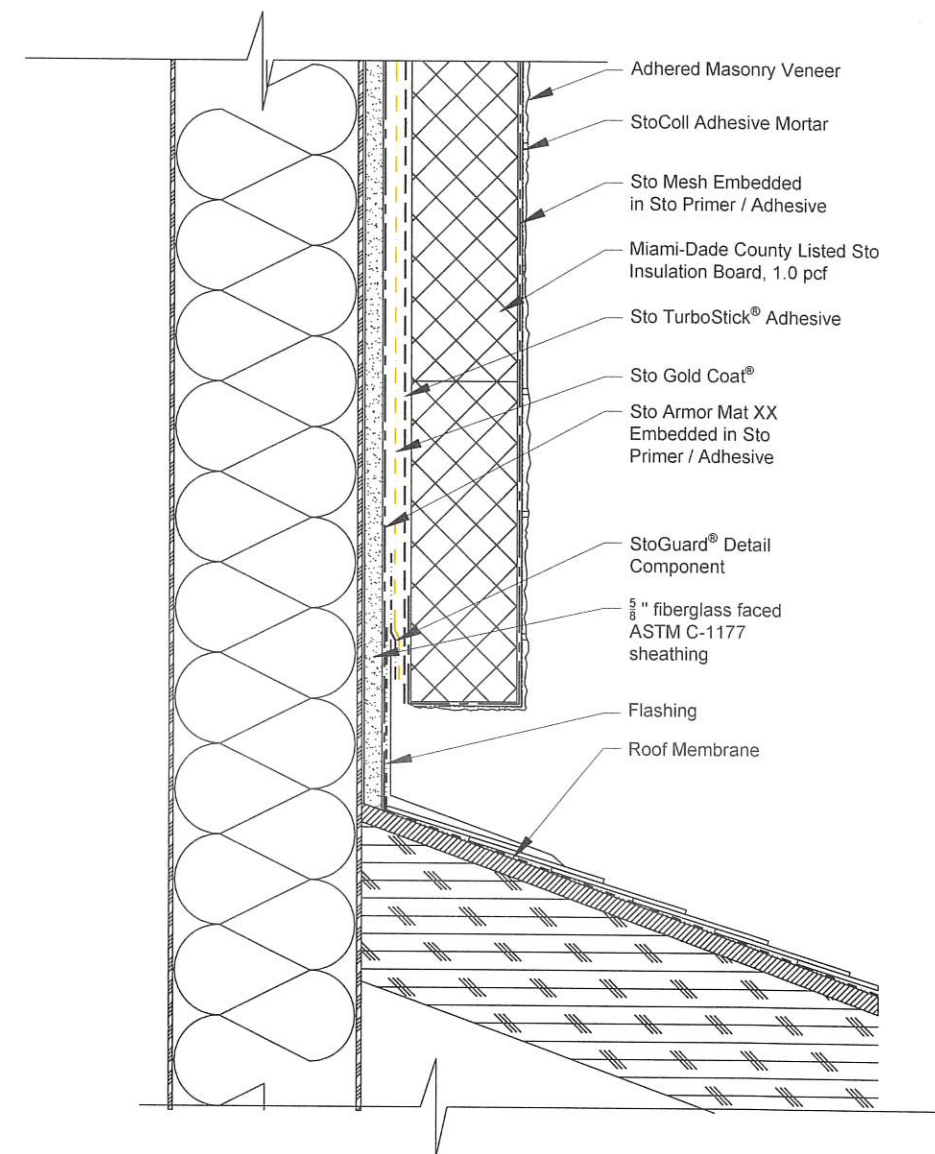

Diverter Flashing at Roof Abutment

SHEET	DATE: 02/05/26	REVISIONS				
	SCALE: HORIZ. N/A PREPARED BY: ZD APPROVED: KS	NO.	DESCRIPTION	DATE	BY	APPROVED
4						
OF						
4						
DWG. NAME:		Property of Sto Corp. All Rights Reserved				

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0305.09
Expiration Date 03/30/2028
By 
Miami-Dade Product Control

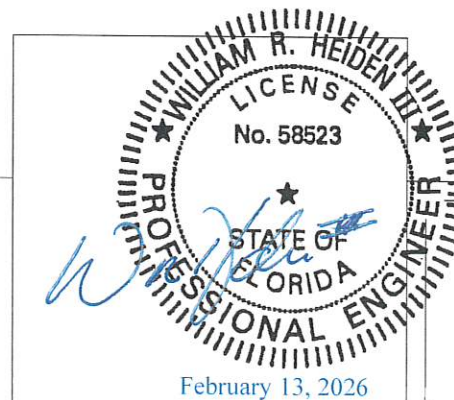

StoTherm[®] ci
MVES GMG-LM
Large Missile

sto

3800 CAMP CREEK PARKWAY
BUILDING 1400 • SUITE 120
ATLANTA, GA • 30331
(800)221-2397 • www.stocorp.com