



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

Worthington Armstrong Venture (WAVE)
101 Lindenwood Drive Suite 350
Malvern, PA 19355

SCOPE: This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: EIFS & STUCCO Ceiling System – N.I.

APPROVAL DOCUMENT: Drawing No. **WAV0001 Rev K**, titled “EIFS & STUCCO Ceiling System”, sheets 1 through 6 of 6, dated 02/24/2026, prepared by Amoruso Consulting Engineering, LLC, signed and sealed by Robert J. Amoruso, P.E. on 03/03/2026, bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Each unit or component shall bear a permanent label (grid piece at not more than 4’ o.c.) with manufacturer’s name or logo, Aberdeen, MD and following statement: "Miami-Dade County Product Control Approved" or on packaging per FBC 1709.10.3. Units or components include containers and boards.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises & renews** NOA # **22-0309.04** and consists of page 1 and evidence pages E-1, E-2, E-3 and E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



04/17/26

NOA No. 26-0311.08
Expiration Date: March 17, 2031
Approval Date: April 23, 2026

Worthington Armstrong Venture (WAVE)

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. Evidence submitted under previous NOA's

A. DRAWINGS “Submitted under NOA #15-0127.04”

1. Drawing No. WAV0001, titled “EIFS & STUCCO Ceiling System”, sheets 1 through 6 of 6, dated 06/18/2004, with revision H dated 01/19/2015, prepared by PTC Product Design Group, LLC, signed and sealed by Robert J. Amoruso, P.E.

B. TESTS “Submitted under NOA #04-0716.03”

1. Test report on Cyclic Load Pressure Test per FBC, TAS 203-94 and test report on Uniform Static Load Test per FBC, TAS 202-94 of EIFS Ceiling System, prepared by Architectural Testing Report No. **01-46423.01**, dated 03/08/2004, signed and sealed by J. A. Reed, P.E.

“Submitted under NOA #04-0716.03”

2. Test report on Cyclic Load Pressure Test per FBC TAS 203-94 and test report on Uniform Static Load Test per FBC, TAS 202-94 of Stucco Ceiling System, prepared by Architectural Testing Report No. **01-46412.02**, dated 03/08/2004, signed and sealed by J. A. Reed, P.E.

C. CALCULATIONS “Submitted under NOA #07-0119.02”

1. Anchor calculations prepared by PTC, LLC, Report No. **131-B**, dated 11/30/2006, pages 1 through 6 and Report No. **131-C**, dated 01/24/2007, pages 1 through 6, signed and sealed by Eric S. Nielsen, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS “Submitted under NOA #15-0127.04”

1. Statement letter of code conformance to the 5th edition (2014) FBC and of no financial interest, issued by PTC Product Design Group, LLC, dated 01/19/2015, signed and sealed by Robert J. Amoruso, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0311.08
Expiration Date: March 17, 2031
Approval Date: April 23, 2026

Worthington Armstrong Venture (WAVE)

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. Evidence submitted under NOA # 18-1120.12

A. DRAWINGS

1. Drawing No. **WAV0001**, titled “EIFS and STUCCO Ceiling System”, sheets 1 through 6 of 6, dated 06/18/2004, with revision I dated 11/01/2018, prepared by PTC Product Design Group, LLC, signed and sealed by Robert J. Amoruso, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None

F. STATEMENTS

1. Statement letter of code conformance to the **FBC 6th Edition (2017)**, issued by PTC Product Design Group, LLC, dated 11/01/2018, signed and sealed by Robert J. Amoruso, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0311.08
Expiration Date: March 17, 2031
Approval Date: April 23, 2026

Worthington Armstrong Venture (WAVE)

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. New evidence submitted

A. DRAWINGS

1. None.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance to the FBC 7th Edition (2020) and of no financial interest, issued by PTC Product Design Group, LLC, dated 03/22/2021, signed and sealed by Robert J. Amoruso, P.E.
2. Statement letter confirming verification testing contracted with ATI/Intertek, dated 08/16/2019, signed by Timothy J. McGill, Product Testing Manager.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0311.08
Expiration Date: March 17, 2031
Approval Date: April 23, 2026

Worthington Armstrong Venture (WAVE)

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

4. Evidence submitted under NOA # 22-0309.04 and new

A. DRAWINGS

1. Drawing No. **WAV0001 Rev K**, titled “EIFS & STUCCO Ceiling System”, sheets 1 through 6 of 6, dated 02/24/2026, prepared by Amoruso Consulting Engineering, LLC, signed and sealed by Robert J. Amoruso, P.E. on 03/03/2026.

B. TESTS

1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
2) Uniform Static Air Pressure Test, Loading per FBC TAS 202-94
3) Water Resistance Test, per FBC, TAS 202-94
4) Cyclic Wind Pressure Loading per FBC, TAS 203-94
along with marked-up drawings and installation diagram of Stucco Ceiling System, prepared by Intertek Testing, Inc., Test Report No. **M9876.01-109-18**, dated 01/12/2022, signed and sealed by Vinu Abraham, P.E.

C. CALCULATIONS

1. Anchorage calculations, prepared by Amoruso Consulting Engineering, LLC, dated 02/27/2026, signed and sealed by Robert J. Amoruso, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS


1. None.

F. STATEMENTS

1. Statement letter of code conformance to the 8th Edition (2023) of the FBC and of no financial interest, issued by Amoruso Consulting Engineering, LLC, dated 03/02/2026, signed and sealed by Robert J. Amoruso, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0311.08
Expiration Date: March 17, 2031
Approval Date: April 23, 2026

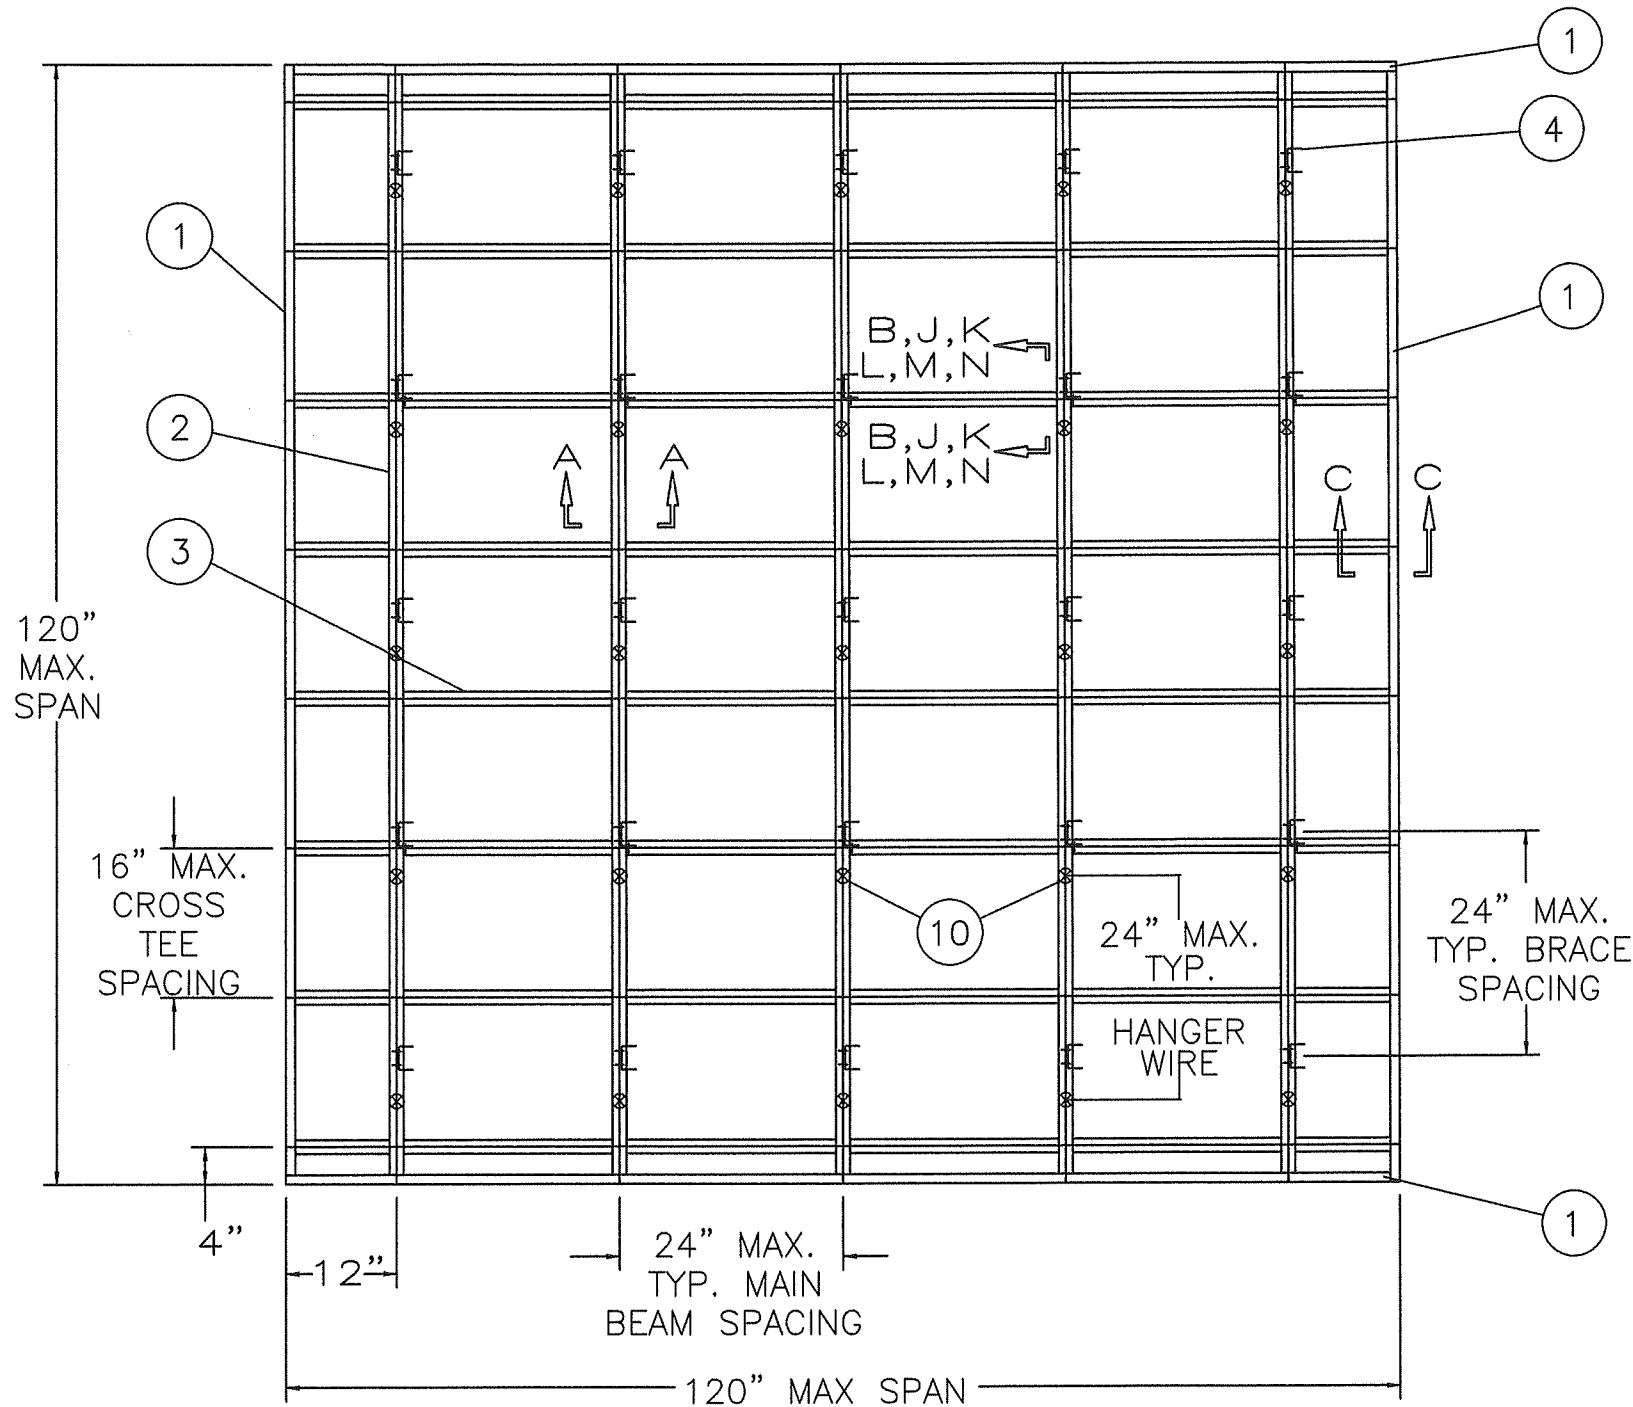

EIFS LAYOUT



EIFS AND STUCCO CEILING SYSTEM INSTALLATION DETAILS

TABLE OF CONTENTS	
SHEET	DESCRIPTION
1	ELEVATION & CROSS SECTIONS - 120" X 120" EIFS CEILING SYSTEM
2	EIFS SYSTEM DETAILS
3	ELEVATION & CROSS SECTIONS - 120" X 120" STUCCO CEILING SYSTEM
4	STUCCO SYSTEM DETAILS
5	ELEVATION & CROSS SECTIONS - STUCCO CEILING SYSTEM INSTALLATION DETAILS
6	EIFS & CEILING SYSTEMS - COMPONENTS & B.O.M.

PERFORMANCE RATING - HVHZ EIFS AND STUCCO CEILING SYSTEM	
DESIGN PRESSURE (PSF)	IMPACT RATING
+/-75	NONE

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0311.08
Expiration Date 03/17/2031

By 
Miami-Dade Product Control

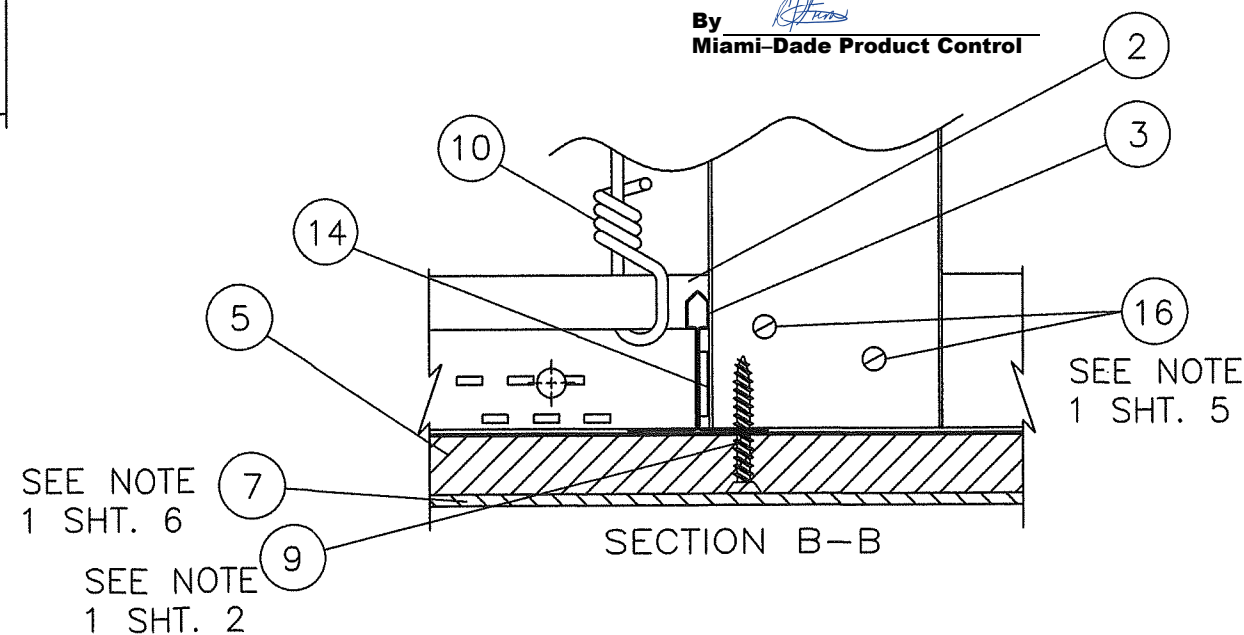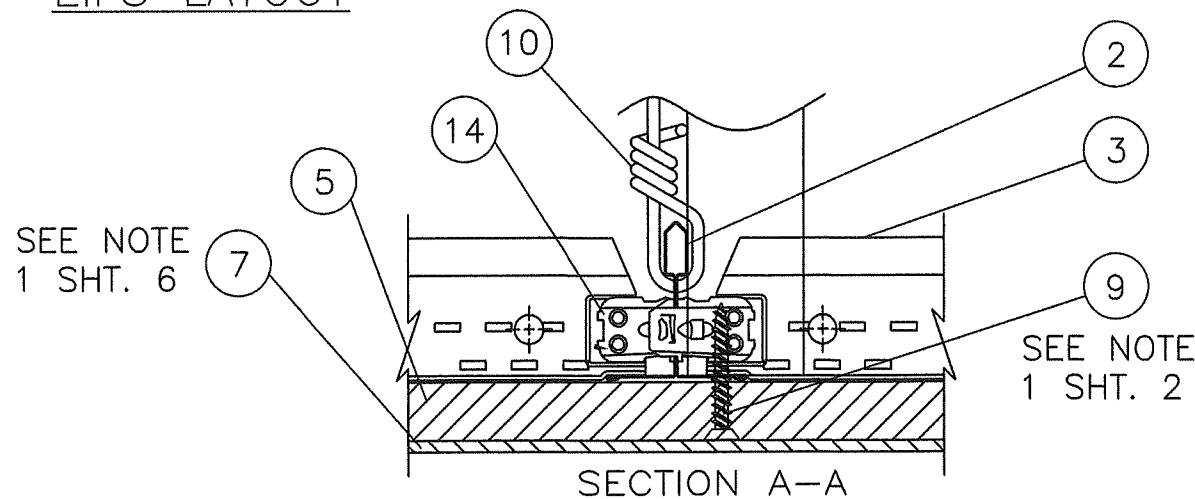


Worthington Armstrong
Venture (WAVE)
101 Lindenwood Dr. Suite 300
Malvern, PA 19355

EIFS AND STUCCO CEILING SYSTEM INSTALLATION DETAILS		DATE	BY
REVISION DESCRIPTION			
NO.			
K	UPDATE TO THE 8TH ED. (2023) FBC	2/24/26	RJA
J	UPDATE TO THE 7TH ED. (2020) FBC	2/23/22	RJA
I	UPDATE TO THE 6TH ED. (2017) FBC	11/1/18	RJA

DATE: 6/9/2025	DWN BY: RJA	CHK BY: n/a	SCALE: NONE
-------------------	----------------	----------------	----------------

ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

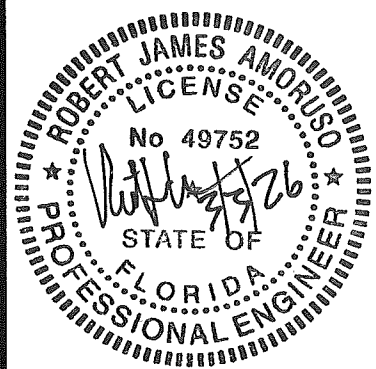



PROJECT#: ACE-2025-123
DWG/REV: WAV0001, Rev K
SHT: 1 of 6

EIFS AND STUCCO CEILING SYSTEM
INSTALLATION DETAILS

NO.	REVISION DESCRIPTION	BY	DATE
K	UPDATE TO THE 8TH ED. (2023) FBC	RJA	2/24/26
J	UPDATE TO THE 7TH ED. (2020) FBC	RJA	2/23/22
I	UPDATE TO THE 6TH ED. (2017) FBC	RJA	11/1/18


DATE: 6/9/2025	DWN BY: RJA	CHK BY: n/a	SCALE: NONE
-------------------	----------------	----------------	----------------

ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

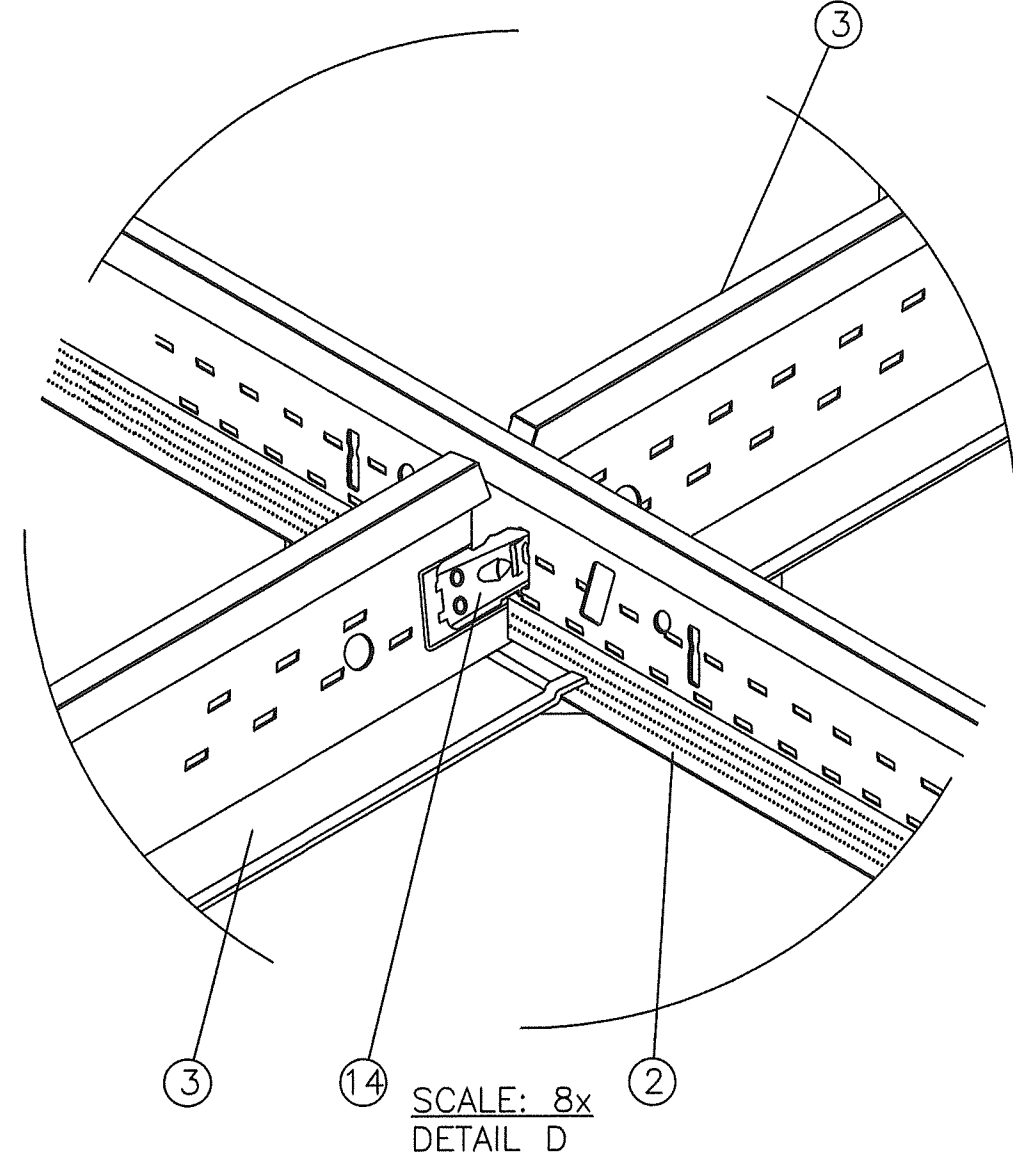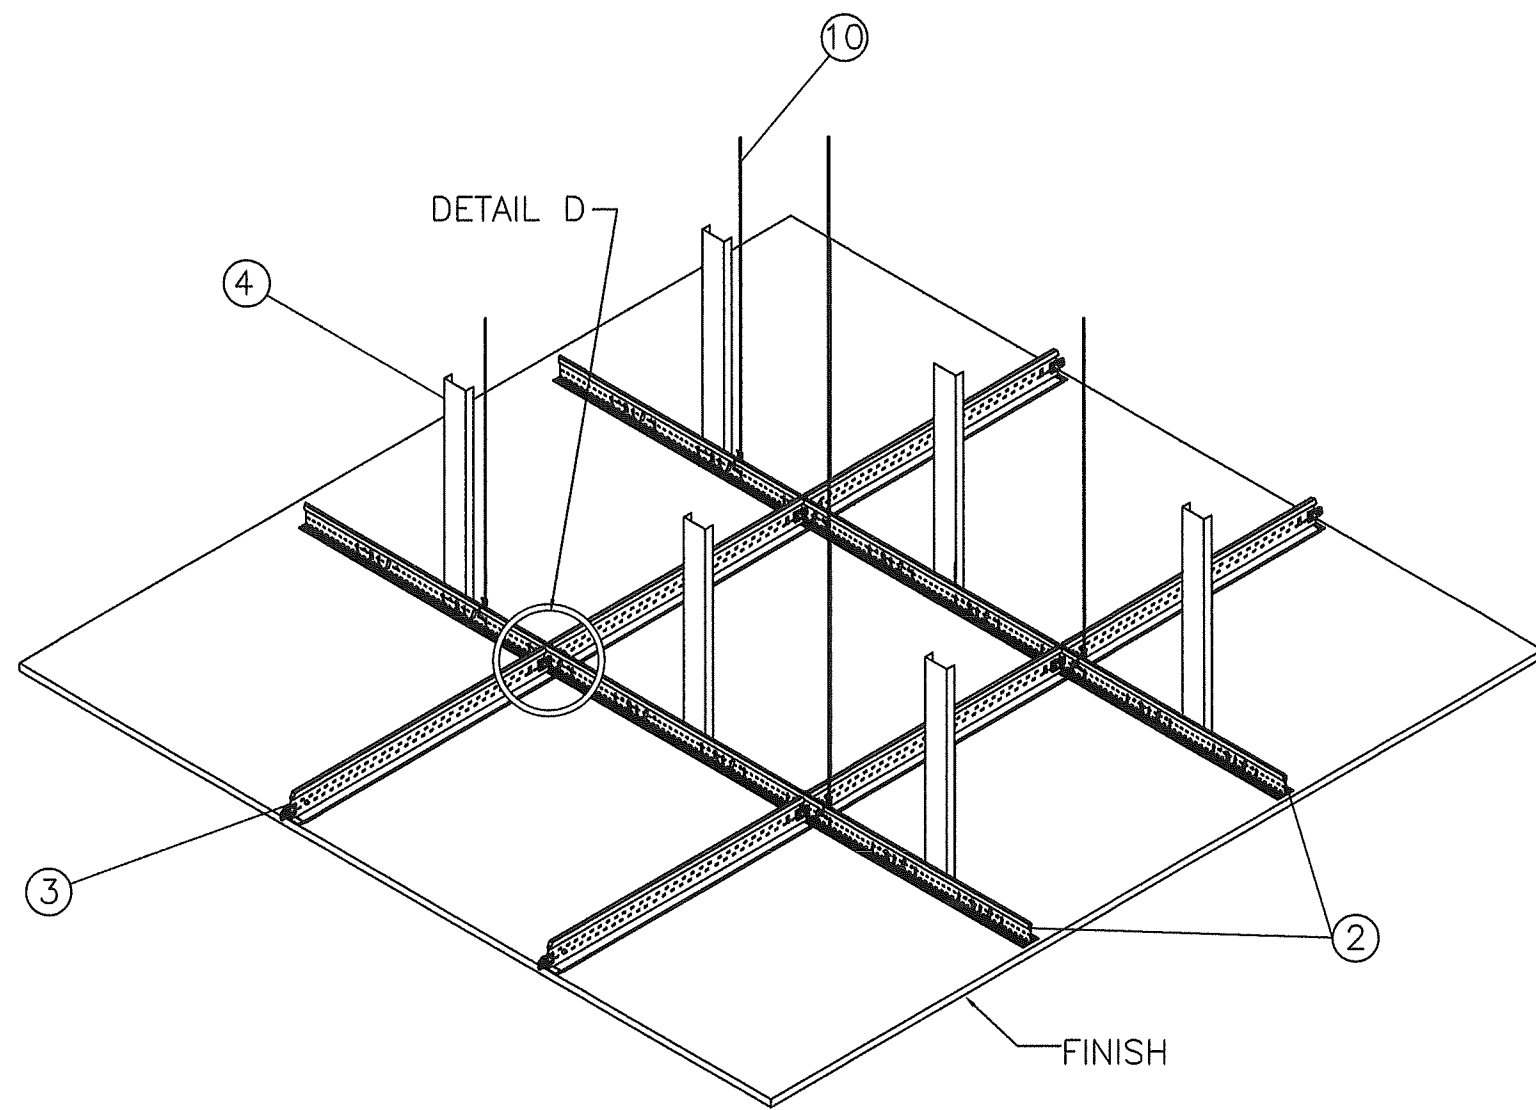


NOTES:

- 1) ITEM #9 THE 1 1/4" DRYWALL SCREW IS SPACED 8" ON CENTER MAX. THROUGH THE DENSGLASS AND INTO THE MAIN RUNNERS, CROSS TEES & PERIMETER CHANNEL.
- 2) HANGER WIRE MUST BE SECURED AT EACH END WITH A MIN. OF (3) TURNS IN 3" PER ASTM C636.
- 3) HANGER WIRE TO BE SPACED A MAXIMUM OF 24" O.C.
- 4) VERTICAL BRACING TO BE INSTALLED ON MAIN BEAMS AT A MAXIMUM OF 24" O.C.
- 5) THIS PRODUCT IS DESIGNED TO COMPLY WITH THE HIGH VELOCITY HURRICANE ZONE (HVHZ) OF THE 8TH EDITION (2023) FLORIDA BUILDING CODE (FBC) AT THE DESIGN PRESSURES STATED HEREIN.

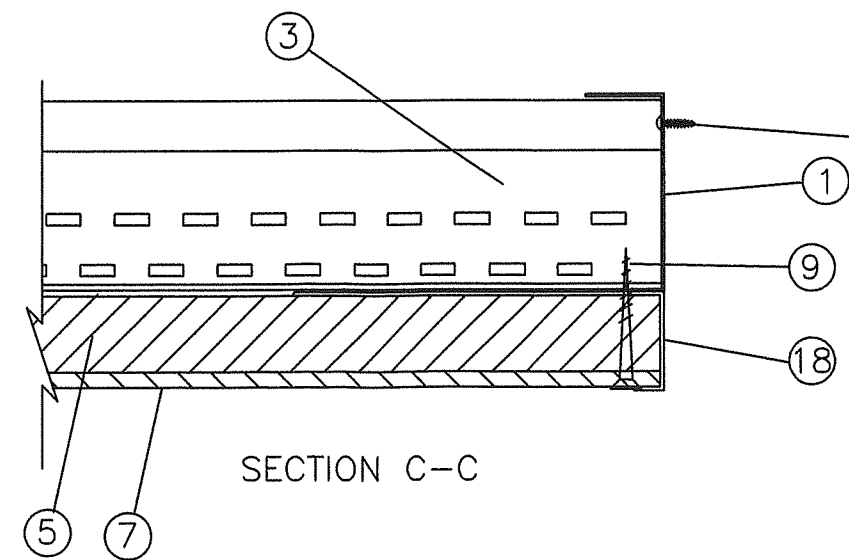


SECURED 12" O.C. W/ (3) WOOD
TO MAIN STRUCTURE (2) STEEL
(2) CONCRETE

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0311.08
Expiration Date 03/17/2031
By Miami-Dade Product Control

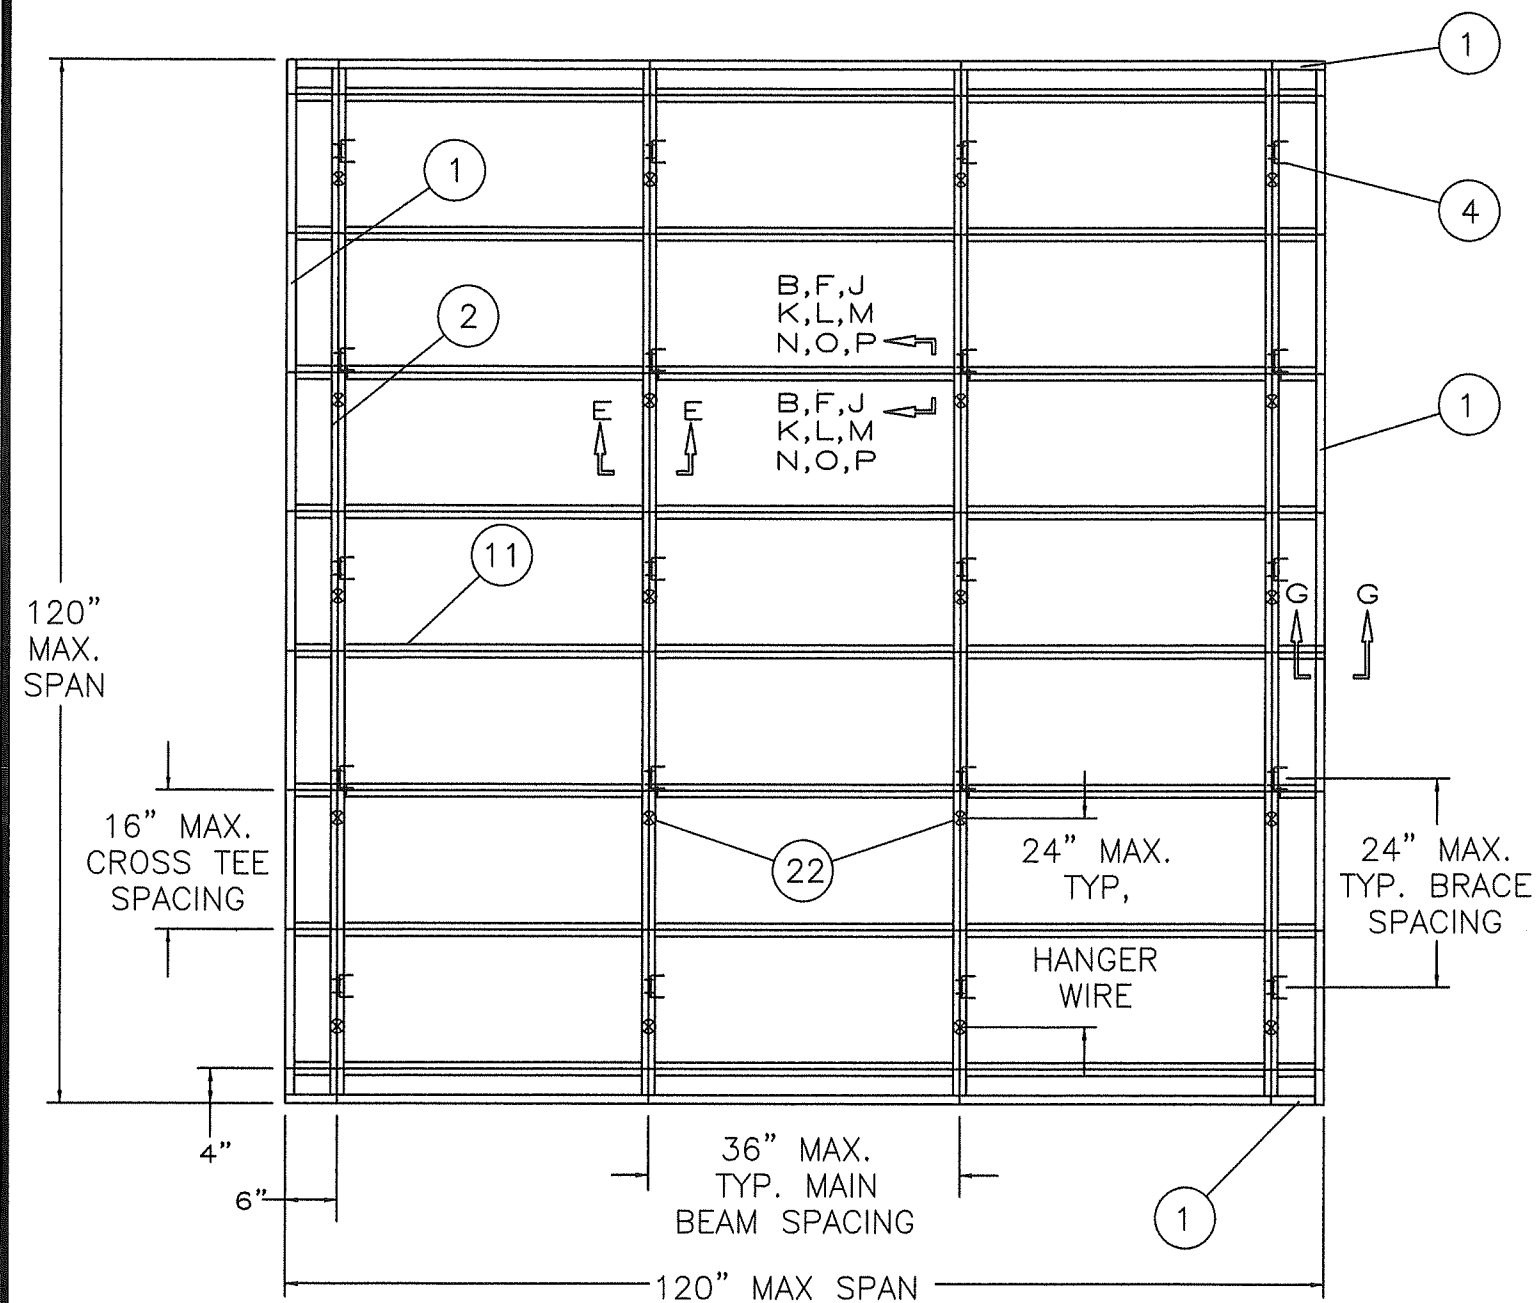

STUCCO LAYOUT

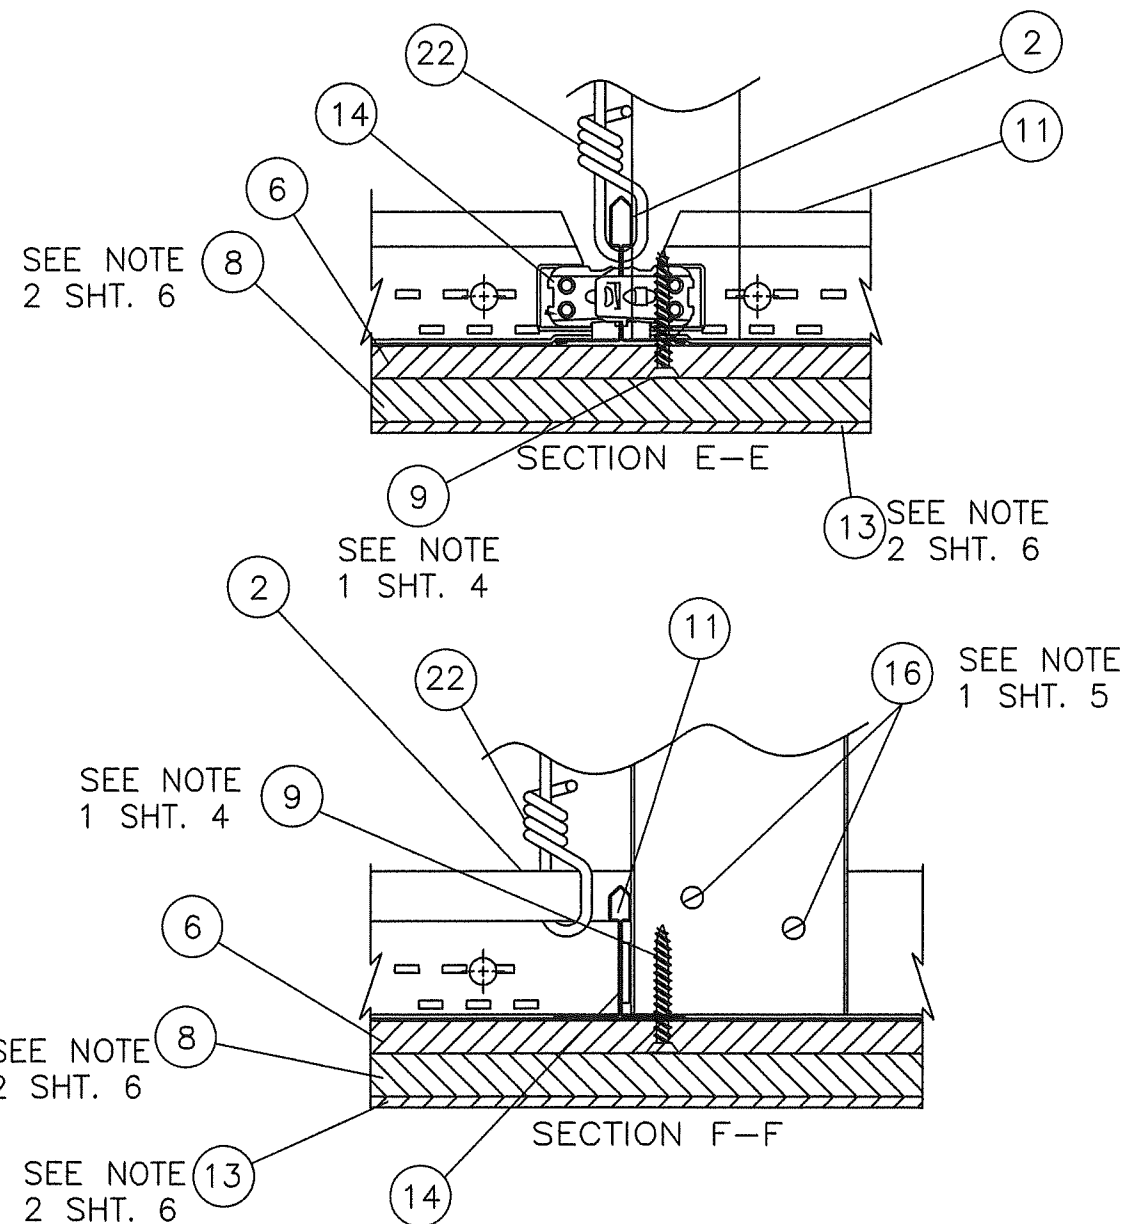

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0311.08
Expiration Date 03/17/2031
By *[Signature]*
Miami-Dade Product Control


Worthington Armstrong
Venture (WAVE)
101 Lindenwood Dr. Suite 300
Malvern, PA 19355

**EIFS AND STUCCO CEILING SYSTEM
INSTALLATION DETAILS**

NO.	REVISION DESCRIPTION	BY	DATE
K	UPDATE TO THE 8TH ED. (2023) FBC	RJA	2/24/26
J	UPDATE TO THE 7TH ED. (2020) FBC	RJA	2/23/22
I	UPDATE TO THE 6TH ED. (2017) FBC	RJA	11/1/18

DATE: 6/9/2025	DWN BY: RJA	CHK BY: n/a	SCALE: NONE
-------------------	----------------	----------------	----------------

ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

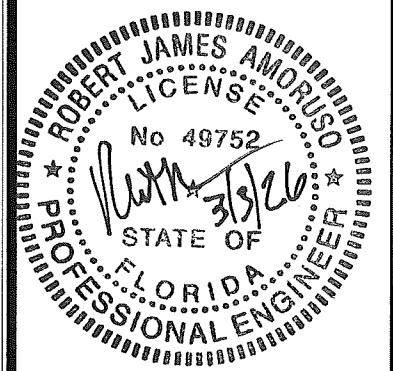


PROJECT#: ACE-2025-123
DWG/REV: WAV0001, Rev K
SHT: 3 of 6

EIFS AND STUCCO CEILING SYSTEM
INSTALLATION DETAILS

NO.	REVISION DESCRIPTION	BY	DATE
K	UPDATE TO THE 8TH ED. (2023) FBC	RIA	2/24/26
J	UPDATE TO THE 7TH ED. (2020) FBC	RIA	2/23/22
I	UPDATE TO THE 6TH ED. (2017) FBC	RIA	11/1/18

DATE: 6/9/2025	DWN BY: RIA	CHK BY: n/a	SCALE: NONE
-------------------	----------------	----------------	----------------




ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

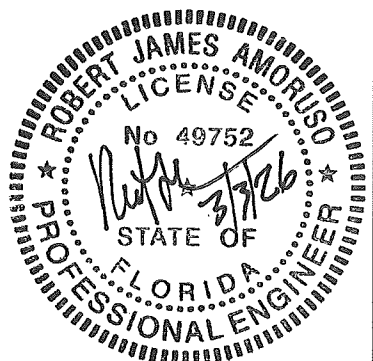

PROJECT#: ACE-2025-123

DWG/REV: WAV0001, Rev K

SHT: 4 of 6


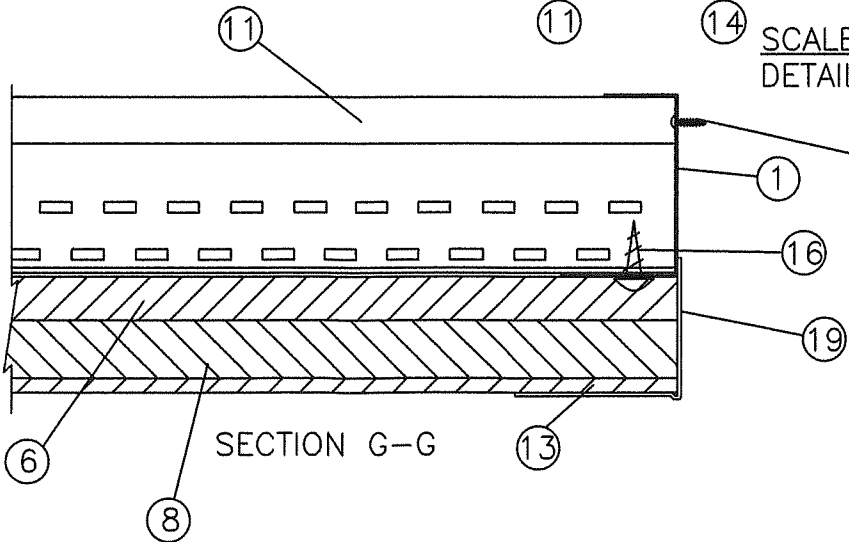
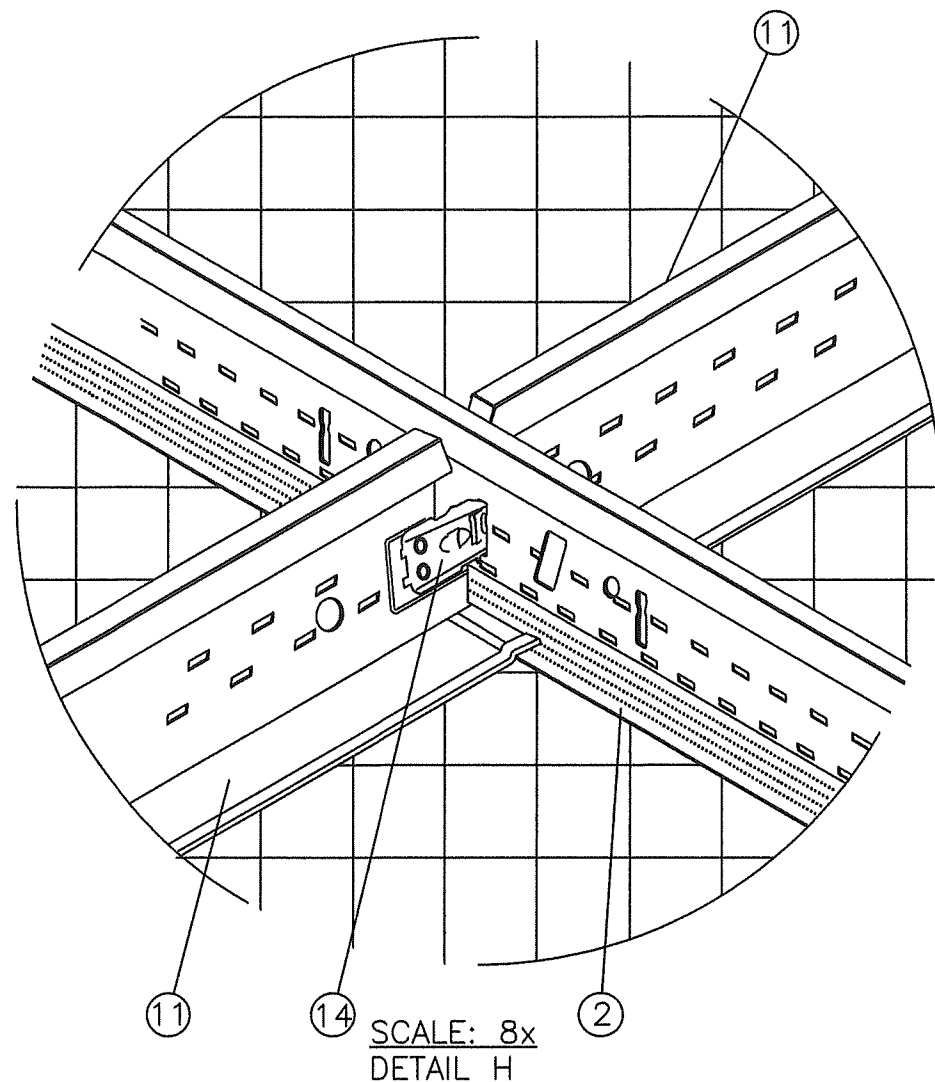
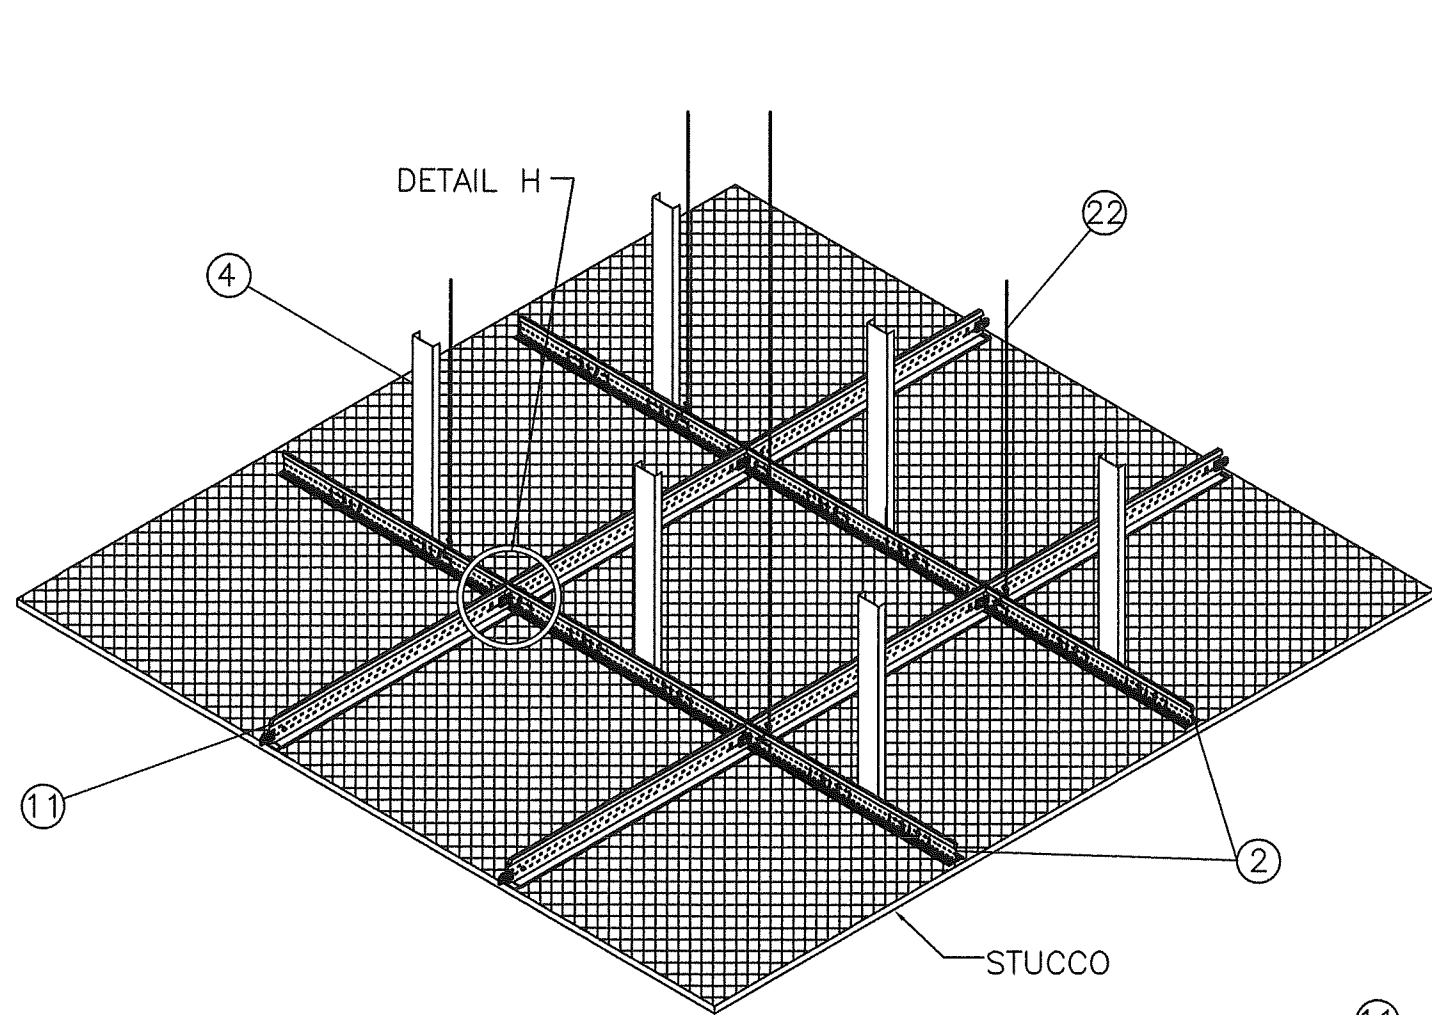


SECURED 12" O.C. W/
TO MAIN STRUCTURE
32 WOOD
20 STEEL
21 CONCRETE



NOTES:

- 1) ITEM #9 THE 1 1/4" DRYWALL SCREW IS SPACED 8" ON CENTER MAX. THROUGH THE RIBBED SHEET LATH AND INTO THE MAIN RUNNERS, CROSS TEES & PERIMETER CHANNEL.
- 2) HANGER WIRE MUST BE SECURED AT EACH END WITH A MIN. OF (3) TURNS IN 3" PER ASTM C636.
- 3) HANGER WIRE TO BE SPACED A MAXIMUM OF 24" O.C.
- 4) VERTICAL BRACING TO BE INSTALLED ON MAIN BEAMS AT A MAXIMUM OF 24" O.C.
- 5) THIS PRODUCT IS DESIGNED TO COMPLY WITH THE HIGH VELOCITY HURRICANE ZONE (HVHZ) OF THE 8TH EDITION (2023) FLORIDA BUILDING CODE (FBC) AT THE DESIGN PRESSURES STATED HEREIN.



PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0311.08
Expiration Date 03/17/2031
By *[Signature]*
Miami-Dade Product Control

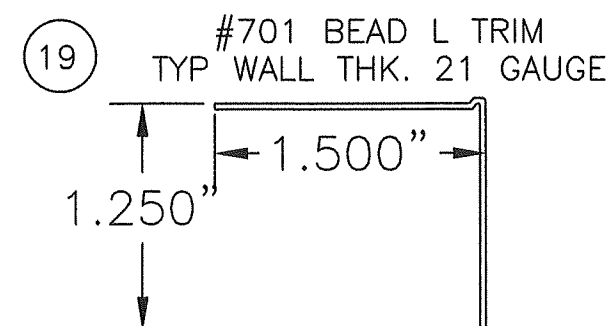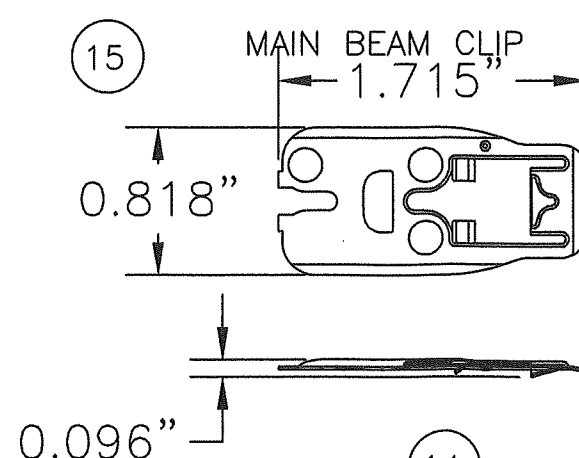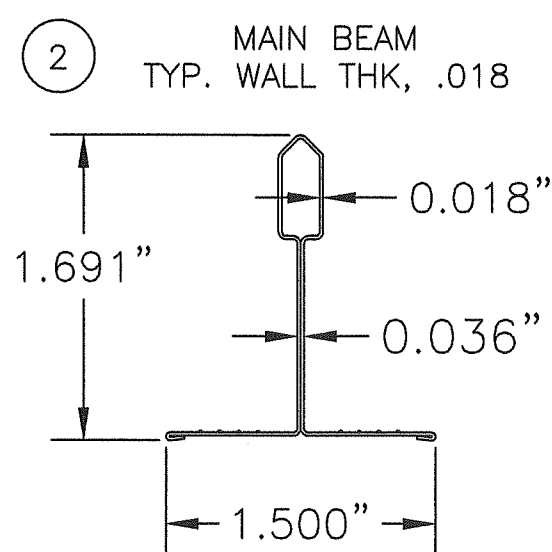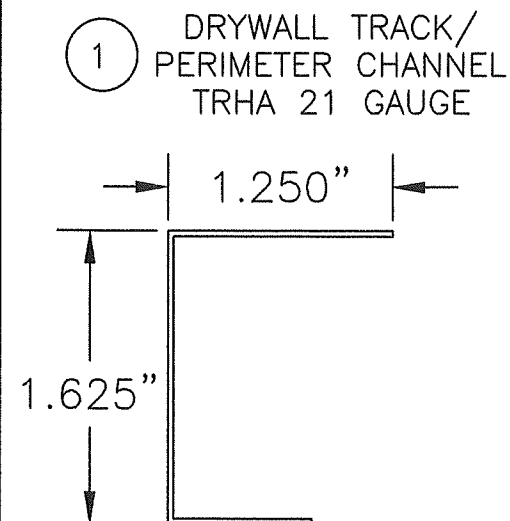

ITEM	QTY	DESCRIPTION
1	A/R	CHANNEL, 33 KSI BY WAVE TRHA 21 GA., 1-5/8"x1-1/4" DRYWALL TRACK/PRIMER
2	A/R	HD8906 G-90 MAIN BEAM BY WAVE
3	A/R	XL8926 G-90 CROSS TEE BY WAVE (EIFS)
4	A/R	STUD 2-1/2" X 1 1/4" STH-22 Ga., 33 KSI VERTICAL BRACE
5	A/R	1/2" DRYWALL SHEET DENSGLASS GOLD, GEORGIA PACIFIC
6	A/R	3/8" RIBBED SHEET LATH, 3.4 LBS/SQ.YD., AS PER ASTM C-847
7	A/R	EIFS FINISHED COAT (SEE NOTE 1, SHEET 6)
8	A/R	STUCCO BASED COAT (SEE NOTE 2, SHEET 6)
9	A/R	#8 x 1-1/4" LG. MODIFIED TRUSS HEAD K LATH DRYWALL SCREW
10	A/R	#12 Ga. H.D.G. HANGER WIRE (EIFS)
11	A/R	G-90 XL7936 CROSS TEE BY WAVE (STUCCO)
12	A/R	BUILDING STRUCTURE OR 2 BY WOOD BUCK BY OTHERS
13	A/R	STUCCO FINISHED COAT (SEE NOTE 2 SHEET 5)
14	A/R	CROSS TEE CLIP BY WAVE
15	A/R	MAIN BEAM CLIP BY WAVE
16	A/R	#6 X 9/16" TRUSS HD SELF DRILLING SCREW
17	A/R	#8 SHEET METAL SCREW TEK ITW BUILDEX
18	A/R	#66 3/4" CASE BEAD BY UNIMAST 3/4" x 3 1/8" x 21 GA.
19	A/R	#701 BEAD L TRIM ZINC BY UNIMAST 1 1/4" x 1 1/2" x 21 GA.
20	A/R	#12 SELF DRILLING & TAPPING BLAZER PANCAKE HEAD SCREW
21	A/R	3/16" DIA. TAPCON (ADVANCED THREADFORM) W/1-1/2" MIN. EMB.
22	A/R	#9 GA. H.D.G. HANGER WIRE (STUCCO)
23	A/R	1/4" DIA. I-LAG W300M WOOD SCREW W/EYELET
24	A/R	1/4" DIA. I-LAG 750SD SELF DRILLING & TAPPING SCREW W/EYELET
25	A/R	1/4" DIA. HILTI KWIK BOLT III ANCHOR W/2" MIN. EMBEDMENT

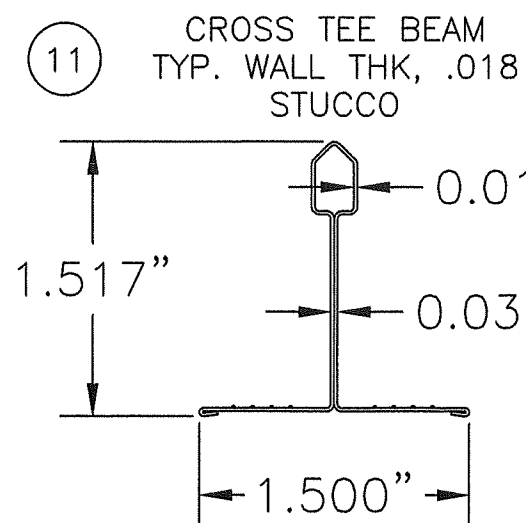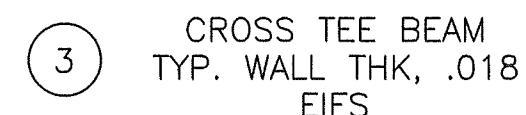

ITEM	QTY	DESCRIPTION
26	A/R	1/4" DIA. DEWALT TIE WIRE POWER STUD+ SD1 W/EYELET
27	A/R	3/8" DIA. HILTI HDI-P DROP-IN ANCHOR
28	A/R	1/4" - 20 THREADED EYELET.
29	A/R	3/8" - 16 THREADED EYELET.
30	A/R	1/4" DIA. HILTI HHDA+ CEILING HANGER W/EYELET
31	A/R	1/4" DIA. ITW/ RED HEAD TRUBOLT ANCHOR
32	A/R	#8 WOOD SCREW (MIN. EMBEDMENT OF 1-1/2")

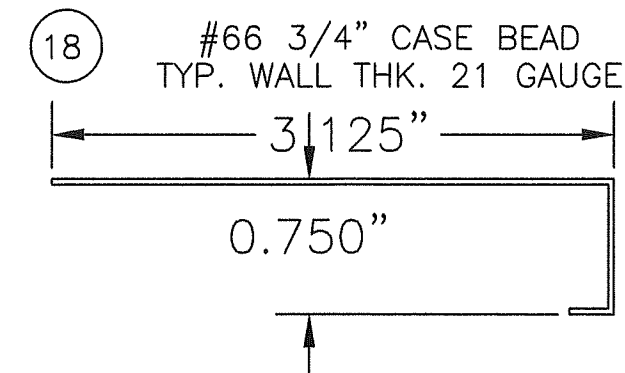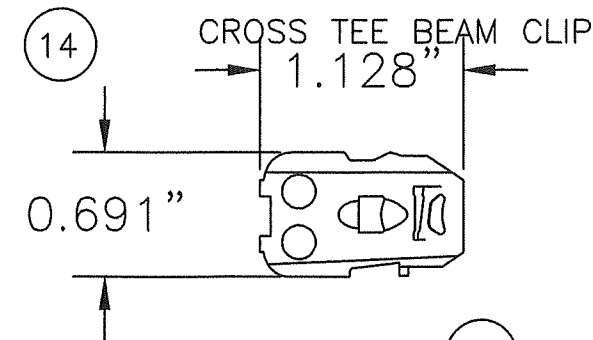

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. **26-0311.08**
Expiration Date **03/17/2031**
By 
Miami-Dade Product Control

- NOTES:
- EIFS COMPOSITION: DRYVIT GENESIS BASE COAT MIXED WITH CEMENT 1/8" THICK BY 9" WIDE PER MANUFACTURER SPECIFICATIONS IS APPLIED TO THE DENSGLASS GOLD JOINTS ONLY, FOLLOWED BY DRYVIT BRAND #20 FIBERGLASS MESH WHICH IS WORKED INTO THE BASE MIX. ANOTHER 3/16" THICK COAT OF MIX IS TROWELED OVER THE ENTIRE SURFACE. A CONTINUOUS LAYER OF MESH IS THEN WORKED INTO THE WET BASE MIX WITH A SECOND LAYER OF BASE MIX COVERING THE MESH. THE BASE MIX IS ALLOWED TO DRY OVERNIGHT AND PRIOR TO A FINISH COAT OF DRYVIT BRAND MIX QUARTZPUTZ DPR BEING APPLIED AND TROWELED TO PRODUCE A 1/8" TO 3/16" FINISH COAT.
 - A STUCCO MIX WITH A FINISH THICKNESS OF 3/4" IS TROWELED INTO THE RIBBED LATH IN THREE COATS. THE FIRST COAT IS ALLOWED TO SET, THEN A SECOND LAYER OF MIX IS TROWELED ON SIDE TO SIDE TO THE STOPS ON ALL SIDES. THE FINISH COAT MIX OF IVORY FINISH LIME, WHITE CEMENT AND WHITE SILICA SAND IS WORKED INTO THE STUCCO MIX AND TROWELED ON IN AN 1/8" TO 3/16" THICK FINISH COAT.
 - STUCCO MIX CONSISTS OF: 22 SHOVELS OF C-144 SAND, 2 1/2 GALLONS "THORO" BRAND ACRYL 60 ACRYLIC ADDITIVE, 1 PACK CONTROL "X" CHOPPED FIBERS, 1 BAG (50 LBS.) TYPE "S" LIME, 1 BAG (94 LBS.) TYPE "1" PORTLAND CEMENT.

Worthington Armstrong
Venture (WAVE)
101 Lindenwood Dr. Suite 300
Malvern, PA 19355

NO.	REVISION DESCRIPTION	BY	DATE	EIFS AND STUCCO CEILING SYSTEM INSTALLATION DETAILS		
				NO.	REVISION DESCRIPTION	BY
K	UPDATE TO THE 8TH ED. (2023) FBC	RIA	2/24/26			
J	UPDATE TO THE 7TH ED. (2020) FBC	RIA	2/23/22			
I	UPDATE TO THE 6TH ED. (2017) FBC	RIA	11/1/18			

DATE:
6/9/2025

DWN BY:
RIA

CHK BY:
n/a

SCALE:
NONE

ROBERT J. AMORUSO, P.E. #49752
AMORUSO CONSULTING ENG., LLC
FBPE REGISTRATION NO. 38327
226 N NOVA RD, NO. 142
ORMOND BEACH, FL 32174
RJAENGPE@GMAIL.COM

PROFESSIONAL ENGINEER
STATE OF FLORIDA
No 49752
ROBERT J. AMORUSO

PROJECT#: ACE-2025-123
DWG/REV: WAV0001, Rev K
SHT: 6 of 6