



DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

PrimeSource Building Products, Inc. (TX)
1321 Greenway Drive
Irving, TX 75038

SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Pro-Twist Concrete, Masonry and Wood Screws

APPROVAL DOCUMENT: Drawing No. **AD18-19**, titled "Pro-Twist Concrete and Masonry Screws", sheets 1 through 3 of 3, dated 04/15/2026, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E., bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance (NOA) number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: None

LABELING: Each box shall bear a permanent label with the manufacturer's name or logo, Taiwan (R.O.C), and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises NOA # 23-0706.01** and consists of this page 1 and evidence pages E-1, E-2, E-3, E-4 and E-5, as well as approval document mentioned above.

The submitted documentation was reviewed by **Carlos M. Utrera, P.E.**



07/29/26

NOA No. 26-0422.02
Expiration Date: October 4, 2028
Approval Date: August 6, 2026
Page 1

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. Evidence submitted under previous NOAs

A. DRAWINGS “Submitted under NOA #12-0809.02”

1. Drawings No. **PBP.12001**, titled “Pro-Twist Concrete and Masonry Screws”, sheet 1 of 1, dated 07/05/2012, with last revision dated 10/31/2012, prepared by Nu-Wind Engineering, signed and sealed by Christian Langley, P.E.

B. TESTS “Submitted under NOA # 05-0526.03”

1. Test report on Tension and Shear Strength of anchor in Concrete per ASTM E488 and in wood per ASTM D1761, prepared by Construction Testing Corporation, Test Report No. **06-010**, dated 03/31/2007, signed and sealed by Yamil G. Kuri, P.E.

C. CALCULATIONS “Submitted under NOA #12-0809.02”

1. Evaluation of test results and dimensional tables prepared by Nu-Wind Engineering, dated 07/20/2012, signed and sealed by Christian Langley, P.E.

“Submitted under NOA # 05-0526.03”

2. Anchors capacity calculations prepared R W Building Consultants, Inc., dated 06/29/2007 and 08/08/2007, signed and sealed by Wendell W. Haney, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS “Submitted under NOA # 05-0526.03”

1. Test report on corrosion resistance per ASTM G-85, Annex 5, prepared by Testing Evaluation Laboratories, Inc, Test Report No. **TEL 05-0930-50**, dated 09/30/2005, signed by Vivian K. Wright.

F. STATEMENTS “Submitted under NOA #12-0809.02”

1. Statement letters of code conformance to 2010 FBC and no financial interest issued by Nu-Wind Engineering, dated 08/02/2012, signed and sealed by Christian Langley, P.E.
2. Distributor agreement dated 08/20/2007.
- “Submitted under NOA # 05-0526.03”**
3. Code compliance and no financial letter issued by R W Building Consultants, Inc., dated 09/07/2007, signed and sealed by Wendell W. Haney, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0422.02
Expiration Date: October 4, 2028
Approval Date: August 6, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

2. Evidence submitted under NOA # 17-1005.01

A. DRAWINGS

1. Drawing No. **AD18-19**, titled “Pro-Twist Concrete and Masonry Screws”, sheet 1 of 1, dated 03/16/2018, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letters of code conformance to the 6th edition (2017) FBC and of no financial interest issued by MCY Engineering, Inc., dated 03/27/2018, signed and sealed by Yiping Wang, P.E.
2. Testing contract letter issued by Hurricane Engineering & Testing Inc., dated 02/09/2018, signed by Waqar Ali.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0422.02
Expiration Date: October 4, 2028
Approval Date: August 6, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

3. Evidence submitted under NOA # 18-1115.02

A. DRAWINGS

1. Drawing No. **AD18-19**, titled “Pro-Twist Concrete and Masonry Screws”, sheet 1 of 1, dated 01/22/2019, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E.

B. TESTS

	<u>Test Report</u>	<u>Standard</u>	<u>Date</u>	<u>Signature</u>
1.	HETI-18-A1021	ASTM E488-15	10/01/18	Rafael E. Droz-Seda, P.E.
2.	HETI-18-C100	ASTM C39-18	07/31/18	Rafael E. Droz-Seda, P.E.
3.	HETI-18-C101	ASTM C39-18	08/06/18	Rafael E. Droz-Seda, P.E.
4.	HETI-18-S303	ASTM G85-11	02/15/19	Rafael E. Droz-Seda, P.E.
5.	HETI-18-S304	ASTM G85-11	02/15/19	Rafael E. Droz-Seda, P.E.
6.	HETI-18-M515	ASTM F606-16	09/26/18	Rafael E. Droz-Seda, P.E.
7.	HETI-18-M530	ASTM F606-16	09/26/18	Rafael E. Droz-Seda, P.E.

C. CALCULATIONS

1. Anchors capacity calculations prepared by MCY Engineering, Inc., dated 01/24/2019, signed and sealed by Yiping Wang, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance to the 6th edition (2017) FBC issued by MCY Engineering, Inc., dated 01/24/2019, signed and sealed by Yiping Wang, P.E.
2. Statement letter of no financial interest issued by MCY Engineering, Inc., dated 01/24/2019, signed and sealed by Yiping Wang, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0422.02
Expiration Date: October 4, 2028
Approval Date: August 6, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

4. Evidence submitted under NOA # 21-0414.05 and # 23-0706.01

A. DRAWINGS

1. Drawing No. **AD18-19**, titled “Pro-Twist Concrete and Masonry Screws”, sheet 1 of 1, dated 07/13/2023, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance to the 7th edition (2020) and the 8th Edition (2023) of the FBC and of no financial interest issued by MCY Engineering, Inc., dated 07/27/2023, signed and sealed by Yiping Wang, P.E.
2. Statement letter of code conformance to the 7th edition (2020) of the FBC and of no financial interest issued by MCY Engineering, Inc., dated 04/13/2021, signed and sealed by Yiping Wang, P.E.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0422.02
Expiration Date: October 4, 2028
Approval Date: August 6, 2026

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

5. New evidence submitted

A. DRAWINGS

1. Drawing No. **AD18-19**, titled “Pro-Twist Concrete and Masonry Screws”, sheets 1 through 3 of 3, dated 04/15/2026, prepared by MCY Engineering, Inc., signed and sealed by Yiping Wang, P.E.

B. TESTS

	<u>Test Report</u>	<u>Standard</u>	<u>Date</u>	<u>Signature</u>
1.	S2795.01-106-18 R1	ASTM E488-22	02/24/26	Tanya A. Dolby, P.E.
2.	S2795.01-106-18 R1	ASTM C39-23	02/24/26	Tanya A. Dolby, P.E.
3.	S2795.01-106-18 R1	ASTM C140M-18	02/24/26	Tanya A. Dolby, P.E.
4.	S2795.01-106-18 R1	ASTM G85-19	02/24/26	Tanya A. Dolby, P.E.
5.	S2795.01-106-18 R1	ASTM D1761-06	02/24/26	Tanya A. Dolby, P.E.
6.	S2795.01-106-18 R1	ASTM F606-21	02/24/26	Tanya A. Dolby, P.E.

C. CALCULATIONS

1. Anchors capacity calculations prepared by MCY Engineering, Inc., dated 04/15/2026, signed and sealed by Yiping Wang, P.E.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of code conformance to the 8th Edition (2023) of the FBC, issued by MCY Engineering, Inc., dated 04/15/2026, signed and sealed by Yiping Wang, P.E.
2. Statement letter of no financial interest, issued by MCY Engineering, Inc., dated 04/15/2026, signed and sealed by Yiping Wang, P.E.
3. Distributor agreement between Homade Inc., as manufacturer and PrimeSource Building Products, Inc. as distributor, dated 07/06/2026, signed by Roger Hsieh and Erin Koss respectively.



Carlos M. Utrera, P.E.
Product Control Examiner
NOA No. 26-0422.02
Expiration Date: October 4, 2028
Approval Date: August 6, 2026

The following pages in this document were submitted by the manufacturer (third party) to represent the product being approved and establish the limits of use. The pages may include technical drawings, schematics and installation details.

PRIMESOURCE BUILDING PRODUCTS, INC.
PRO-TWIST CONCRETE, MASONRY AND WOOD SCREWS

GENERAL NOTES:

- 1- ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATION.
- 2-ANCHOR EMBEDMENT AND EDGE DISTANCE EXCLUDES STUCCO, FOAM, BRICK, AND OTHER WALL FINISHES.
- 3-ALLOWABLE DESIGN LOAD CAPACITIES ARE BASED ON ULTIMATE LOAD DIVIDED BY SAFETY FACTOR AS FOLLOWS:
-CONCRETE: SAFETY FACTOR = 4
-CMU: SAFETY FACTOR = 5
-WOOD: SAFETY FACTOR = 4
- 4- SUBSTRATES SHALL CONFORM TO:
-CONCRETE: ACI 318 & ASTM C39
-CMU: ASTM C90
-WOOD: AS SPECIFIC GRAVITY SG=0.45 MIN.
- 5-ANCHORS SHALL NOT BE INSTALLED INTO CRACKED CONCRETE AS DEFINED IN ACI 355.2.
- 6-ALLOWABLE DESIGN LOAD CAPACITIES FOR WOOD SUBSTRATE ARE LESSER OF VALUES DETERMINED FROM TESTING (ASTM D1761) AND VALUES DETERMINED PER NDS-05 USING THE FOLLOWING SPECIFICATIONS:
-SPECIFIC GRAVITY SG=0.45 MIN.
-SIDE MEMBER Ls=0.75"
-MAIN MEMBER Lm= 1.5"
- 7- FOR INSTALLATION TO WOOD SUBSTRATE, USE CODE-REFERENCED STANDARDS (e.g. NDS) WITH SPECIFIC MAIN MEMBER MATERIAL AND THREAD PENETRATION TO DETERMINE CONNECTION CAPACITY. IN NO CASE SHALL THE ANCHOR CAPACITY BE GREATER THAN ALLOWABLE LOADS SHOW HEREIN.
- 8- THIS PRODUCT EVALUATION DOCUMENT IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SPECIFIC SITE. FOR SITE CONDITIONS DIFFERENT FROM THE CONDITIONS DETAILED HEREIN, A LICENSED PROFESSIONAL ENGINEER OR REGISTERED ARCHITECT SHALL PREPARE SITE-SPECIFIC DOCUMENTS FOR USE IN CONJUNCTION WITH THE APPROVAL AND APPLY FOR MIAMI-DADE COUNTY PRODUCT CONTROL ONE-TIME NOTICE OF ACCEPTANCE.

9- PILOT HOLE:

	BIT SIZE	HOLE DEPTH
SIZE	5/32"	EMBEDMENT+ 1/4"
3/16"	3/16"	EMBEDMENT+ 1/4"
1/4"		

COMPLIANCE SUMMARY:

THIS PRODUCT COMPLY WITH THE REQUIREMENTS OF THE 2023 (8TH EDITION) FLORIDA BUILDING CODE INCLUDING HIGH VELOCITY HURRICANE ZONE (HVHZ).

MATERIALS: C1018 ~ C1022 STEEL WITH CORROSION RESISTANT COATING

3/16" SCREWS: Fu=377.0 ksi
Fu=296.0 ksi
COLOR: BLUE/WHITE.

NOTES: SEE PAGE 02 FOR ANCHOR DIMENSIONS, SEE PAGE 03 FOR ANCHOR CAPACITIES.

Fy=89.0 ksi (0.2% OFFSET)

Fy=83.6 ksi (0.2% OFFSET)

MIAMI-DADE COUNTY


PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. **26-0422.02**
Expiration Date **10/04/2028**
By 
Miami-Dade Product Control



Drawn Date	Scale
04.15.2026	AS SHOWN
DRAWING NO.	
AD18-19	
COVER	
Sheet No.	
01 OF 03	

PRO-TWIST CONCRETE, MASONRY AND WOOD SCREWS


PRIMESOURCE
BUILDING PRODUCTS, INC.
1321 GREENWAY DRV. IRVING, TX 75038

**MCY ENGINEERING, INC.**
GLAZING CONSULTANTS

12781 MIRAMAR PARKWAY #301
MIRAMAR, FL 33027 P: 305.588.5224


www.MCYEngineering.com MCY@mcyengineering.com

ANCHOR DIMENSIONS

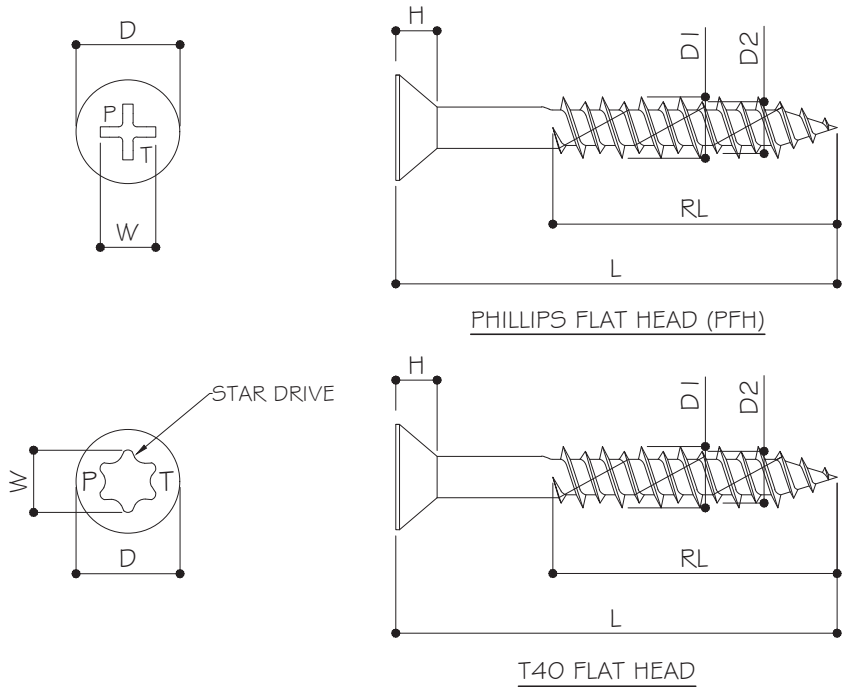

DIAMETER	HEAD O.D	ACROSS WIDTH	HEAD THICK	MAJOR DIA (H)	MAJOR DIA(L)
	D	W	H	D1	D2
3/16	0.380"	0.190"	0.153"	0.215"	0.165"
1/4	0.485"	0.277"	0.160"	0.255"	0.205"

LENGTH (L)	THREADED LENGTH (RL)
1 - 1/4"	FULL
1 - 3/4"	FULL
2 - 1/4"	1.969"
2 - 3/4"	1.969"
3 - 1/4"	1.969"
3 - 3/4"	1.969"
4"	1.969"

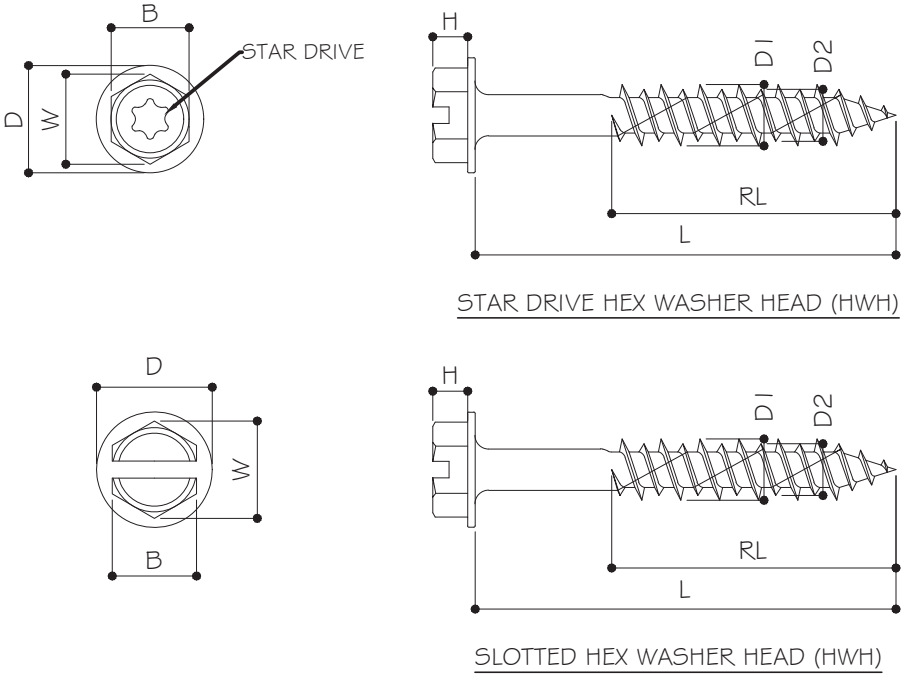


DIAMETER	WASHER DIA	ACROSS WIDTH	ACROSS FLATS	HEAD THICK	MAJOR DIA (H)	MAJOR DIA(L)
	D	W	B	H	D1	D2
3/16	0.380"	0.272"	0.247"	0.131"	0.215"	0.165"

LENGTH (L)	THREADED LENGTH (RL)
1 - 1/4"	FULL
1 - 3/4"	FULL
2 - 1/4"	1.969"
2 - 3/4"	1.969"
3 - 1/4"	1.969"
3 - 3/4"	1.969"
4"	1.969"

MIAMI-DADE COUNTY

PRODUCT REVISED
as complying with the Florida Building Code
NOA-No. 26-0422.02
Expiration Date 10/04/2028

By 
Miami-Dade Product Control




April 17th, 2026

PRO-TWIST CONCRETE, MASONRY AND WOOD SCREWS

PRIMESOURCE
BUILDING PRODUCTS, INC.
1321 GREENWAY DRV. IRVING, TX 75038

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

MCY ENGINEERING, INC.
GLAZING CONSULTANTS



12781 MIRAMAR PARKWAY #301
MIRAMAR, FL 33027 P: 305.588.5224

www.MCYEngineering.com MCY@mcyengineering.com

TEL. (972)-999-8500

CONCRETE SUBSTRATE
SAFETY FACTOR = 4

NOMINAL DIAMETER	MINIMUM EMBEDMENT	MINIMUM SPACING	MINIMUM EDGE DISTANCE	ALLOWABLE CAPACITY PER ANCHOR			
				2000 p _{si}		3000 p _{si}	
				Tension (Lbs)	Shear (Lbs)	Tension(Lbs)	Shear (Lbs)
3/16" HWH	1"	3"	1-7/8"	204	136	208	219
3/16" PFH	1"	3"	1-7/8"	176	100	255	167
	1-1/4"	3"	1-7/8"	279	-	306	-
	1-1/2"	3"	1-7/8"	347	239	444	301
1/4" PFH	2-1/4"	4"	1"	-	-	507	-
	2-1/4"	4"	1-1/4"	-	-	534	-
	1-1/2"	4"	2-1/4"	-	-	429	186
	1-1/4"	4"	2-1/4"	-	-	339	-
	1"	4"	2-1/4"	-	-	228	197
1/4" T40	1"	4"	2-1/4"	193	159	-	-
	1-1/4"	4"	2-1/4"	314	-	-	-
	1-1/2"	4"	2-1/4"	393	155	-	-
	2-1/4"	4"	1"	472	-	-	-
	2-1/2"	4"	1-1/4"	584	-	-	-


NOMINAL DIAMETER	MINIMUM EMBEDMENT	MINIMUM SPACING	MINIMUM EDGE DISTANCE	ALLOWABLE CAPACITY PER ANCHOR	
				1620 psi	
				Tension (Lbs)	Shear (Lbs)
3/16" HWH	1-1/4"	3"	1"	184	-
	1"	3"	1-1/4"	-	113
3/16" PFH	1-1/4"	3"	1"	144	-
	1-1/4"	3"	1-7/8"	157	-
	1-1/4"	4"	1-1/4"	156	-
	1"	3"	1-1/4"	-	92
	1-7/8"	3"	1-1/4"	-	188
1/4" PFH	1-1/4"	4"	1-1/4"	-	122
	1-1/2"	4"	1-1/4"	-	151
	1-1/4"	4"	2-1/2"	188	-

NOMINAL DIAMETER	MINIMUM EMBEDMENT	MINIMUM SPACING	MINIMUM EDGE DISTANCE	ALLOWABLE CAPACITY PER ANCHOR		
				Tension (Lbs)	Shear (Lbs)	
					Parallel	Perpendicular
3/16" HWH	1"	3"	3/4"	112.0	-	-
	1-1/2"	1-1/2"	3/4"	-	158.0	156.0
3/16" PFH	1-3/4"	4"	3/4"	270.0	-	-
	1-1/2"	4"	3/4"	207.0	-	-
	1-1/4"	4"	3/4"	163.0	-	-
	1"	4"	3/4"	113.0	-	-
	1"	3"	3/4"	117.0	-	-
	1-1/2"	1-1/2"	3/4"	-	146.0	150.0
1/4" PFH	1"	4"	3/4"	153.0	-	-
	1-1/4"	4"	3/4"	189.0	-	-
	1-1/2"	4"	3/4"	240.0	-	-
	1-3/4"	4"	3/4"	315.0	-	-
	1-1/2"	1-1/2"	3/4"	-	171.0	166.0

MIAMI-DADE COUNTY

PRODUCT REVISED
as complying with the Florida
Building Code
NOA-No. 26-0422.02
Expiration Date 10/04/2028

By 
Miami-Dade Product Control

[illegible]

MCY ENGINEERING, INC.
GLAZING CONSULTANTS
12781 MIRAMAR PARKWAY #301
MIRAMAR, FL 33027 P: 305.588.5222
www.MCYEngineering.com MCY@mcvengeineering.com

PRO-TWIST CONCRETE, MASONRY AND WOOD SCREWS

PRIMESOURCE
BUILDING PRODUCTS, INC.
 1321 GREENWAY DRV. IRVING, TX 75038

TEL. (972)-999-8500